

MECHANICAL SHEET INDEX

Table with 2 columns: Code and Description. Lists mechanical general information, floor plan, roof plan, specifications, schedules, energy code compliance, and captive air drawings from M701 to M709.

RESPONSIBILITY MATRIX

Responsibility matrix table with columns: Description, Furnished (GC, OWNER, LL), Installed (GC, OWNER, LL), and Remarks. Includes sections for Division 23 (HVAC, Piping, Kitchen Exhaust) and Division 23.8 (Commissioning).

GENERAL NEW NOTES:

- 1. PRIOR TO SUBMITTING BID, VISIT THE JOB SITE AND BECOME FULLY ACQUAINTED WITH THE EXISTING CONDITIONS OF THE PROJECT. REVIEW THE GENERAL NOTES SPECIFICATIONS AND OTHER DRAWINGS FOR ADDITIONAL REQUIREMENTS WHICH MAY NOT BE SPECIFICALLY CALLED OUT IN THIS PORTION OF THE CONSTRUCTION DOCUMENTS...

MECHANICAL SYMBOLS

Mechanical symbols table divided into three columns: STANDARD MOUNTING HEIGHT, HVAC DUCTWORK AND ACCESSORIES, and PIPING SYMBOLS. Includes detailed notes on device installation, annotation, abbreviations, and HVAC control devices.

5310 E. HIGH STREET SUITE 350 PHOENIX, AZ 85054 TJ 480.448.6250 WWW.SARGARCH.COM



CONSULTANTS: artm 14901 Ootum Drive, Suite 905, Dallas, TX 75254 | 947.756.4180

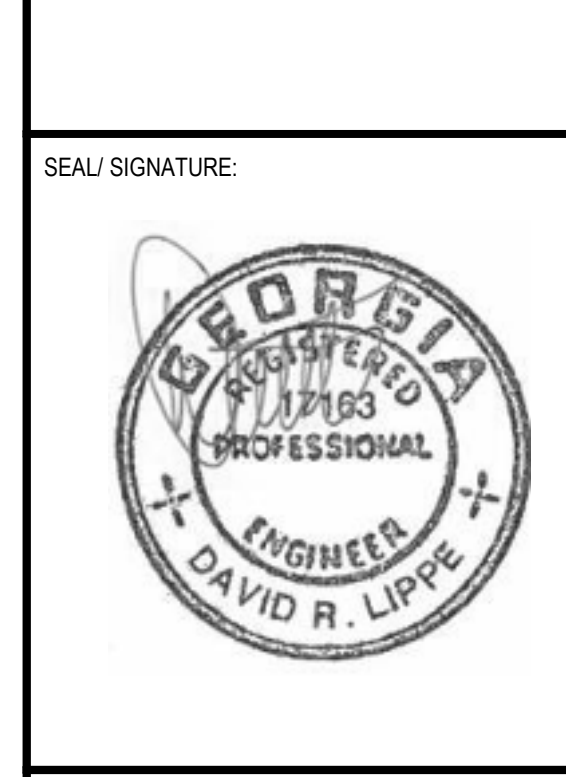


Table with 2 columns: NO., BY, DATE, DESCRIPTION. Lists drawing items and their descriptions.



SHAKE SHACK - ATHENS

161 ALPS RD ATHENS, GA 30606 SHACK #1765

PERMIT/BID SET

MECHANICAL GENERAL INFORMATION

DRAWN BY: RTM

CHECKED BY: RTM

PROJECT NO: 25-088

M001



CONSULTANTS:




14901 Quorum Drive, Suite 905, Dallas, TX
75254 | 947.756.4190

SEAL SIGNATURE:



MECHANICAL PLAN NOTES:	
1	TYPE I GREASE HOOD EXHAUST DUCTWORK SHALL BE MINIMUM 16 GAUGE STEEL OR MINIMUM 18 GAUGE STAINLESS STEEL WITH LIQUID TIGHT WELDS.
2	INSTALL ACCESS PANELS FOR CLEANING AS REQUIRED BY NFPA 96 AND LOCAL CODES. TRANSITION GREASE DUCTWORK AS REQUIRED TO HOOD AND FAN CONNECTIONS. PROVIDE 45° MAX OFFSETS AS REQUIRED TO COORDINATE WITH STRUCTURE. PROVIDE RADIUS ELBOWS WITHOUT TURNING VANES. SLOPE HORIZONTAL GREASE DUCT BACK TOWARDS HOOD AT MINIMUM OF .14" PER LINEAL FOOT. GREASE DUCTS SHALL BE CONTAINED IN A UL APPROVED GREASE DUCT WRAP SYSTEM.
3	INSTALL "DUCTMATE ULTIMATE DOOR" ON DUCTS 12" OR LARGER AND INSTALL "DUCTMATE F2 SANDWICH ACCESS DOOR" FOR DUCTS LESS THAN 12" ON GREASE DUCT FOR CLEANING IN LOCATION SHOWN AT A MINIMUM AND AS REQUIRED BY NFPA 96 AND LOCAL CODES.
4	TYPE I HOODS SHALL BE FURNISHED COMPLETE WITH INTERNALLY PIPED FIRE SUPPRESSION SYSTEM AND EXTERNAL FOAM SUPPLY BOTTLES WITH REMOTE FULL CONTROLS AND IN COMPLIANCE WITH NFPA 96, DIVISION 23 SHALL COORDINATE COMPLETE INSTALLATION WITH FIRE PROTECTION CONTRACTOR TO MEET APPROVAL OF LOCAL INSPECTOR AND CODE COMPLIANCE INCLUDING TESTING.
5	HOOD SHALL OVERHANG THE COOKING SURFACE BY AT LEAST 6" ON BOTH SIDES.
6	MOUNT THERMOSTATS, HUMIDITY SENSORS, AND TEMPERATURE SENSOR(S) ON WALL. THERMOSTATS AND SENSOR(S) SHALL BE LABELED TO MATCH THE UNIT TAG AND CORRESPOND TO THE ELECTRICAL LEGEND IN THE ELECTRICAL PANELBOARD SERVING THE EQUIPMENT. COORDINATE COLOR WITH ARCHITECT. TEMPERATURE SENSOR SHALL BE CAPABLE OF DEMAND RESPONSE.
7	COMBINATION TEMPERATURE SENSOR AND HUMIDITY SENSOR.
8	MOUNT TEMPERATURE SENSOR PROVIDED WITH KITCHEN EXHAUST HOODS ON WALL.
9	INSTALL HOOD FIRE SUPPRESSION MANUAL PULL STATION. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH FIRE SUPPRESSION SYSTEM INSTALLER AND THE AUTHORITY HAVING JURISDICTION.
10	PROVIDE ANALOX AX60 OR APPROVED EQUAL CARBON DIOXIDE SENSOR WITH REMOTE ALARM REPEATER TO BE MOUNTED AT 12" AFF. PROVIDE CARBON DIOXIDE SENSOR WITH RELAY. RELAY SHALL BE INTERLOCKED WITH THE BUILDING FIRE ALARM SYSTEM. THE SENSOR SHALL BE EQUIPPED WITH A LOCAL AUDIBLE AND VISUAL ALARM. THE LOW LEVEL ALARM SHALL ACTIVATE THE LOCAL AUDIBLE AND VISUAL ALARM. THE HIGH LEVEL ALARM SHALL ACTIVATE RELAY. INSTALL SENSOR PER MANUFACTURER'S INSTALLATION INSTRUCTIONS. LOW LEVEL ALARM - 0.5% = 5,000 PPM HIGH LEVEL ALARM - 3.0% = 30,000 PPM
11	CARBON MONOXIDE DETECTOR FURNISHED BY OWNER. INSTALL AT 5'-0" AFF. COORDINATE FINAL LOCATION WITH OWNER REPRESENTATIVE.
12	INSTALL DUCT SMOKE DETECTOR IN RETURN AIR PLENUM.
13	INSTALL EMERGENCY ALARM IN MANAGER'S OFFICE TO INDICATE CARBON MONOXIDE AND CARBON DIOXIDE DETECTION IN MECHANICAL ROOM. PROVIDE LIGHT IN OFFICE WITH TAG FOR EACH ALARM.
14	TRANSITION 6" OUTDOOR AIR DUCT TO 4" FLEXIBLE DUCTWORK AND CONNECT TO UNIT.
15	REFRIGERANT PIPING UP TO CU-1 ON ROOF. REF 1/M150.
16	CONTRACTOR TO COORDINATE 1" UNDERCUT ON DOOR FOR EXHAUST AIR PATH.
17	PROVIDE COMBUSTION AIR AND EXHAUST PIPE AND ROUTE TO CONCENTRIC VENT THROUGH ROOF.
18	PROVIDE 1/4" GALVANIZED CONSTRUCTION HARDWARE CLOTH SCREEN OVER OPEN END OF RETURN DUCT. PROVIDE DUCT LINER IN BOOT. RETURN AIR DUCT SHALL BE MINIMUM 36" HORIZONTAL EXTENSION FOR SOUND ATTENUATION.
19	PROVIDE SA DUCT THROUGH ROOF. FULL SIZE OF UNIT OPENING, AND CONNECT TO UNIT WITH FLEXIBLE CONNECTOR. TRANSITION 45 DEGREES THROUGH ROOF CURB.
20	PROVIDE RA DUCT THROUGH ROOF. FULL SIZE OF UNIT OPENING, AND CONNECT TO UNIT WITH FLEXIBLE CONNECTOR. TRANSITION 45 DEGREES THROUGH ROOF CURB.
21	PROVIDE EA DUCT THROUGH ROOF. FULL SIZE OF UNIT OPENING, AND CONNECT TO UNIT WITH FLEXIBLE CONNECTOR. TRANSITION 45 DEGREES THROUGH ROOF CURB.
22	9"X9" GREASE EXHAUST DUCT UP TO KEF-1 ON ROOF.
23	8"X8" GREASE EXHAUST DUCT UP TO KEF-2 ON ROOF.
24	8"X8" GREASE EXHAUST DUCT UP TO KEF-3 ON ROOF.
25	ROUTE DUCTWORK LEVEL, TIGHT TO STRUCTURE, AND ABOVE LIGHTS. COORDINATE WITH STORM DRAINAGE, STRUCTURAL, AND ELECTRICAL.
26	AIR CURTAIN MOUNTED ABOVE DOOR. INSTALL PER MANUFACTURERS RECOMMENDATIONS.

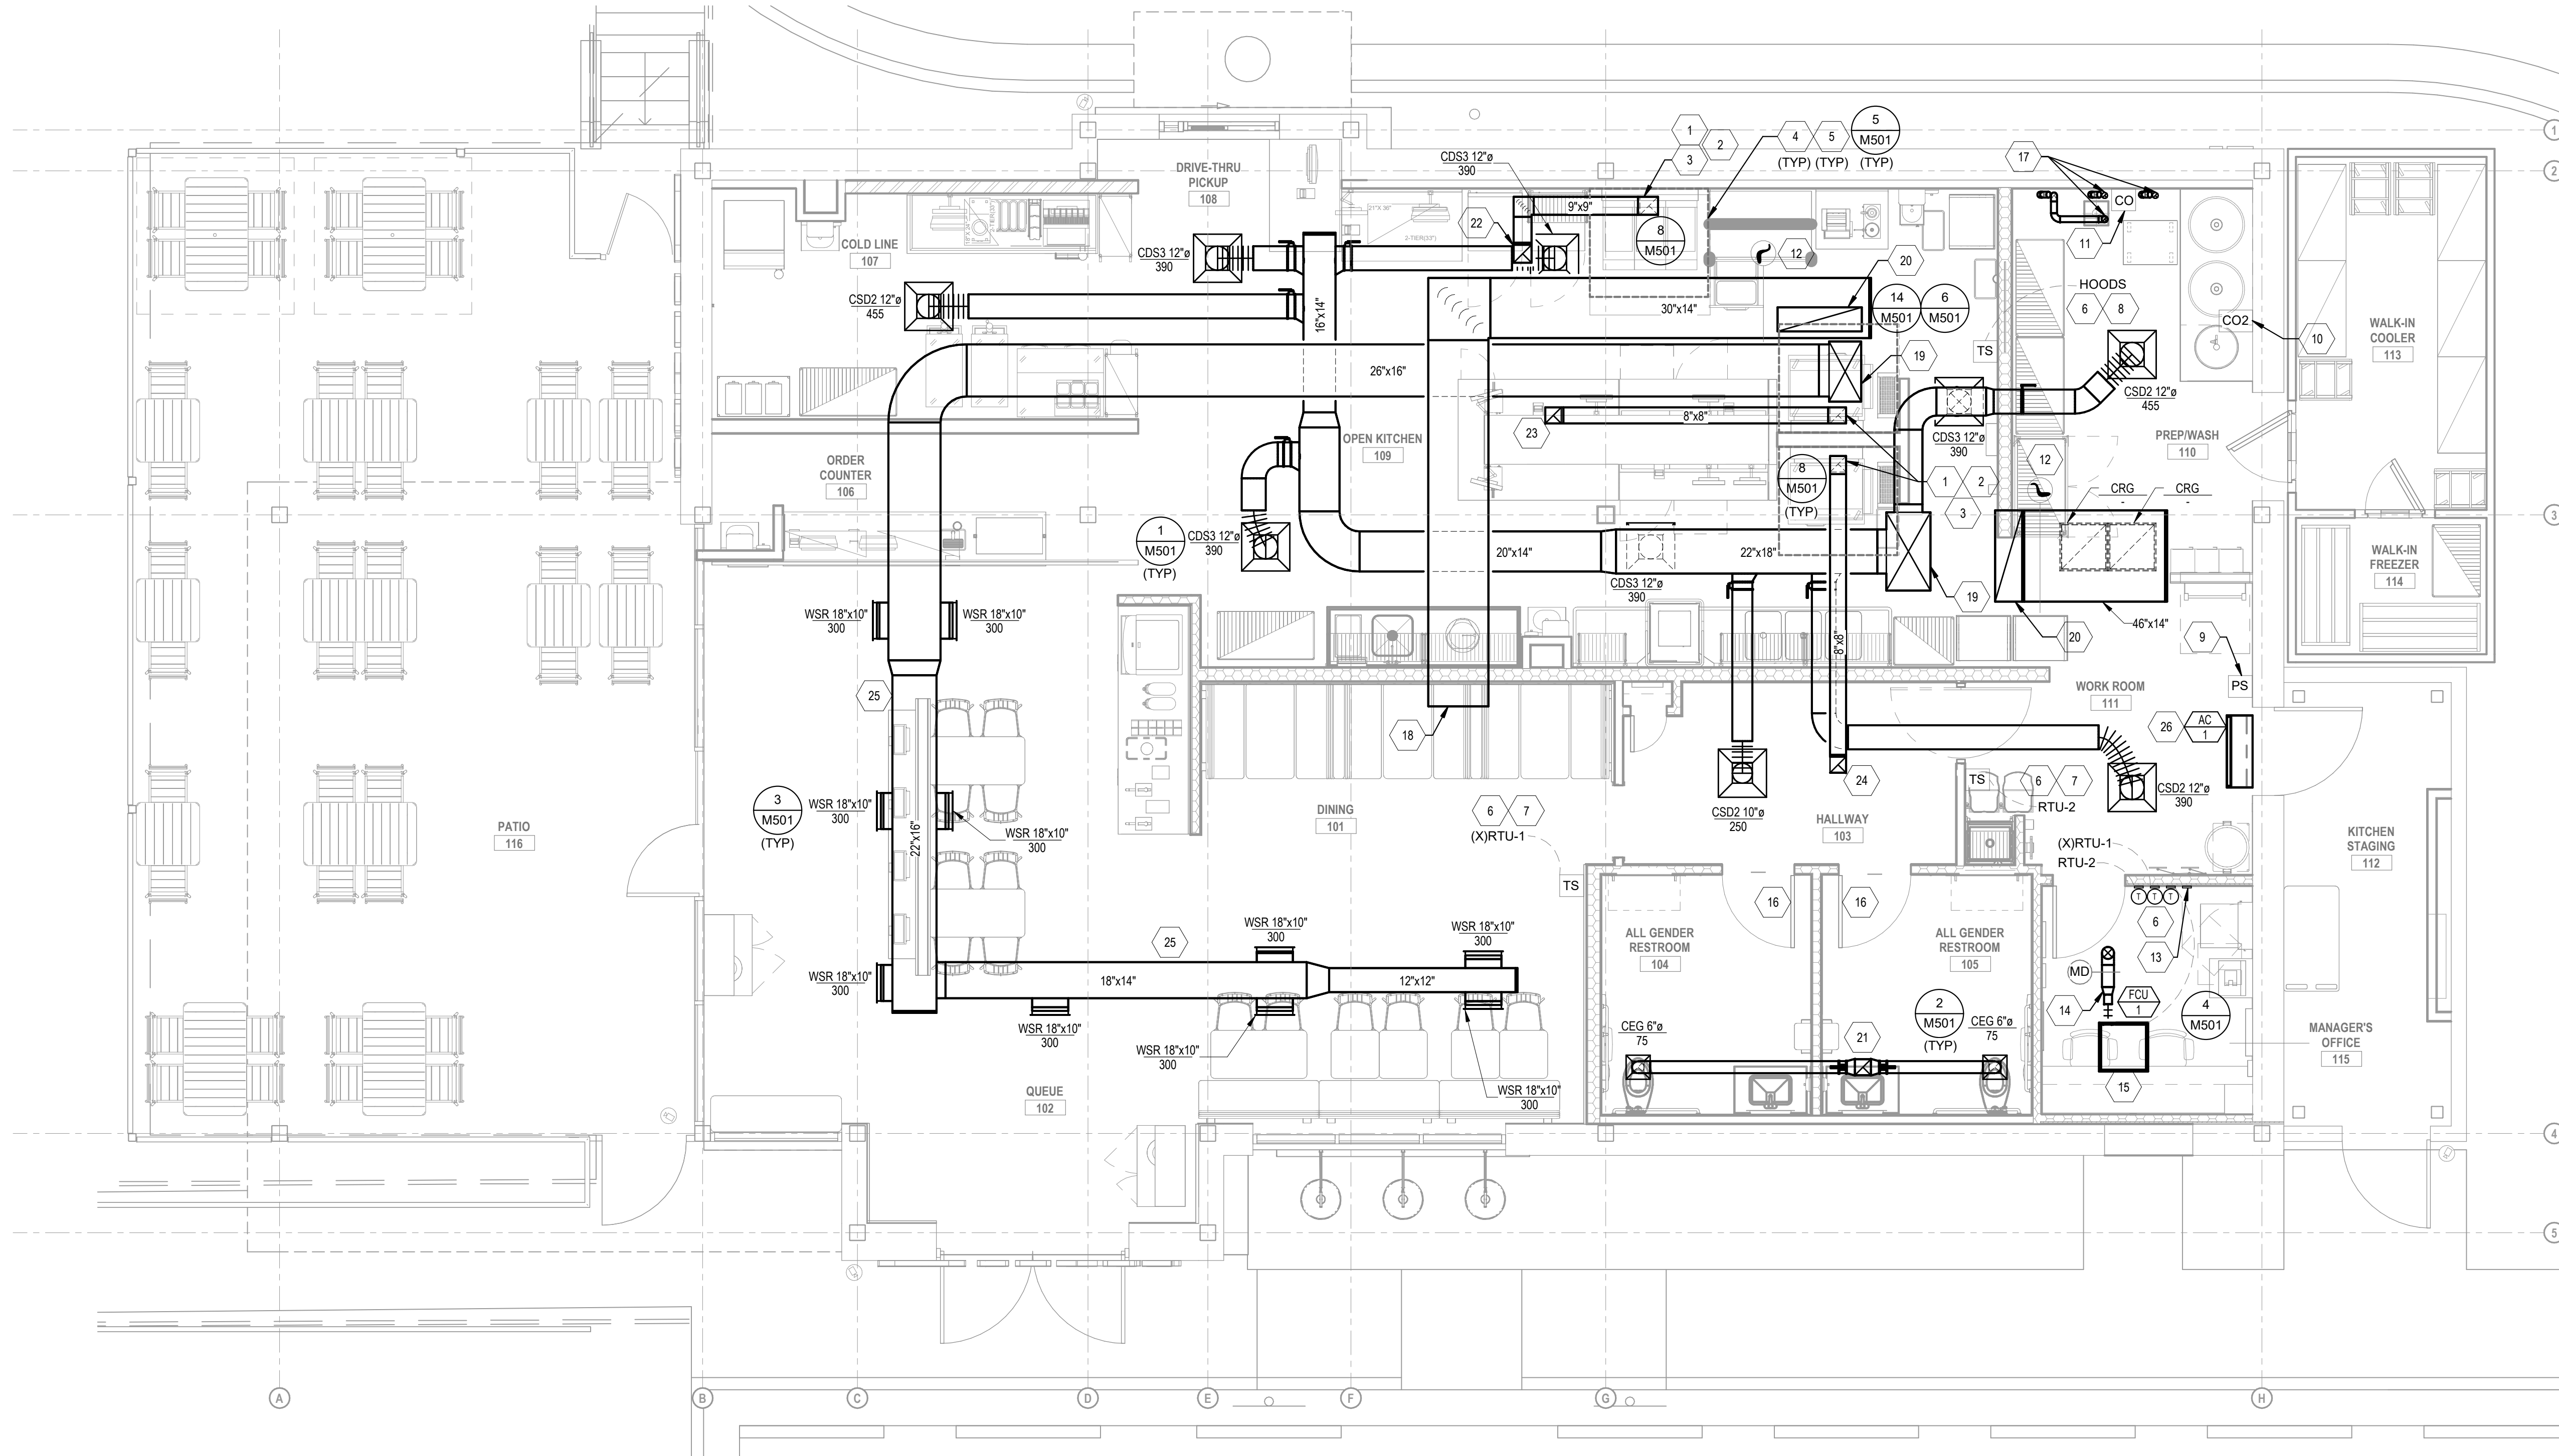

MECHANICAL PLAN

1/4" = 1'-0" 1

NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS

161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET



MECHANICAL FLOOR PLAN

DRAWN BY: RTM
CHECKED BY: RTM
PROJECT NO: 25-088

M101

MECHANICAL ROOF PLAN NOTES:

1	PROVIDE CONCENTRIC VENT MODEL NUMBER PVC-3CT.
2	MAINTAIN ALL OUTSIDE AIR INTAKES A MINIMUM OF 10'-0" RADIUS FROM EXHAUST, TYPICAL.
3	CONTRACTOR SHALL VERIFY WITH EQUIPMENT SUPPLIER EXACT ROUTING AND SIZE OF INSULATED REFRIGERANT PIPING. SINGLE LINESET SHOWN FOR CLARITY. INSTALL PER MANUFACTURERS RECOMMENDATIONS.
4	TURN DOWN 6"Ø INTAKE AND END OPEN OVER ROOF (MIN. 24") WITH INSECT SCREEN.
5	CONTRACTOR SHALL COORDINATE WITH NATIONAL TAB TO PROVIDE UV-PHI INDOOR AIR PURIFICATION SYSTEM, MODEL PH-PPKG-24V. INSTALL IN UNIT BLOWER COMPARTMENT PER MANUFACTURER'S INSTRUCTIONS.
6	AREA RESERVED FOR REFRIGERATION CONDENSER(S) PROVIDED BY KITCHEN EQUIPMENT CONTRACTOR. COORDINATE EQUIPMENT LOCATION AND CONDENSER INSTALLATION WITH KITCHEN EQUIPMENT CONTRACTOR.
7	REFERENCE PLUMBING DRAWINGS FOR CONDENSATE DRAIN ROUTING AND TERMINATION REQUIREMENTS.

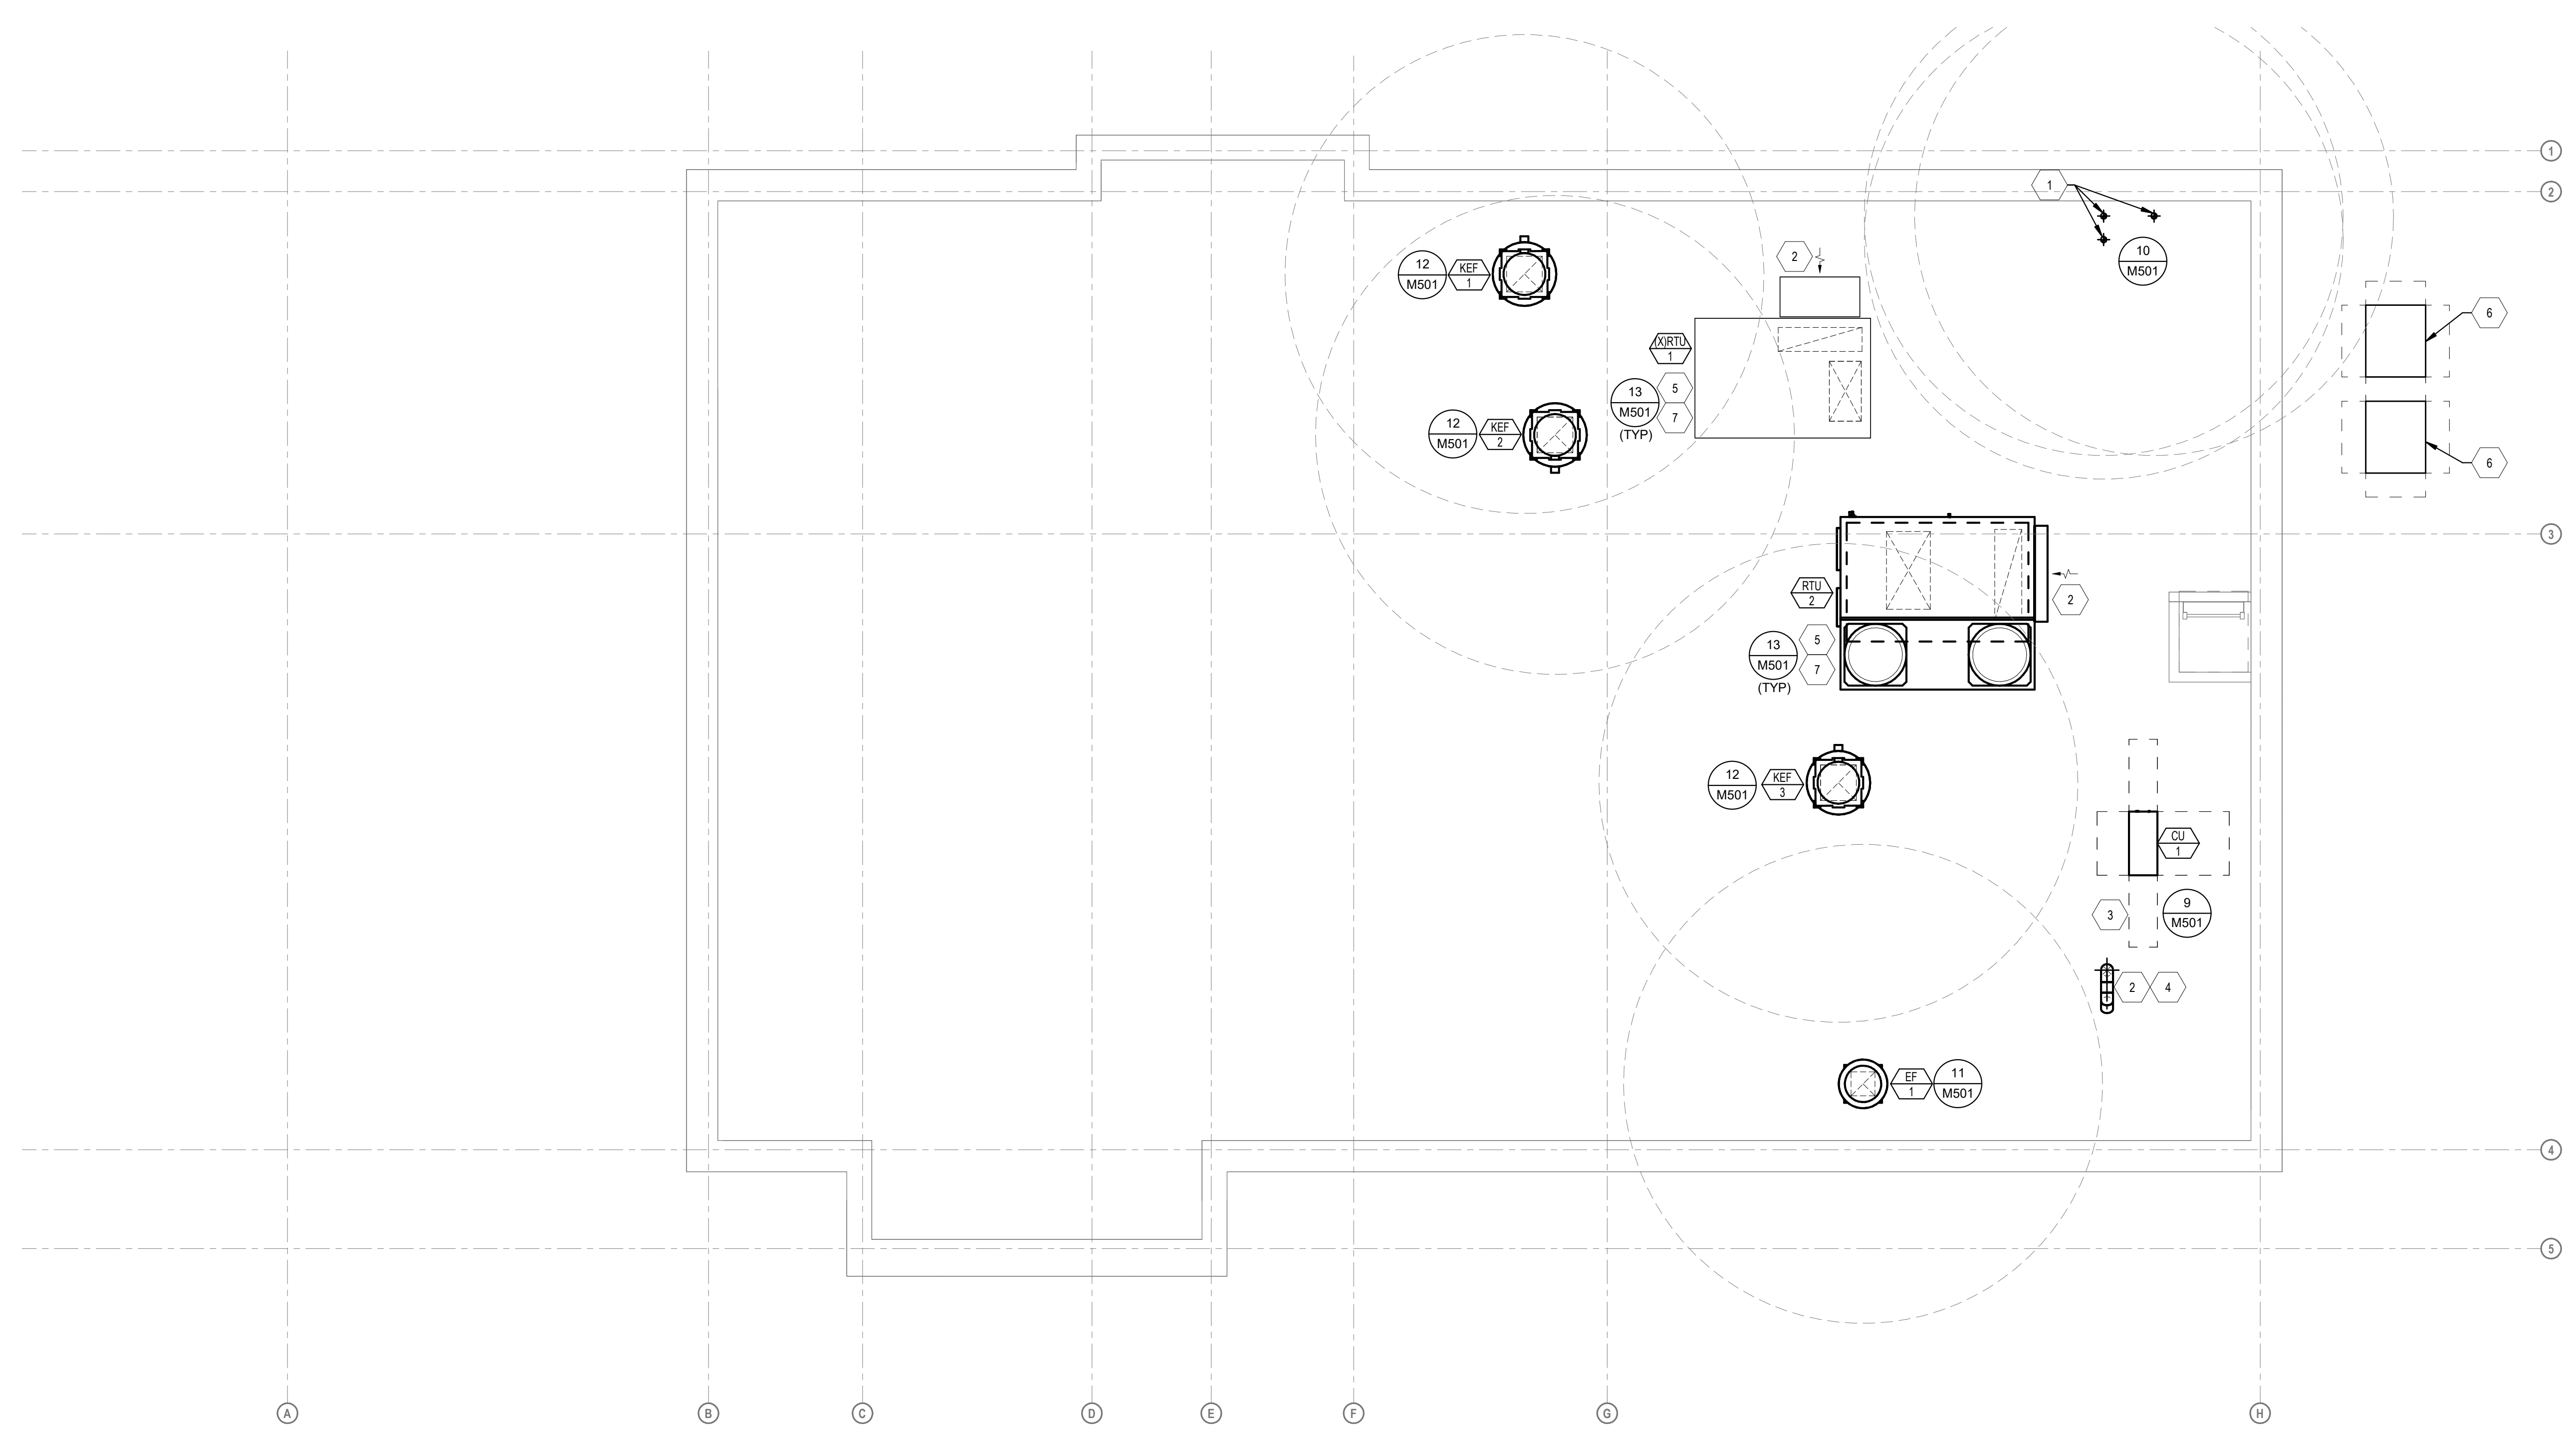

MECHANICAL ROOF PLAN

1

6/20/2025 Autodesk Docs/SHAKE SHACK - Athens, GA/SHAKE SHACK Athens, GA - MEP.rvt

5310 E. HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:



SEAL SIGNATURE:



NO.	BY	DATE	DESCRIPTION
-----	----	------	-------------

SHAKE SHACK

SHAKE SHACK - ATHENS

161 ALPS RD
ATHENS, GA 30606
SHACK #1765


PERMIT/BID SET

MECHANICAL ROOF PLAN

DRAWN BY: RTM
CHECKED BY: RTM
PROJECT NO: 25-088


M150

Autodesk Docs/Shake Shack - Athens, GA/Shake Shack - Athens, GA - MEP.rvt

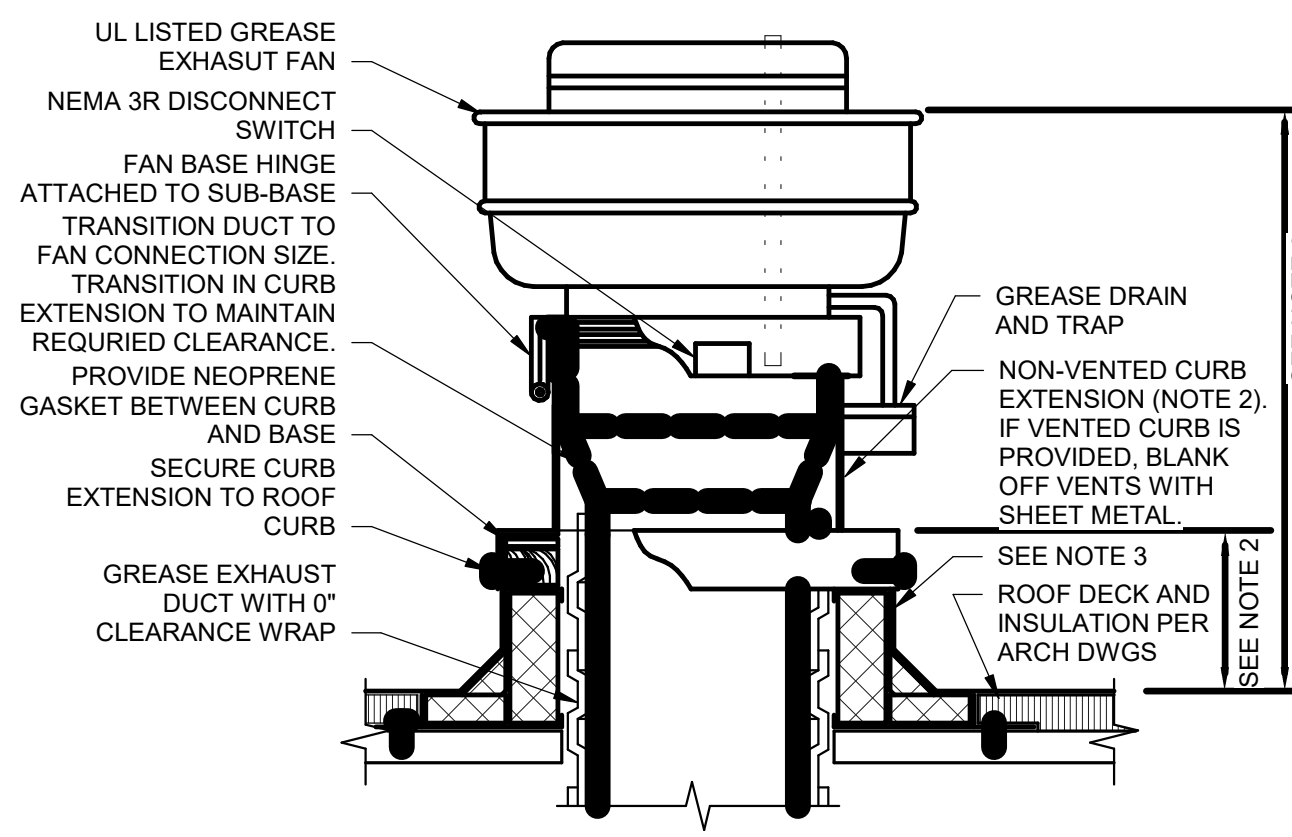


- NOTES:**
- ARRANGEMENT SHOWN IS SCHEMATIC, ADJUST TO SUIT FIELD CONDITIONS AND MEET LOCAL CODE.
 - PROVIDE CURB EXTENSION MADE FROM NON-COMBUSTIBLE MATERIAL OF HEIGHT REQUIRED TO MOUNT FAN BASE A MINIMUM 18 INCHES ABOVE COMBUSTIBLE CURB MATERIAL AND DISCHARGE GREASE OUTLET A MINIMUM OF 40 INCHES ABOVE ROOF SURFACE OR ANY ADJACENT BUILDING STRUCTURE WITHIN 10 FEET OF OUTLET, WHICHEVER IS HIGHER.
 - PREFABRICATED INSULATED ROOF CURB WITH TREATED WOOD NAILER, CANT, AND STEP AS REQUIRED TO ACCOMMODATE ROOF INSULATION. FRAME AND SECURE CURB TO ROOF WITH METHOD CONSISTENT WITH ROOF CONSTRUCTION. ROOF CURB SHALL BEAR ON ROOF STRUCTURE. FOR SLOPED ROOFS, PROVIDE CURB WITH DIMENSIONS CAPABLE OF COMPENSATING ROOF SLOPE TO ENSURE FAN IS INSTALLED LEVEL. REFER TO ARCHITECTURAL DRAWINGS AND CURB MANUFACTURER'S DETAILS FOR MORE INFORMATION.
- HIGH WIND STRAPPING: PROVIDE STAINLESS STEEL STRAPS OF LENGTH, WIDTH, THICKNESS, AND SPACING SUFFICIENT TO SECURE FAN TO CURB TO WITHSTAND WIND SPEED REQUIREMENTS PER LOCAL CODE. WRAP STRAPS OVER FAN AND SECURELY ATTACH TO OPPOSITE SIDE OF THE CURB.

12 UPBLAST GREASE EXHAUST FAN DETAIL
M501 SCALE: N.T.S.

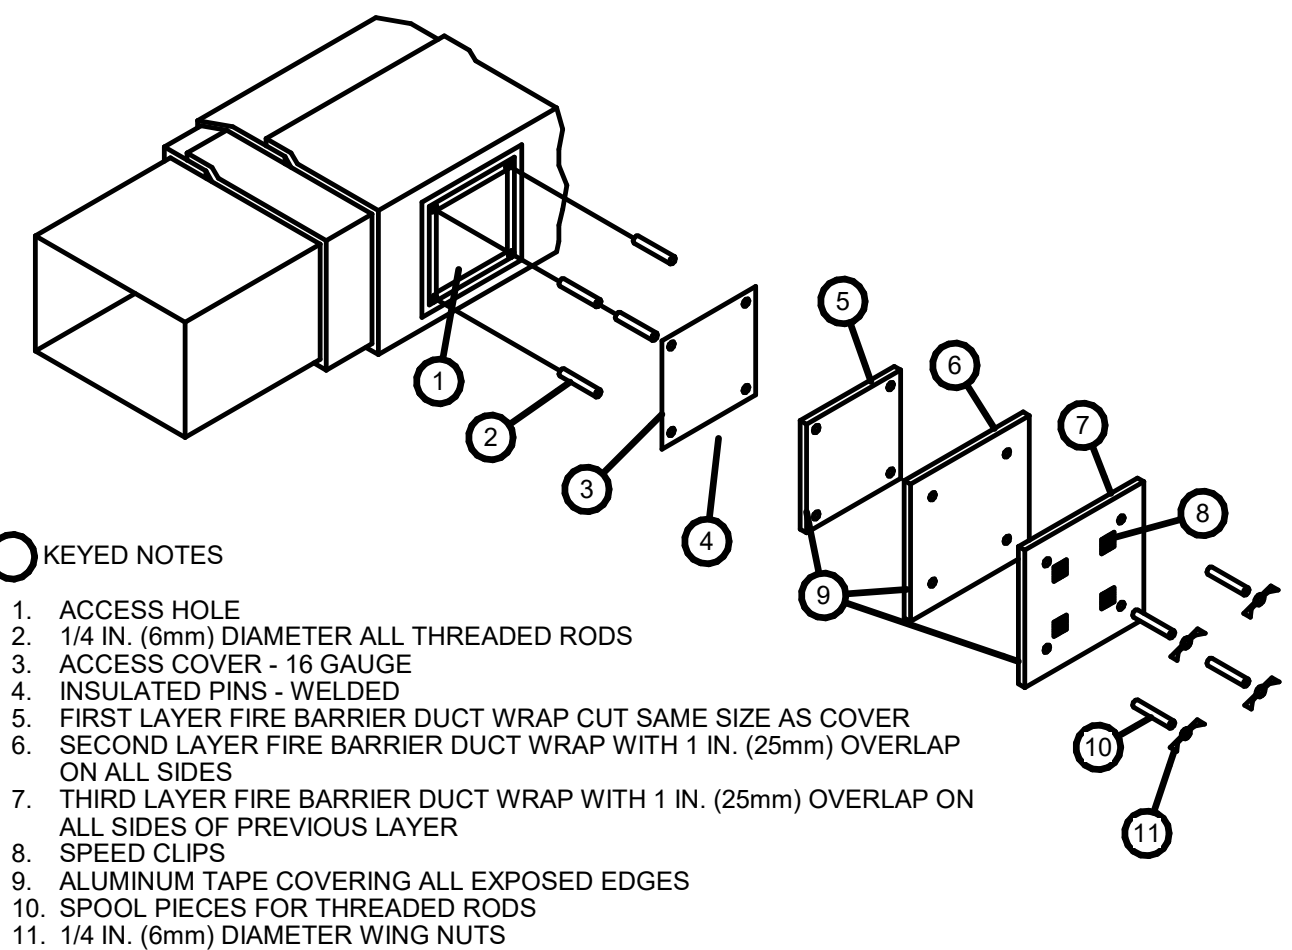


- KEYED NOTES**
- ACCESS HOLE
 - 1/4 IN. (6mm) DIAMETER ALL THREADED RODS
 - ACCESS COVER - 16 GAUGE
 - INSULATED PINS - WELDED
 - FIRST LAYER FIRE BARRIER DUCT WRAP CUT SAME SIZE AS COVER
 - SECOND LAYER FIRE BARRIER DUCT WRAP WITH 1 IN. (25mm) OVERLAP ON ALL SIDES
 - THIRD LAYER FIRE BARRIER DUCT WRAP WITH 1 IN. (25mm) OVERLAP ON ALL SIDES OF PREVIOUS LAYER
 - SPEED CLIPS
 - ALUMINUM TAPE COVERING ALL EXPOSED EDGES
 - SPOOL PIECES OF THREADED RODS
 - 1/4 IN. (6mm) DIAMETER WING NUTS
- NOTES:**
- FOR REFERENCE ONLY. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
 - AT CONTRACTOR'S OPTION, A LISTED UL 1976 GREASE ACCESS DOOR PRODUCT MAY BE SUBSTITUTED FOR THE ACCESS DOOR PICTURED IN THIS DETAIL. DOOR SHALL BE RATED FOR UP TO 2,300F AND MEET NFPA STANDARDS. BOLTS SHALL BE LONG ENOUGH FOR DUCT WRAP SYSTEM (WHEN USED). INSTALL IN ACCORDANCE WITH MANUFACTURER'S LITERATURE.

8 GREASE DUCT CLEANOUT ACCESS DOOR DETAIL
M501 SCALE: N.T.S.

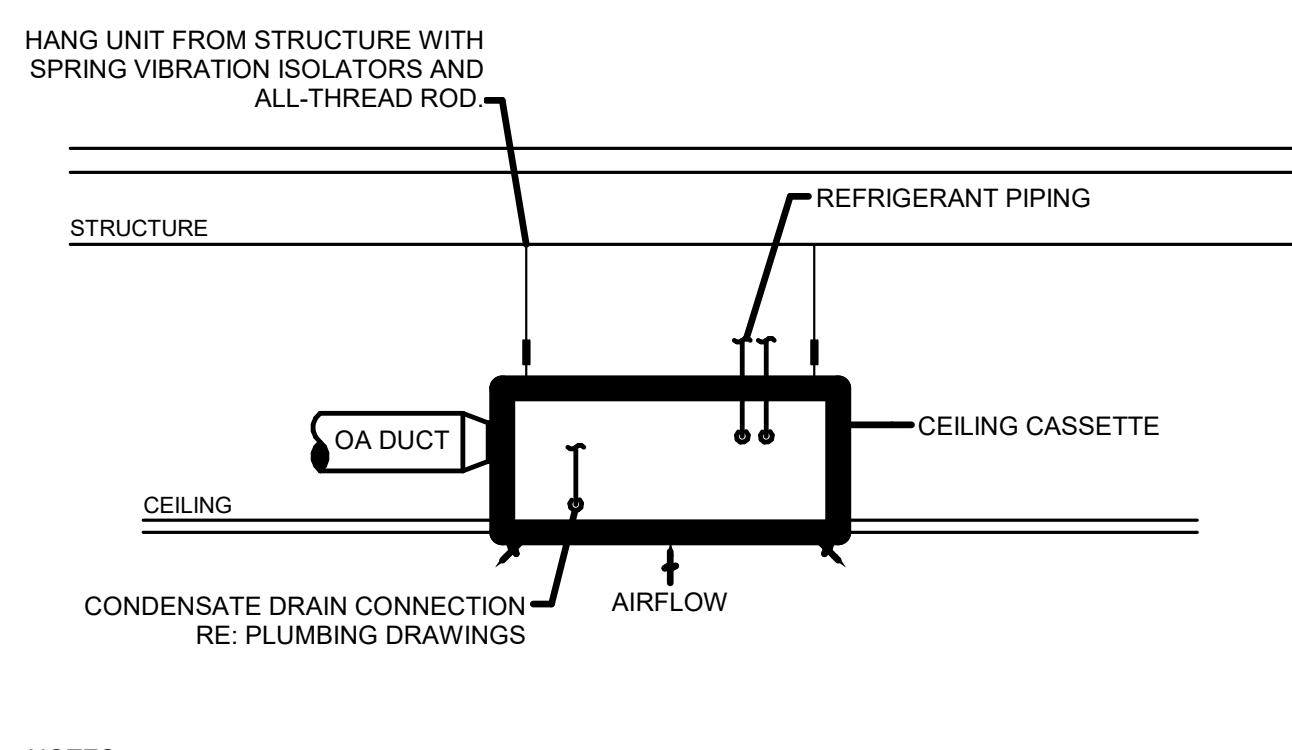


- NOTES:**
- ARRANGEMENT SHOWN IS SCHEMATIC, ADJUST TO SUIT FIELD CONDITIONS AND MEET LOCAL CODE REQUIREMENTS.
 - SET DAMPER TO DELIVER SCHEDULED OUTSIDE AIR FLOW.
 - REFER TO MANUFACTURER'S RECOMMENDATIONS FOR MAXIMUM CONDENSATE DRAIN LIFT HEIGHT.
 - REFER TO MANUFACTURER'S RECOMMENDATIONS FOR HORIZONTAL CONDENSATE DRAIN LIFT CONNECTION FROM THE UNIT.

4 CEILING CASSETTE DETAIL
M501 SCALE: N.T.S.

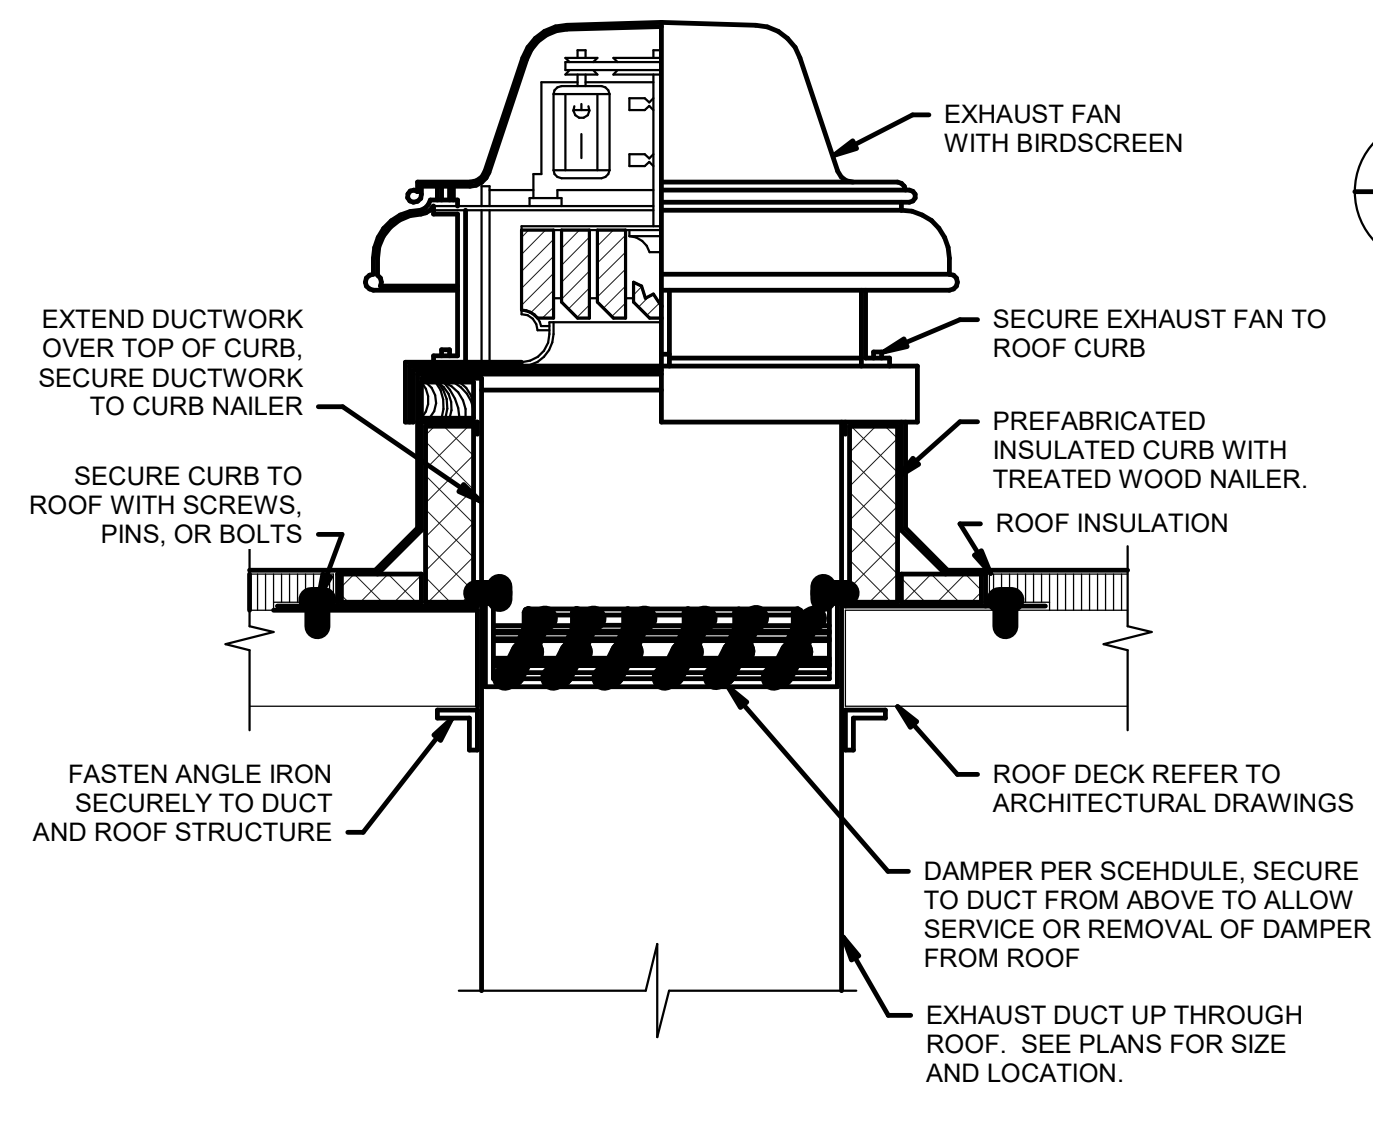


11 DOWNBLAST EXHAUST FAN DETAIL
M501 SCALE: N.T.S.

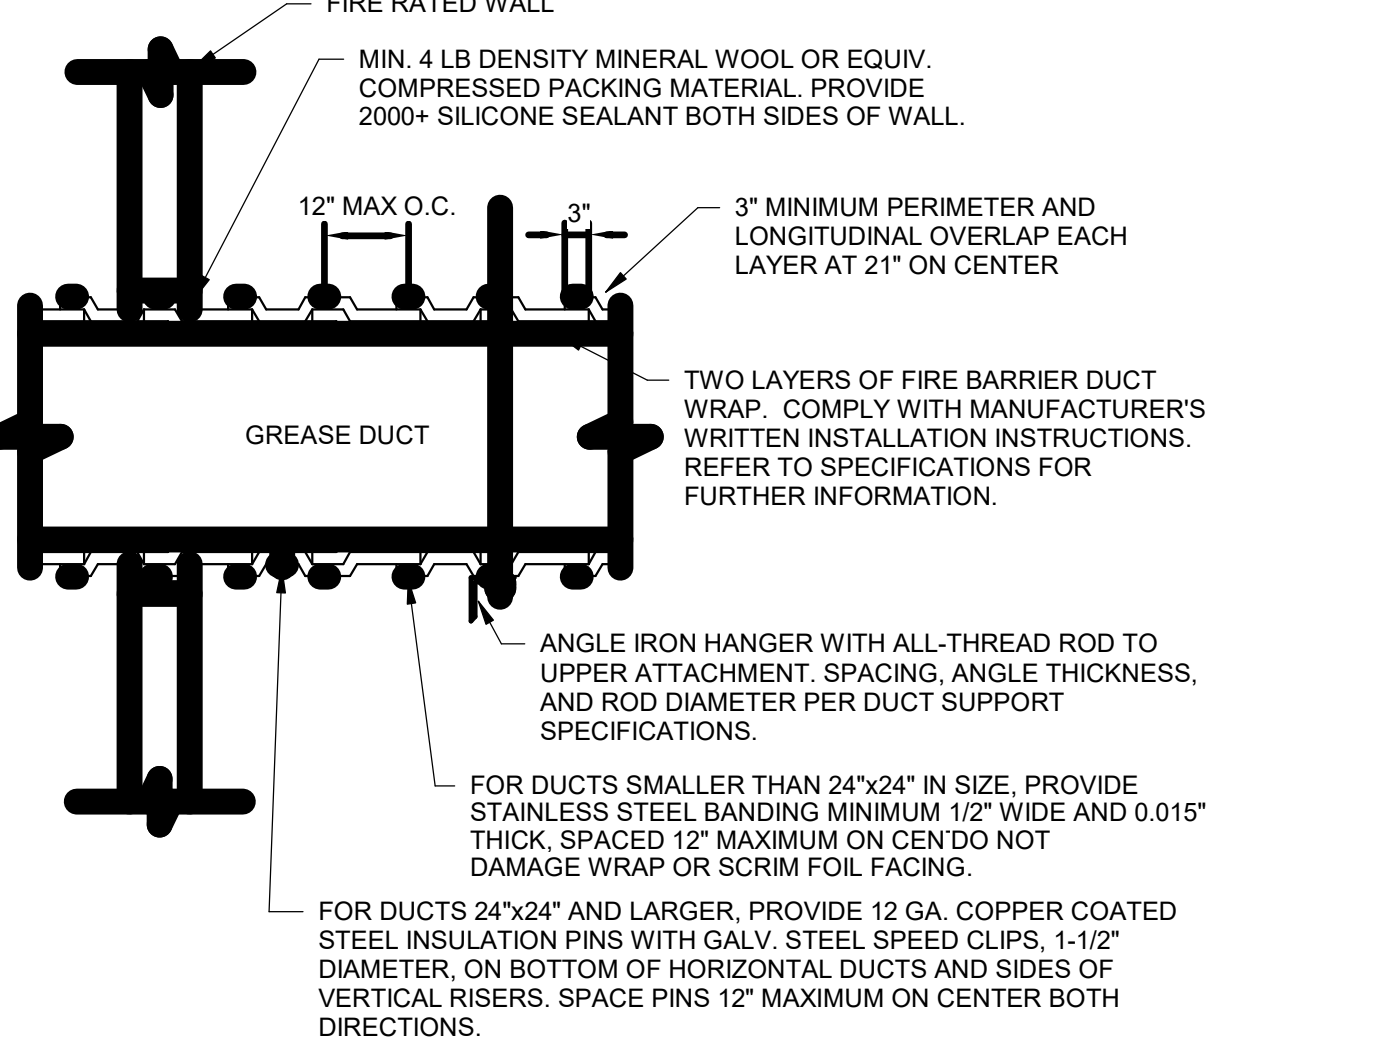


- NOTES:**
- INSTALL GREASE EXHAUST AND FIRE RATED DUCT WRAP IN ACCORDANCE WITH THE MANUFACTURER'S APPROVED INSTRUCTIONS AND UL LISTED INSTALLATION DETAILS. TECHNIQUES THAT DIFFER FROM THE ABOVE METHOD ARE ACCEPTABLE IF THEY ARE UL TESTED AND APPROVED.

7 GREASE DUCT FIRE WRAP INSULATION INSTALLATION DETAIL
M501 SCALE: N.T.S.

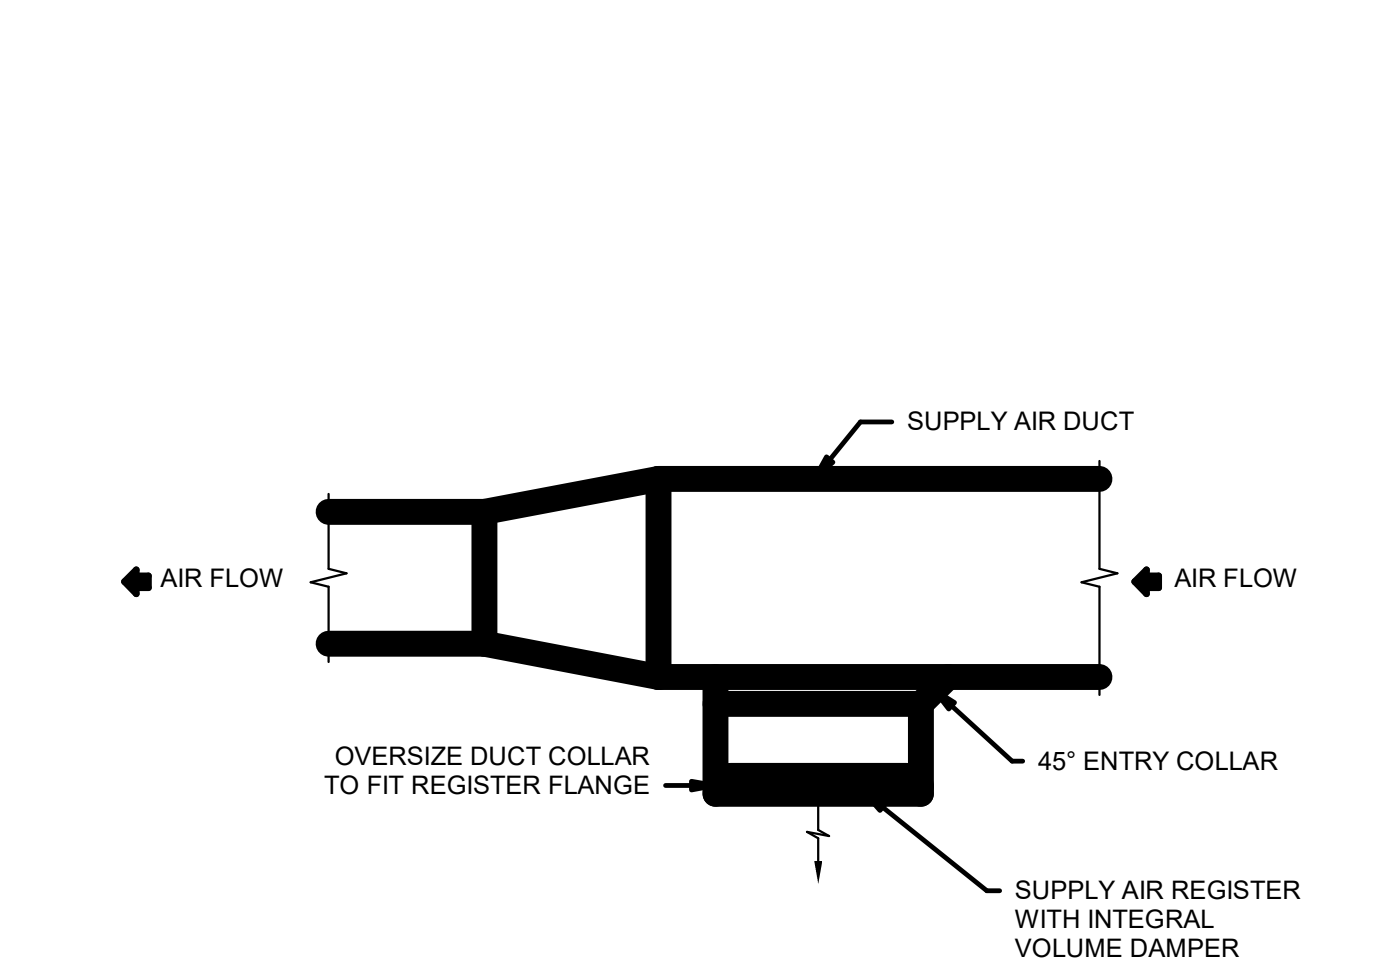


3 DUCT MOUNTED REGISTER DETAIL
M501 SCALE: N.T.S.

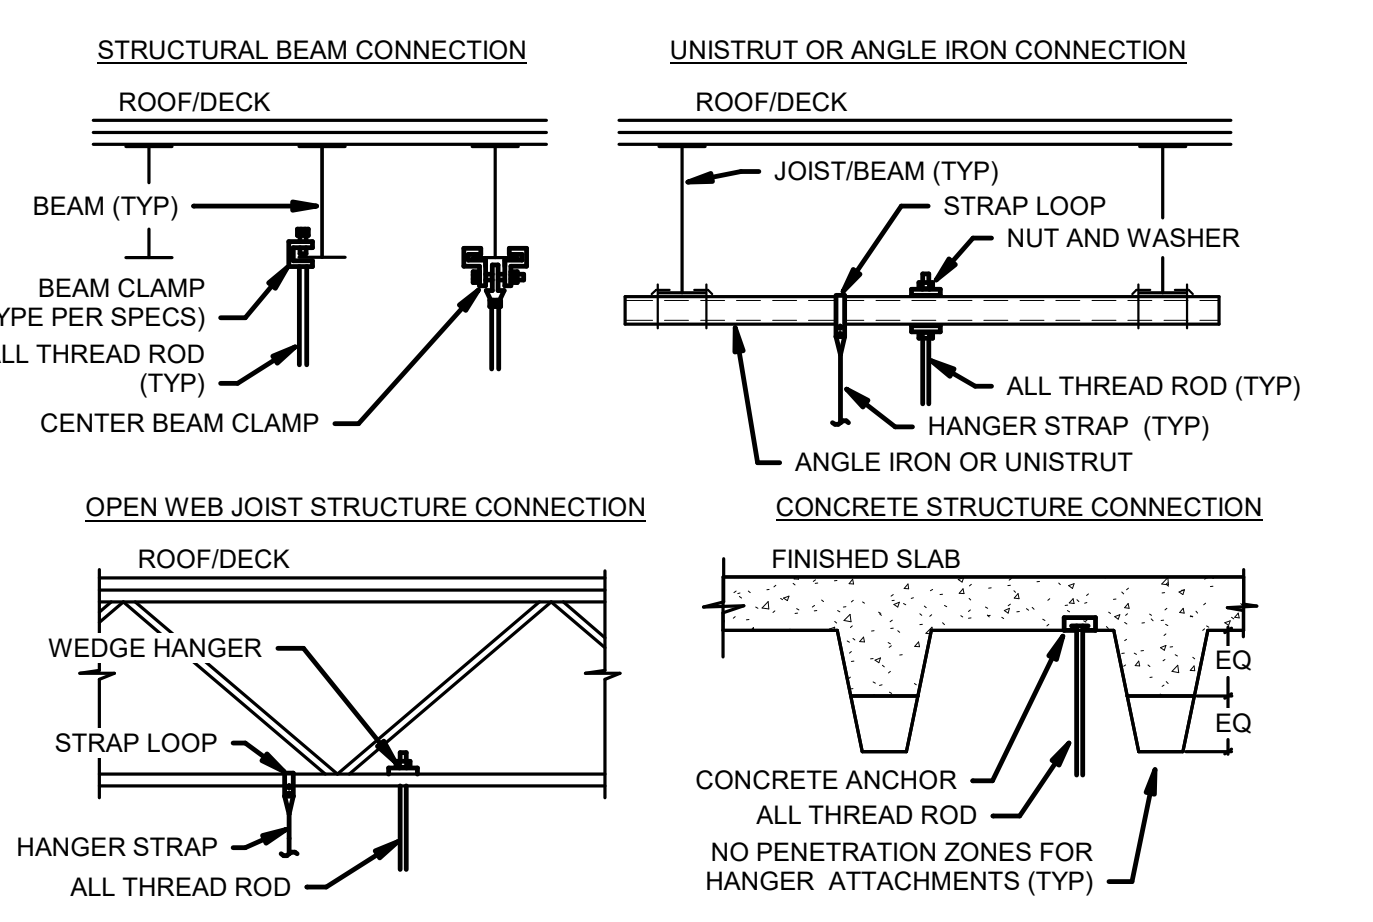


- NOTES:**
- ALL ATTACHMENTS SHALL BE INSTALLED PER MANUFACTURER'S REQUIREMENTS AND SHALL BE APPROVED FOR THE SPECIFIC APPLICATION.
 - COORDINATE ALL ATTACHMENTS WITH ARCHITECT AND STRUCTURAL ENGINEER.
 - REFER TO SPECIFICATIONS FOR MORE INFORMATION ON APPROVED ATTACHMENT METHODS.
 - REFER TO SPECIFICATIONS FOR REQUIREMENTS RELATING TO SEISMIC INSTALLATIONS.
 - FOR OPEN WEB JOIST STRUCTURE, CONTRACTOR MAY HANG FROM TOP CHORD AND RUN DUCT AND PIPING THROUGH WEB JOIST WHEN APPROPRIATE. ANY CONCENTRATED LOADS NOT OCCURRING AT JOIST PANEL POINTS MUST BE REVIEWED BY A STRUCTURAL ENGINEER FOR FIELD INSTALLED PANEL BRACE REQUIREMENTS.

14 HANGER UPPER ATTACHMENT DETAILS
M501 SCALE: N.T.S.

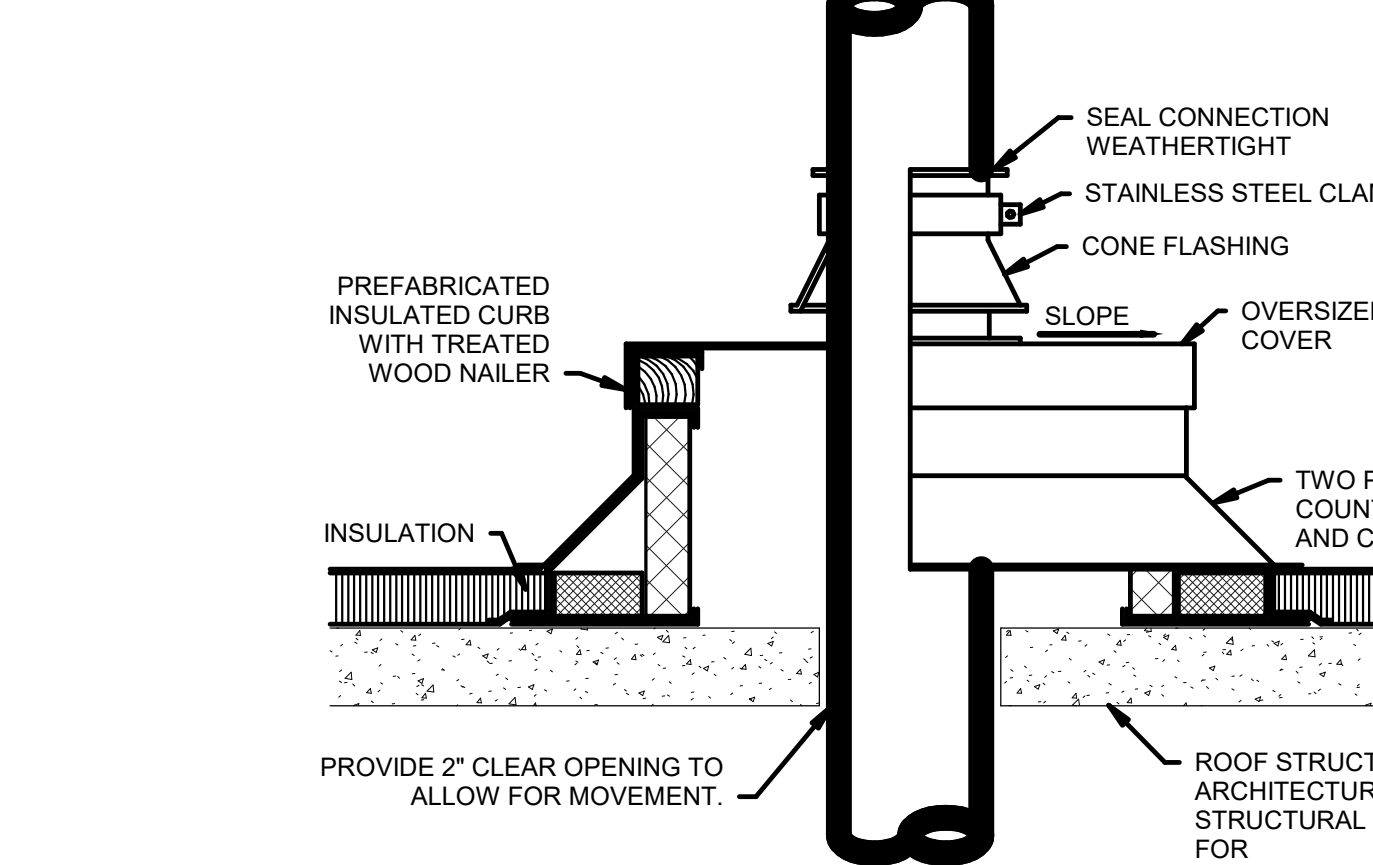


10 ROUND AIR DUCT OR PIPE PENETRATION THROUGH ROOF DETAIL
M501 SCALE: N.T.S.

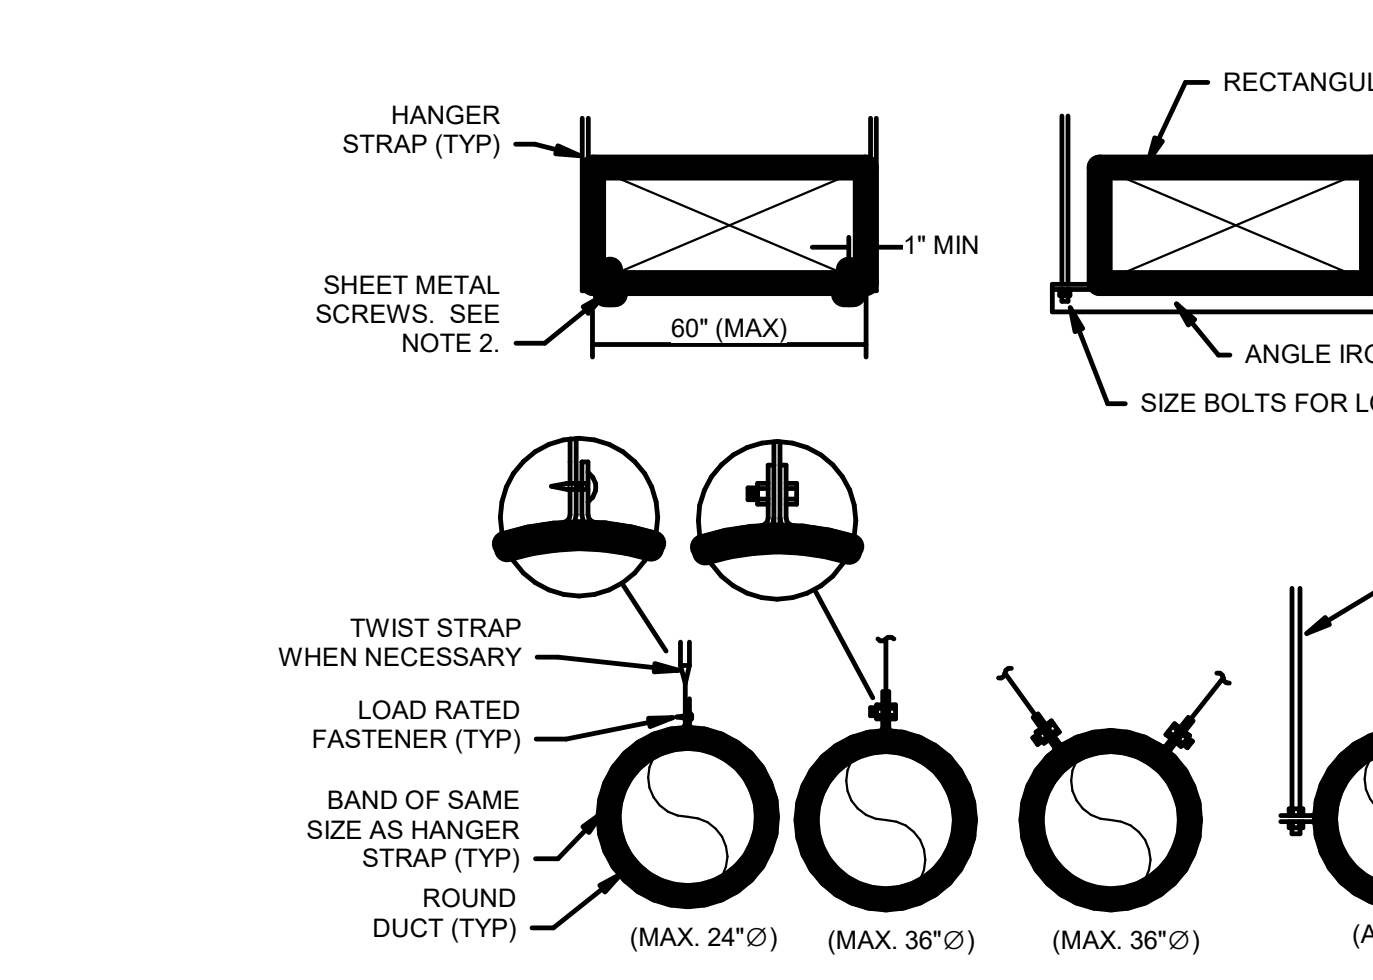


- NOTES:**
- USE THREADED ROD FOR RECTANGULAR DUCTS LARGER THAN 60" DIA.
 - OMIT SHEET METAL SCREWS IF HANGER STRAP IS CONTINUOUS AND LOOPS UNDER ENTIRE RECTANGULAR DUCT.
 - FOR ROUND DUCTS LARGER THAN 36" DIA, USE TWO HANGER RODS TO SUPPORT DUCT FROM EACH SIDE.
 - HANGERS MUST NOT DEFORM DUCT SHAPE.

6 DUCT HANGER LOWER ATTACHMENT DETAILS
M501 SCALE: N.T.S.

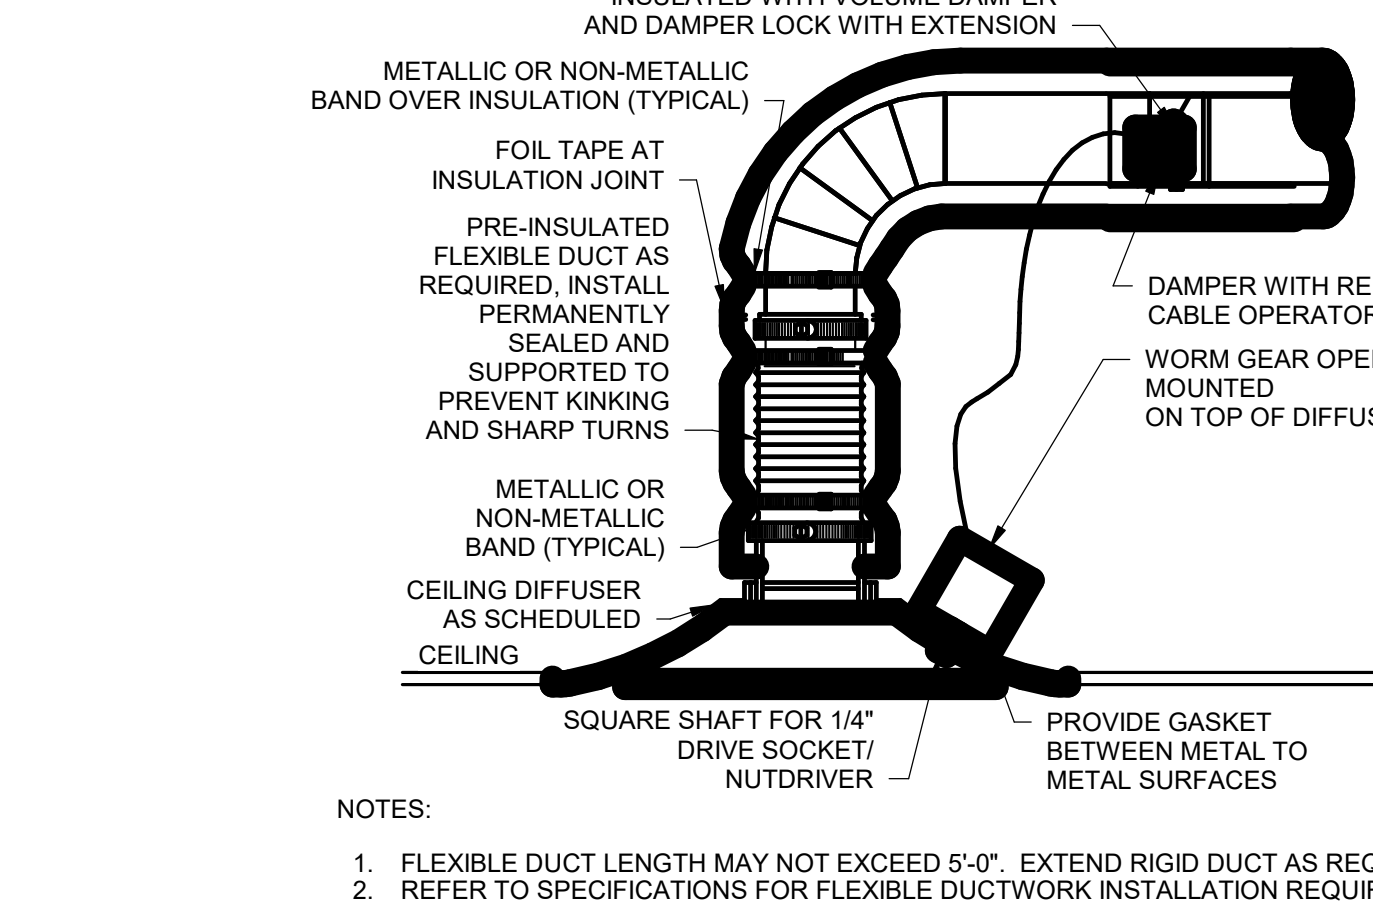


2 HARD CEILING DIFFUSER DETAIL
M501 SCALE: N.T.S.

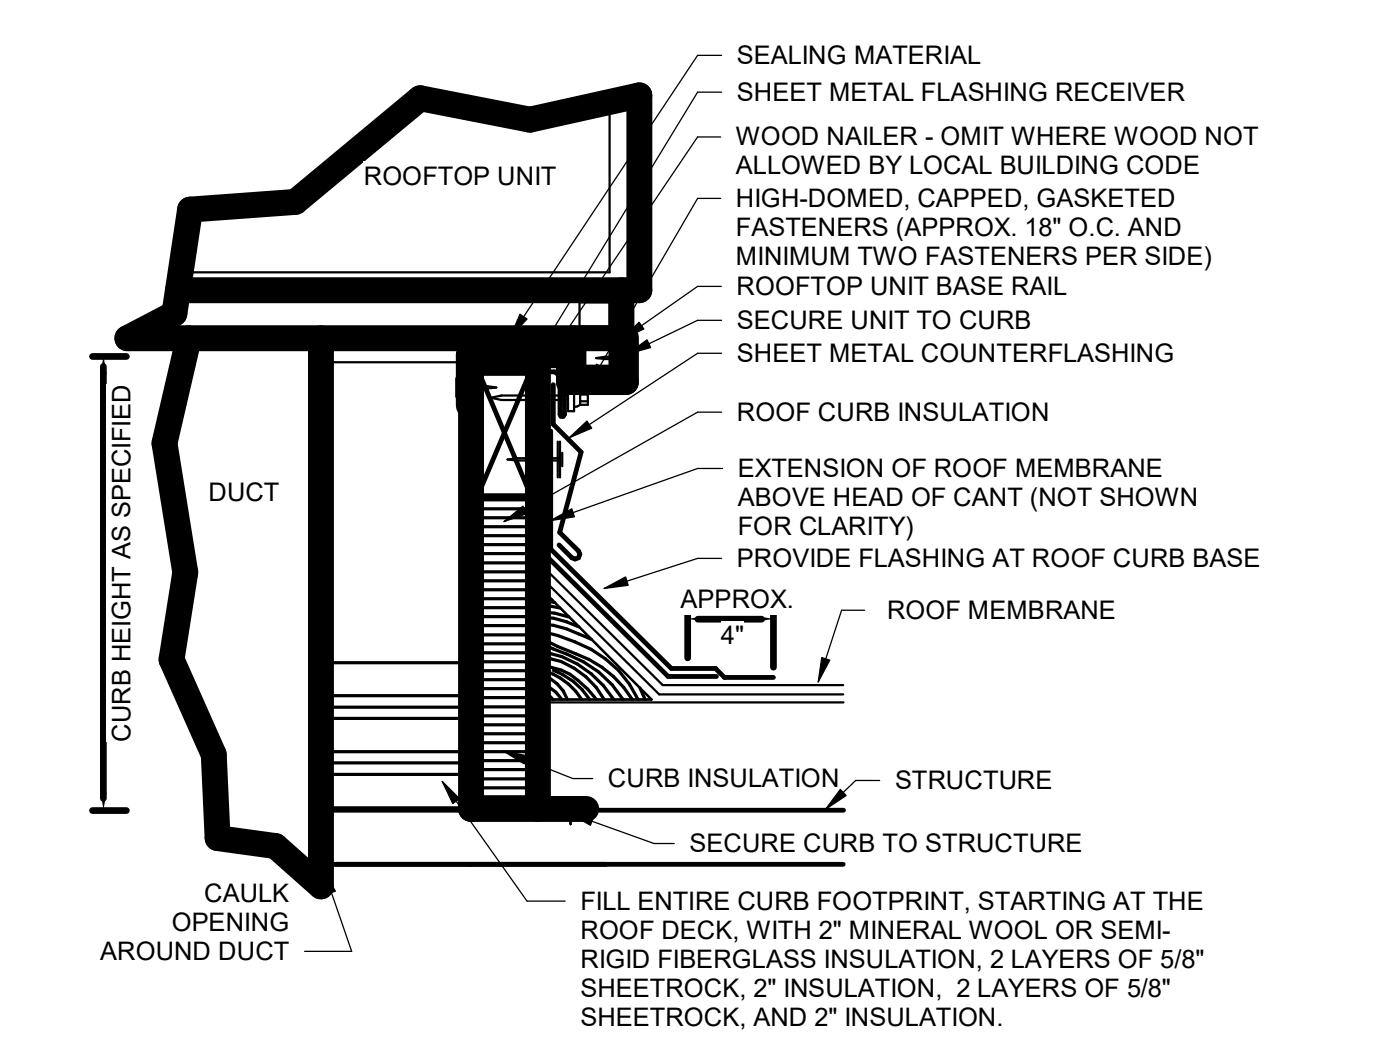


- NOTES:**
- CUT METAL DECKING TO ALLOW CURB INSTALLATION ON STEEL FRAMING. AFTER CURB IS SET IN PLACE, TRIM REMAINING METAL DECKING AND INSTALL WITHIN CURB. TACK WELD DECKING TO SUPPORT STEEL. DO NOT WELD INTERIOR DECKING TO ROOF CURB. PROVIDE ADDITIONAL CROSS FRAMING TO SUPPORT INTERIOR DECKING AND FILL MATERIAL AS REQUIRED.
 - REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS FOR ROOF CURBS, ANCHORING AND SEISMIC/WIND RESISTANCE.

13 ROOF CURB DETAIL
M501 SCALE: N.T.S.

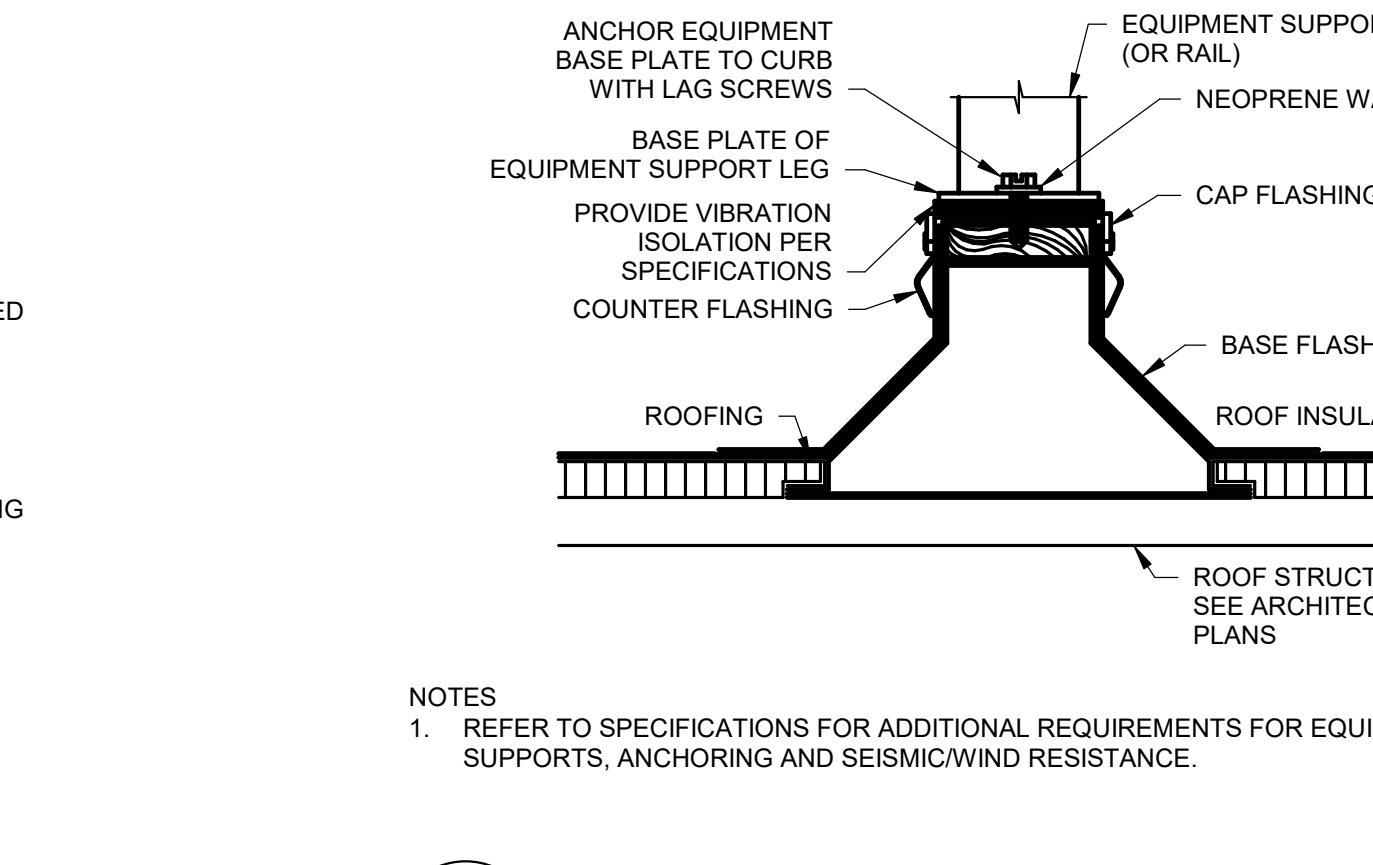


9 ROOF EQUIPMENT SUPPORT RAIL DETAIL
M501 SCALE: N.T.S.

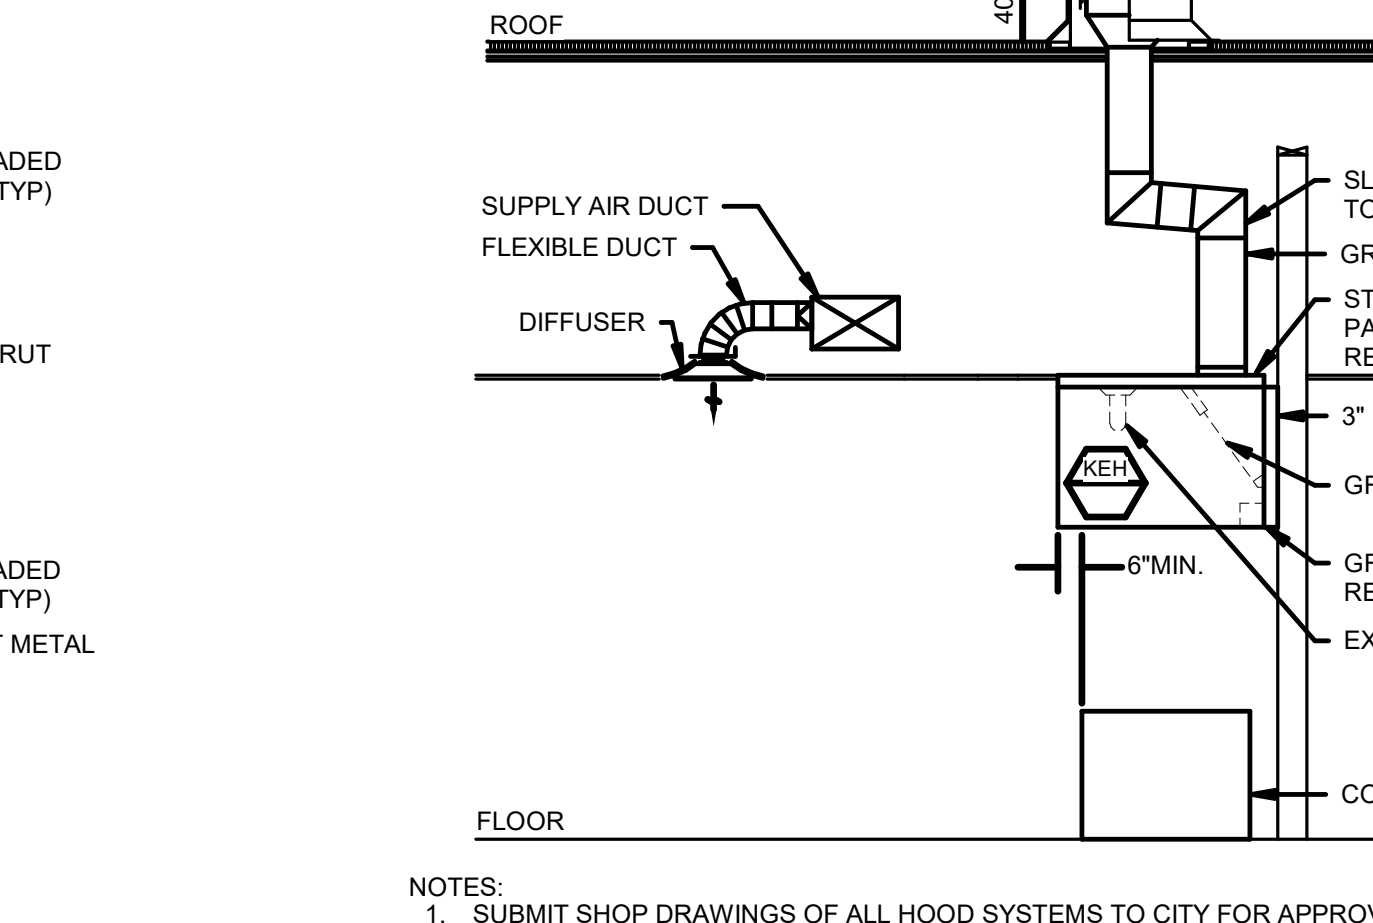

- NOTES:**
- SUBMIT SHOP DRAWINGS OF ALL HOOD SYSTEMS TO CITY FOR APPROVAL PRIOR TO INSTALLATION. TOTAL HOOD SYSTEM TO BE IN COMPLETE CONFORMANCE WITH NFPA, AND ALL LOCAL CODES AND REGULATIONS.
 - COORDINATE ALL FIRE PROTECTION SYSTEMS WITH FIRE PROTECTION CONTRACTOR WHO SHALL ALSO BE RESPONSIBLE FOR ALL PERMITS AND TESTING REQUIRED.
 - PROVIDE WRAP SYSTEM WHERE APPROVED BY LOCAL CODES IN LIEU OF RATED ENCLOSURE.
 - PROVIDE ACCESS PANELS AS REQUIRED BY LOCAL CODE AND PER PLAN.
 - HOODS SHALL EXTEND MINIMUM 6" BEYOND ALL OPEN SIDES AND FRONT EDGE OF FOOD COOKING EQUIPMENT BEING SERVED.

5 KITCHEN EXHAUST HOOD ELEVATION DETAIL
M501 SCALE: N.T.S.

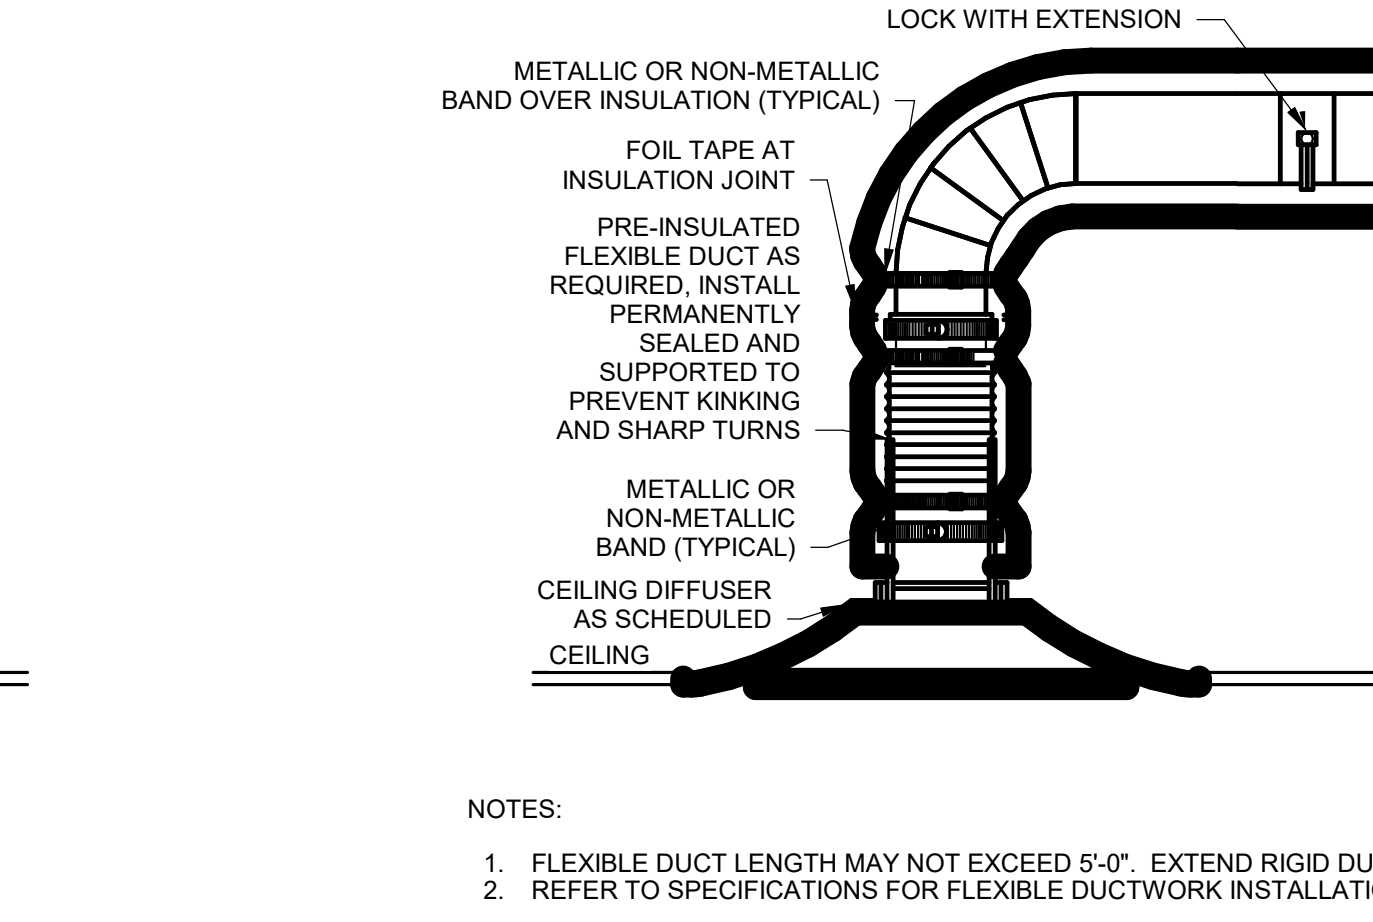

1 LAY-IN CEILING DIFFUSER DETAIL
M501 SCALE: N.T.S.

5310 E HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:
rtm
14901 Quorum Drive, Suite 905, Dallas, TX
75254 | 947.756.4190



SEAL SIGNATURE:

NO.	BY	DATE	DESCRIPTION

SHAKE SHACK

SHAKE SHACK - ATHENS
161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET

MECHANICAL DETAILS

DRAWN BY: RTM
CHECKED BY: RTM
PROJECT NO: 25-088

M501

Provide remote sensors where indicated on the drawings and integrate them with the thermostat control equipment. Remote sensors shall have the following features:

1. Wired connection.
2. Temperature sensor.
3. Humidity sensor.
4. Blank faceplate.
5. Where multiple remote sensors are shown for a single unit, the sensors shall be provided in a single device.

Dry-bulb temperature sensors at a minimum shall be accurate to +/- 2 degrees Fahrenheit over the range of 40 to 80 degrees Fahrenheit. Wet-bulb temperature shall be calculated using dry-bulb temperature and humidity and shall be accurate to +/- 2 degrees Fahrenheit. Enthalpy shall be calculated using dry-bulb temperature and humidity and shall be accurate to +/- 3 BTU/lb over the range of 20 to 36 BTU/lb. Humidity sensors at a minimum shall be accurate within +/- 3 percent full range between 20 and 95 percent, with drift less than 1 percent full scale per year. Pressure transmitters at a minimum shall be accurate to +/- 1 percent full scale with drift less than 1 percent full scale per year.

Smoke detectors furnished and installed as indicated in this section or as scheduled on the plans (or heat detectors, if permitted by code) shall shut down each associated unit supply fan upon activation where required by code. Provide remote visual and audible alarm device in an approved location if smoke detectors are not connected to a fire alarm panel and label device as "Air Duct Detector Trouble".

Provide 24 Volt or 120 Volt timeswitches Intermatic Series FMD20 or equal programmable type with 7-day programming with up to two "ons" and "offs" per day. Battery backup shall provide 48 hours of memory retention. Override timer switches shall be spring wound, 8-hour, normally open type. Coordinate 120 V wiring of timeswitch with electrical contractor if 120 V model is provided.

Provide relays with contact rating, configuration, and coil voltage that is suitable for the application. Relay shall be general purpose, enclosed plug-in type and protected by a heat and shock resistant duct cover. Number of contacts and operational function shall be as required. Transient suppression shall be provided as an integral part of the relay. Contactors shall be single coil, electrically operated, mechanically held, double-break, silver-to-silver type protected by arcing contacts. Positive locking shall be obtained without the use of hooks, latches, or semi-permanent magnets. Operating and release times shall be 100 milliseconds or less.

7. SEQUENCE OF OPERATION

A. FAN COIL UNIT CONTROL

During occupied hours, operate fan coil unit supply fan continuously and open outdoor air damper to maintain minimum ventilation. Cycle stage(s) of DX cooling and electric heating to maintain room thermostat set point (75 degrees Fahrenheit cooling, 70 degrees Fahrenheit heating). Duct mounted smoke detectors shall shutdown unit upon alarm.

During unoccupied hours, cycle the fan coil unit supply fan and cooling or heating system to maintain unoccupied setback temperature set points. Outdoor motorized air damper shall be closed during unoccupied hours.

Connect the Outdoor motorized air damper to the same time clock as the restroom exhaust.

B. KITCHEN EXHAUST FAN CONTROL

Kitchen exhaust fan shall be energized through on-off switches at the associated exhaust hoods or cooking equipment or through a master kitchen ventilation control panel as indicated on the drawings. Kitchen fans shall be interlocked to operate with cooking appliances, make-up air and other air-handling equipment providing fresh air to the kitchen area as noted or scheduled on the drawings.

C. ROOFTOP UNIT CONTROL

Refer to RTU CONTROL MATRIX on Sheet M601 for required rooftop unit control options.

D. RESTROOM EXHAUST FAN (EF-1) CONTROL

Operate exhaust fans continuously during occupied hours and shut down during unoccupied hours. Provide a 7-day timedlock to switch each system between occupied and unoccupied operation.

E. AIR CURTAIN CONTROL

Interlock air curtain with door limit switch to energize when the door opens. Units scheduled with heating coils shall cycle the stages of heat to maintain room temperature setpoint of 70 F (adj).

F. ELECTRIC UNIT HEATER CONTROL

Unit heater shall be activated by unit mounted thermostat to maintain room temperature setpoint (60 deg F).

8. ALTERNATES

A. DESCRIPTION

Refer to the architectural portion of the specification for list of alternates. Applicable sections of the base specifications shall apply to all work required by the alternate unless otherwise specified. Determine whether or not and how each alternate affects work. Include labor, materials, equipment, and transportation services necessary for and incidental to the completion of work under each particular alternate. Furnish separate bid for each alternate applicable to work, stating the amount to be added or deducted from the base bid.

9. COMMISSIONING OF MECHANICAL SYSTEMS
Commissioning of HVAC System

A. PART 1 GENERAL

1.1 SUMMARY

a. Section includes Cx process requirements for the following HVAC systems, assemblies, and equipment:

1. Air handling units (Supply fans, return fan, packaged units, roof top units, specialized fans)
2. Exhaust fans
3. Fan coil units and terminal units
4. Condensing units
5. Make-Up air units
6. Ductwork and piping
- b. Related Requirements:
 1. Section 019113 "General Commissioning Requirements" for general Cx process requirement and CxA responsibilities.

1.2 INFORMATIONAL SUBMITTALS

a. Construction Checklists: Draft construction checklists will be created by CxA for Contractor review.
b. Construction Checklists: Installation and Performance test checklists for systems, assemblies, subsystems, equipment, and components to be part of the Cx process and according to requirement in Section 019113 "General Commissioning Requirement."

1. Refrigerant piping, including the following:
 - a. Refrigerant piping, fittings, and specialties.
 - b. Refrigerant charge.
 - c. General duty and specialty valves.
 - d. Meters and gauges.
2. Air distribution systems, including the following:
 - a. Supply, return, and exhaust systems.
 - b. Metal ducts, liners, and fittings.
 - c. Nonmetal ducts and fittings.
 - d. Air-duct accessories, including volume dampers, fire and smoke dampers, turning vanes, sound attenuators, and flexible connectors.
 - e. Duct-mounted access doors and panels.
3. Kitchen exhaust system, including the following:
 - a. Exhaust and makeup air system.
 - b. Metal ducts, liners, and fittings.
 - d. Air-duct accessories, including volume dampers, fire and smoke dampers, turning vanes, sound attenuators, and flexible connectors.
 - e. Duct-mounted access doors and panels.
 - f. Exhaust fans.
 - g. Make-Up air unit
4. Air-handling equipment, including the following:
 - a. Fans and motors.
 - b. Indoor air-handling units with and without coils, dampers, and filters.
 - c. Outdoor air-handling units with and without coils, dampers, and filters.

B. PART 3 EXECUTION

3.1 CONSTRUCTION CHECKLISTS

- a. Complete detailed construction checklists (prefunctional checklists) prepared by the CxA for HVAC systems, assemblies, subsystems, equipment, and components.
1. Air and hydronic distribution systems, including the following:
 - a. Supply, return, outdoor-air, and exhaust-air distribution systems.
 - b. Automatic dampers.
 - c. Control valves.
 2. Heating and cooling terminal and unitary equipment, including the following:
 - a. Unit heaters.
 - b. Fan coil units.
 - c. Electric heating.
 3. TAB verification.

3.2 CONSTRUCTION CHECKLIST REVIEW

- a. Review and provide written comments on draft construction checklists. CxA will create required draft construction checklists and provide item to Contractor.
- b. Return draft construction checklist review comments within 5 days of receipt.
- c. When review comments have been resolved, the CxA will provide final construction checklists marked "Approved for Use, (date)."
- d. Use only construction checklists marked "Approved for Use, (date)."

3.3 Cx TESTING PREPARATION

- a. Certify that HVAC systems, subsystems, and equipment have been installed, calibrated, and started and that they are operating according to the Contract Documents and approved submittals.
- b. Set systems, subsystems, and equipment into operating mode to be tested according to approved test procedures (for example, normal shutdown, normal auto position, normal manual position, unoccupied cycle, and alarm conditions).

3.4 Cx TESTS COMMON TO HVAC SYSTEMS

- a. Comply with construction checklist requirements, including installation checks, startup, and performance tests requirements for HVAC systems and equipment.
- b. Measure capacities and effectiveness of systems, assemblies, subsystems, equipment and components, including operational and control functions, to verify compliance with acceptance criteria.
- c. Coordinate schedule with, and perform Cx activities at the direction of CxA.
- d. Provide technicians, instrumentation, tools, and equipment to perform and document the following:
 1. Construction checklist verification tests.
 2. Construction checklist verification tests demonstrations
 3. Cx test demonstrations.

3.5 START-UP DOCUMENTATION COMMON TO ALL SYSTEMS

- a. The following Start-Up Documentation (Checklists and Tests) shall be considered common to all systems:
1. Checkout shall proceed from lower level devices to larger components to the entire system operation.
 2. Verify labeling is affixed per specification and visible.
 3. Verify prerequisite procedures are done.
 4. Inspect for damage and ensure none is present.
 5. Verify system is installed per the manufacturer's recommendations.
 6. Verify system has undergone Start-Up per the manufacturer's recommendations.
 7. Verify that access is provided for inspection, operation and repair.
 8. Verify that access is provided for eventual replacement of the equipment.
 9. Verify that record drawings, submittal data and O&M documentation accurately reflect the installed systems.
 10. Verify all gauges and test ports are provided as required by contract documents and manufacturer's recommendations.
 11. Verify all recorded nameplate data is accurate.
 12. Verify that the installation ensures safe operation and maintenance.
 13. Verify all rotating and moving parts are properly lubricated.
 14. Verify specified replacement material/stock has been provided as required by the Contract Documents.
 15. Verify all monitoring and ensure all alarms are active and set per requirements.

3.6 MECHANICAL IDENTIFICATION

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: Perform the following checks:
1. Verify all valve tags, piping, duct, and equipment labeling corresponds with drawings and indexes and meets requirements specified. Correct any deficiencies for all piping and duct system.
 2. Adjusting: Relocate any mechanical identification device which has become visually blocked by work of this division or other divisions.
 3. Cleaning: Clean face of identification devices, and glass frames of valve charts.

3.7 MECHANICAL INSULATION

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: Examine all piping, systems and equipment specified to be insulated.
1. Ensure quality of insulation. Patch and repair all insulation damaged after installation.
 2. Ensure the integrity of vapor barrier around all cold surfaces.

3.8 PIPING GENERAL

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: These procedures apply to all installed piping systems, including underground site utilities.
1. Inspect all piping for proper installation, adequate support (with appropriate vibration isolation where applicable) and adequate isolation valves for required service.
 2. Provide notifications of pipe cleaning and flushing activities.
 3. Flush and clean all piping and clean all strainers. Provide documentation of all related procedures.
 4. Ensure adequate drainage is provided at low points and venting is provided at high points.
 5. Ensure facilities to effectively drain and fill the system are in place.
 6. Ensure air is thoroughly removed from the system as applicable.
 7. Provide notification of pressure testing.
 8. Pressure and/or leak test all applicable systems in accordance with the requirements in the applicable Division 23 specification.
 9. Sterilize applicable piping systems as specified in the individual sections and as required by regulatory authorities.
 10. Submit pressure test reports that document the pressure testing results with certification of the results. Include drawings/diagrams indicating sections of pipe that are tested with the corresponding report.
 11. Set and adjust fill, pressure, or level controls to the required setting.

3.9 AC MOTORS

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: Perform the following checks during start-up and as specified in manufacturer's instructions:
1. Verify proper alignment, installation, and rotation.
 2. Verify properly sized overloads are in place.
- c. Start-Up Tests: Perform the following tests, measurements, or procedures during start-up and as specified in the manufacturer's instructions:
1. Measure voltage available to all phases. Measure amps and RPM after motor has been placed in operation and is under load.
 2. Record all motor nameplate data.

3.10 PACKAGED HEATING AND COOLING UNITS

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Refer to AC Motors in this section.
c. General: Provide the services of a factory-authorized service representative to test and inspect unit installation, provide startup service, and to demonstrate and train Owner's maintenance personnel is required by the Owner.
- b. Start-Up Checks: Perform the following inspections/checks during start-up:
1. Test controls and demonstrate compliance with requirements. Replace damaged or malfunctioning controls and equipment.
 2. Install new filter units after start-up.

3.11 TERMINAL UNITS

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: Perform the following inspections/checks during start-up:
1. After construction is completed, including painting if applicable, clean unit exposed surfaces.
 2. Clean factory-finished surfaces. Repair any marred or scratches surfaces with manufacturer's touch-up paint.
 3. Verify adequate access for maintenance.
 4. Check power and control voltages.
 5. Check rotation of fan where applicable.
 6. Check operation of water leak sensors.
 7. Check calibration and operation of the controlling elements.
 8. Check control valves for required close-off and fail position.
 9. Install new filter units for terminals requiring same.

3.12 FANS

- a. Include all applicable "Start-Up Checks Common to All Systems".
b. General: Provide the services of a factory-authorized service representative to test and inspect exhaust fan installation, provide startup service, and to demonstrate and train Owner's maintenance personnel is required by the Owner.
- c. Start-Up Checks: Perform the following inspections/checks during start-up:
1. Inspect the field assembly of components and installation of the units, piping, ductwork, and electrical connections.
 2. Clean unit cabinet interiors to remove foreign material and construction dirt and dust. Vacuum clean fan wheel, fan cabinet, coils entering air face. Ensure volatile irritants are contained and kept out of occupied spaces.
 3. Adjust and lubricate dampers and linkages for proper damper operation.
 4. Verify the unit is secure on mountings and supporting devices and connections for ductwork, and electrical are complete. Verify proper thermal overload protection is installed in motors, starters, and disconnects.
 5. Ensure vibration isolation integrity is maintained with the fan installation and associated connections.
 6. Lubricate bearings, pulleys, belts, and other moving parts with factory-recommended lubricants.
 7. Stroke all dampers to ensure free and full travel.

3.13 DUCTWORK ACCESSORIES


- a. Include all applicable "Start-Up Checks Common to All Systems".
b. Start-Up Checks: Perform the following checks during start-up and as specified:
1. Cleaning: Clean factory-finished surfaces. Repair any marred or scratches surfaces with manufacturer's touch-up paint.
- c. Start-Up Tests: In addition to specifications, perform the following as a minimum:
1. Operate installed ductwork accessories to demonstrate compliance with requirements. Test for air leakage while system is operating. Repair or replace faulty accessories, as required to obtain proper operation and leak proof performance.
 2. Label access doors in accordance with Division 21 Section "Mechanical Identification"
 3. Adjusting: Adjust ductwork accessories for proper settings. Install fusible links in-fire dampers and adjust for proper action.

END OF SECTION 23

5310 E HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:
 CONSULTANTS
14901 Oquirrum Drive, Suite 905, Dallas, TX
75254 | 947.756.4190

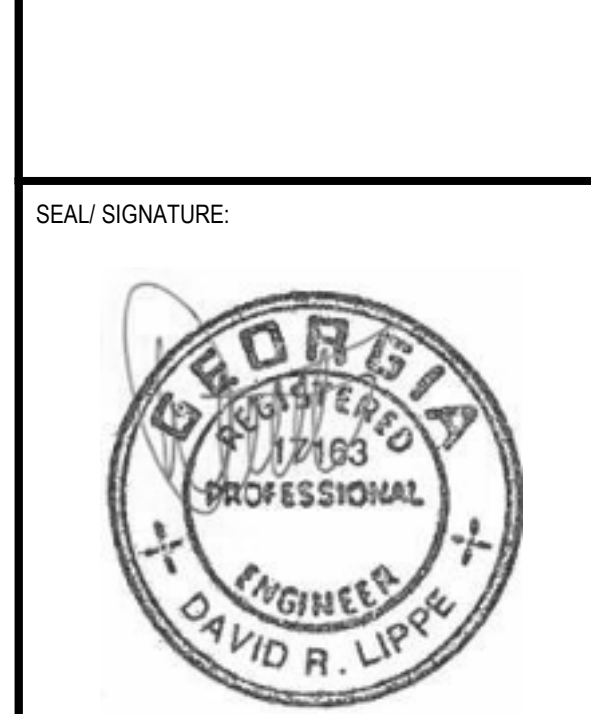

NO.	BY	DATE	DESCRIPTION
SHAKE SHACK - ATHENS			
161 ALPS RD ATHENS, GA 30606 SHACK #1765			
PERMIT/BID SET			
MECHANICAL SPECIFICATIONS			
DRAWN BY: RTM			
CHECKED BY: RTM			
PROJECT NO: 25-088			

M592

ROOFTOP UNIT CONTROL MATRIX				
CONTROL FEATURE	UNITS	RTU-1 SETPOINT OR Y/N	RTU-2 SETPOINT OR Y/N	NOTES
CONTROL STRATEGY				
SPACE TEMPERATURE CONTROL		Y	Y	
HEATING AND COOLING SET POINTS				
COOLING MODE ENABLE - SPACE TEMPERATURE - OCCUPIED SETPOINT	"F DB	75	75	
COOLING MODE ENABLE - SPACE TEMPERATURE - UNOCCUPIED SETPOINT	"F DB	80	80	
COOLING - SUPPLY AIR TEMPERATURE SETPOINT	"F DB	55	55	
HEATING MODE ENABLE - SPACE TEMPERATURE - OCCUPIED SETPOINT	"F DB	70	70	
HEATING MODE ENABLE - SPACE TEMPERATURE - UNOCCUPIED SETPOINT	"F DB	60	60	
HEATING - SUPPLY AIR TEMPERATURE SETPOINT	"F DB	85	85	
DEAD BAND - MINIMUM HEATING AND COOLING TEMPERATURE SETPOINT DIFFERENCE	"F DB	5	5	
VENTILATION ONLY MODE ENABLE - OUTSIDE AIR TEMPERATURE	"F DB	55 < X < 75	55 < X < 75	
VENTILATION ONLY MODE - SUPPLY AIR TEMPERATURE SETPOINT	"F DB	N/A	N/A	Q
VENTILATION AIR HEATING/REHEAT CONTROL RESET - SUPPLY AIR TEMPERATURE SETPOINT	"F DB	65	65	N
DEHUMIDIFICATION MODE ENABLE - OUTSIDE AIR DEW POINT	"F DP	55	55	F
DEHUMIDIFICATION SETPOINT HUMIDITY SENSOR FEEDBACK	%RH	50	50	F
DEHUMIDIFICATION - REHEAT CONTROL - SUPPLY AIR TEMPERATURE SETPOINT	"F DB	70	70	F
PROGRAMMED CONTROL FEATURES				B
HVAC SYSTEM SHALL BE UNOCCUPIED MODE - PROGRAMMABLE THERMOSTAT	Y			
OPTIMUM START SEQUENCE	Y			
EQUIPMENT COMPONENTS, ACCESSORIES AND CONTROL FEATURES				
COOLING COIL (DX - MODULATING CAPACITY)	Y	Y		K
DEHUMIDIFICATION - MODULATING HOT GAS REHEAT	Y			
HEATING - NATURAL GAS - MODULATING	Y			K
RETURN AIR PATH WITH MOTORIZED RETURN AIR DAMPER FOR UNOCCUPIED OPERATION	Y			D, T
OUTSIDE AIR DAMPER - MOTOR OPERATED	Y			J, T
RELIEF/EXHAUST AIR DAMPER - BAROMETRIC	Y			N
RELIEF/EXHAUST AIR DAMPER - MOTOR OPERATED	N			J
OUTSIDE SUPPLY AIR AIRFLOW MONITORING	Y			F
REMOTE TEMPERATURE SENSOR	N			B
REMOTE COMBINATION TEMPERATURE AND HUMIDITY SENSOR	N			B
INTEGRATED ECONOMIZER - DIFFERENTIAL ENTHALPY ENABLE (OA ENTHALPY < RA...)	BTU/LB	Y	Y	U
SUPPLY FAN CONTROL METHODS				
ON DURING OCCUPIED MODE	Y	Y		
CYCLE WITH LOADS DURING UNOCCUPIED HOURS	Y	Y		
VARIABLE VOLUME - STAGED FAN CONTROL IN RESPONSE TO ACTIVE COOLING COIL STAGES	Y	Y		K, V
SAFETIES, INTERLOCKS, AND ALARMS				
GAS VALVE SAFETY	Y	Y		F
RETURN AIR SMOKE DETECTOR - SAFETY SHUTDOWN	Y	Y		E
LOW LIMIT FREEZE STAT - FREEZE PROTECTION SAFETY SHUTDOWN	Y	Y		F
DIFFERENTIAL PRESSURE SWITCH - FILTER CHANGE ALARM	Y	Y		F
FIRE ALARM CONTROL PANEL - SAFETY SHUTDOWN INTERLOCK	Y	Y		S
OUTSIDE AIR DAMPER END SWITCH - SAFETY SHUTDOWN	Y	Y		S
KITCHEN EXHAUST SYSTEM INTERLOCK	Y	Y		L
Div. 23 CONTRACTOR SHALL PROVIDE CONTROL PANEL(S), WIRING, THERMOSTAT(S), TEMPERATURE SENSOR(S), HUMIDISTAT(S), AND/OR CO2 SENSOR(S) WHERE SHOWN ON THE DRAWINGS AND AS REQUIRED TO FACILITATE THE SCHEDULED CONTROL MODULES AND SEQUENCES OF OPERATION. EACH UNIT SHALL CONTROL BASED ON ITS OWN INTERNAL SAFETIES, TIME DELAYS, AND SEQUENCES UNLESS NOTED OTHERWISE. COORDINATE WITH OWNER FINAL BUILDING AND EQUIPMENT SCHEDULES DURING STARTUP. REFERENCE DIVISION SPECIFICATIONS FOR INDIVIDUAL DEVICE REQUIREMENTS.				
NOTES:				
B. DIVISION 23 CONTRACTOR SHALL PROVIDE DEVICE.				
D. DURING UNOCCUPIED OPERATION, EXHAUST AND OUTSIDE AIR DAMPERS SHALL CLOSE. THE RETURN AIR DAMPER SHALL OPEN TO PERMIT RECIRCULATION OF INDOOR AIR THROUGH UNIT.				
E. DIVISION 28 CONTRACTOR SHALL PROVIDE DEVICE.				
F. DEVICE SHALL BE FACTORY MOUNTED AND PRE-WIRED FOR OPERATION SUBJECT TO THE ONBOARD CONTROLLER.				
J. DAMPER SHALL BE CLOSED DURING UNOCCUPIED MODE.				
K. UNITARY CONTROLLER SHALL MODULATE AND/OR CYCLE SUPPLY FAN SPEED AND COIL CAPACITY SUBJECT TO THE INTERNAL SAFETIES AND SEQUENCES TO MAINTAIN SCHEDULED SETPOINTS.				
L. INTERLOCK RTU WITH KITCHEN EXHAUST HOOD SYSTEM(S) TO SHUT DOWN UPON SIGNAL FROM HOOD FIRE EXTINGUISHING SYSTEM. INTERLOCK RTU WITH KITCHEN EXHAUST FAN TO ENERGIZE WHEN HOOD SYSTEM IS ENERGIZED FOR PRESSURIZATION.				
N. UNITS THAT PROVIDE VENTILATION AIR TO MULTIPLE ZONES AND OPERATE IN CONJUNCTION WITH ZONE HEATING AND COOLING SYSTEMS SHALL NOT USE HEATING OR HEAT RECOVERY TO WARM SUPPLY AIR TO A TEMPERATURE GREATER THAN VALUE INDICATED WHEN THE OUTSIDE AIR TEMPERATURE EXCEEDS 75°.				
Q. VENTILATION ONLY MODE PROVIDES OUTSIDE AIR DIRECTLY TO SPACE WITHOUT HEATING OR COOLING WHEN OUTDOOR AIR CONDITIONS ARE FAVORABLE.				
VENTILATION ONLY MODE CAN BE INTERRUPTED ON A CALL FOR DEHUMIDIFICATION.				
S. PROVIDE END SWITCH ON THE OUTSIDE AIR DAMPER AND INTERLOCK THE SWITCH WITH THE SUPPLY FAN TO KEEP IT FROM STARTING IF END SWITCH IS NOT MADE.				
T. DURING UNOCCUPIED OPERATION, OUTSIDE AIR DAMPERS SHALL CLOSE AND RETURN AIR DAMPER SHALL MODULATE OPEN.				
U. IF SETPOINT VALUE IS LISTED, IT INDICATES ECONOMIZER HIGH-LIMIT SHUTOFF. UNIT SHALL BE IN ECONOMIZER IF CONDITIONS ARE LESS THAN SETPOINT. THE FOLLOWING SENSORS SHALL DETERMINE ECONOMIZER ON POINT.				
OUTSIDE AIR TEMPERATURE; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE. RETURN AIR TEMPERATURE; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE. OUTSIDE AIR HUMIDITY; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE. RETURN AIR HUMIDITY; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE.				
V. PROVIDE STAGED FAN CONTROL WITH MINIMUM 2 FAN SPEEDS. LOW SPEED SHALL NOT EXCEED 66% OF FULL SPEED AND SHALL DRAW NO MOR...				

FAN COIL UNIT SCHEDULE (HEAT PUMP)

MARK	MFR	MODEL	SUPPLY FAN					COOLING COIL				HEAT PUMP HEATING COIL				ELECTRICAL				WEIGHT (LBS)	NOTES		
			CFM	ESP (IN)	NOM HP	TH (MBH)	SH (MBH)	EAT ("F DB)	(F WB)	LAT ("F DB)	(F WB)	REFR TYPE	MIN OUT (MBH)	AMBIENT (DB)	EAT ("F DB)	LAT ("F DB)	MIN O/A (CFM)	V/PH	MCA			MOCO	DISC TYPE
FCU-1	CARRIER	40MBC018	420	0.025	0.061	10.6	9.1	76.8	63.9	57.0	55.5	R410A	9.2	13.8	64.6	85	40	208/1	N/A	N/A	NF	45	A - J

* EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T002 / VENDOR LIST FOR MORE INFORMATION.
MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

NOTES:
A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
B. ASSOCIATED CONDENSING UNIT SHALL BE BY THE SAME MANUFACTURER.
C. FOR COOLING, EQUIPMENT SIZED FOR 95°F AMBIENT TEMPERATURE. HEAT PUMP HEATING CAPACITY BASED ON AMBIENT TEMPERATURE LISTED.
D. PROVIDE UNIT WITH CLEANABLE AIR FILTERS.
E. PROVIDE WITH 7 DAY PROGRAMMABLE THERMOSTAT WITH STAGED HEATING AND COOLING CAPABILITY AS REQUIRED FOR OPERATION OF HEATING AND COOLING CONTROLS.
F. PROVIDE FACTORY MOUNTED STARTER AND DISCONNECT SWITCH INSTALLED ON SERVICE SIDE OF UNIT.
G. PROVIDE SINGLE POINT POWER CONNECTION.
H. PROVIDE WITH SPRING VIBRATION ISOLATION AND ALL-THREAD HANGING RODS.
I. REFERENCE PLUMBING PLANS FOR CONDENSATE DRAIN PIPING FROM UNIT.

BUILDING AIR BALANCE SUMMARY NORMAL OPERATION

UNIT NO.	SUPPLY (CFM)	OUTDOOR (CFM)	EXHAUST (CFM)	PERCENT OA/SA
(X)RTU-1	3,000	700	--	23.3%
RTU-2	3,500	1,950	--	55.7%
FCU-1	420	40	--	10%
KEF-1	--	--	860	--
KEF-2	--	--	738	--
KEF-3	--	--	738	--
EF-1	--	--	150	--
TOTALS	6,920	2,690	2,486	--
TOTAL AIRFLOW AVAILABLE FOR PRESSURIZATION (CFM)				204
PERCENT POSITIVE PRESSURIZATION				7.58%

BUILDING AIR BALANCE SUMMARY ECONOMIZER MODE

UNIT NO.	SUPPLY (CFM)	OUTDOOR (CFM)	EXHAUST (CFM)	PERCENT OA/SA
(X)RTU-1	3,000	3,000	--	100%
RTU-2	3,500	3,500	--	100%
FCU-1	420	40	--	10%
KEF-1	--	--	860	--
KEF-2	--	--	738	--
KEF-3	--	--	738	--
EF-1	--	--	150	--
RELIEF RTU-1	--	--	1,800	--
RELIEF RTU-2	--	--	2,100	--
TOTALS	6,920	6,540	6,386	--
TOTAL AIRFLOW AVAILABLE FOR PRESSURIZATION (CFM)				154
PERCENT POSITIVE PRESSURIZATION				2.35%

Project Design Conditions

CLIMATE CONDITIONS		ATHENS, GA, USA				BUILDING OPERATING HOURS:										
WEATHER STATION	3A					MONDAY-FRIDAY TBD BY OWNER										
CLIMATE ZONE	99.6%	22.4	"F			SATURDAY TBD BY OWNER										
HEATING (DB):	0.4%	95.4	"F	74.6	"F	SUNDAY TBD BY OWNER										
COOLING (DB/MCWB):					HOLIDAY TBD BY OWNER											
SPACE/UNIT DESCRIPTION	SET POINTS												NOTES			
	COOLING/DE-HUMIDIFICATION				HEATING		HUMIDIFICATION		ZONE VENTILATION RESET					SPACE OPERATING HOURS OCCUPIED/UNOCCUPIED		
	OCC "F	UNOCC "F	MAX RH %	MIN RH %	OCC "F	UNOCC "F	MIN RH %	MAX RH %	CONTROL METHOD	BASE PPM	MAXIMUM PPM	M-F	SAT	SUN		
DINING AREAS	75	80	50%	NA	70	60	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C	
OFFICES	75	80	50%	NA	70	60	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C	
MECHANICAL ROOM	NA	NA	NA	NA	70	60	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C	
KITCHEN/BOH	75	80	50%	NA	70	60	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C	
NOTES: A. ZONE LEVEL SET POINT CONDITIONS SHALL BE AS SCHEDULED UNLESS OTHERWISE SCHEDULED OR NOTED ON THE DRAWINGS FOR ROOM SPECIFIC SPACE CONDITIONS. B. ZONE LEVEL OCCUPANCY HOUR SCHEDULE SHALL BE PER BUILDING OPERATING HOURS UNLESS OTHERWISE SCHEDULED. C. ZONE LEVEL CONTROLS SHALL BE CAPABLE OF OPERATING WITH INDEPENDENT OCCUPANCY SCHEDULES.																

FAN SCHEDULE

MARK	SERVICE	MANUFACTURER	MOUNTING	MODEL	CFM	ESP (IN)	DRIVE	MIN. HP	FAN RPM	VFD (Y/N)	ELECTRICAL			NOTES
											V/PH	DISC.	STARTER	
EF-1	TOILETS	GREENHECK	ROOF	G-097-VG	150	0.5	DIRECT	1/4	1236	N	120/1	NF	COMBI	A-E

MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

NOTES:
A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
B. PROVIDE WITH MINIMUM 12" HIGH ROOF CURB, BIRDSCREEN AND BACKDRAFT DAMPER.
C. PROVIDE FACTORY MOUNTED DISCONNECT SWITCH.
D. INTERLOCK FAN OPERATION WITH TIME CLOCK.
E. PROVIDE WITH MANUFACTURER'S FAN SPEED CONTROLLER FOR BALANCING PURPOSES.

OUTSIDE AIR REQUIREMENTS, IMC-2018 (IP)

SYSTEM DESIGNATION	SYSTEM TAB NAME OR LIST 'SINGLE'	SINGLE-ZONE SYSTEMS ONLY		MULTI-ZONE SYSTEMS ONLY	FLOOR AREA SERVED BY SYSTEM [As] (SF)	SYSTEM AVERAGED AREA-BASED OUTDOOR AIR RATE (CFM/SF)	SYSTEM POPULATION [P] (PEOPLE)	SYSTEM AVERAGED PEOPLE-BASED OUTDOOR AIR RATE (CFM/P)	REQUIRED OA INTAKE FLOW [Vo] (CFM)	REQUIRED DCV OA INTAKE FLOW [Vo] (CFM)	DESIGN OA INTAKE FLOW [Vo] (CFM)	NOTES
		SINGLE-ZONE SYSTEM ASSOCIATED VENTILATION ZONE	SINGLE ZONE WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS [Ez]									
(X)RTU 1	MULTIZONE ((X)RTU 1)	-	-	0.94	1230	0.18	58	7.50	656	N/A	700	ALL
RTU 2	MULTIZONE (RTU 2)	-	-	0.99	1500	0.12	12	7.50	270	N/A	1950	ALL
FCU 1	SINGLE ZONE	OFFICE	0.80	-	75	0.06	2	5.00	15	N/A	40	ALL
TOTALS									935	0	2960	

GENERAL NOTES:
1. VENTILATION CALCULATIONS BASED ON IMC-2018.
2. SYSTEM POPULATIONS BASED ON MAX SEATING AND/OR CODE MAXIMUM VALUES.
3. SINGLE ZONE SYSTEMS (Vot = Voz): SYSTEM VENTILATION EFFICIENCY CALCULATION IS NOT REQUIRED FOR SINGLE ZONE SYSTEMS. WORST CASE AIR DISTRIBUTION EFFECTIVENESS BETWEEN HEATING AND COOLING MODES OF OPERATION IS SHOWN IN TABLE.
4. 100% OA SYSTEMS (Vot = Σ all zones Voz): WHEN ONE AIR HANDLER SUPPLIES ONLY OUTDOOR AIR TO ONE OR MORE ZONES, EACH ZONE IS INDIVIDUALLY CALCULATED WITH ITS WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS (HEATING/COOLING).
5. MULTI-ZONE RECIRCULATING SYSTEMS: CALCULATOR USED TO DETERMINE VENTILATION AIRFLOW IN COMPLIANCE WITH IMC 118 VPB AND ASHRAE 62.1-2016 APPENDIX A. VENTILATION RATE SHOWN IS ACTUAL CALCULATED WITH CORRECTION FACTORS INCLUDED. EACH ZONE IS CALCULATED WITH ITS WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS (HEATING/COOLING) AS PART OF CALCULATIONS TO FIND Ev.

HEAT PUMP CONDENSING UNIT SCHEDULE

MARK	SERVICE	MANUFACTURER	MODEL	REFR TYPE	COOLING CAPACITY			HEATING CAPACITY			ELECTRICAL			WEIGHT (LBS)	NOTES
					TH (MBH)	AMBIENT (DB)	MIN EFF (SEER)	CAP (MBH)	AMBIENT (DB)	MIN EFF COP 47°F	MCA	MOCO	V/PH		
CU-1	FCU-1	CARRIER	38MARBQ18AA3	R410A	10.6	98.0	19.0	9.2	13.8	3.3	18	25	208 / 1	102.5	A - H

* EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T002 / VENDOR LIST FOR MORE INFORMATION.
MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

NOTES:
A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
B. EQUIPMENT CAPACITY SCHEDULED IS MINIMUM CAPACITY THAT MUST BE PROVIDED AT AMBIENT TEMPERATURE INDICATED.
C. CONTRACTOR SHALL VERIFY WITH EQUIPMENT SUPPLIER EXACT QUANTITY AND SIZE OF REFRIGERANT PIPING.
D. PROVIDE LIQUID LINE FILTER DRYER AND SIGHT GLASS.
E. PROVIDE PREFABRICATED EQUIPMENT SUPPORT RAILS.
F. PROVIDE FACTORY MOUNTED DISCONNECT INSTALLED ON SERVICE SIDE OF UNIT.
G. STARTERS FOR ALL MOTORS SHALL BE FURNISHED INTEGRAL WITH UNIT.
H. COORDINATE SIZE OF CONDUCTOR TERMINATION LUGS WITH CONDUCTOR SIZES SHOWN ON ELECTRICAL DRAWINGS.

AIR CURTAIN SCHEDULE

MARK	SERVICE AREA	MANUFACTURER	MODEL	UNIT SPECS					MOTOR	V/PH/Hz	NOTES
				LENGTH (IN)	MAX. AIRFLOW	HEATING CAPACITY (KW)					
AC-1	SERVICE ENTRY	MARS	STD2	36	1379	N/A	1/2	115/1	A-F		

MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.



NOTES:
A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
B. MOUNT UNIT PER MANUFACTURER'S RECOMMENDATIONS TO FACE OF WALL AND SUPPORT VERTICALLY.
C. PROVIDE INTEGRAL STARTER AND DISCONNECT SWITCH.
D. REFER TO SEQUENCE OF OPERATION FOR UNIT CONTROLS.
E. PROVIDE AIR CURTAIN WITH NORMALLY CLOSED DOOR LIMIT SWITCH FOR INSTALLATION ON DOOR. THE AIR CURTAIN SHALL ENERGIZE WHEN DOOR OPENS.
F. PROVIDE WITH DELAY MICROSWITCH WITH ADJUSTABLE DELAY TIMERS PRE MOUNTED IN THE AIR CURTAIN CONTROL PANEL.
G. PROVIDE WITH INTEGRAL THERMOSTAT.

ROOFTOP UNIT SCHEDULE (DX COOLING, HEAT PUMP)

MARK	MANUFACTURER	MODEL	NOMINAL TONS	UNIT TYPE	SUPPLY FAN					COOLING COIL				GAS HEAT				ELECTRICAL				WEIGHT (LBS)	NOTES									
					CFM	ESP (IN)	HP	VFD (Y/N)	TH (MBH)	SH (MBH)	OUTSIDE AIR ("F DB)	(F WB)	(F DB)	(F WB)	(F DB)	(F WB)	MIN EFF (IEER)	GAS TYPE	INPUT MBH	OUTPUT MBH	TEMP RISE (F)			GAS PRESSURE (IN. W.C.)	A2L MINIMUM ROOM VOLUME (FT2)	MIN O/A CFM	V/PH	MCA	MOCO	DISC TYPE		
(X)RTU-1	CARRIER	48TCDD08	7.5	SINGLE ZONE	3,000	0.75	-	-	91.6	69.2	95.4	74.6	79.7	66.6	57.3	56.3	-	NATURAL	180.0	148.0	-	-	-	-	700	208/3	48.75	50	FUSED	835	A-O	
RTU-2	CAPTIVEAIRE	CAS-HVAC31-250-24-15T	15	SINGLE ZONE	3,500	1.0	5.0	Y	204.1	132.4	95.4	74.6	86.4	70.2	51.6	51.6	18.8	NATURAL	201.48	163.20	42	7-14	572.7	1031	7.2	1950	208/3	74.2	80	FUSED	2665	A-O

* EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS. EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T.12 / VENDOR LIST FOR MORE INFORMATION.
MODEL NUMBERS AND NOMINAL TONS LISTED SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER, MODEL NUMBERS, OR NOMINAL TONS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

NOTES:
A. REFER TO ROOFTOP UNIT CONTROL MATRIX FOR CONTROL FEATURES, MODULES, AND ACCESSORIES THAT SHALL BE PROVIDED WITH THE EQUIPMENT.
B. EQUIPMENT SIZED FOR 100°F AMBIENT TEMPERATURE.
C. PROVIDE 2" MERV 8 EFFICIENT PLEATED THROWAWAY AIR FILTERS.
D. PROVIDE FACTORY MOUNTED DISCONNECT INSTALLED ON SERVICE SIDE OF UNIT.
E. STARTERS FOR ALL MOTORS SHALL BE FURNISHED INTEGRAL WITH UNIT.
F. PROVIDE SINGLE POINT POWER CONNECTION.
G. COORDINATE SIZE OF CONDUCTOR TERMINATION LUGS WITH CONDUCTOR SIZES SHOWN ON ELECTRICAL DRAWINGS.
H. PROVIDE 125 VAC, 20 AMP DUPLEX CONVENIENCE RECEPTACLE MOUNTED TO UNIT READY FOR FIELD WIRING WITH A COVER UL LISTED FOR WET AND DAMPER LOCATIONS WHEN IN USE.
I. SPECIFIED FAN ESP ACCOUNTS FOR DUCT LOSSES EXTERNAL TO UNIT.
J. PROVIDE MOTOR HORSEPOWER TO OVERCOME INTERNAL UNIT STATIC PRESSURE DROP PLUS SPECIFIED EXTERNAL STATIC PRESSURE DROP. NOMINAL MOTOR HP SHALL BE NO LARGER THAN THE FIRST AVAILABLE NOMINAL MOTOR SIZE GREATER THAN THE REQUIRED BHP.
K. PROVIDE INSULATED ROOF CURBS WITH MINIMUM HEIGHT REQUIRED TO MAINTAIN BOTTOM OF EQUIPMENT A MINIMUM OF 14 INCHES ABOVE FINISHED ROOF SURFACE. PROVIDE SLOPED CURB IF NEEDED TO MATCH ROOF SLOPE. COORDINATE CURB WITH ROOF INSULATION THICKNESS AND ROOF TAPER AT INSTALLED LOCATION. COORDINATE CURB TYPE WITH DRAWINGS.
L. SCHEDULED WEIGHT IS THE MAXIMUM ALLOWABLE OPERATING WEIGHT OF THE EQUIPMENT ONLY.
M. COOLING COIL LAT IS LEAVING AIR TEMPERATURE OF COIL.
N. PROVIDE GUARDS TO PROTECT CONDENSER COIL FROM HAIL OR OTHER DAMAGE.
O. PROVIDE HEATER TO MEET OR EXCEED SCHEDULED MINIMUM MBH OUTPUT. NOMINAL INPUT IS BASED ON LISTED MANUFACTURER'S STANDARD PRODUCT. COORDINATE EQUIPMENT GAS LOAD WITH PLUMBING CONTRACTOR IF DIFFERENT FROM THAT SCHEDULED. MEET MINIMUM EFFICIENCY SCHEDULED.



COMcheck Software Version COMcheckWeb
Mechanical Compliance Certificate

Project Information

Energy Code: 2015 IECC
Project Title: Shake Shack - Athens, GA
Location: Athens, Georgia
Climate Zone: 3a
Project Type: New Construction

Commissioning Site: Owner/Agent: Design/Contractor
361 Alspa Rd
Athens, Georgia 30606

Additional Efficiency Packages

Credits: 1.0 Required, 0.0 Received

Mechanical Systems List

Quantity System Type & Description

- HVAC System (Single Zone)
Heating: 1 each - Central Furnace, C95, Capacity = 221 MBtu/h
Proposed Efficiency = 80.00% EER, Required Efficiency = 80.00% EER or 79% AFUE
Cooling: 1 each - Single Package DX Unit, Capacity = 204 MBtu/h, Air-Cooled Condenser, Air-cooled
Proposed Efficiency = 10.80 EER, Required Efficiency = 12.80 EER
Proposed Part Load Efficiency = 12.25 IEER, Required Part Load Efficiency = 12.20 IEER
FRT System: FAN SYSTEM 1 - Compliance (Motor nameplate HP and fan efficiency method) - Passes
- Fans:
FAN 1 Supply, Capacity: 3500 CFM, 1.0 motor to replace hp, 0.0 fan efficiency grade, 0.0 non fan efficiency, 0.0 design fan efficiency, fan exception: Part of cooling equipment
- Water Heater:
Gas Water Heaters: Water Heater, Capacity: 1 gallons, Input Rating: 599 kbtu/h
Proposed Efficiency: 95.00 EF, Required Efficiency: 95.00 EF

Mechanical Compliance Statement

Compliance Statement: The proposed mechanical design presented in this document is consistent with the building plans, specifications, and other calculations included with this permit application. The proposed mechanical systems have been designed to meet the 2015 IECC requirements in COMcheckWeb and to comply with any applicable mandatory requirements listed in the inspection checks.

David R. Lippe, P.E.
Name: Title: Sign: Date: 06/20/2025

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 2 of 0

Section # & Req.ID	Mechanical Rough-in Inspection	Complies?	Comments/Assumptions
C403.2.4 (MEC11) 5	Thermally ineffective panel surfaces or uninsulated heating panel boxes in spaces >= 4'-6".	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.3 (MEC11) 6	Unenclosed spaces that are heated use only radiating heat.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (MEC11) 7	Fan location and operation must not be such that any DX units having economizers.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.6 (MEC11) 8	Demand control ventilation provided for spaces >450 ft ² and >25 people shall be automatic demand control served by systems with air flow measurement, auto modulating coils, air damper control, or design air flow >3,000 CFM.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.6 (MEC11) 9	Enclosed parking garage ventilation has automatic demand control and capacity to stop or modulate fans to 50% or less of design capacity.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.7 (MEC11) 10	Exhaust air energy recovery on systems meeting Table C403.2.7(1) and C403.2.7(2).	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.8 (MEC11) 11	Kitchen exhaust systems comply with requirements for air and grease removal, fire dampers, and spray hood racks, fire dampers and maximum exhaust velocity.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.9 (MEC11) 12	HVAC ducts and plenums, in all cases, where ducts or plenums are installed in or under a slab, ventilation may need to occur during Fan-Stop/Restart function.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.9 (MEC11) 13	Ducts and plenums sealed based on duct placement and location.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.9 (MEC11) 14	Disclosures operating >3 in. water relief valves require air leakage testing.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.3 (MEC11) 15	At economizer units provided where proper and meet the requirements for duct capacity, control, and ventilation controls, high air ducts, off-leakage restrictions, and provide a means to relieve excess outside air during operation.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.3.2 (MEC11) 16	Economizer operation will not increase heating energy use during normal operation.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 5 of 0

COMcheck Software Version COMcheckWeb
Inspection Checklist
Energy Code: 2015 IECC

Requirements: 0.0% were addressed directly in the COMcheck software. Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is claimed in a separate table, a reference to that table is provided.

Section # & Req.ID	Plan Review	Complies?	Comments/Assumptions
C103.2 (PR1) 1	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the mechanical systems, and equipment and documents are in compliance with the standards are dated, and calculations per applicable engineering standards and handbooks.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C103.2 (PR1) 2	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the service water heating systems, and equipment and documents are in compliance with the standards are dated, and calculations per applicable engineering standards and handbooks.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406 (PR1) 3	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the additional energy efficiency measures.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Additional Comments/Assumptions:

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 2 of 0

Section # & Req.ID	Mechanical Rough-in Inspection	Complies?	Comments/Assumptions
C403.4.4 (MEC11) 4	Multiple zone VAV systems with DDC and individual zone boxes, pressure independent controls, pressure independent controls.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	See the Mechanical System List for values
C408.2.2 (MEC11) 5	Air outlets and zone terminal devices have means for air balancing.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.3 (MEC11) 6	Refrigerated display cases, walk-in coolers or walk-in freezers served by remote compressors and remote condensers shall be located in a conditioned space. Remote compressor condensers that comply with sections C403.3.1 and refrigeration compressor systems that comply with C403.3.2.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 6 of 0

Section # & Req.ID	Footings / Foundation Inspection	Complies?	Comments/Assumptions
C103.2.4 (MEC11) 5	Showcase water system sensors for future connection of backflow prevention systems have automatic controls installed.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Additional Comments/Assumptions:

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 3 of 0

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
C103.3 (FIS1) 1	Finished OEM manuals for HVAC systems within 90 days of system acceptance.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C103.2.2 (FIS1) 2	HVAC systems and equipment readily clean and exceed label rated loads.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 3	Heating and cooling to each zone is controlled by a thermostat control. Minimum zone humidity control device per installation manufacturer's instructions.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 4	Thermostatic controls have a 5°F differential.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 5	Temperature controls have setback minimum restrictions.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 6	Each zone is equipped with setback restrictions using automatic or programmable controls system.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 7	Automatic Controls Setbacks to 55°F (heat) and 65°F (cool) 7 days a week, 24 hour occurrence over the 1-hour.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C403.2.4 (FIS1) 8	Systems include optimum start controls.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C404.3 (FIS1) 9	Heat traps installed on supply and return piping of new existing systems.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C404.4 (FIS1) 10	All piping insulated in accordance with requirements in Table C403.2.16.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406.2.1 (FIS1) 11	Commissioning plan developed by registered design professional or approved agency.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406.2.3 (FIS1) 12	HVAC equipment has been tested to ensure proper operation.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 7 of 0

Section # & Req.ID	Plumbing Rough-in Inspection	Complies?	Comments/Assumptions
C104.3 (PL1) 1	Heated water supply piping conforms to pipe length and volume requirements. Refer to section details.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C104.3 (PL1) 2	Pumps that circulate water between heating and cooling loops have controls that limit operation from startup to <= 5 minutes after end of heating cycle.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C104.7 (PL1) 3	Water distribution system that pumps water from a heated water supply point back to the hot-water source through a cold-water supply pipe is a balanced circulation water system. Pumps when in systems have controls that start the pump upon receiving signal from the action of a user of a fan, or appliance and stops the temperature of the water entering the cold-water piping to the fan.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Additional Comments/Assumptions:

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 4 of 0

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
C106.2.3 (FIS1) 1	HVAC control systems have been tested to ensure proper operation, calibration and adjustment of controls.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C106.2.3 (FIS1) 2	Economizers have been tested to ensure proper operation.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C106.2.4 (FIS1) 3	Preliminary commissioning report completed and certified by registered design professional or approved agency.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406.2.5 (FIS1) 4	Finished HVAC as-built drawings submitted within 90 days of system acceptance.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406.2.5 (FIS1) 5	An air and/or hydronic system balancing report is issued for HVAC systems.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	
C406.2.5 (FIS1) 6	Final commissioning report due to heating system within 90 days of receipt of certificate of occupancy.	<input type="checkbox"/> Complies <input checked="" type="checkbox"/> Does not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	

Project Title: Shake Shack - Athens, GA Report Date: 06/20/25
Data Filename: Page: 6 of 0

5310 E HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:
rtm
14901 Quorum Drive, Suite 905, Dallas, TX
75244 | 947.756.4180



NO.	BY	DATE	DESCRIPTION
-----	----	------	-------------



SHAKE SHACK - ATHENS


161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET

MECHANICAL ENERGY
CODE COMPLIANCE

DRAWN BY: RTM
CHECKED BY: RTM
PROJECT NO: 25-088

M630

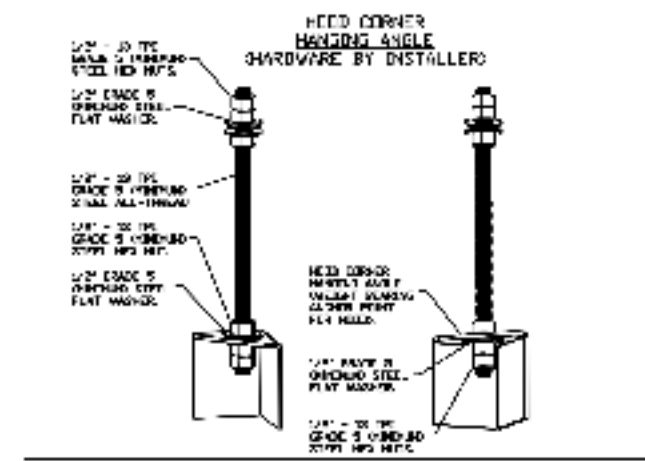

HANGING ANGLE DETAILS

HOOD STYLE / MOUNT	430 DFGFRFS cfm/ft.	630 DFGFRFS cfm/ft.	730 DFGFRFS cfm/ft.
CANOPY HD-2	150	200	250
CANOPY HD-2 w/ LED PANELS	105	140	175
ISLAND HD-2W	289	300	360
ISLAND HD-3	346	422	475

ETL HOOD LISTING DETAIL

EXHAUST CFM = FACES OF HOOD X CFM/FACT. (64%)
 SUPPLY CFM = EXHAUST CFM X PERCENTAGE REQUIRED
 TOTAL DUCT AREA (Sq. In.) = 144 X CFM

DUCT LENGTH	DUCT AREA
100'	144
200'	288
300'	432
400'	576
500'	720
600'	864
700'	1008
800'	1152
900'	1296
1000'	1440

CALCULATIONS UTILIZED

CAPTIVE-AIRE HOODS BUILT IN COMPLIANCE WITH:

BUILDING CODES

CAPTIVE-AIRE HOODS MEET OR EXCEED ALL APPLICABLE REQUIREMENTS OF THE FOLLOWING:

CLEARANCE TO COMBUSTIBLES

INSTALLATION

- ALL LISTED HOODS MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- ALL HOODS MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- HOODS MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- ALL CONNECTIONS FROM CAPTIVE-AIRE HOODS FOR MECHANICAL CONTRACTORS SHALL BE:
- COOKING EQUIPMENT TO SHUT OFF IN EVENT OF FIRE.
- EXHAUST FANS TO SHUT OFF IN EVENT OF FIRE.
- ALL HOODS MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- SEALING MATERIALS ARE RESPONSIBILITY OF INSTALLING CONTRACTOR.
- INSTALLING CONTRACTORS ASSUME ALL RELATED RESPONSIBILITY FOR THE CORRECT INSTALLATION OF HOODS. CAPTIVE-AIRE HOODS ARE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.

REMARKS

- HOODS MUST BE INSTALLED WITH A MINIMUM CLEARANCE TO COMBUSTIBLES AS SHOWN ON DRAWING.
- RESTRICTIONS SHALL BE POSITIVE WITH RESPECT TO AIRBENT PRESSURE.

ADDITIONAL

- IF HOODS HOOD DIMENSIONS HAVE PRECEDENCE OVER SCALE.
- SCALE AND APPROVED COPIES OF THIS DOCUMENT SHALL BE KEPT ON FILE BY THE CONTRACTOR.

FOR QUESTIONS, CALL THE Eastern PA Mechanical REGION 103

PHONE: (667) 504-4196
 EMAIL: reg103@captvair.com

HOOD INFORMATION - JOB#7544342






HOOD NO.	TAG	MODEL	MANUFACTURER	LENGTH	MAX. CLIPPING TEMP.	TYPE	APPLICANCE DUTY	DESIGN CFM/FT.	TOTAL EXH. CFM	EXHAUST PIPING				HOOD CONSTRUCTION	HOOD CONFIG.			
										WIDTH	FRG.	HEIGHT	DA		CFM	VFI	SP	END L
1	FRYER	3430 ND-2	CAPTIVEAIRE	4' 11"	450 DEG	I	MEDIUM	175	860	9"	9"	4"	85C	15PS	-0.494"	430 SS WHERE EXPOSED	ALONE	ALONE
2	GRILL(South)	3430 ND-2	CAPTIVEAIRE	4' 11"	450 DEG	I	MEDIUM	150	738	8"	8"	4"	738	1561	-0.417"	430 SS WHERE EXPOSED	ALONE	FRONT
3	GRILL(North)	3430 ND-2	CAPTIVEAIRE	4' 11"	450 DEG	I	MEDIUM	150	738	8"	8"	4"	730	1561	-0.417"	430 SS WHERE EXPOSED	ALONE	BACK

HOOD OPTIONS

HOOD NO.	TAG	FILTER(S)			LIGHT(S)			UTILITY CABINETS			FIRE SYSTEM	HUNG PIPING WEIGHT					
		TYPE	HEIGHT	LENGTH	EFFICIENCY @ 7 MICRONS	QTY	TYPE	WIRE GUARD	LOCATION	SIZE			ELECTRICAL MODEL #	SWITCHES QTY			
1	FRYER	CAPTIVEAIRE SOLO FILTER	3'	20"	16"	85% SEE FILTER SPEC	2	RECESSED ROUND	NO	RIGHT	12"X14"X30"	TANK FS	4.0/4.0/4.0	SC-25012MA	1 LIGHT 1 FAN	YES	747 LBS
2	GRILL(South)	CAPTIVEAIRE SOLO FILTER	3'	20"	16"	85% SEE FILTER SPEC	2	RECESSED ROUND	NO							YES	356 LBS
3	GRILL(North)	CAPTIVEAIRE SOLO FILTER	3'	20"	16"	85% SEE FILTER SPEC	2	RECESSED ROUND	NO							YES	356 LBS

HOOD OPTIONS

HOOD NO.	TAG	OPTION
1	FRYER	FIELD WRAPPER 2'00" HIGH FRONT, LEFT, RIGHT RIGHT QUARTER END PANEL 23" TOP WIDTH, 0" BOTTOM WIDTH, 23" HIGH 430 SS. LEFT QUARTER END PANEL 23" TOP WIDTH, 0" BOTTOM WIDTH, 23" HIGH 430 SS. INSULATION FOR BACK OF HOOD. RISER SENSER INSTALL GIN PANEL. FIELD WRAPPER 2'00" HIGH FRONT, LEFT, RIGHT. LEFT END STANDBY FINISHED 1" WIDE 54" LONG INSULATED. INSULATION FOR BACK OF HOOD. RISER SENSER INSTALL GIN PANEL.
2	GRILL(South)	RIGHT VERTICAL END PANEL 27" TOP WIDTH, 21" BOTTOM WIDTH, 80" HIGH INSULATED 430 SS. GFCI DUPLEX OUTLET, 20A 125V - HOOD FRONT LEFT - HORIZONTAL - DIST FROM END 3.50 DIST FROM BOTTOM 4.00 LEFT WALL AS END PANEL.
3	GRILL(North)	FIELD WRAPPER 2'00" HIGH FRONT, LEFT, RIGHT RIGHT END STANDBY FINISHED 1" WIDE 54" LONG INSULATED. INSULATION FOR BACK OF HOOD. RISER SENSER INSTALL GIN PANEL. LEFT VERTICAL END PANEL 27" TOP WIDTH, 21" BOTTOM WIDTH, 80" HIGH INSULATED 430 SS. GFCI DUPLEX OUTLET, 20A 125V - HOOD FRONT LEFT - HORIZONTAL - DIST FROM END 3.50 DIST FROM BOTTOM 4.00 RIGHT WALL AS END PANEL.

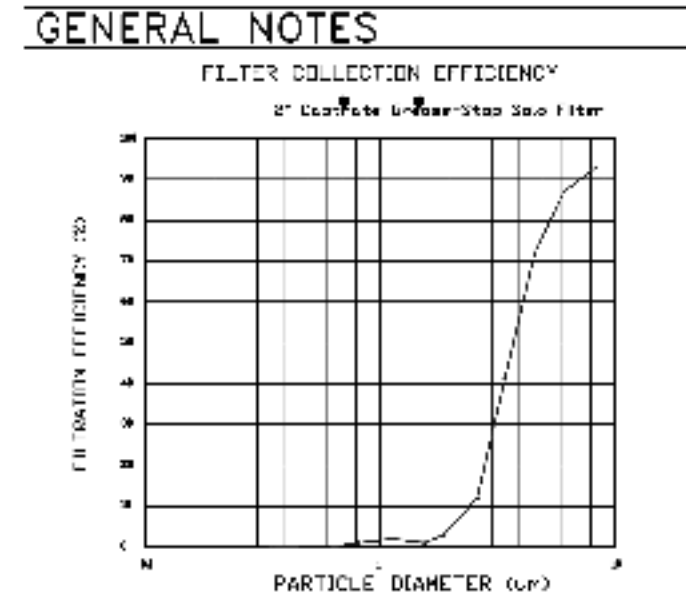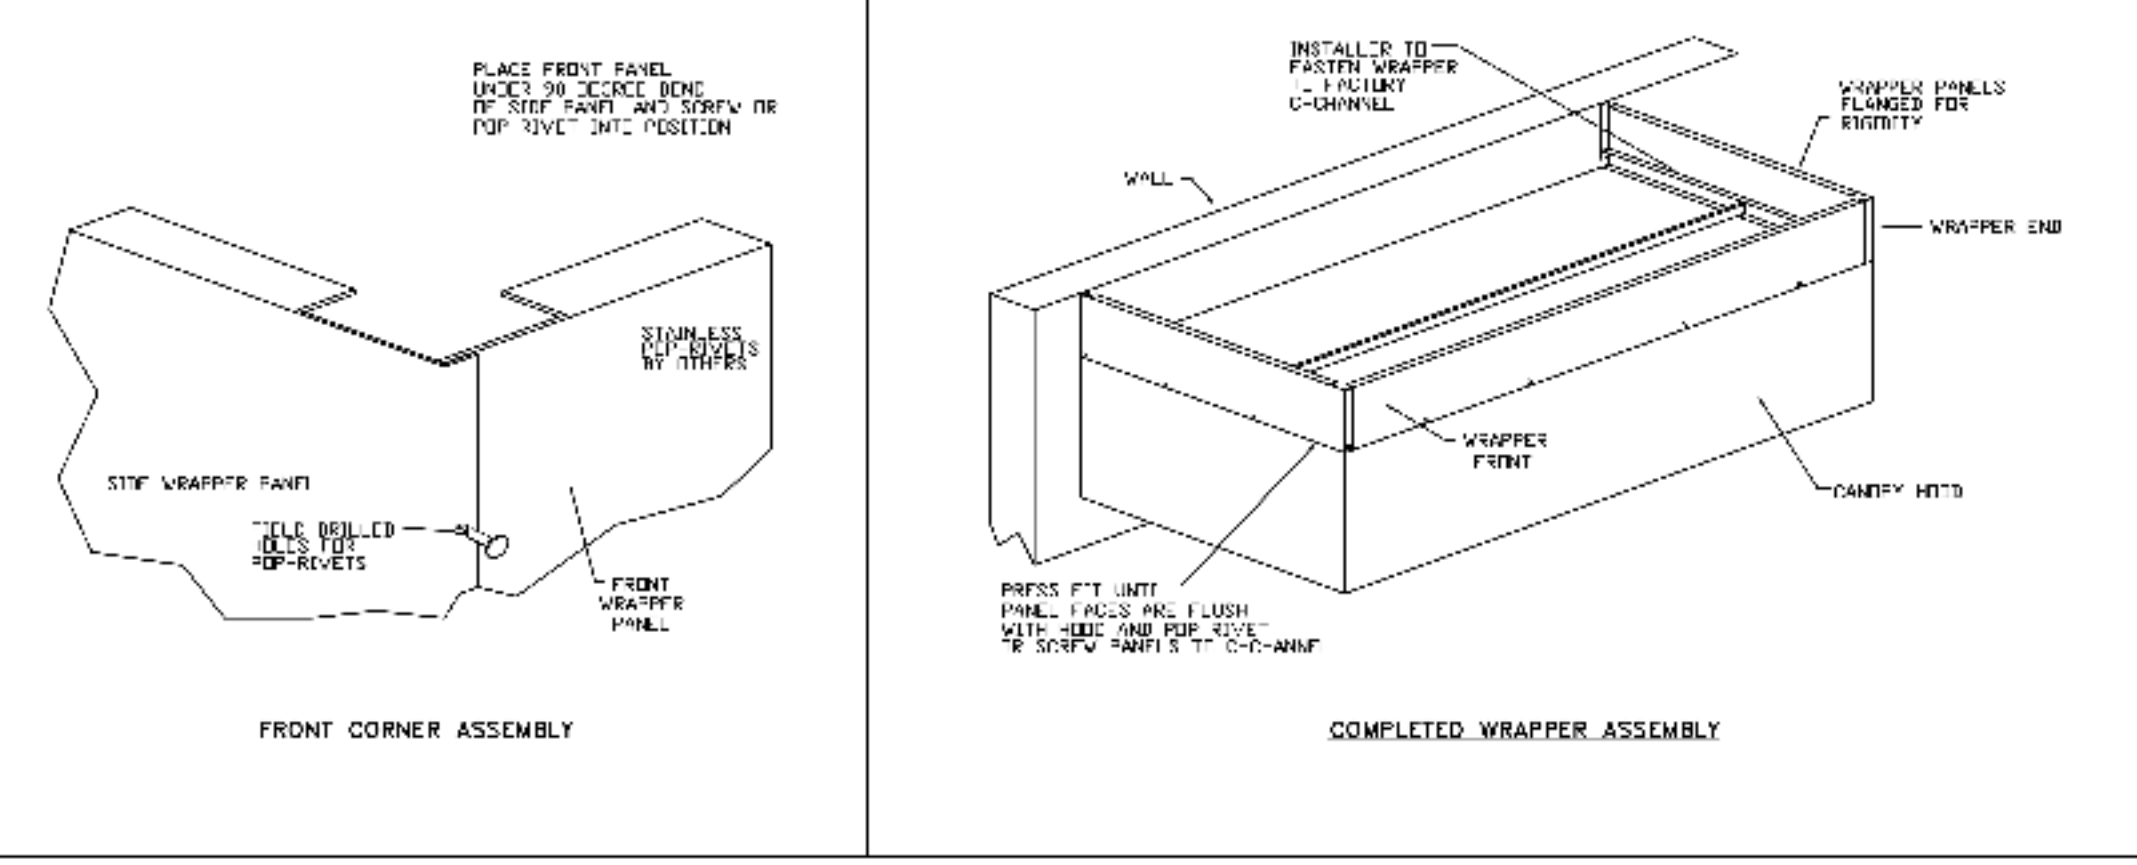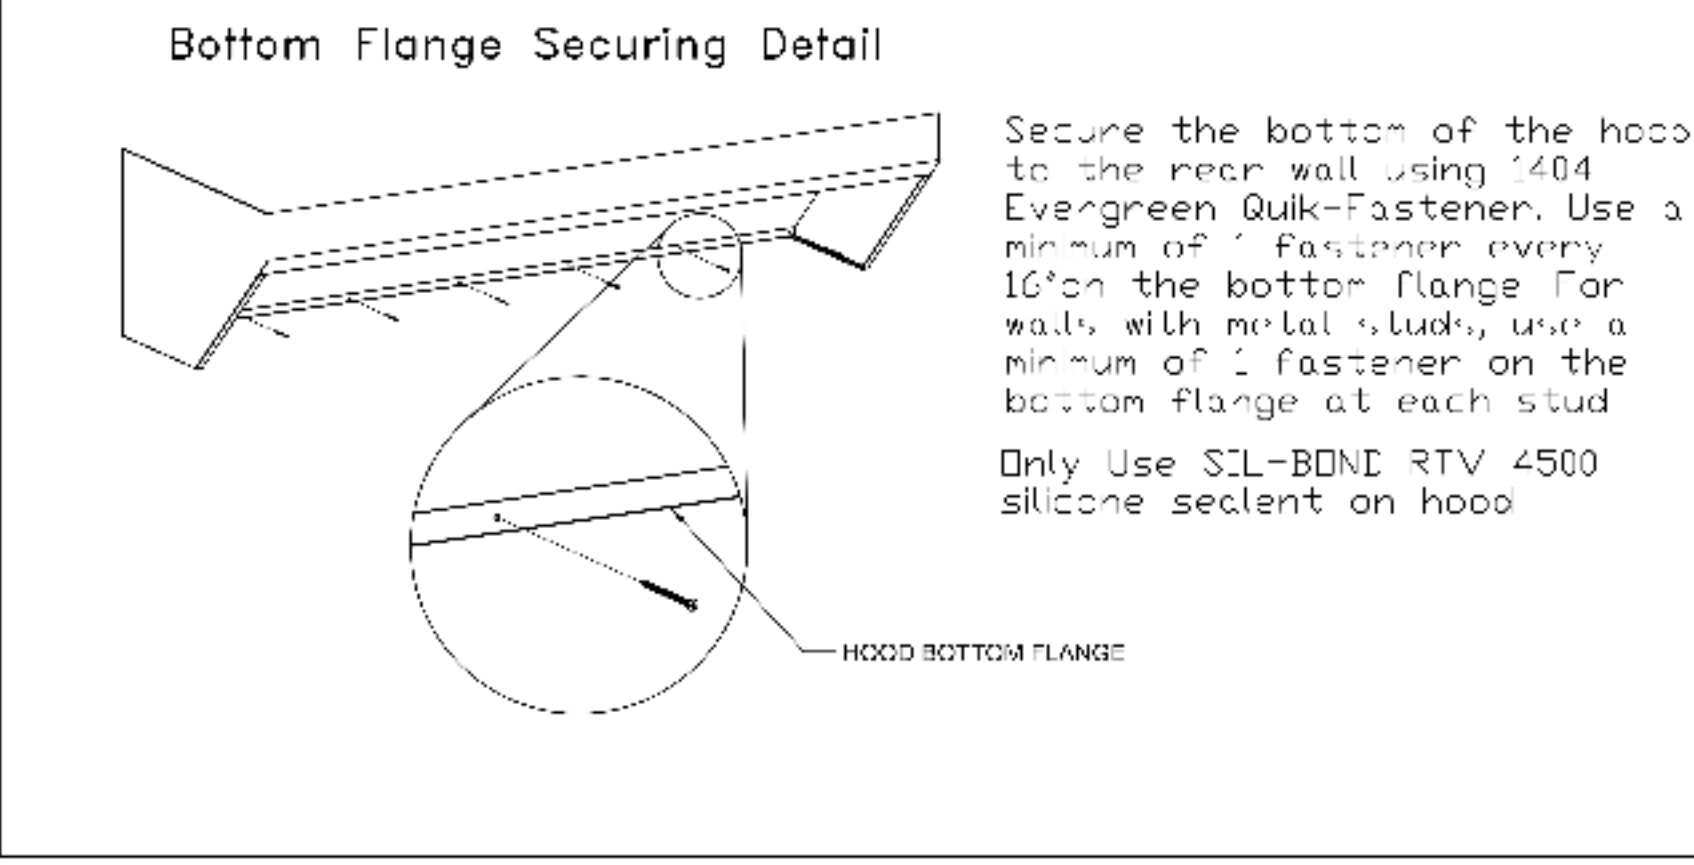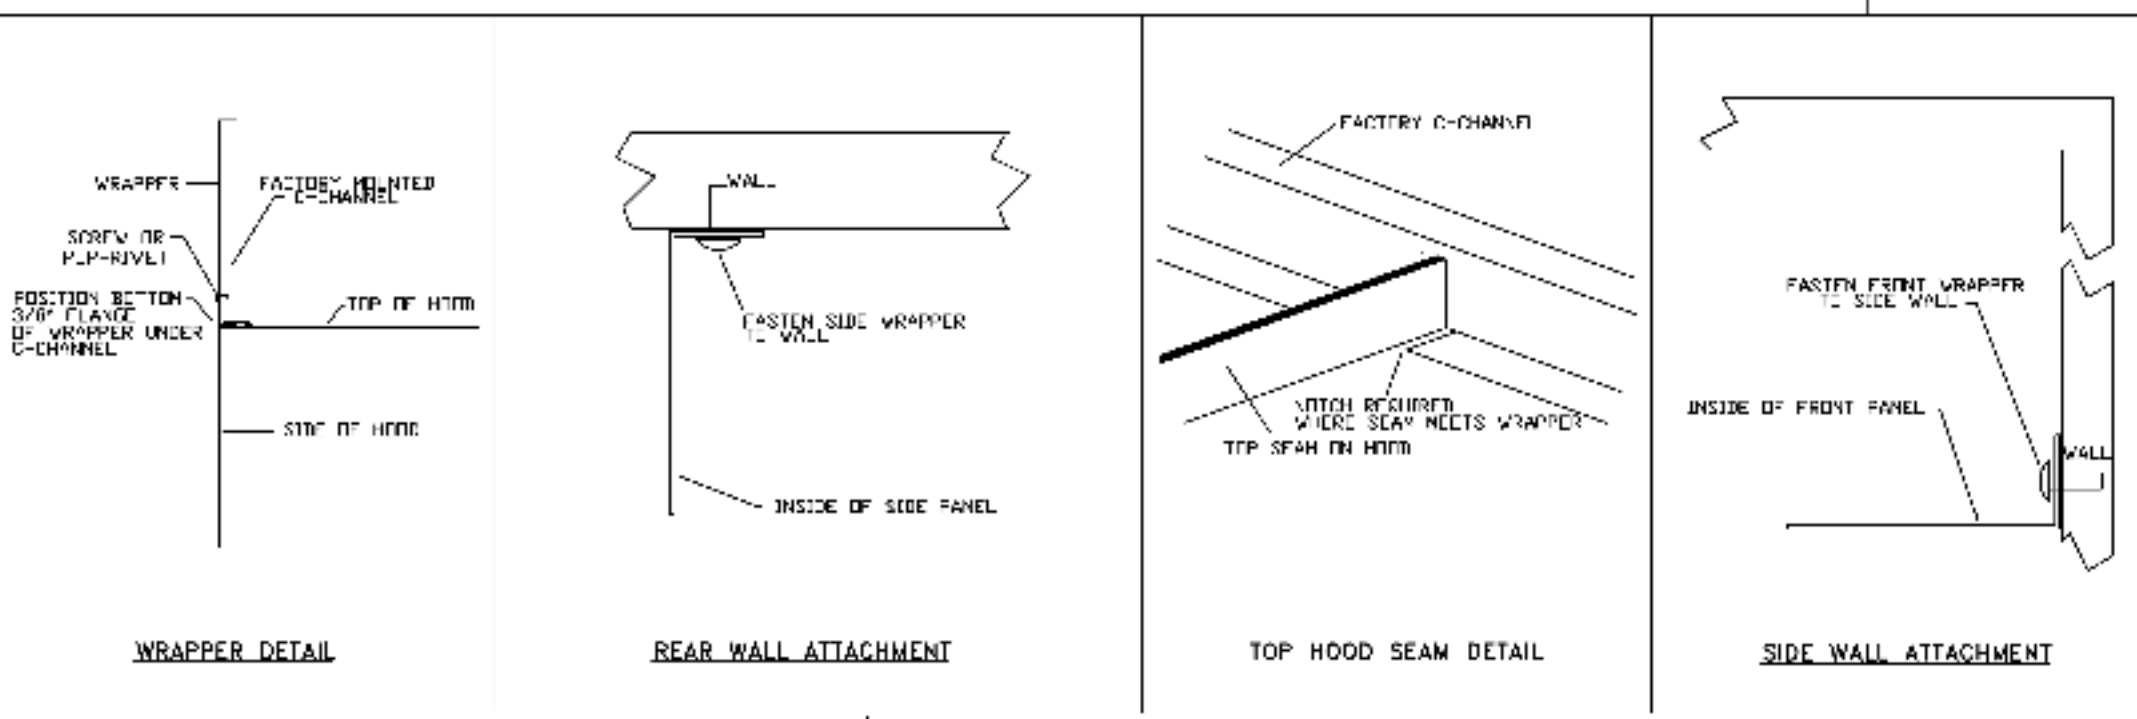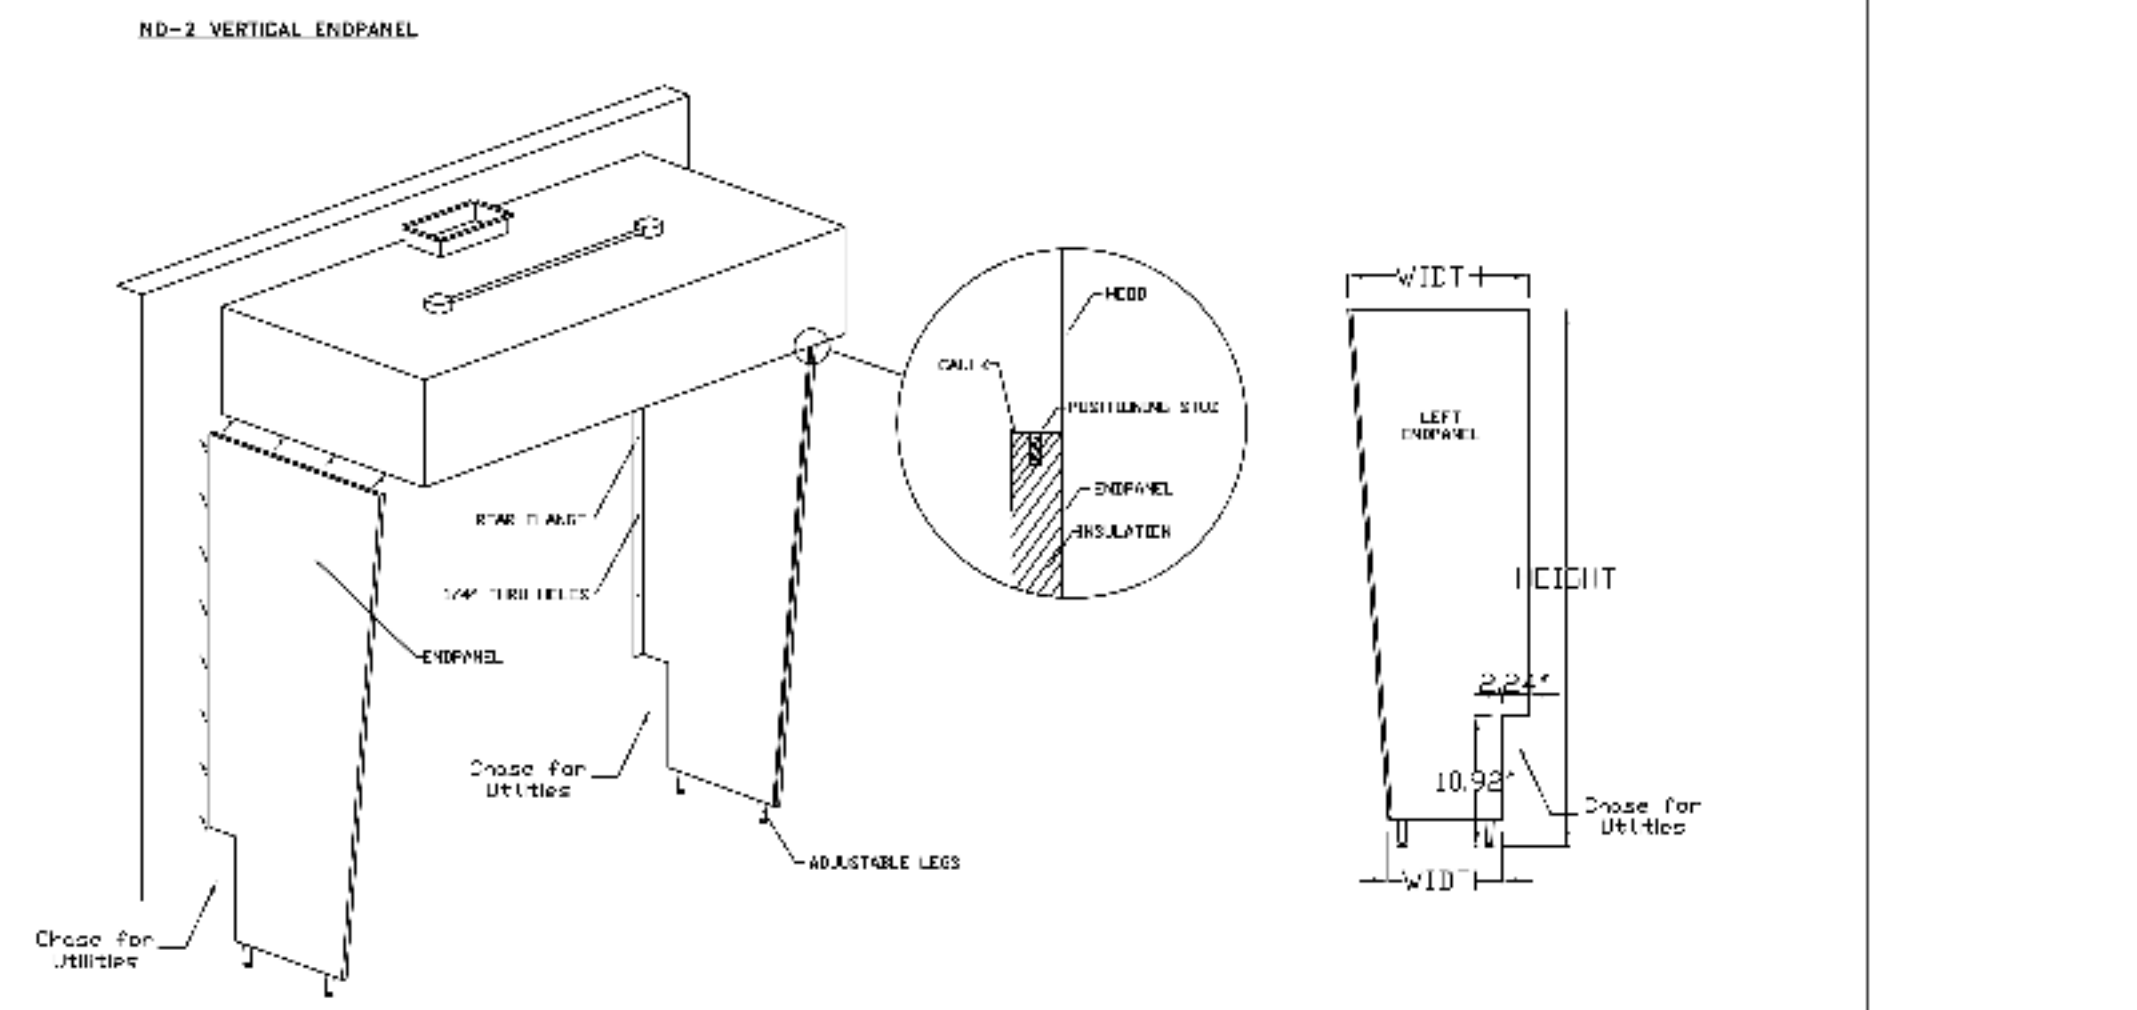

REVISIONS

NO.	DESCRIPTION	DATE

CAPTIVE

Eastern PA Mechanical

225 E. City Line Avenue, Suite #103, Bala Cynwyd, PA 19004
 PHONE: (667) 504-4196 FAX: (667) 504-4128
 EMAIL: reg103@captvair.com www.captvair.com

Shake Shack - Athens, GA (Kitchen)

ATHENS, GA, 30606

DATE: 5/22/2025

DWG.#: 7544342

DRAWN BY: Joe Shilco

SCALE: 3/4" = 1'-0"

MASTER DRAWING

SHEET NO. 1

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

5310 E HIGH STREET SUITE 350
 PHOENIX, AZ 85054
 T: 480.448.6250
 WWW.SARGARCH.COM



CONSULTANTS:

rtm

14901 Quorum Drive, Suite 905, Dallas, TX 75244 (972) 754-1180



NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS


161 ALPS RD
 ATHENS, GA 30606
 SHACK #1765

PERMIT/BID SET


CAPTIVE AIRE DRAWINGS

DRAWN BY:	XX
CHECKED BY:	XX
PROJECT NO.:	25-088

M701

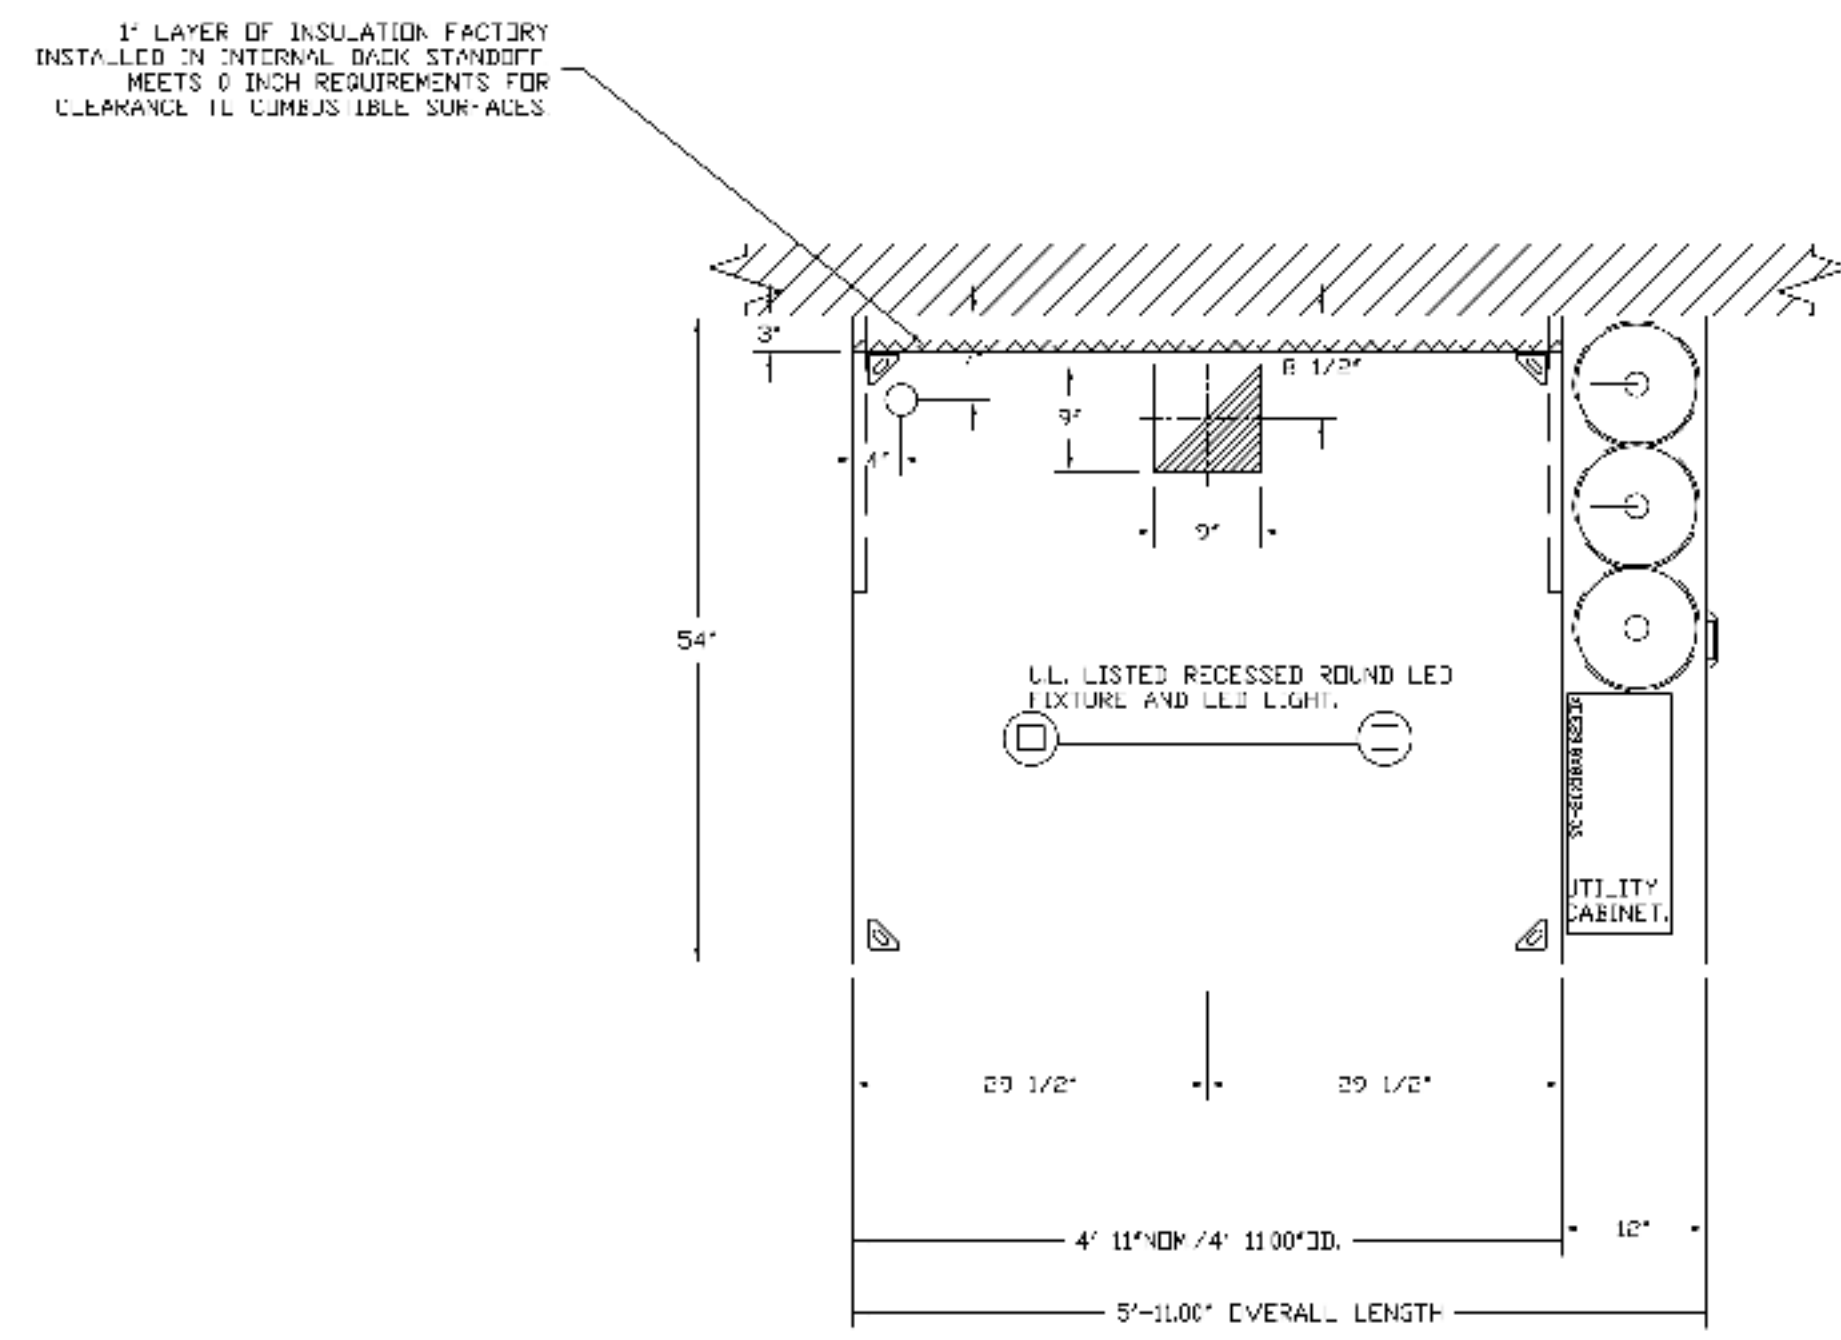

PLAN VIEW HOOD #1 (FRYER)
4' 11.00\"/>

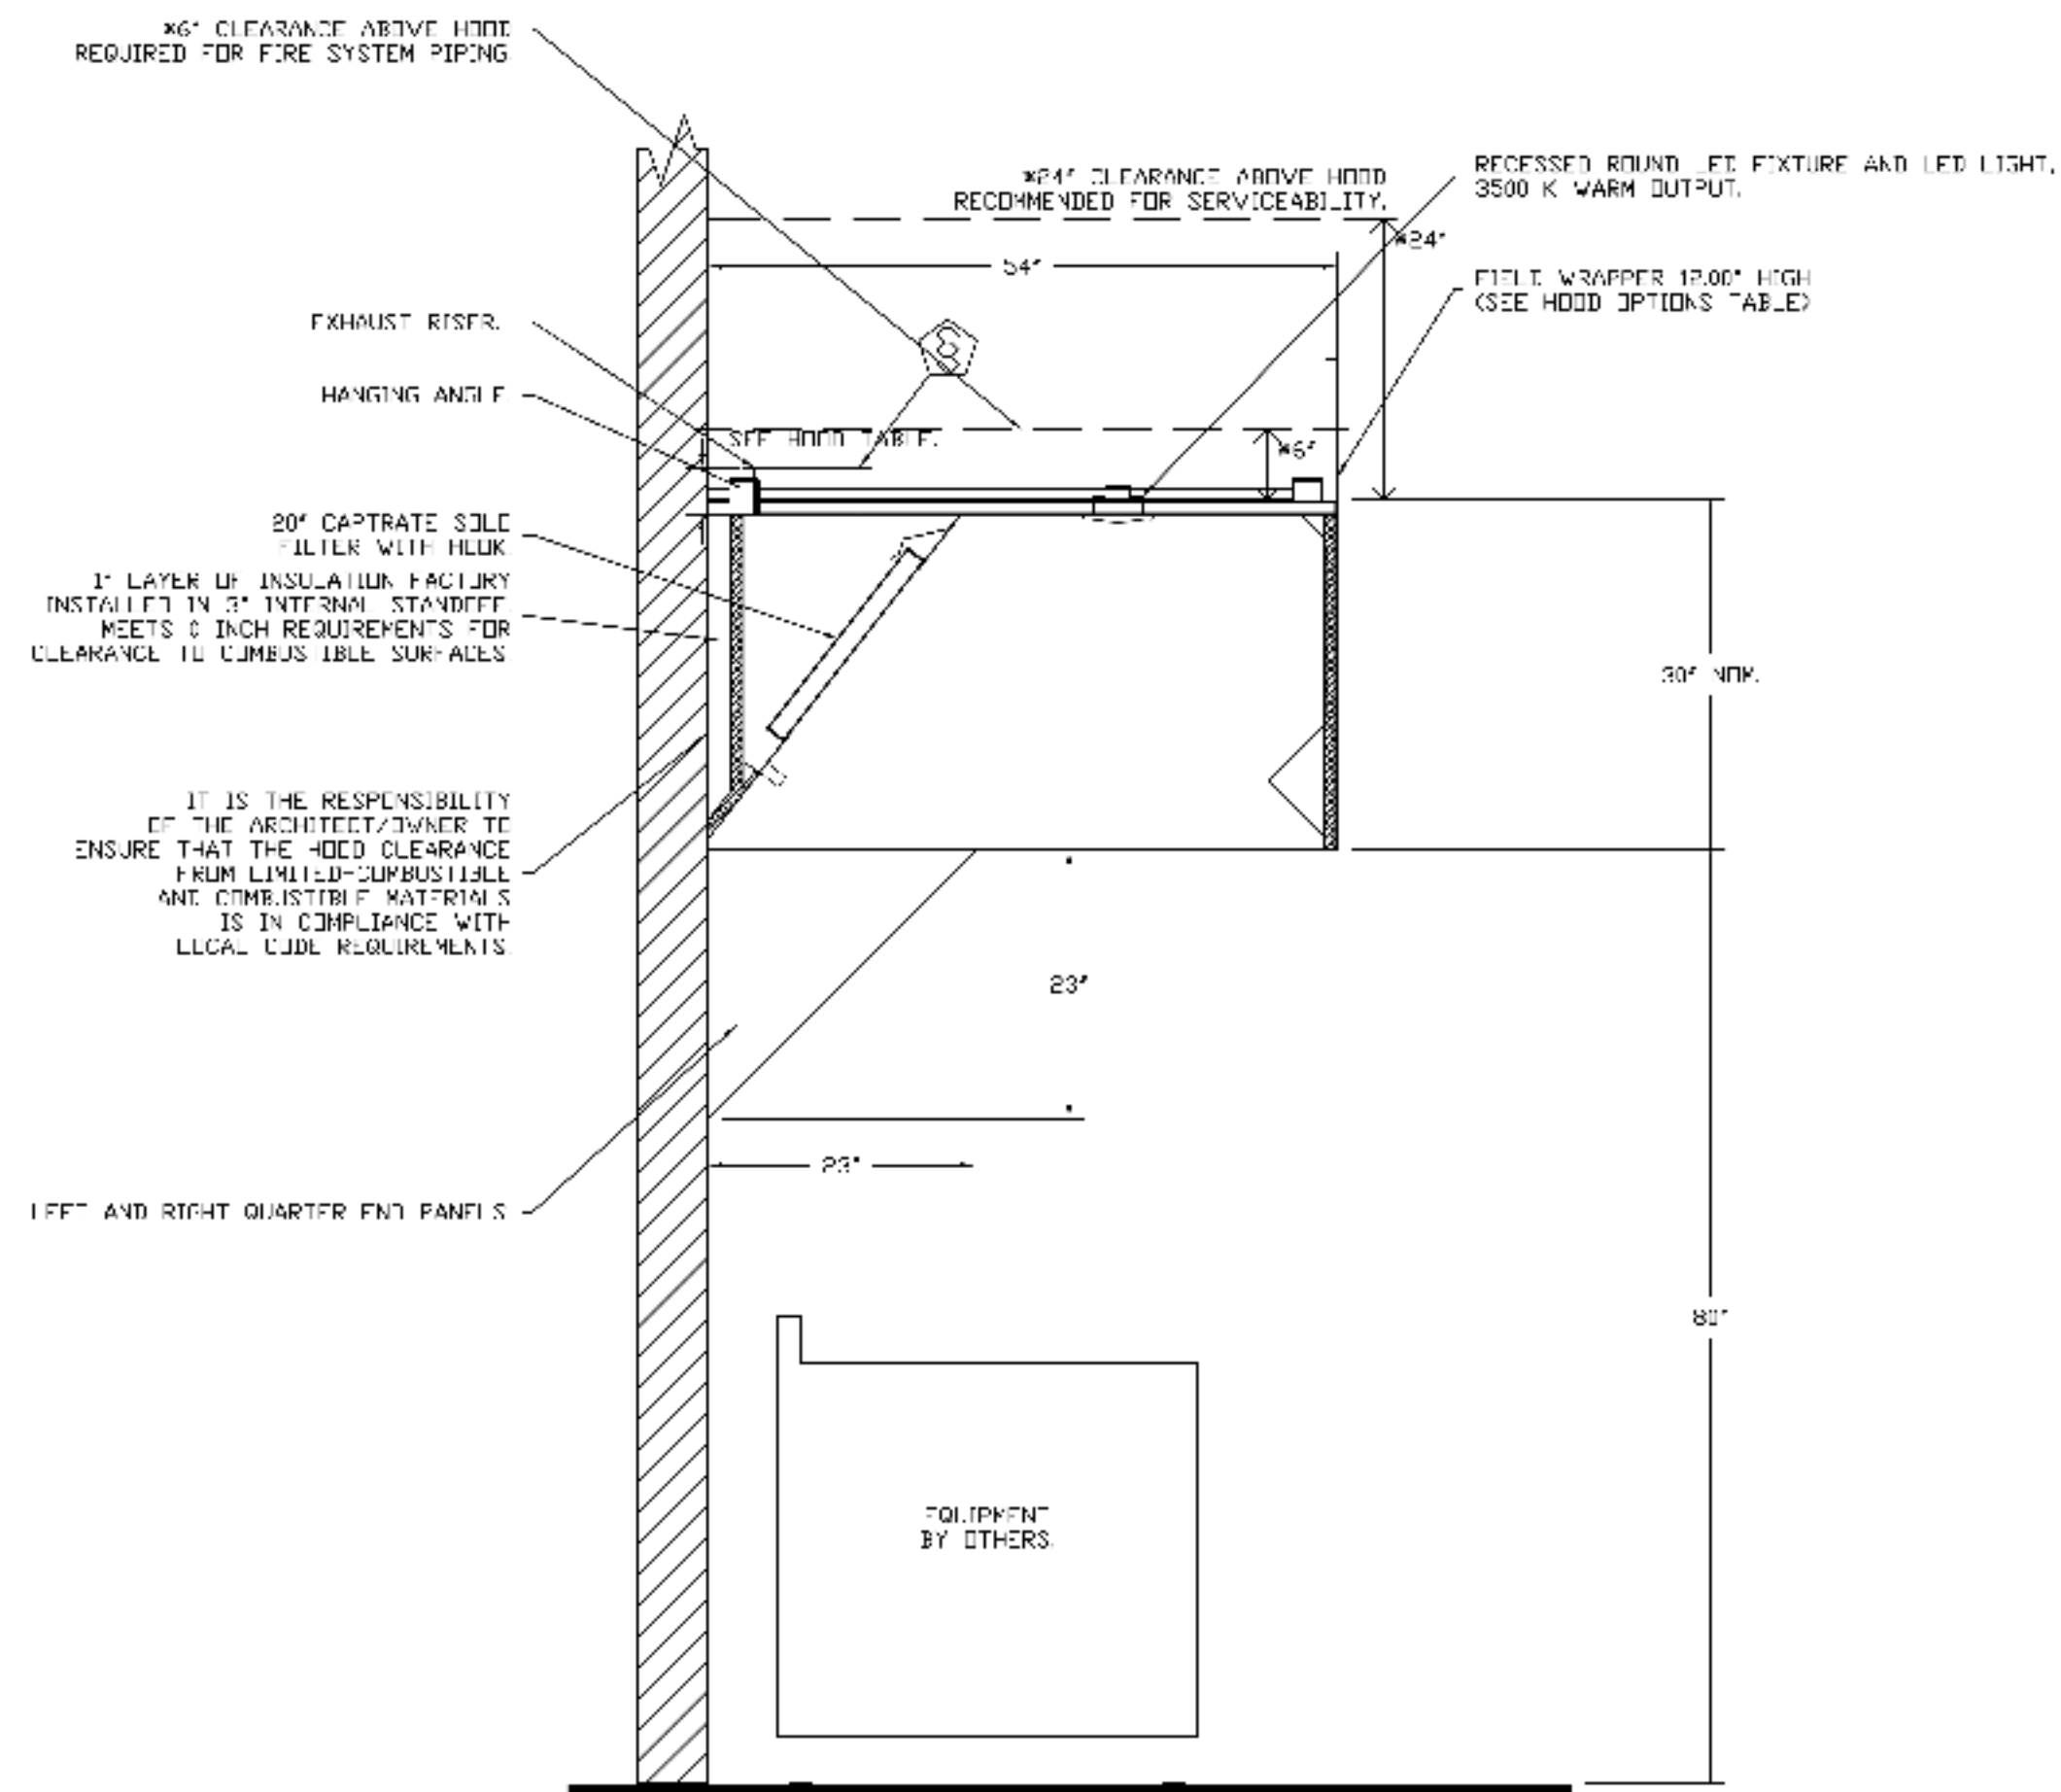

SECTION VIEW MODEL 5430ND-2
HOOD - #1 (FRYER)

CLEARANCE TO COMBUSTIBLES

HOODS #	SURFACE	# OF SURFACE
1,3	TOP	18'
	FRONT	3'
	BACK	3'
	RIGHT	3'
2	TOP	18'
	FRONT	3'
	BACK	3'
	RIGHT	3'

*3' CLEARANCE TO COMBUSTIBLES CONFORMS TO UL710 STANDARD.
HOOD MOUNTED UTILITY CABINETS REQUIRE 36\"/>

REVISIONS	
NO.	DESCRIPTION



228 E. City Line Avenue, Suite #103, Bensalem, PA, 19006
PHONE: (267) 604-4128
EMAIL: eng103@captivemechanical.com

Shake Shack - Athens, GA (Kitchen)
ATHENS, GA, 30606

DATE: 5/22/2025
DWG.#: 1544342
DRAWN BY: Joe Shilloo
SCALE: 3/4" = 1'-0"
MASTER DRAWING

SHEET NO. 2

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIERS AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

5310 E. HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:
rtm
14901 Quorum Drive, Suite 905, Dallas, TX 75241 | 947.756.4180



NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS


161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: XX
CHECKED BY: XX
PROJECT NO: 25-088

M702

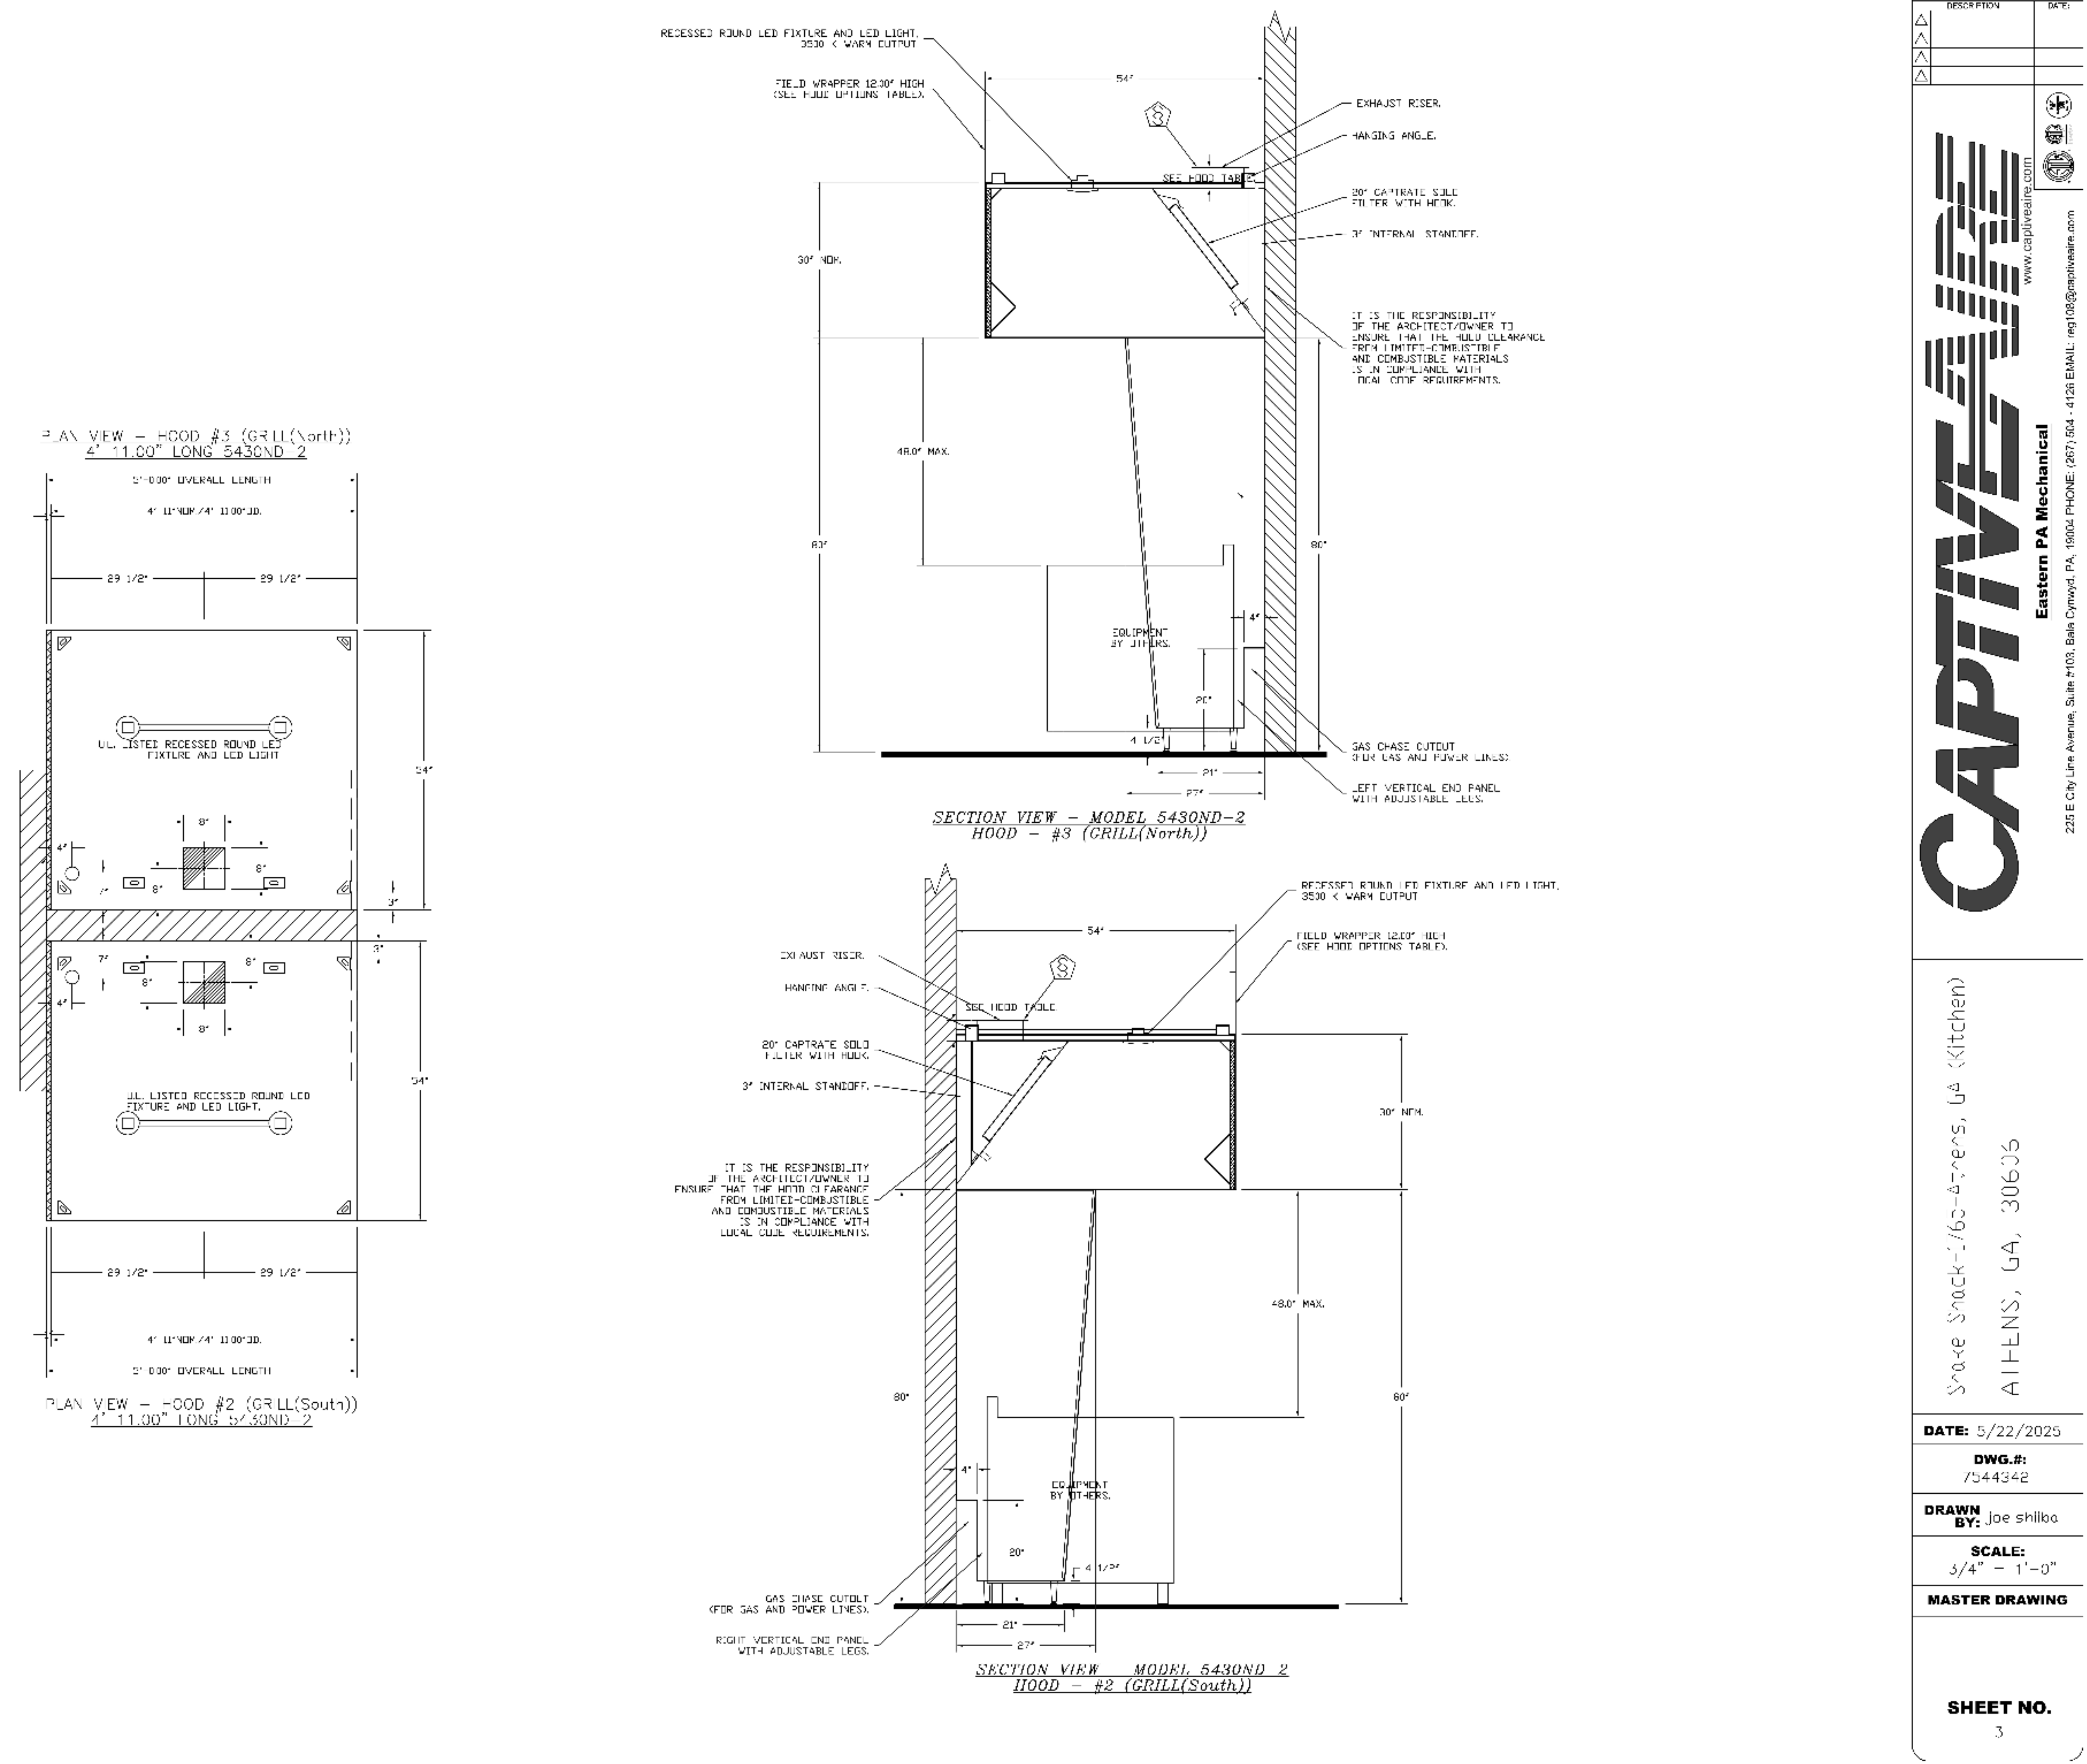

5310 E. HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:
rtm
14901 Quorum Drive, Suite 905, Dallas, TX 75241 | 947.756.4180



NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS

161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: xx
CHECKED BY: xx
PROJECT NO: 25-088

M703

FIRE SYSTEM INFORMATION - JOB#7544342

FIRE SYSTEM NO	TAG	TYPE	SIZE	MAX FP	DESIGN FP	INSTALLATION	
						SYSTEM	LOCATION ON HOOD
1		TANK FS	4.0/4.1/4.0	50	54	FIRE CABINET RIGHT	RIGHT, HOOD 1

NOTES

- FIELD PIPE DROPS AS SHOWN
- PIPING, ELBOWS, TEES, AND NOZZLES SUPPLIED BY CAS.
- FIELD INSTALLED DROP: FACTORY WILL PROVIDE QTY 2 60" LONG PIECES OF CHROME PLATED PIPE SHIPPED LOOSE TO BE FIELD-INSTALLED.
- SHIP LOOSE DROP: FACTORY WILL PROVIDE THE EXACT CHROME PIPE LENGTH NEEDED SHIPPED LOOSE TO BE FIELD-INSTALLED.
- RELOCATE NOZZLES IF FLOW PATTERN IS BLOCKED BY SHELVING, SALAMANDERS, ETC.
- OVERLAPPING COVERAGE SHALL NOT BE USED ON ANY APPLIANCE WITH AN OBSTRUCTION AT APPLIANCE. EXHIBIT D PREPARED DROPS AS SHIPPED LIST. FACTORY PIPING EXTENDS A MAXIMUM OF 6' ABOVE THE TOP OF THE HOOD.
- APPLIANCE DIMENSIONS LISTED REPRESENT THE COOKING SURFACE SIZE, NOT THE OVERALL APPLIANCE SIZE.
- THIS PRE-ENGINEERED FIRE SYSTEM COMPLIES WITH UL 300 REQUIREMENTS.
- DL-F NOZZLE PART NUMBER REPLACES 3070-3/8H-10-SS

JOB # 7544342

JOB NAME: SHAKE SHACK-1765-ATHENS, GA (KITCHEN)

SYSTEM SIZE: TANK-SP-3 DESIGN FP: 54, MAXIMUM FP: 60

HOOD # 1: 1.4' 1.00" LONG x 34" WIDE x 30" HIGH

RISER # 1: SIZE: 8" x 8"

HOOD # 1 METAL BLOW-OFF CAPS INCLUDED.

HOOD # 2: 1.1' 11.02" LONG x 54" WIDE x 30" HIGH

RISER # 2: SIZE: 8" x 8"

HOOD # 2 METAL BLOW-OFF CAPS INCLUDED.

HOOD # 3: 1.1' 11.02" LONG x 54" WIDE x 30" HIGH

RISER # 3: SIZE: 8" x 8"

HOOD # 3 METAL BLOW-OFF CAPS INCLUDED.



- HEAVY-DUTY APPLIANCES (RATED 600°F) WILL REQUIRE AN ADDITIONAL DOWNSTREAM FITTING IN THE EVENT THAT THE DUCTWORK CONTAINS ANY HORIZONTAL RUNS OVER 20 FT IN LENGTH.
- MEDIUM TO LIGHT-DUTY APPLIANCES (RATED 450°F) WILL NOT REQUIRE ANY ADDITIONAL DOWNSTREAM FITTING.

AGENT DISTRIBUTION PIPING LIMITATIONS	
PIPE SECTION	MAX PIPE LENGTH (FT)
MAX SUPPLY LINE TO FIRST OVERLAPPING NOZZLE	42
OVERLAPPING NOZZLE APPLIANCE BRANCH	10
DEDICATED NOZZLE APPLIANCE BRANCH	10

LEGEND FIRE CABINET TANK SYSTEM

- 1 4 GALLON TANK
- 2 PRIMARY ACTUATOR RELEASE
- 3 SECONDARY ACTUATOR RELEASE
- 4 PRESSURE SUPERVISION SWITCH
- 5 PRIMARY HOSE ASSEMBLY
- 6 SECONDARY HOSE ASSEMBLY
- 7 REMOTE MANUAL ACTIVATION DEVICE

TANK MANUAL ACTIVATION DEVICE DETAIL

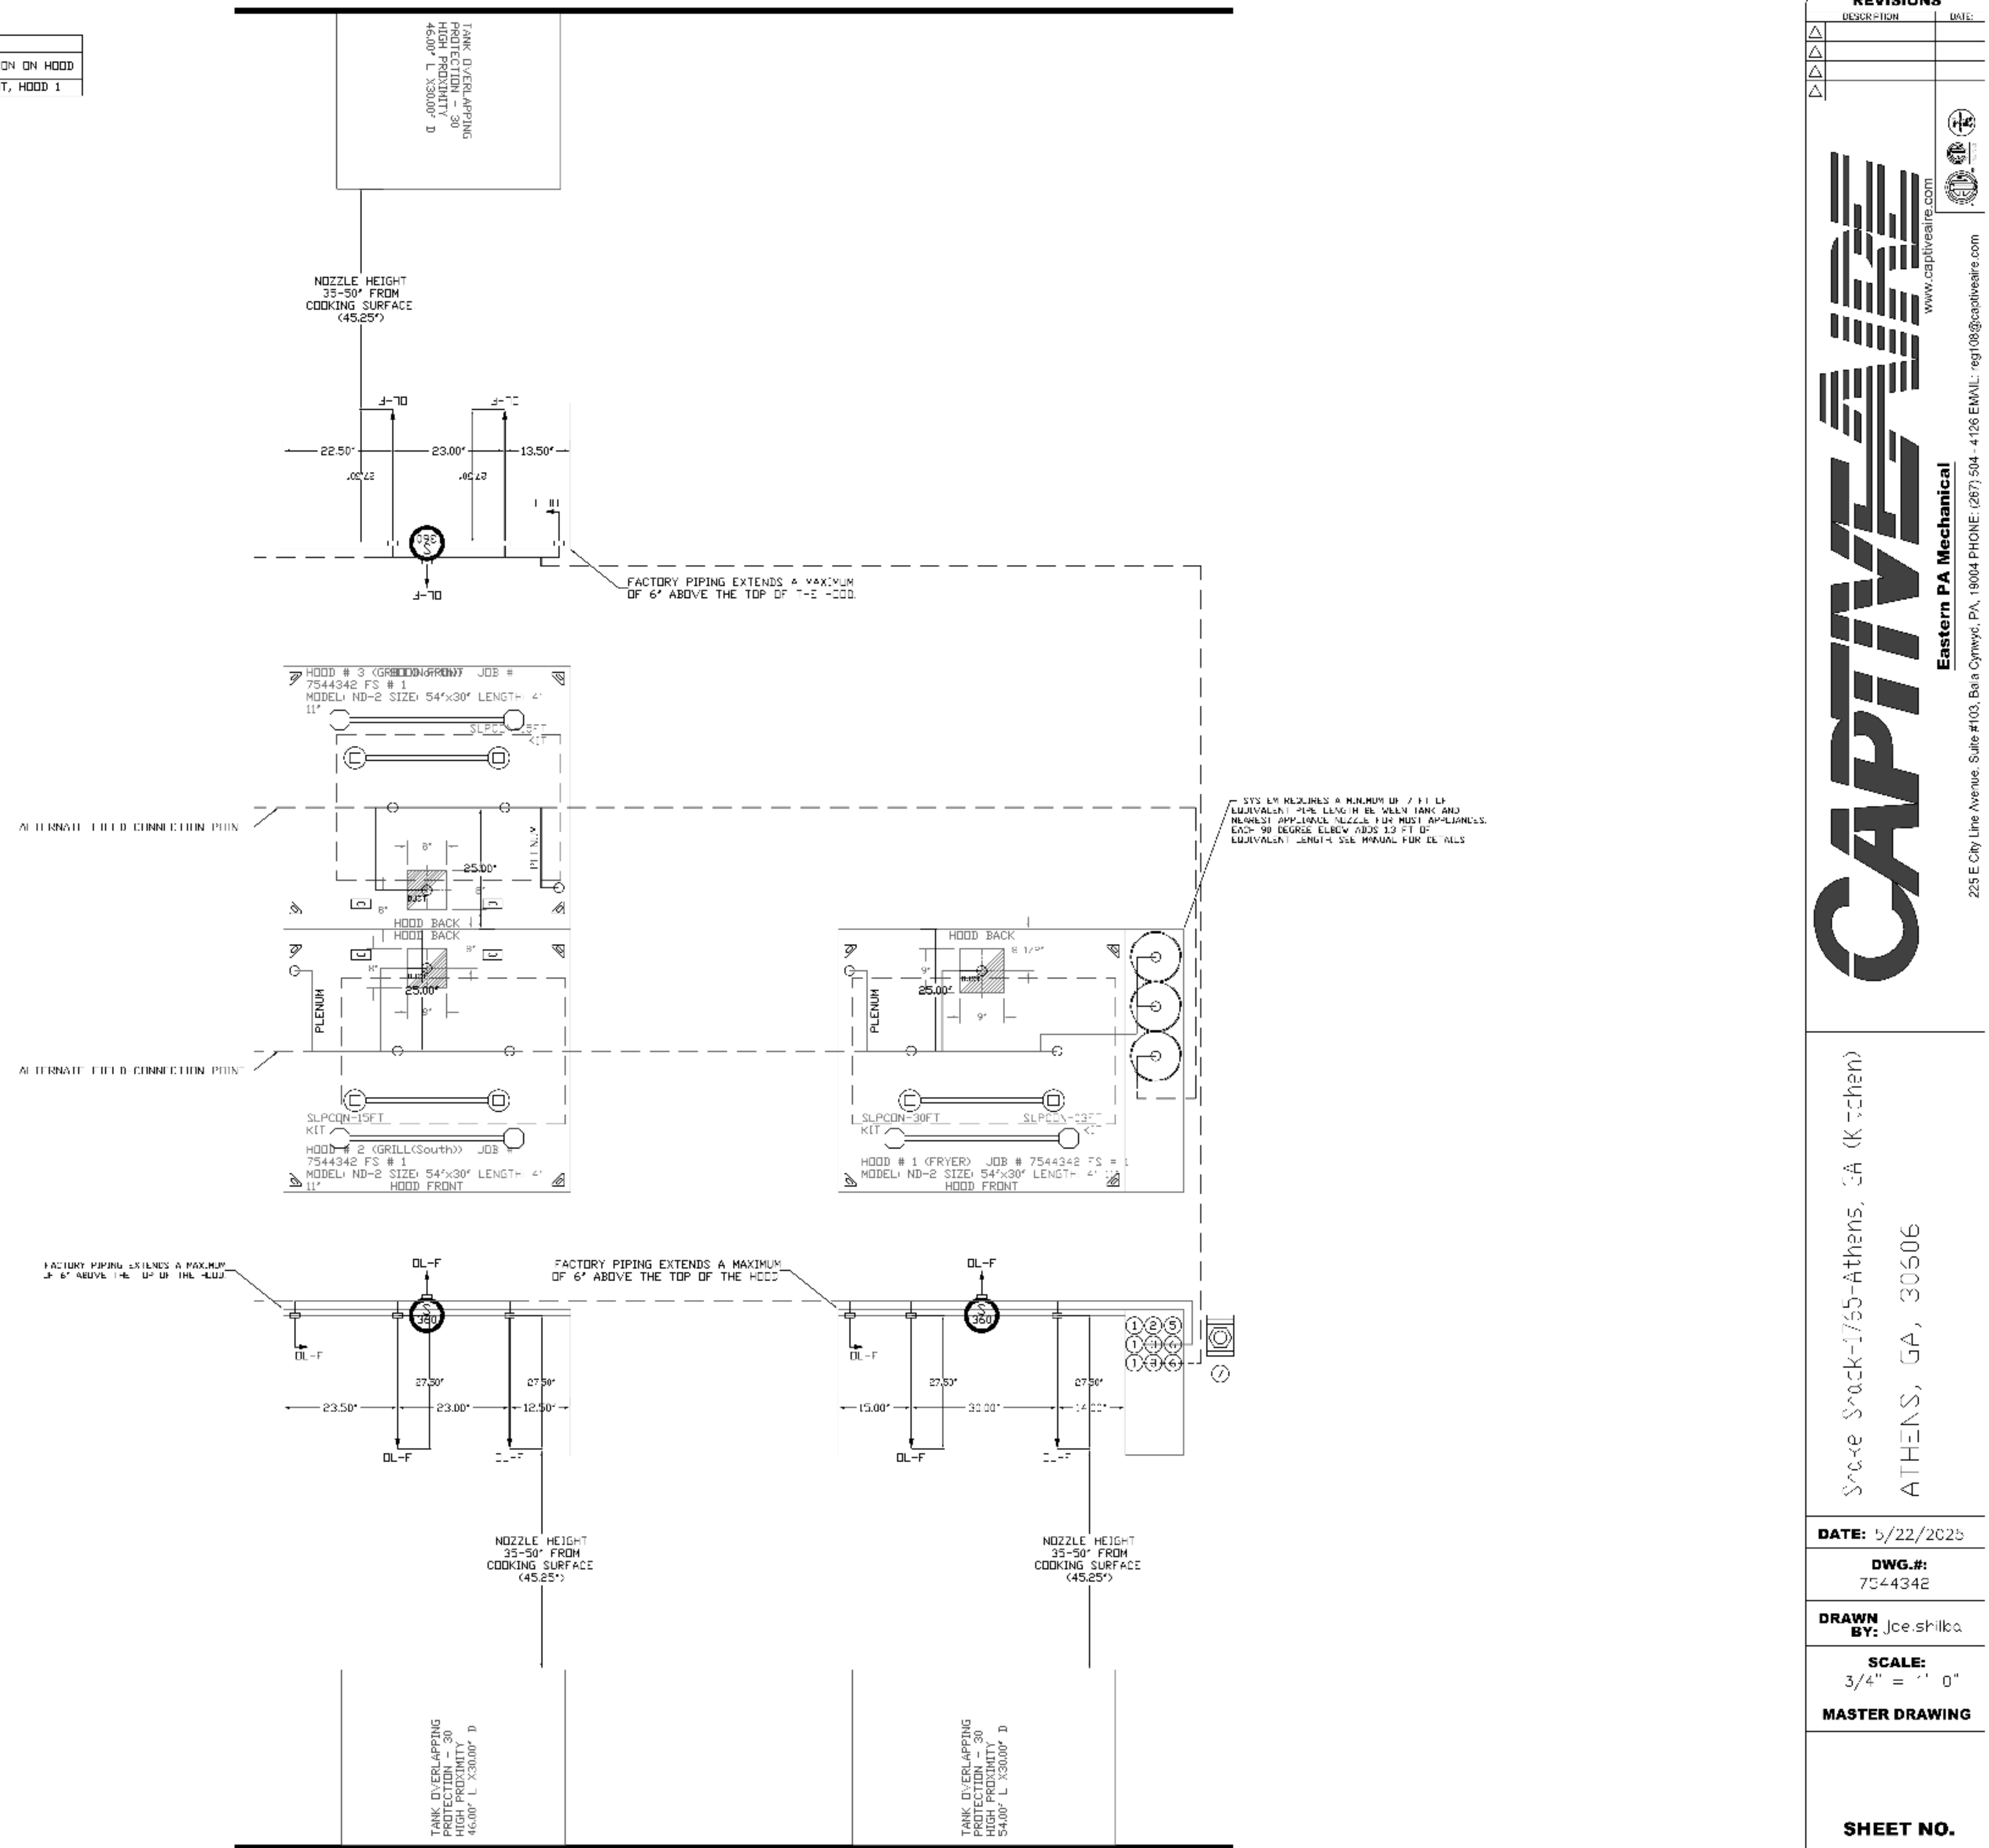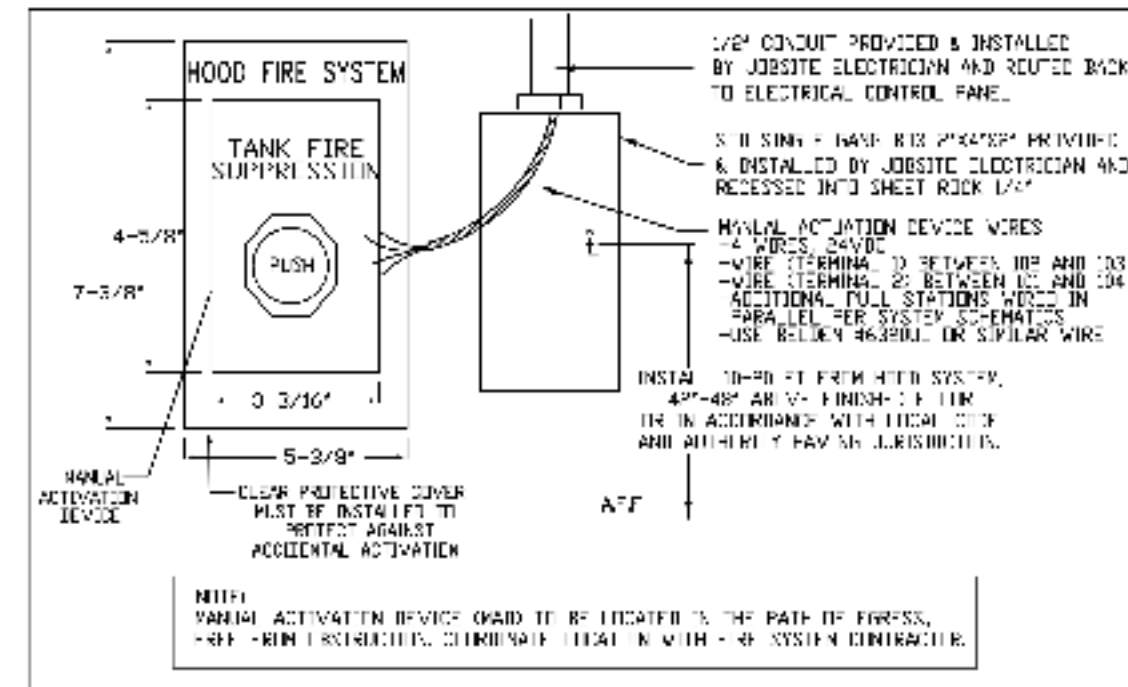

REVISIONS	
NO.	DESCRIPTION

CAPTIVE
 Eastern PA Mechanical
 225 E. City Line Avenue, Suite #103, Bala Cynwyd, PA 19004
 PHONE: (267) 504-4125 EMAIL: rgr10@captivemechanical.com
 www.captivemechanical.com

Shake Shack-1765-Athens, GA (Kitchen)
 ATHENS, GA, 30606

DATE: 5/22/2025
 DWG.#: 7544342
 DRAWN BY: Joe Shilka
 SCALE: 3/4" = 1'-0"
 MASTER DRAWING
 SHEET NO. 4

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION/EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THE CONTRACTOR.

5310 E. HIGH STREET SUITE 350
 PHOENIX, AZ 85054
 T: 480.448.6250
 WWW.SARGARCH.COM



CONSULTANTS:

 14901 Quorum Drive, Suite 905, Dallas, TX 75244 (947) 756-4180

SEAL SIGNATURE:

NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS

161 ALPS RD
 ATHENS, GA 30606
 SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: xx
 CHECKED BY: xx
 PROJECT NO: 25-088

M704

EXHAUST FAN INFORMATION - JOB#7544342

FAN UNIT NO.	TAG	QTY	FAN UNIT MODEL	MANUFACTURER	CFM	ESP	RPM	MOTOR ENCL.	HP	BHP	PHASE	VOLT	FLA	DISCHARGE VELOCITY	WEIGHT (LBS)	SIZES
1	KFF-1	1	DU50K-FA	CAPTIVEAIRE	860	1.000	1460	TFAF-FCM	0.500	3.38PPD	1	208	3.8	327 FPM	79	14.6
2	KFF-2	1	DU50K-FA	CAPTIVEAIRE	738	1.000	1419	TZAD-FCM	0.500	3.25SD	1	200	3.0	281 FPM	79	13.0
3	KFF-3	1	DU50K-FA	CAPTIVEAIRE	738	1.000	1419	TFAF-FCM	0.500	3.25SD	1	208	3.8	281 FPM	79	13.0

FAN ACCESSORIES

FAN UNIT NO.	TAG	EXHAUST				SUPPLY		
		GREASE CLIP	GRAVITY DAMPER	WALL MOUNT	SIDE DISCHARGE	GRAVITY DAMPER	MOTORIZED DAMPER	WALL MOUNT
1	KFF-1	YES						
2	KFF-2	YES						
3	KFF-3	YES						



CURB ASSEMBLIES

NJ	OR FAN	TAG	WEIGHT	LEN	SIZE
1	# 1	KFF-1	34 LBS	CJRB	19.500"W X 19.500"L X 24.000"H HINGED
2	# 2	KFF-2	34 LBS	CJRB	19.500"W X 19.500"L X 24.000"H HINGED
3	# 3	KFF-3	34 LBS	CJRB	19.500"W X 19.500"L X 24.000"H HINGED

FAN OPTIONS

FAN UNIT NO.	TAG	QTY	DESCRIPTION
1	KFF-1	1	GREASE BOX
		1	FCM WIRING PACKAGE - EXHAUST - MOTOR CONTROL - MSC - CFL CD, COW ROTATION
		1	FAN BASE CERAMIC SEAL - DU/DK50K-FA - INSTALLED AT PLANT - FOR GREASE DUCTS
		1	2 YEAR PARTS WARRANTY
2	KFF-2	1	GREASE BOX
		1	FCM WIRING PACKAGE - EXHAUST - MOTOR CONTROL - MSC - CFL CD, COW ROTATION
		1	FAN BASE CERAMIC SEAL - DU/DK50K-FA - INSTALLED AT PLANT - FOR GREASE DUCTS
		1	2 YEAR PARTS WARRANTY
3	KFF-3	1	GREASE BOX
		1	FCM WIRING PACKAGE - EXHAUST - MOTOR CONTROL - MSC - CFL CD, COW ROTATION
		1	FAN BASE CERAMIC SEAL - DU/DK50K-FA - INSTALLED AT PLANT - FOR GREASE DUCTS
		1	2 YEAR PARTS WARRANTY

FAN # (KFF-1), #2 (KFF-2), #3 (KFF-3) - DU50KFA EXHAUST FAN

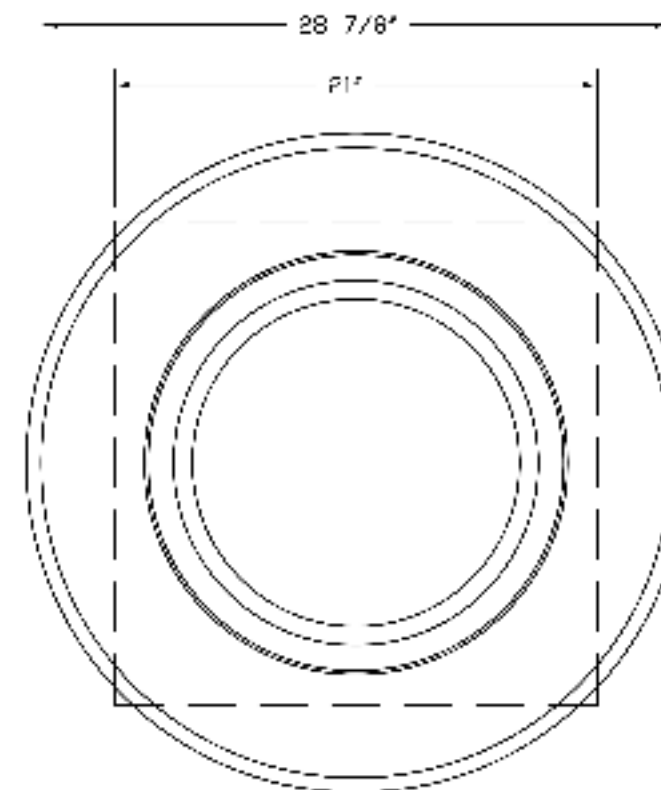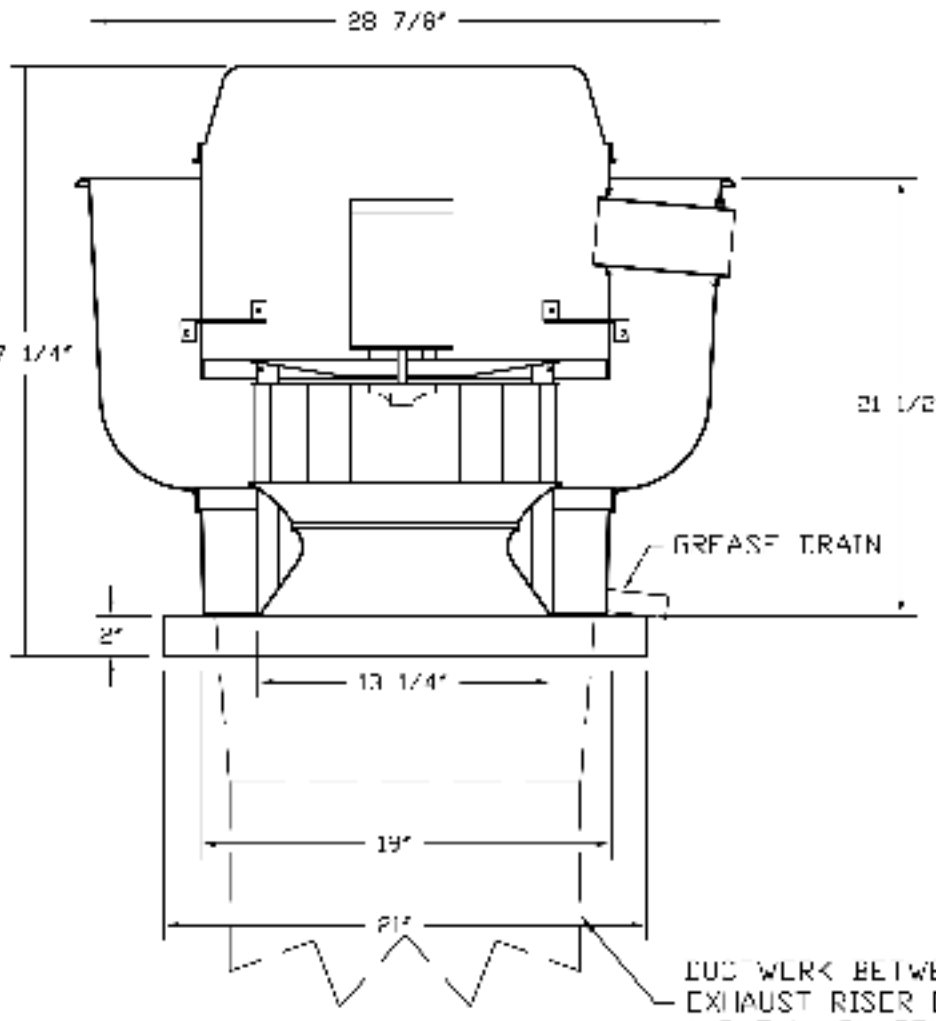

TOP VIEW

FEATURES:

- DIRECT DRIVE CONSTRUCTION (NO BELTS/PULLEYS)
- ROOF MOUNTED FANS
- RUSHAWAY RIBBLE
- UL703 AND UL762 AND JLC 5645
- VARIABLE SPEED CONTROL
- INTERNAL WIRING
- THERMAL OVERLOAD PROTECTION (SINGLE PHASE)
- HIGH HEAT SPREAD (UN 3007) (49°C)
- GREASE CLASSIFICATION TESTING
- NEMA 3R SAFETY DISCONNECT SWITCH

NORMAL TEMPERATURE TEST


EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING AIR AT 200°F (93°C) UNTIL ALL FAN PARTS HAVE REACHED THERMAL EQUILIBRIUM, AND WITHOUT ANY INTERMITTENT EXHAUSTION TO THE FAN WHICH WOULD CAUSE INOPERATION.

ABNORMAL TEMPERATURE TEST

EXHAUST FAN MUST OPERATE CONTINUOUSLY WHILE EXHAUSTING BURNT GREASE VAPORS AT 600°F (316°C) FOR A PERIOD OF 15 MINUTES WITHOUT THE FAN BECOMING DAMAGED IN ANY MANNER THAT WOULD CAUSE AN UNSAFE CONDITION.




DETAILS:

- TRAP OFF BNC
- ECM WIRING PACKAGE - EXHAUST - MOTOR CONTROL - MSC - CFL CD, COW ROTATION
- FAN BASE CERAMIC SEAL - DU/DK50K-FA - INSTALLED AT PLANT - FOR GREASE DUCTS
- 2 YEAR PARTS WARRANTY

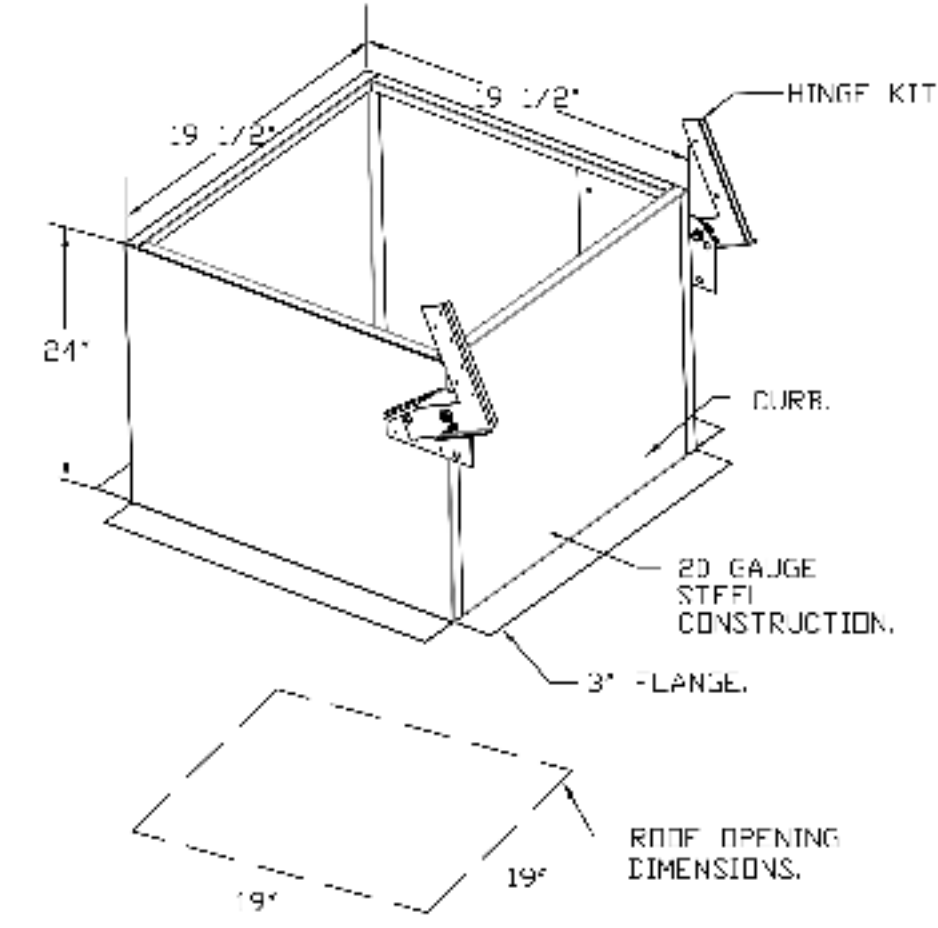

REVISIONS

NO.	BY	DATE	DESCRIPTION

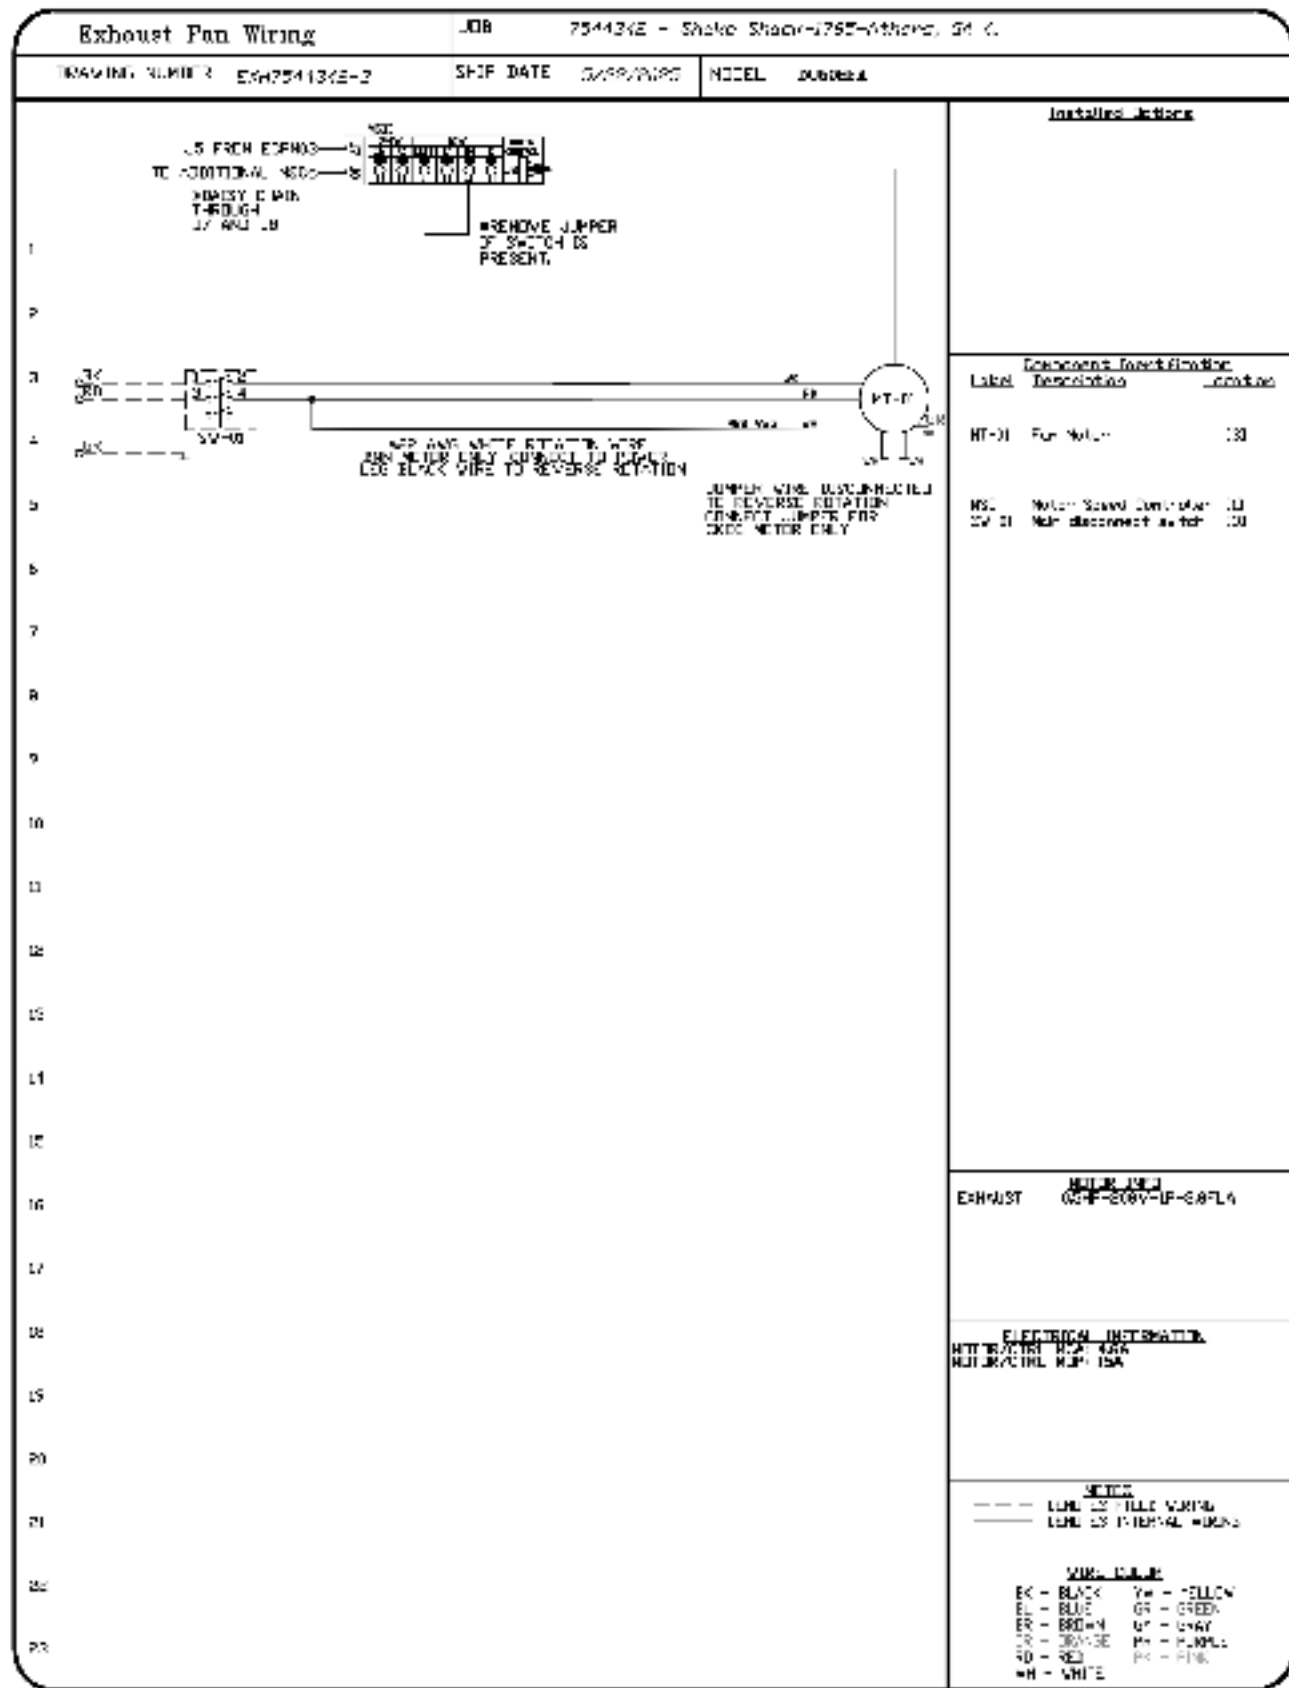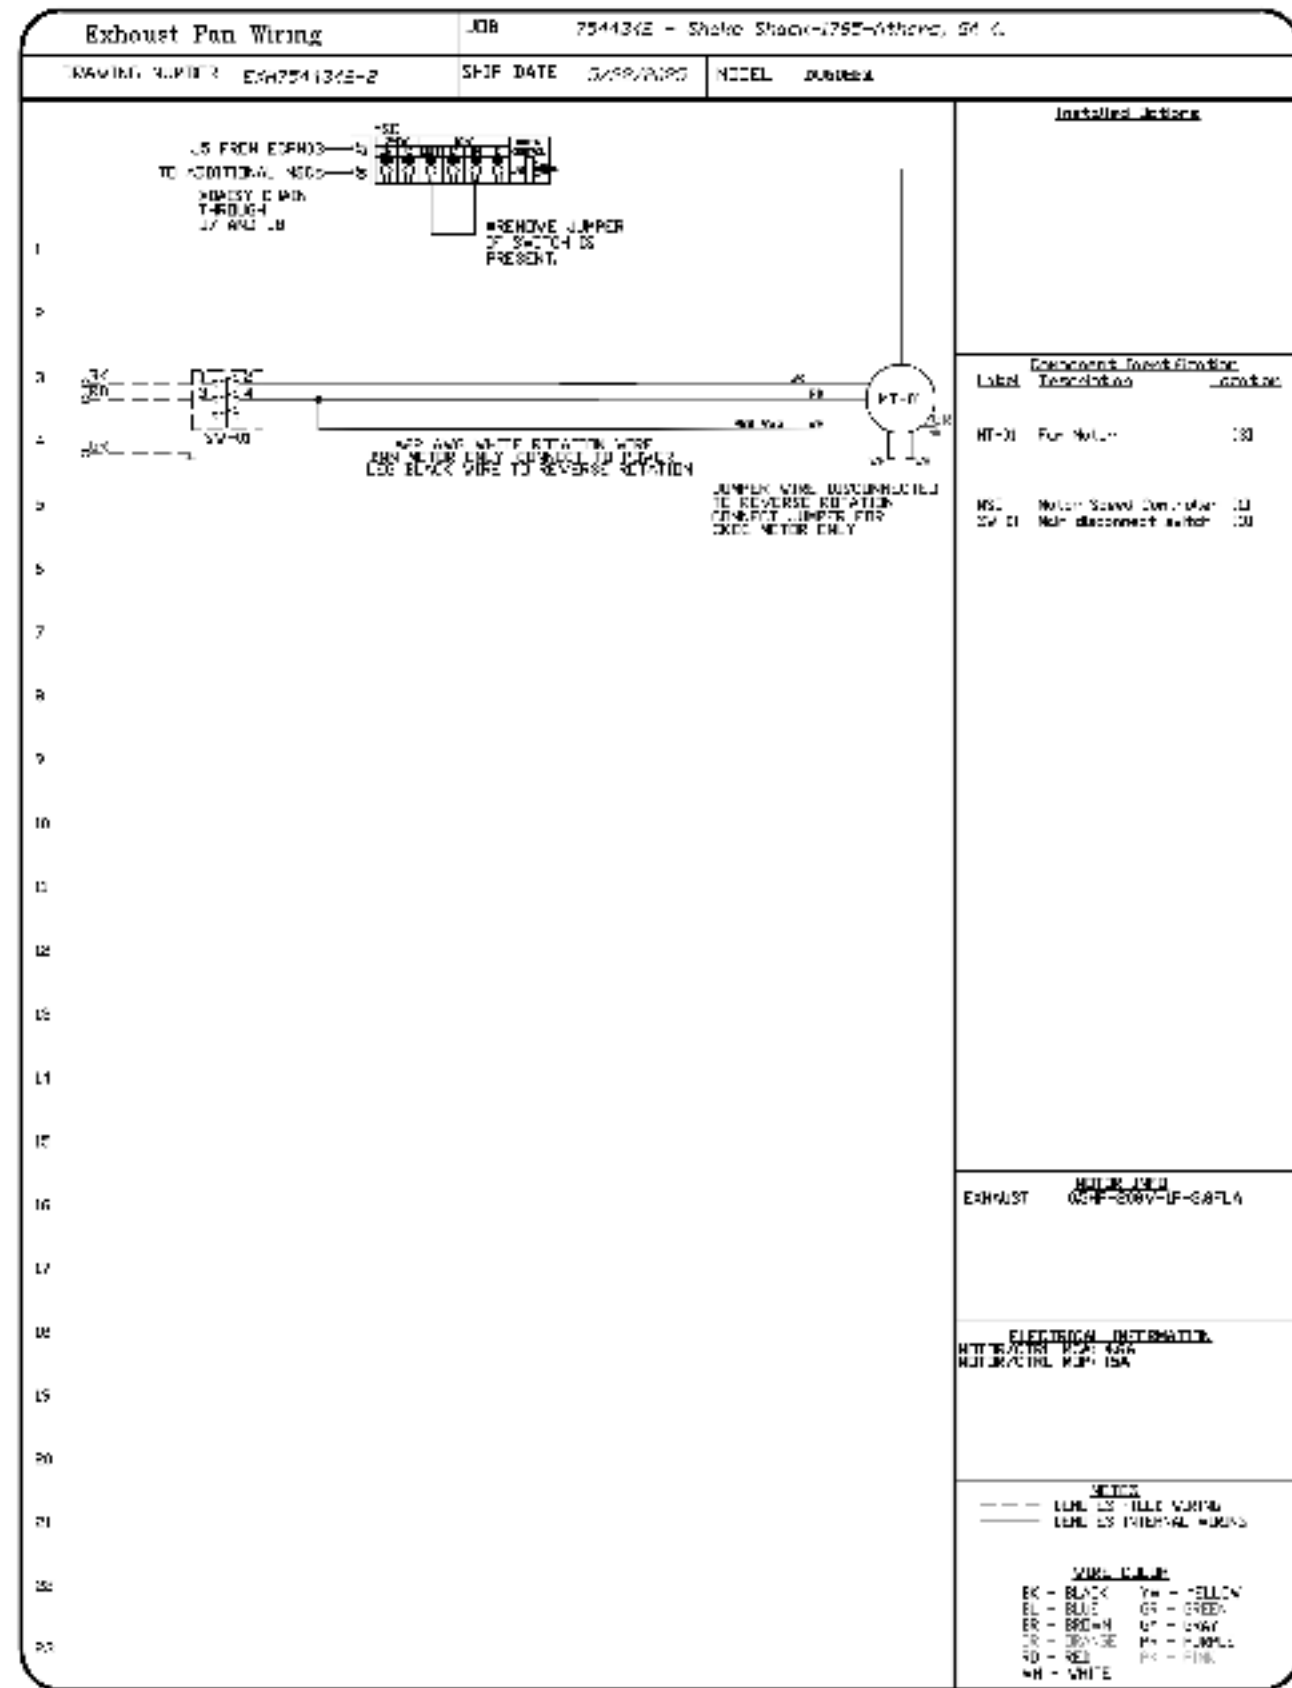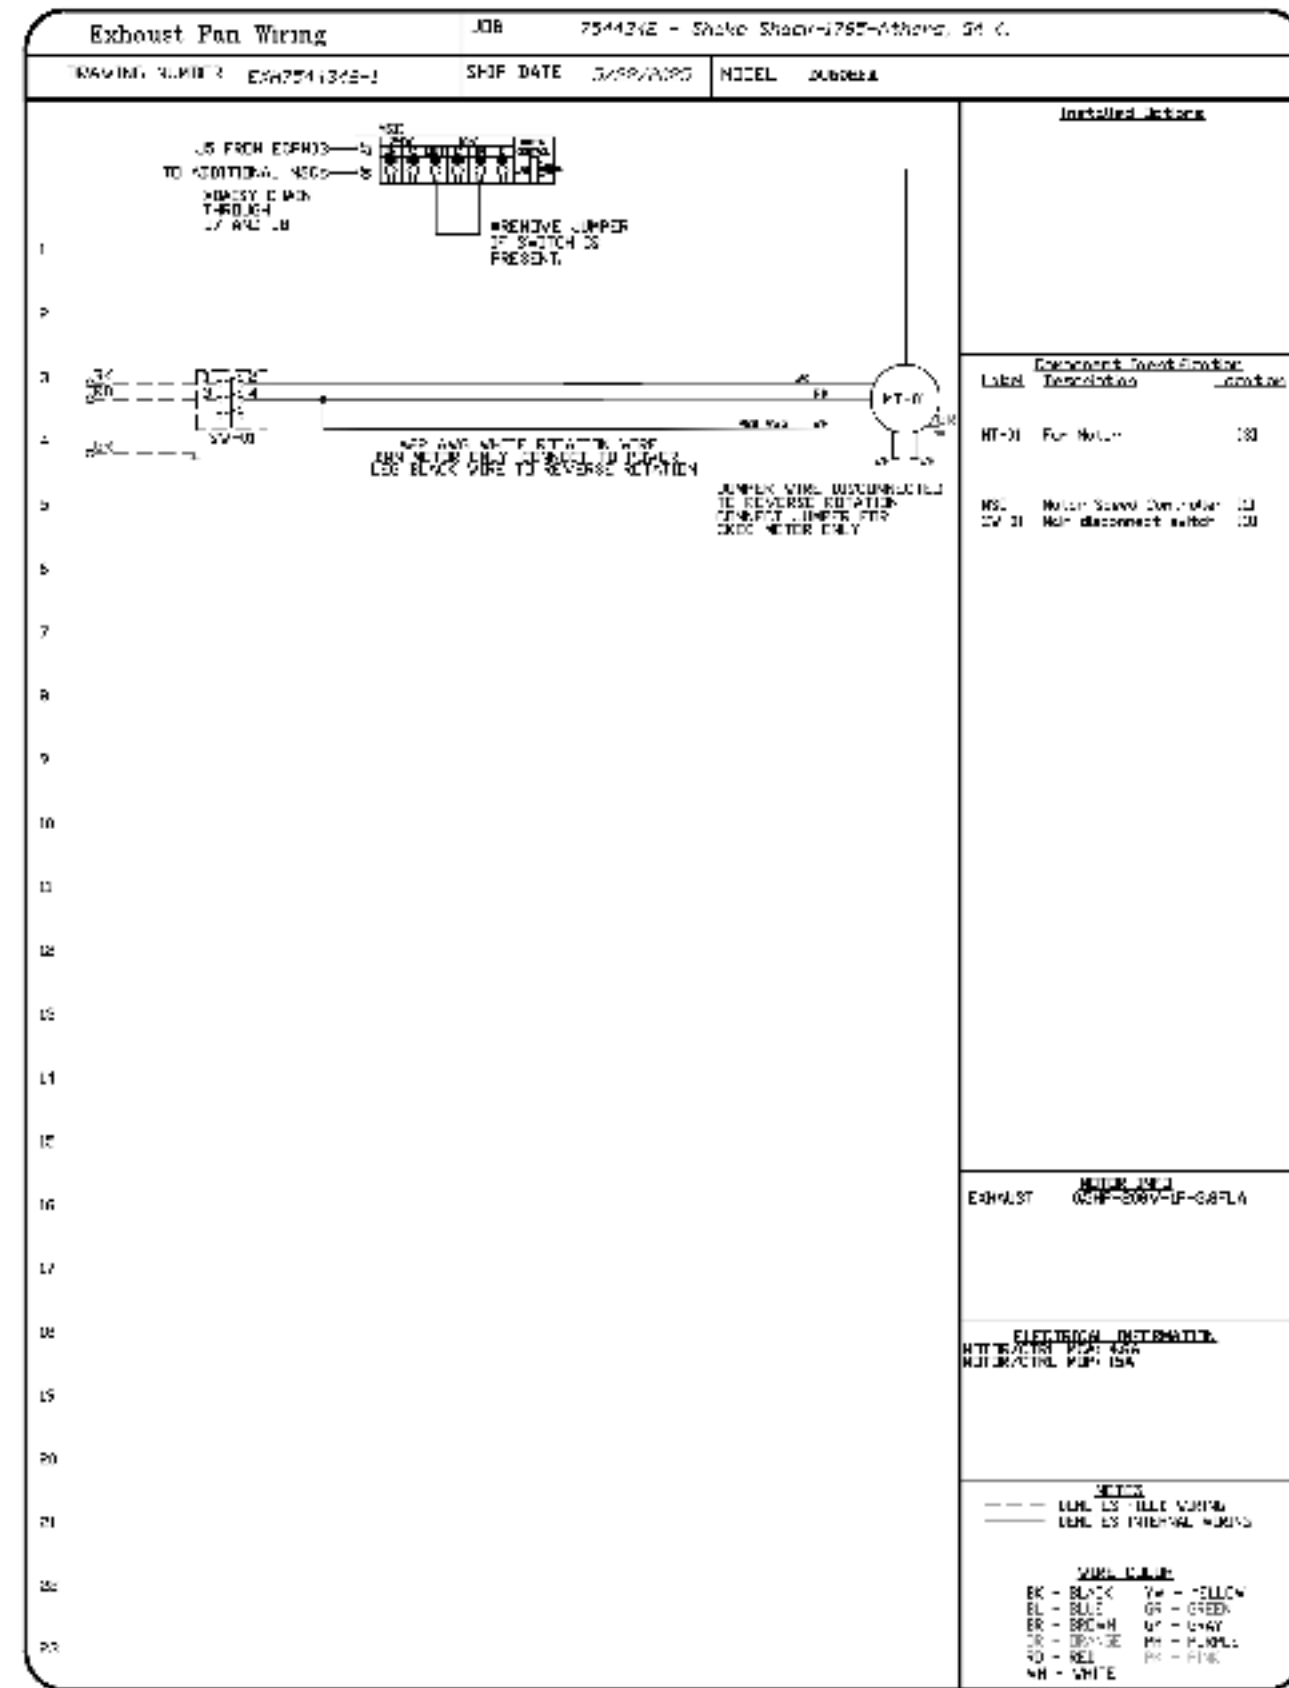

Store Stock # 160-6-ars, U6 (Kitchen)
ATHENS, GA, 30605

DATE: 5/22/2025
DWG.#: 1544342
DRAWN BY: Joe Shiloo
SCALE: 3/4" = 1'-0"
MASTER DRAWING

SHEET NO.
5

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

5310 E HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM

INTEGRVS

CONSULTANTS:

rtm
14901 Quorum Drive, Suite 905, Dallas, TX 75244 (947) 756-4180

SEAL SIGNATURE:

GEORGIA REGISTERED PROFESSIONAL ENGINEER DAVID R. LIPPE

NO.	BY	DATE	DESCRIPTION

SHAKE SHACK

SHAKE SHACK - ATHENS

161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET


CAPTIVE AIRE DRAWINGS

DRAWN BY: xx
CHECKED BY: xx
PROJECT NO: 25-088

M705

ELECTRICAL PACKAGE - JOB#7544342

WT	TAG	PACKAGE #	LOCATION	SWITCHES		QUANTITY	NOTES	FANS CONTROLLED					
				LOCATION	FUNCTION			FAN TAG	TYPE	HP	VOLTS	PHASE	
1		SC-230100A	JUILITY CABINET	JUILITY CABINET	RIGHT	1 LIGHT	SMART CONTROL	KEL-1	EXHAUST	1	230V	3PH	3.0
					ICDD # 1	1 FAN	W/ RELAY UNIT/FT WITH SUPPLY	KEL-2	EXHAUST	1	230V	3PH	3.0
								KEL-3	EXHAUST	1	230V	3PH	3.0




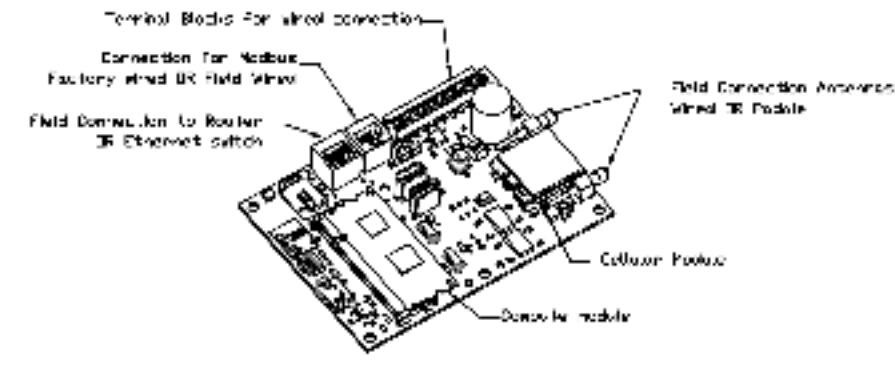


CASlink Monitor and Control

Head control panel to support communications in cloud-based Building Management System.
 Head control panel to allow cloud-based Building Management System to monitor and time parameter monitoring on the panel.
 Head control panel to allow cloud-based Building Management System to control parameter monitoring on the panel.
 Head control panel to allow cloud-based Building Management System to implement feature monitoring control strategies for fully integrated Building Management.

MONITORING AND CONTROL POINTS LIST

DC Package	Function	DC Package	Function
River Temperature	MONITOR	River Temperature	MONITOR
Water Temperature	MONITOR	Water Temperature	MONITOR
Water Discharge Temperature	MONITOR	Water Discharge Temperature	MONITOR
Water BTU Discharge Temperature	MONITOR	Water BTU Discharge Temperature	MONITOR
Pan Speed	MONITOR	Discharge Panel	MONITOR
Pan Airspeed	MONITOR	Pan Airspeed	MONITOR
Pan Power	MONITOR	Pan Power	MONITOR
BTU Panel	MONITOR	BTU Panel	MONITOR
Control Panel	MONITOR	BTU Power Dis Panel	MONITOR
Pan Panel	MONITOR	Flow Location	MONITOR
Pan Panel	MONITOR	Water Flow System	MONITOR
Pan Panel	MONITOR	Discharge Pressure	MONITOR
Pan Panel	MONITOR	Pan Location	MONITOR & CONTROL
Pan Panel	MONITOR	Water Discharge	MONITOR & CONTROL
Pan Panel	MONITOR	Water Discharge	MONITOR & CONTROL
Pan Panel	MONITOR	Water Discharge	MONITOR & CONTROL

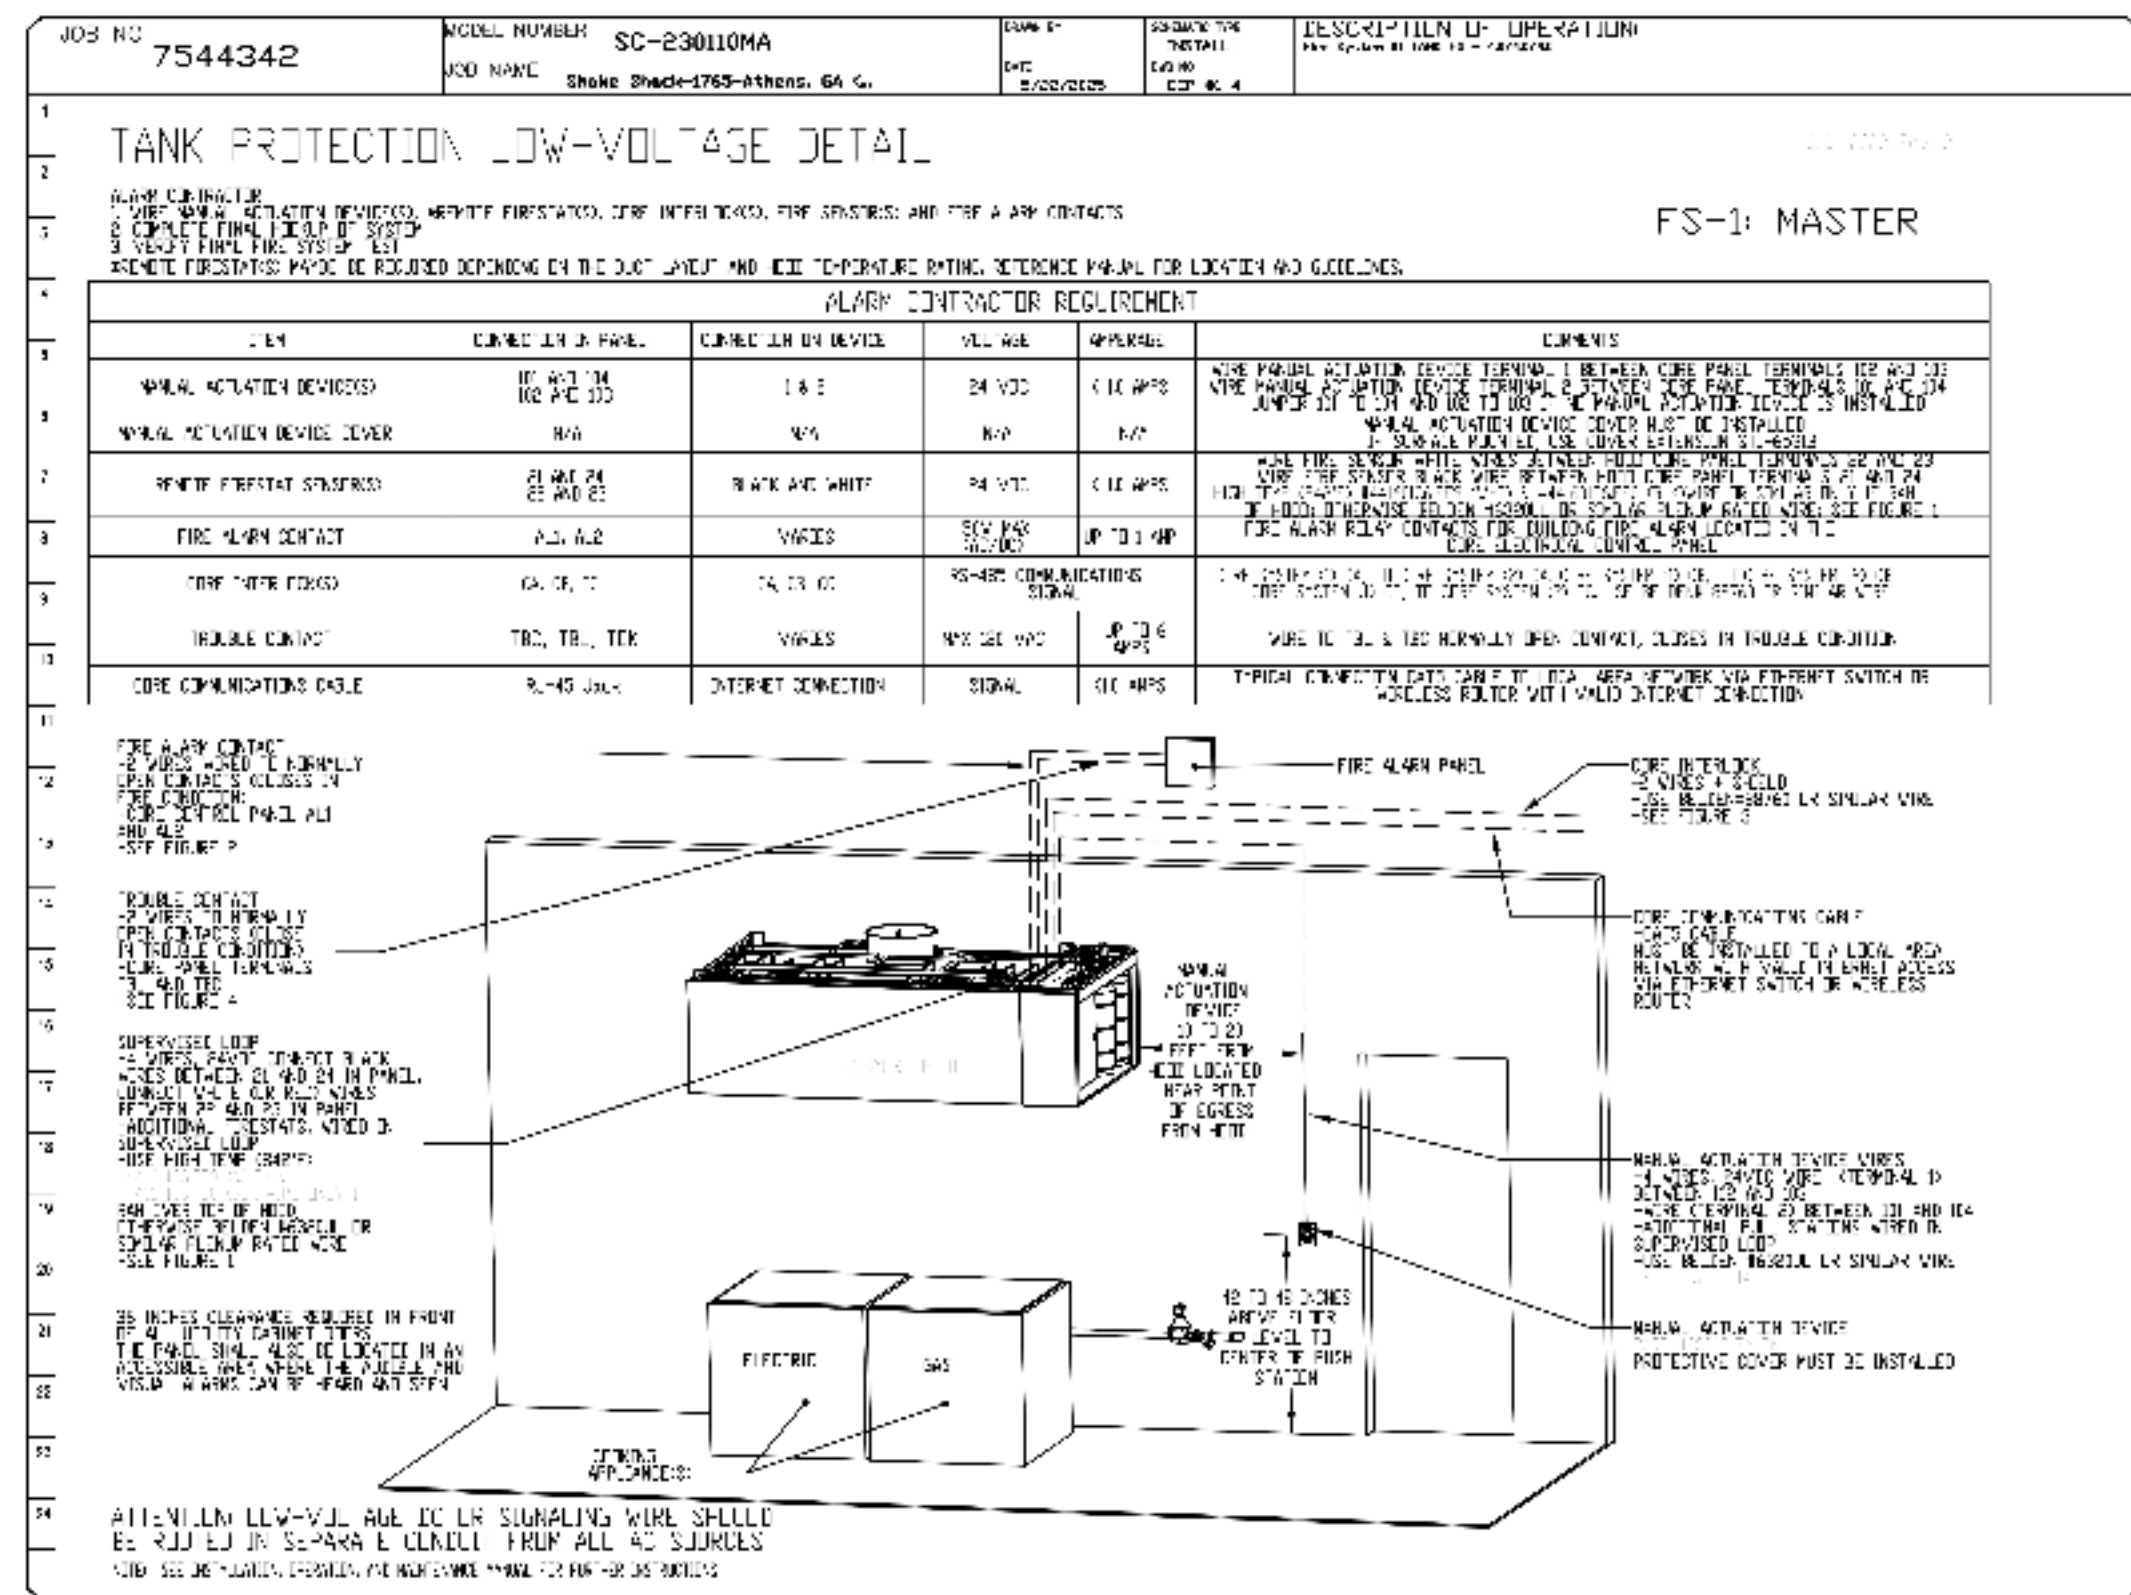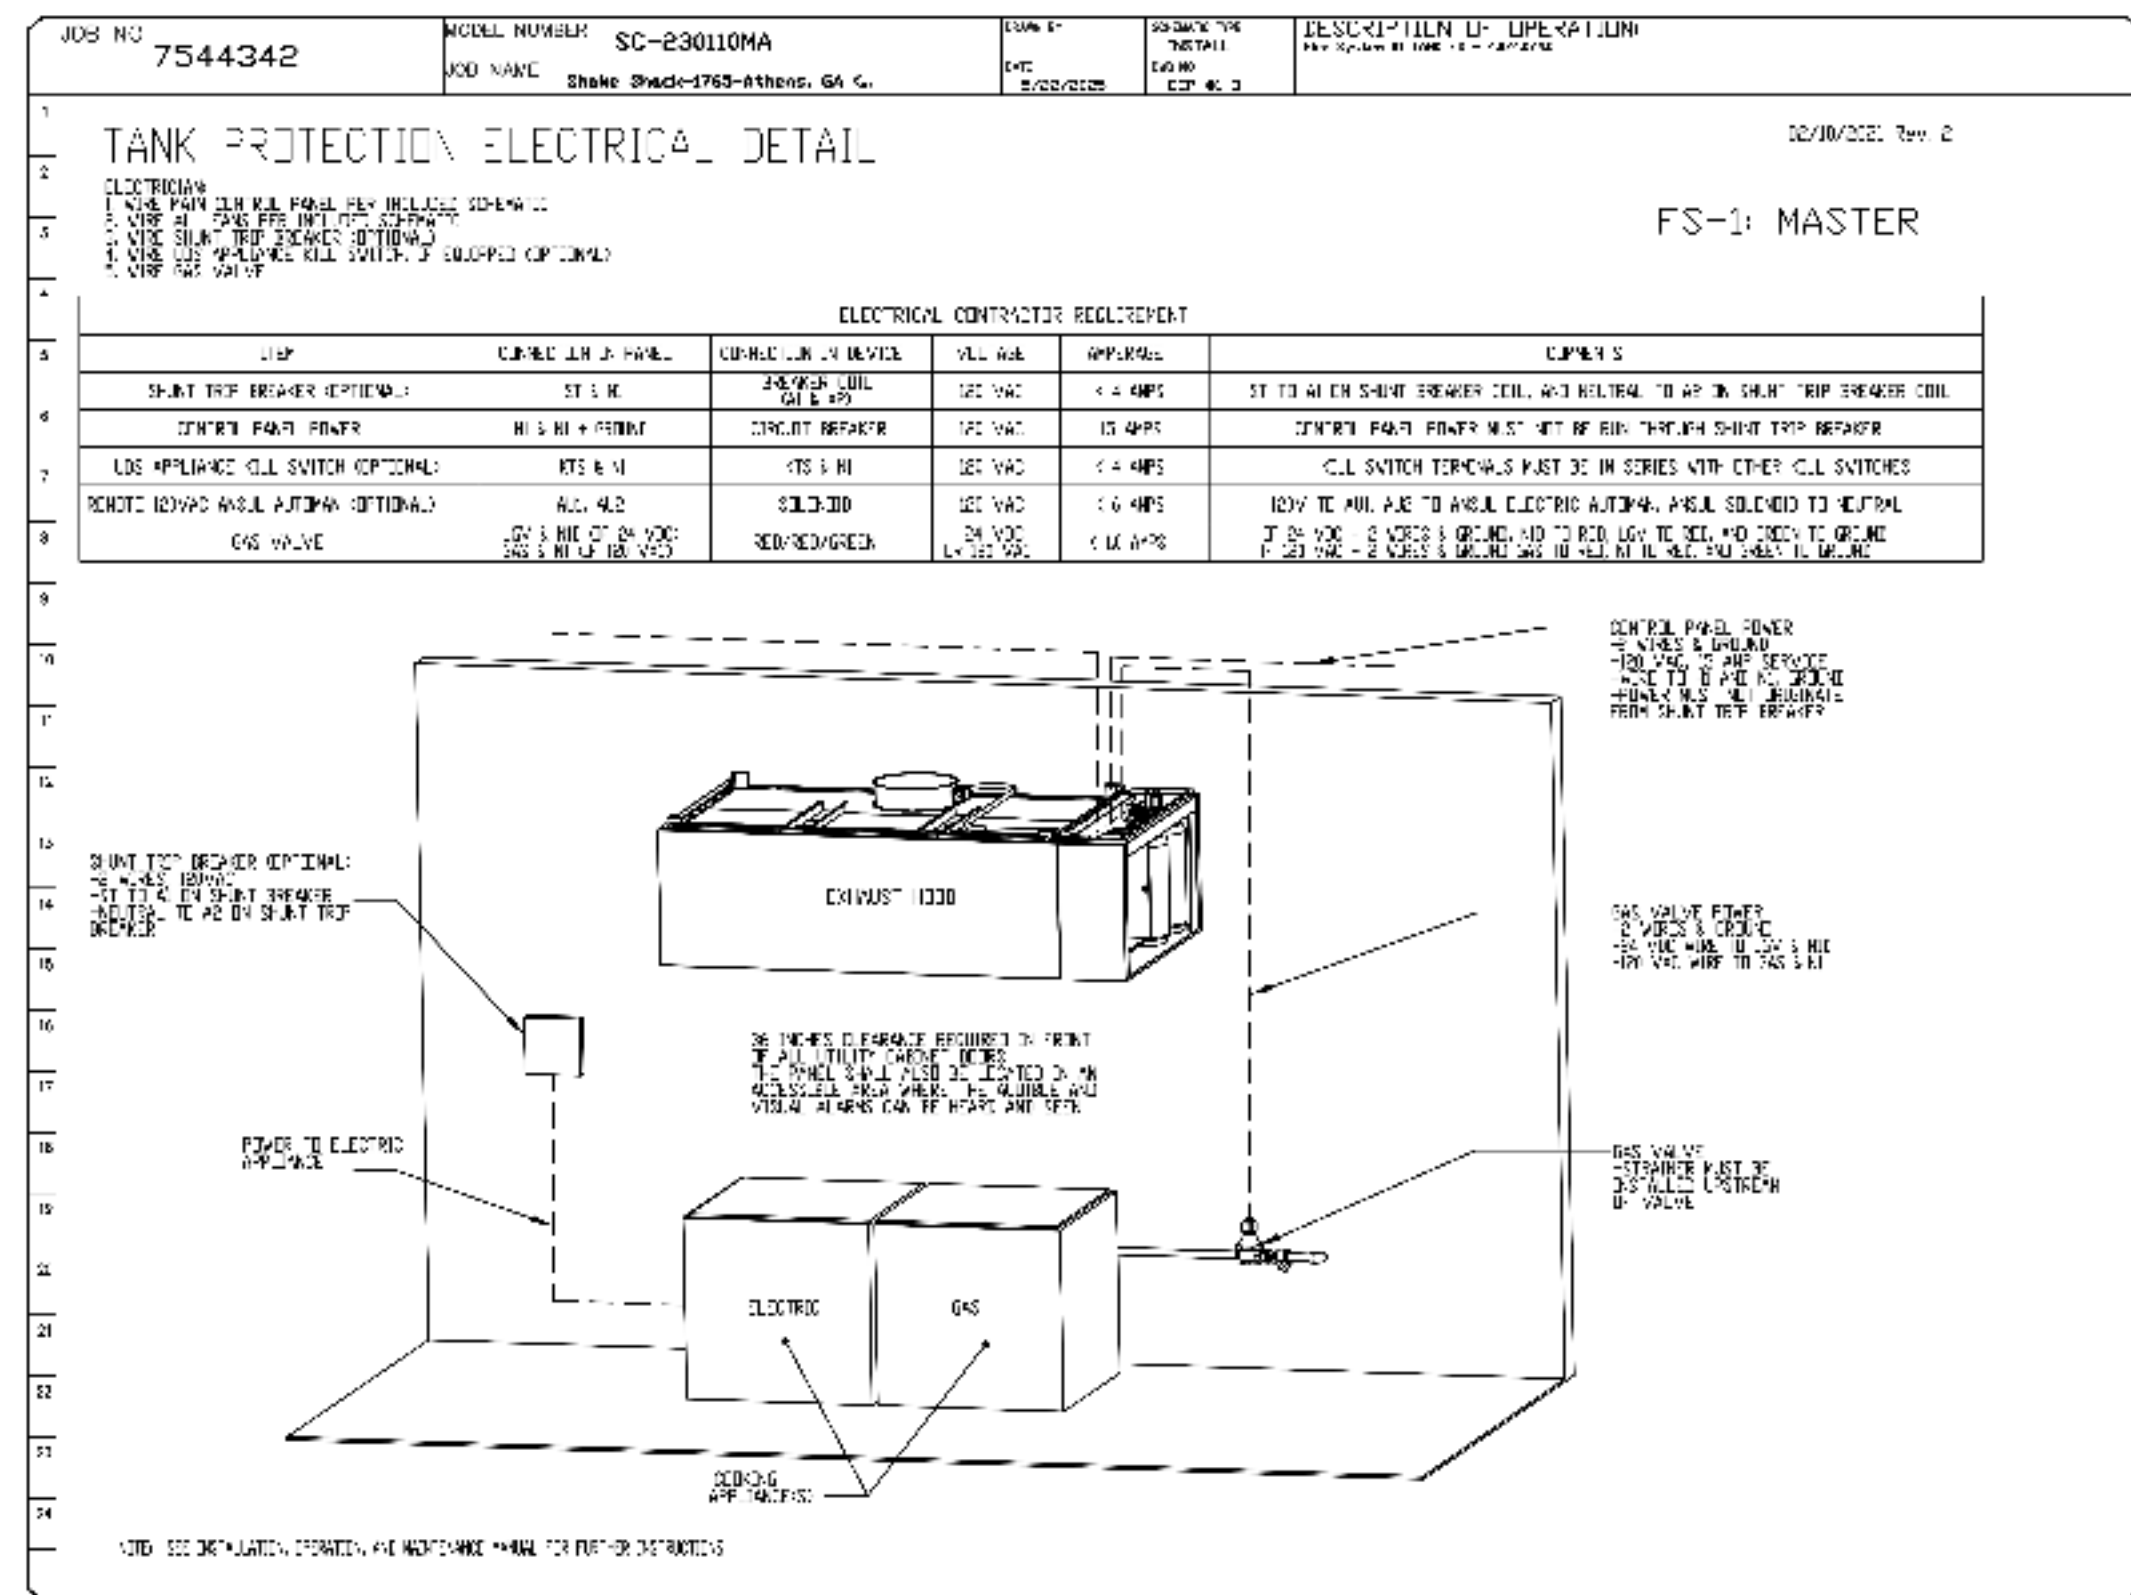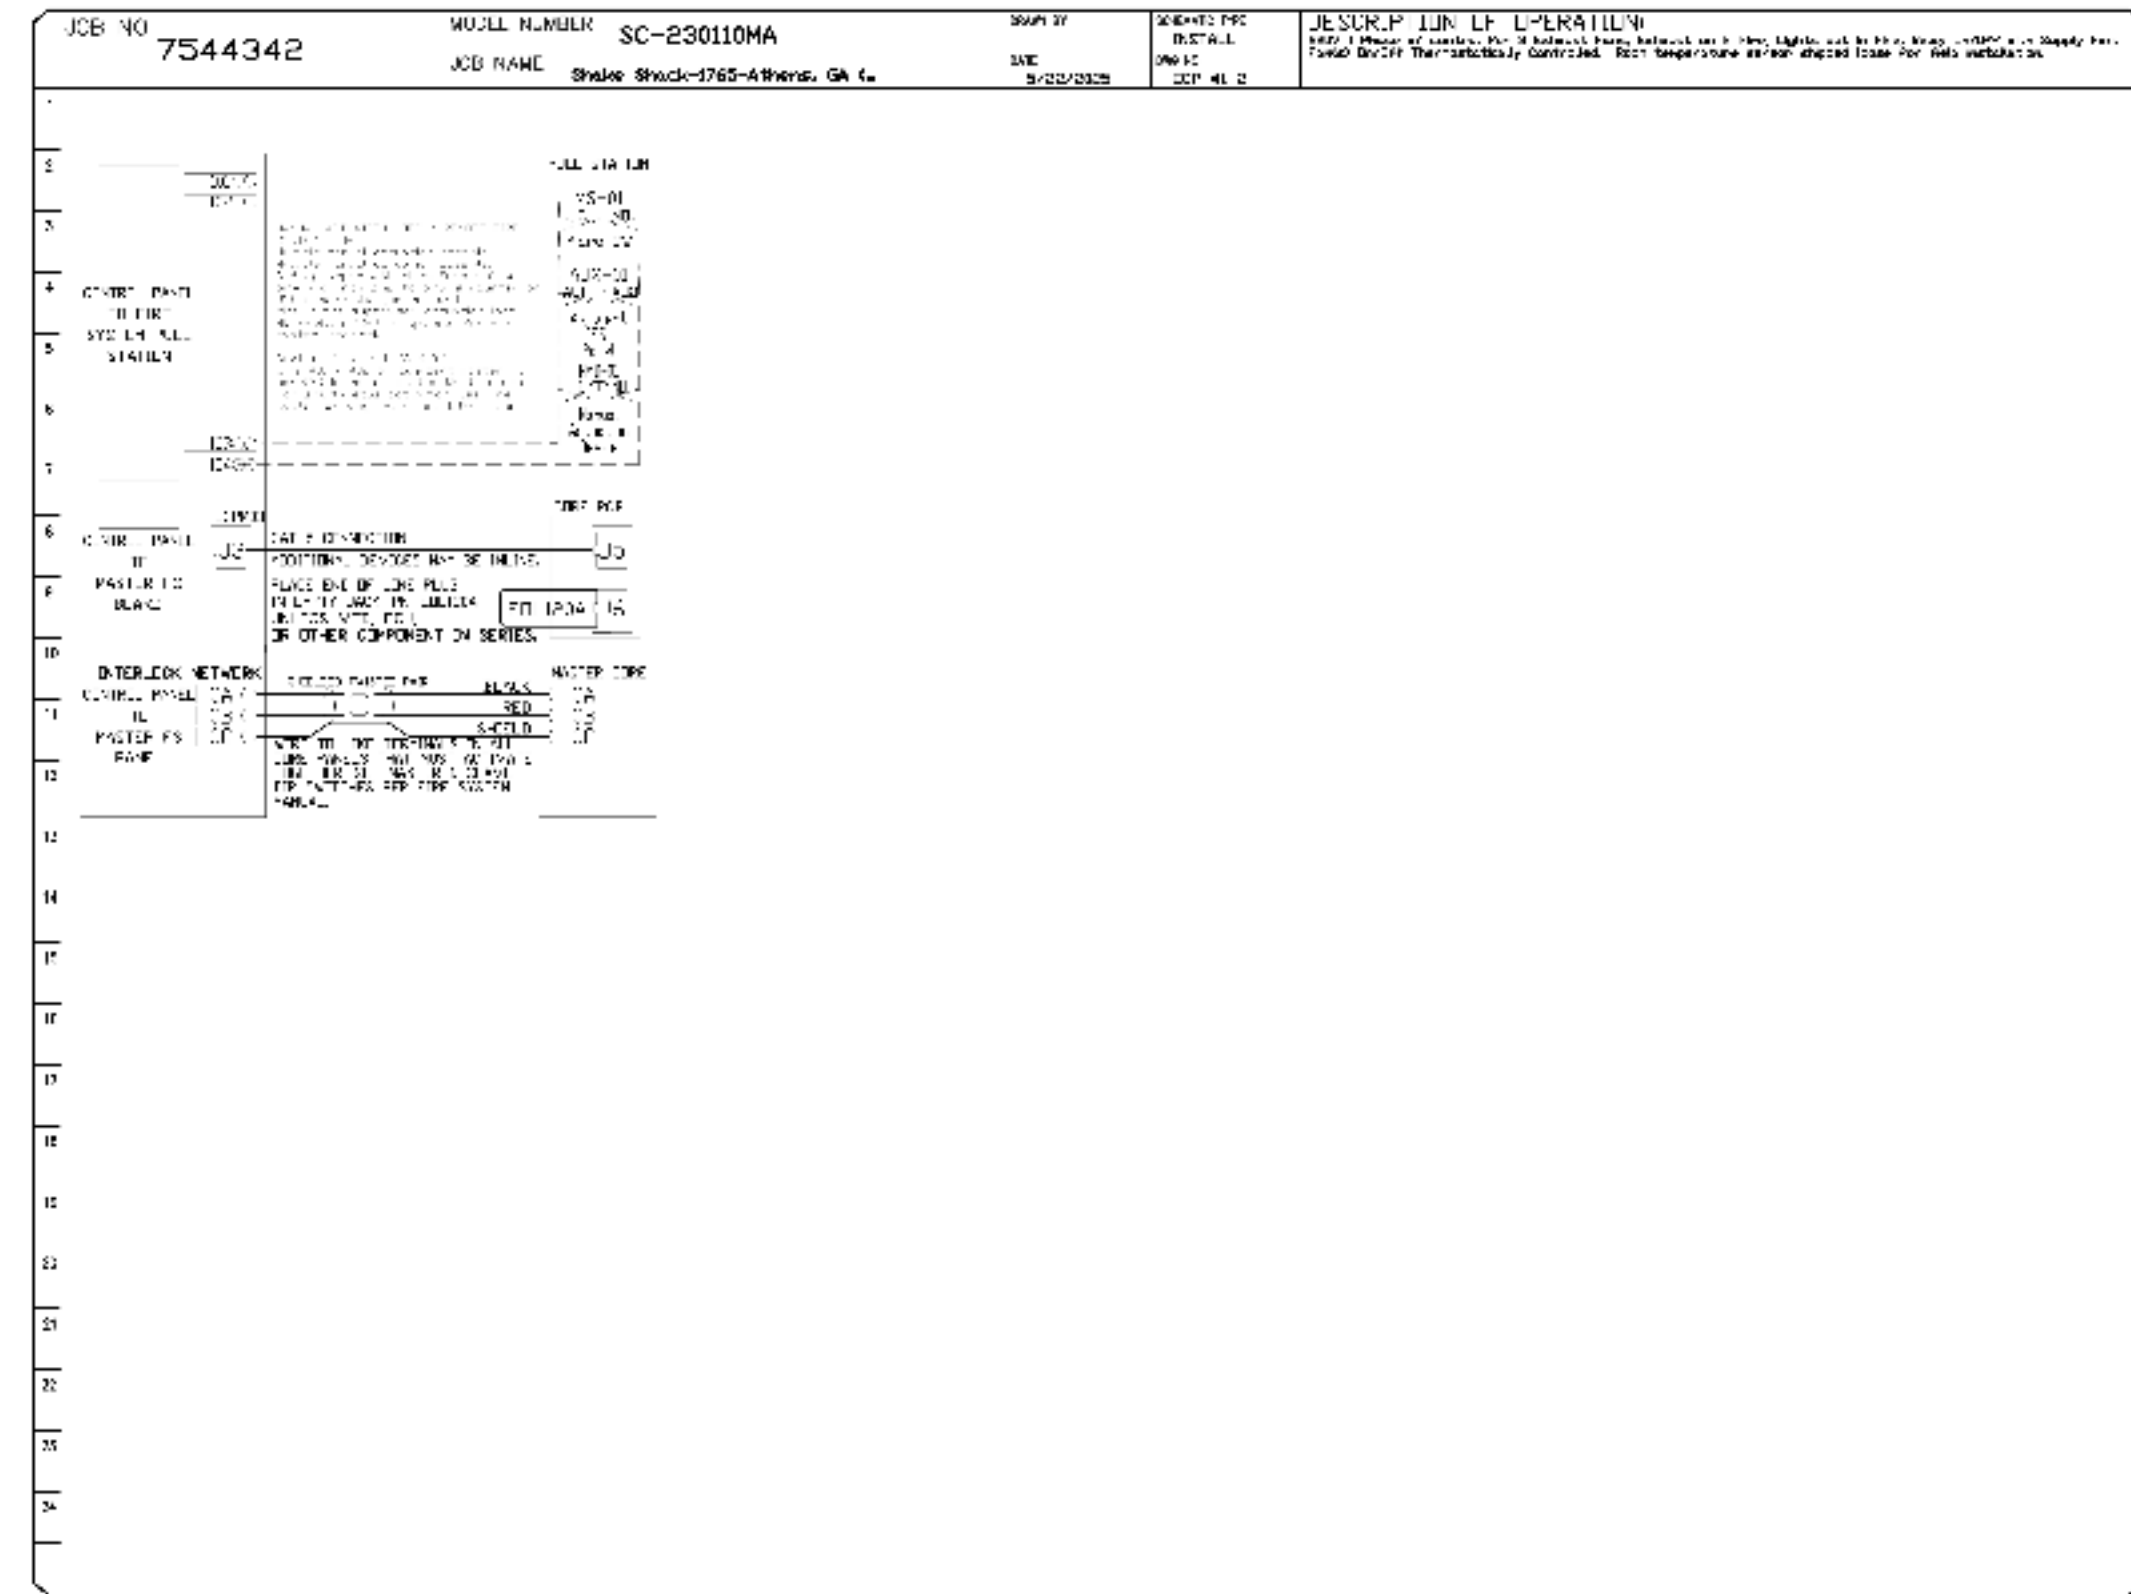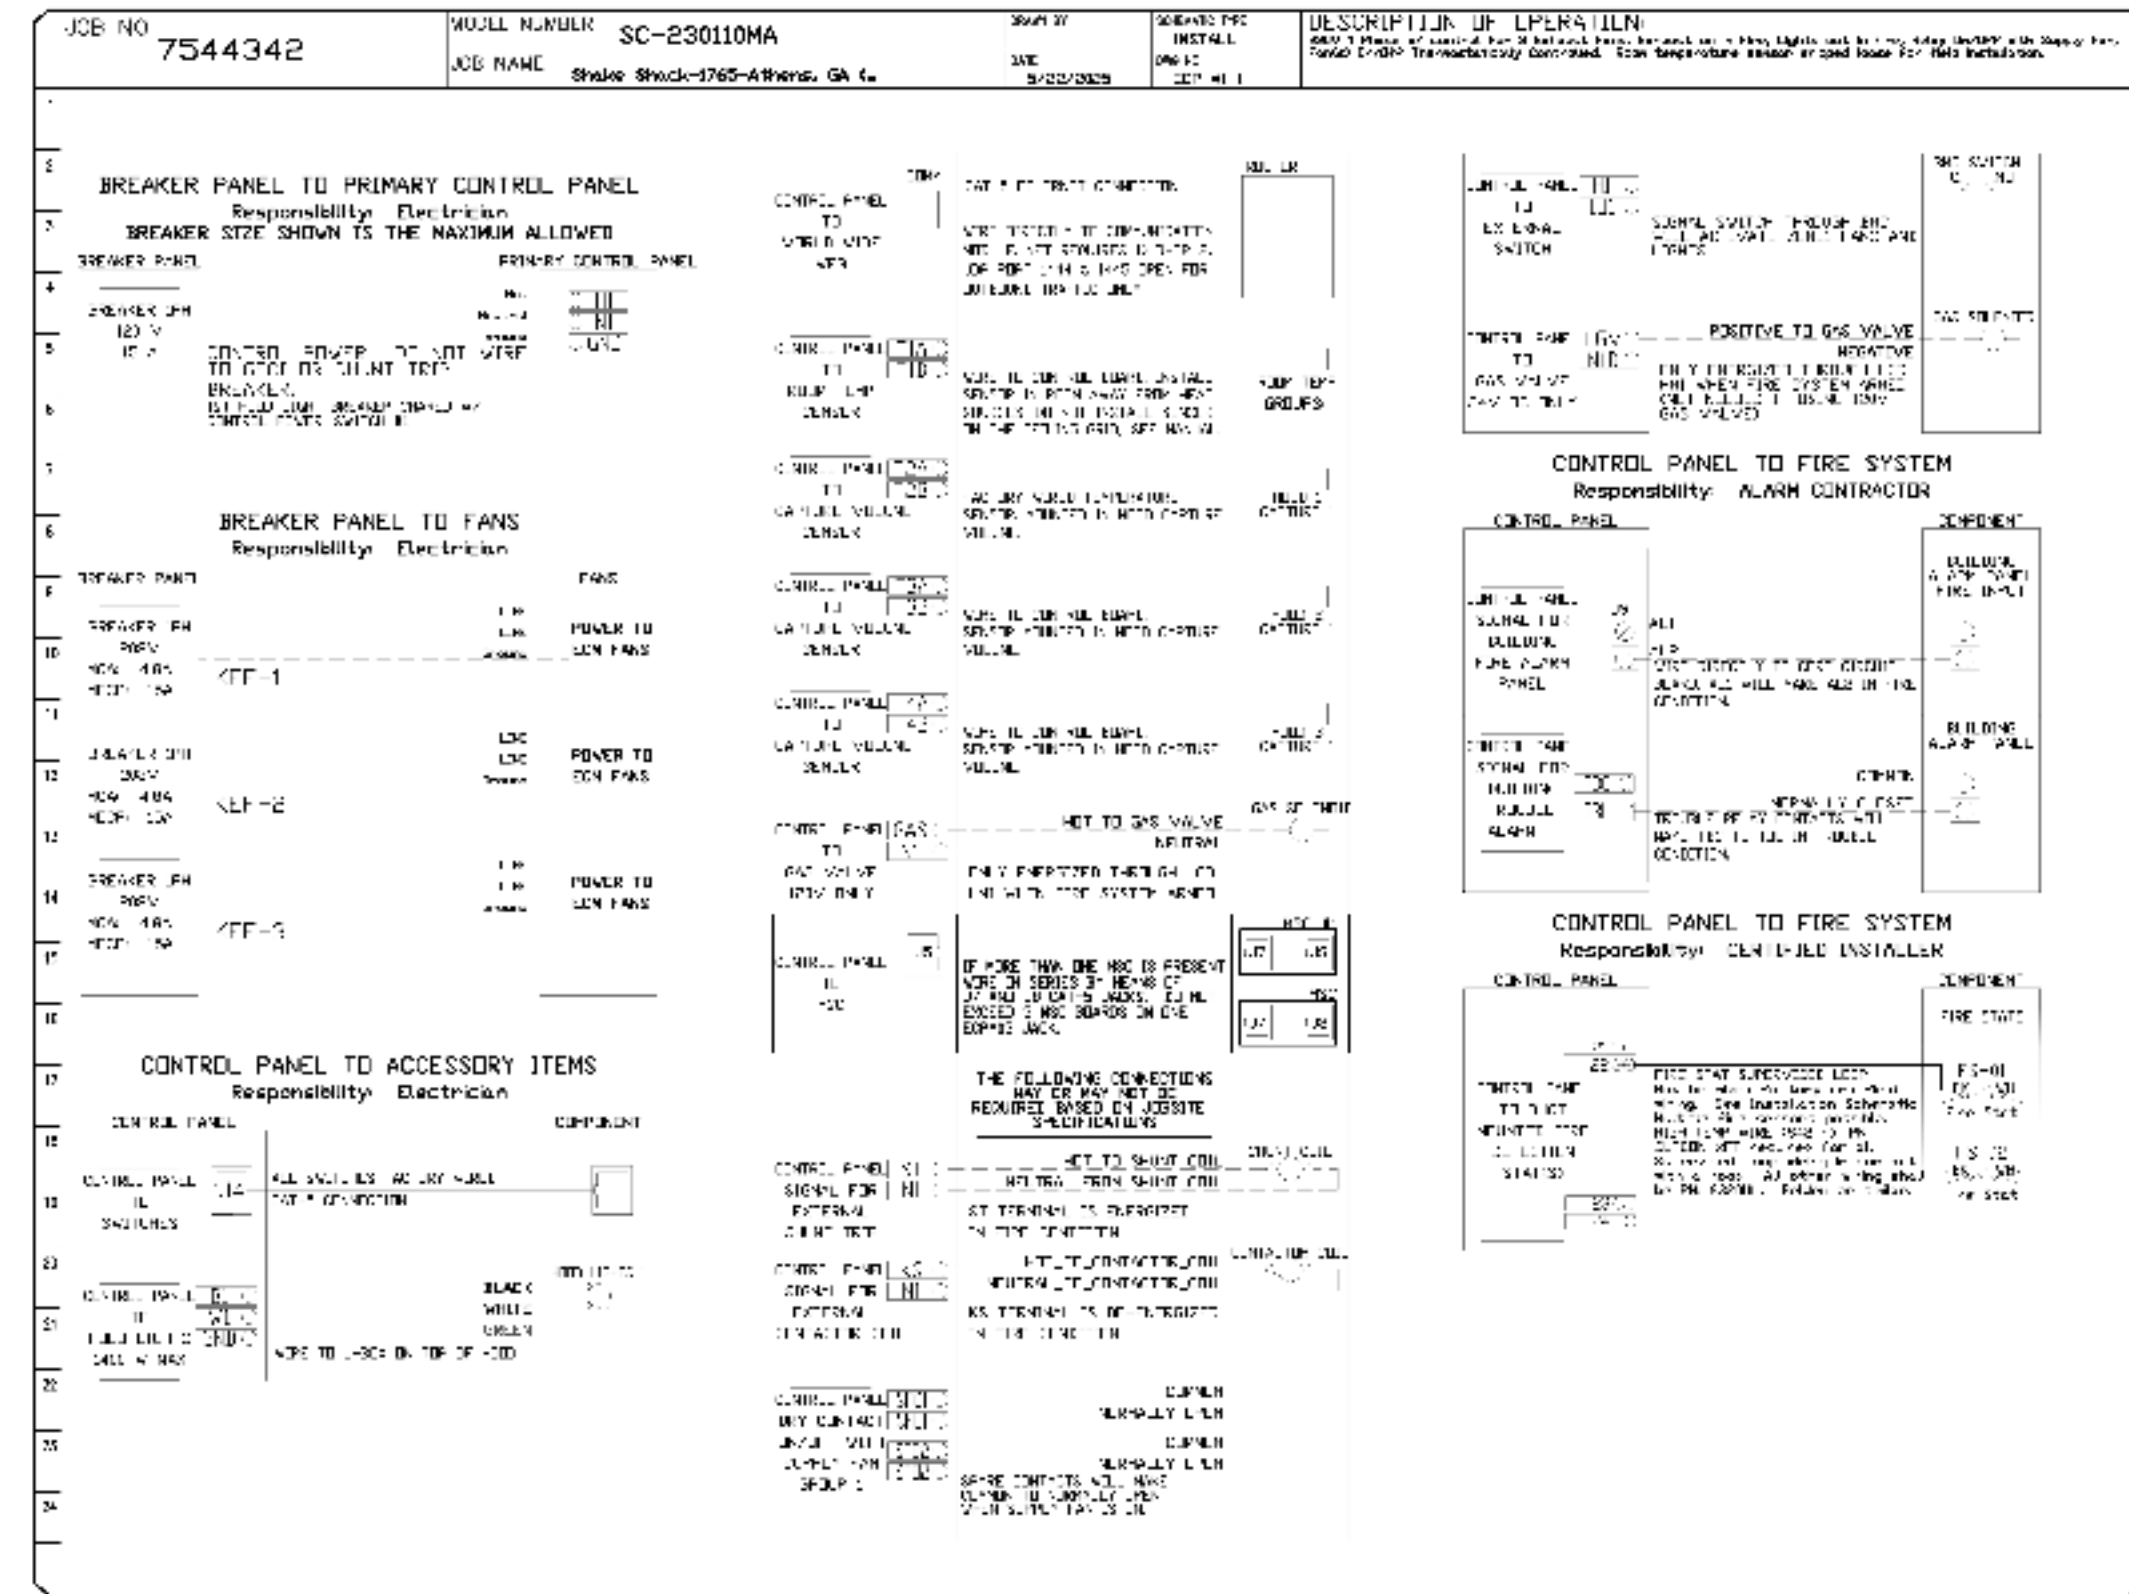

REVISIONS

NO.	DESCRIPTION	DATE

CAPTIVE

Eastern PA Mechanical
 228 E. City Line Avenue, Suite #103, Bensalem, PA 19006
 PHONE: (607) 604-4128 FAX: (607) 604-4129
 www.captiveinc.com

Spare Stock - Athens, GA (Kitchen)
 ATHENS, GA, 30605

DATE: 5/22/2025
 DWG.#: 7544342
 DRAWN BY: Joe Shilco
 SCALE: 3/4" = 1'-0"
 MASTER DRAWING

SHEET NO. 6

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THE CONTRACTOR.

AutoCAD/SharePoint/SharePoint - Athens, GA/SharePoint/SharePoint - Athens, GA

5310 E HIGH STREET SUITE 350
 PHOENIX, AZ 85054
 T: 480.448.6250
 WWW.SARGARCH.COM



CONSULTANTS

rtm

14901 Quorum Drive, Suite 905, Dallas, TX 75244 (972) 419-1100



NO. BY DATE DESCRIPTION

SHAKE SHACK

SHAKE SHACK - ATHENS





161 ALPS RD
 ATHENS, GA 30606
 SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: xx
 CHECKED BY: xx
 PROJECT NO: 25-088

M706

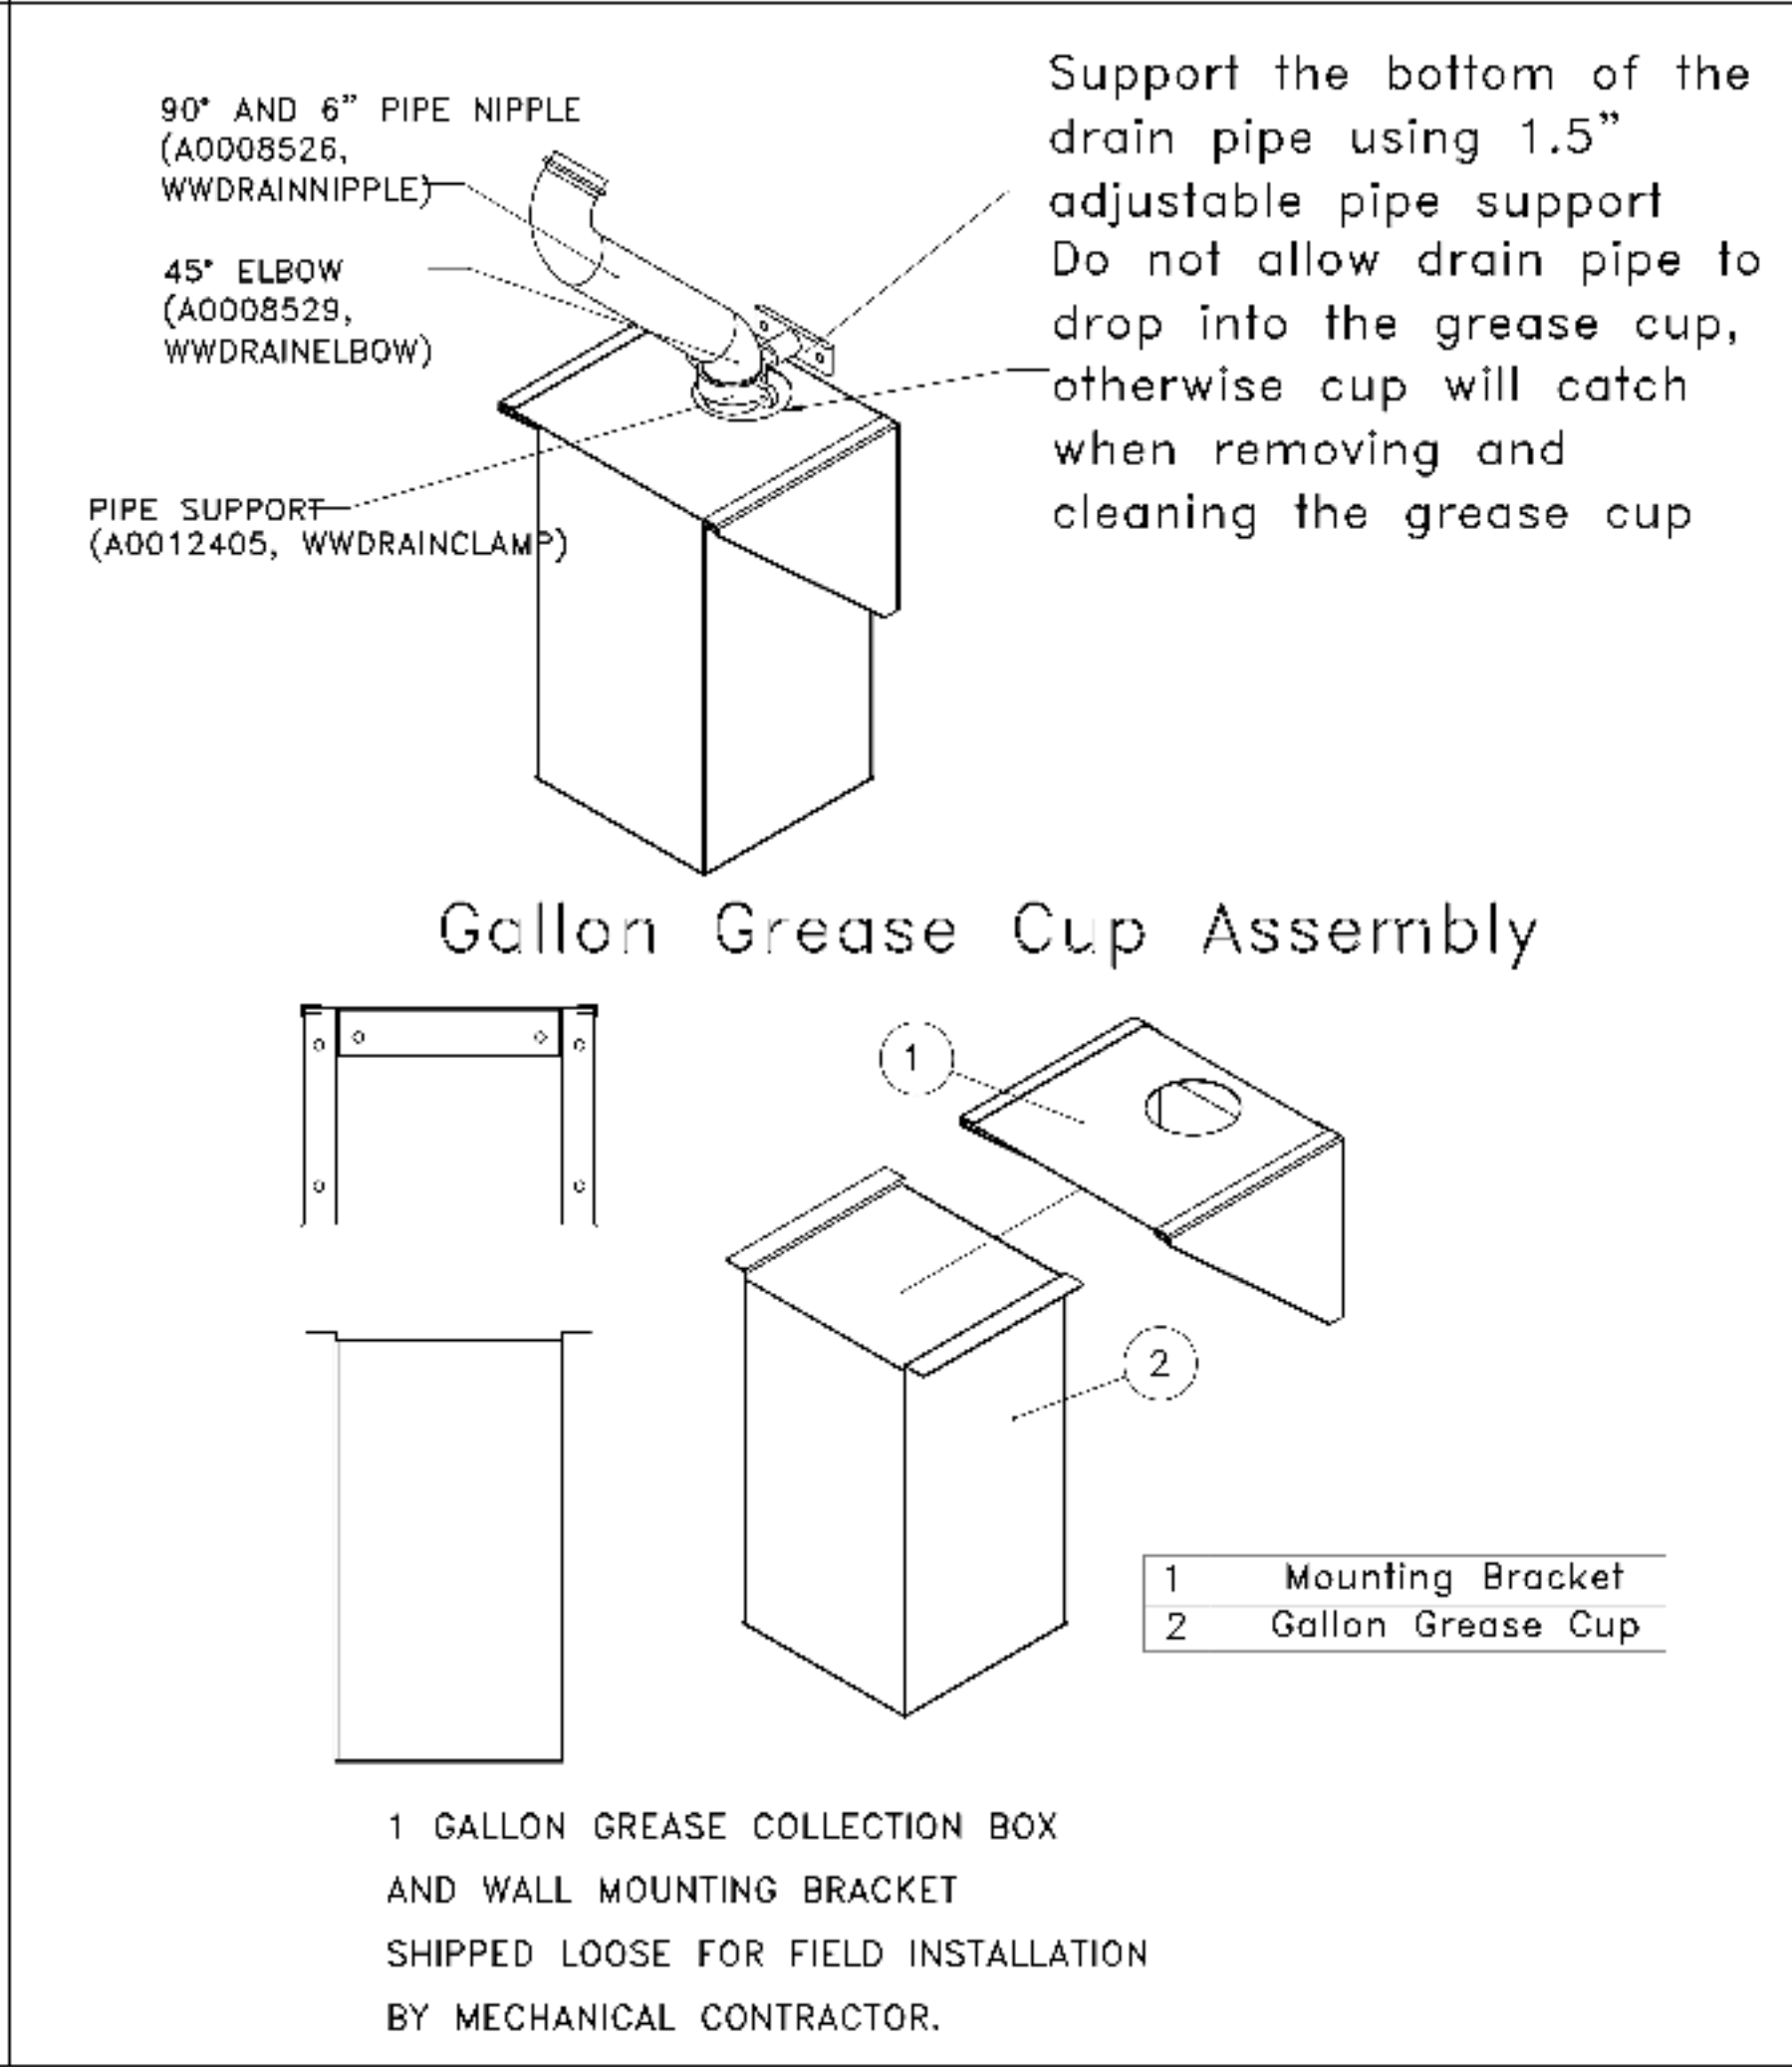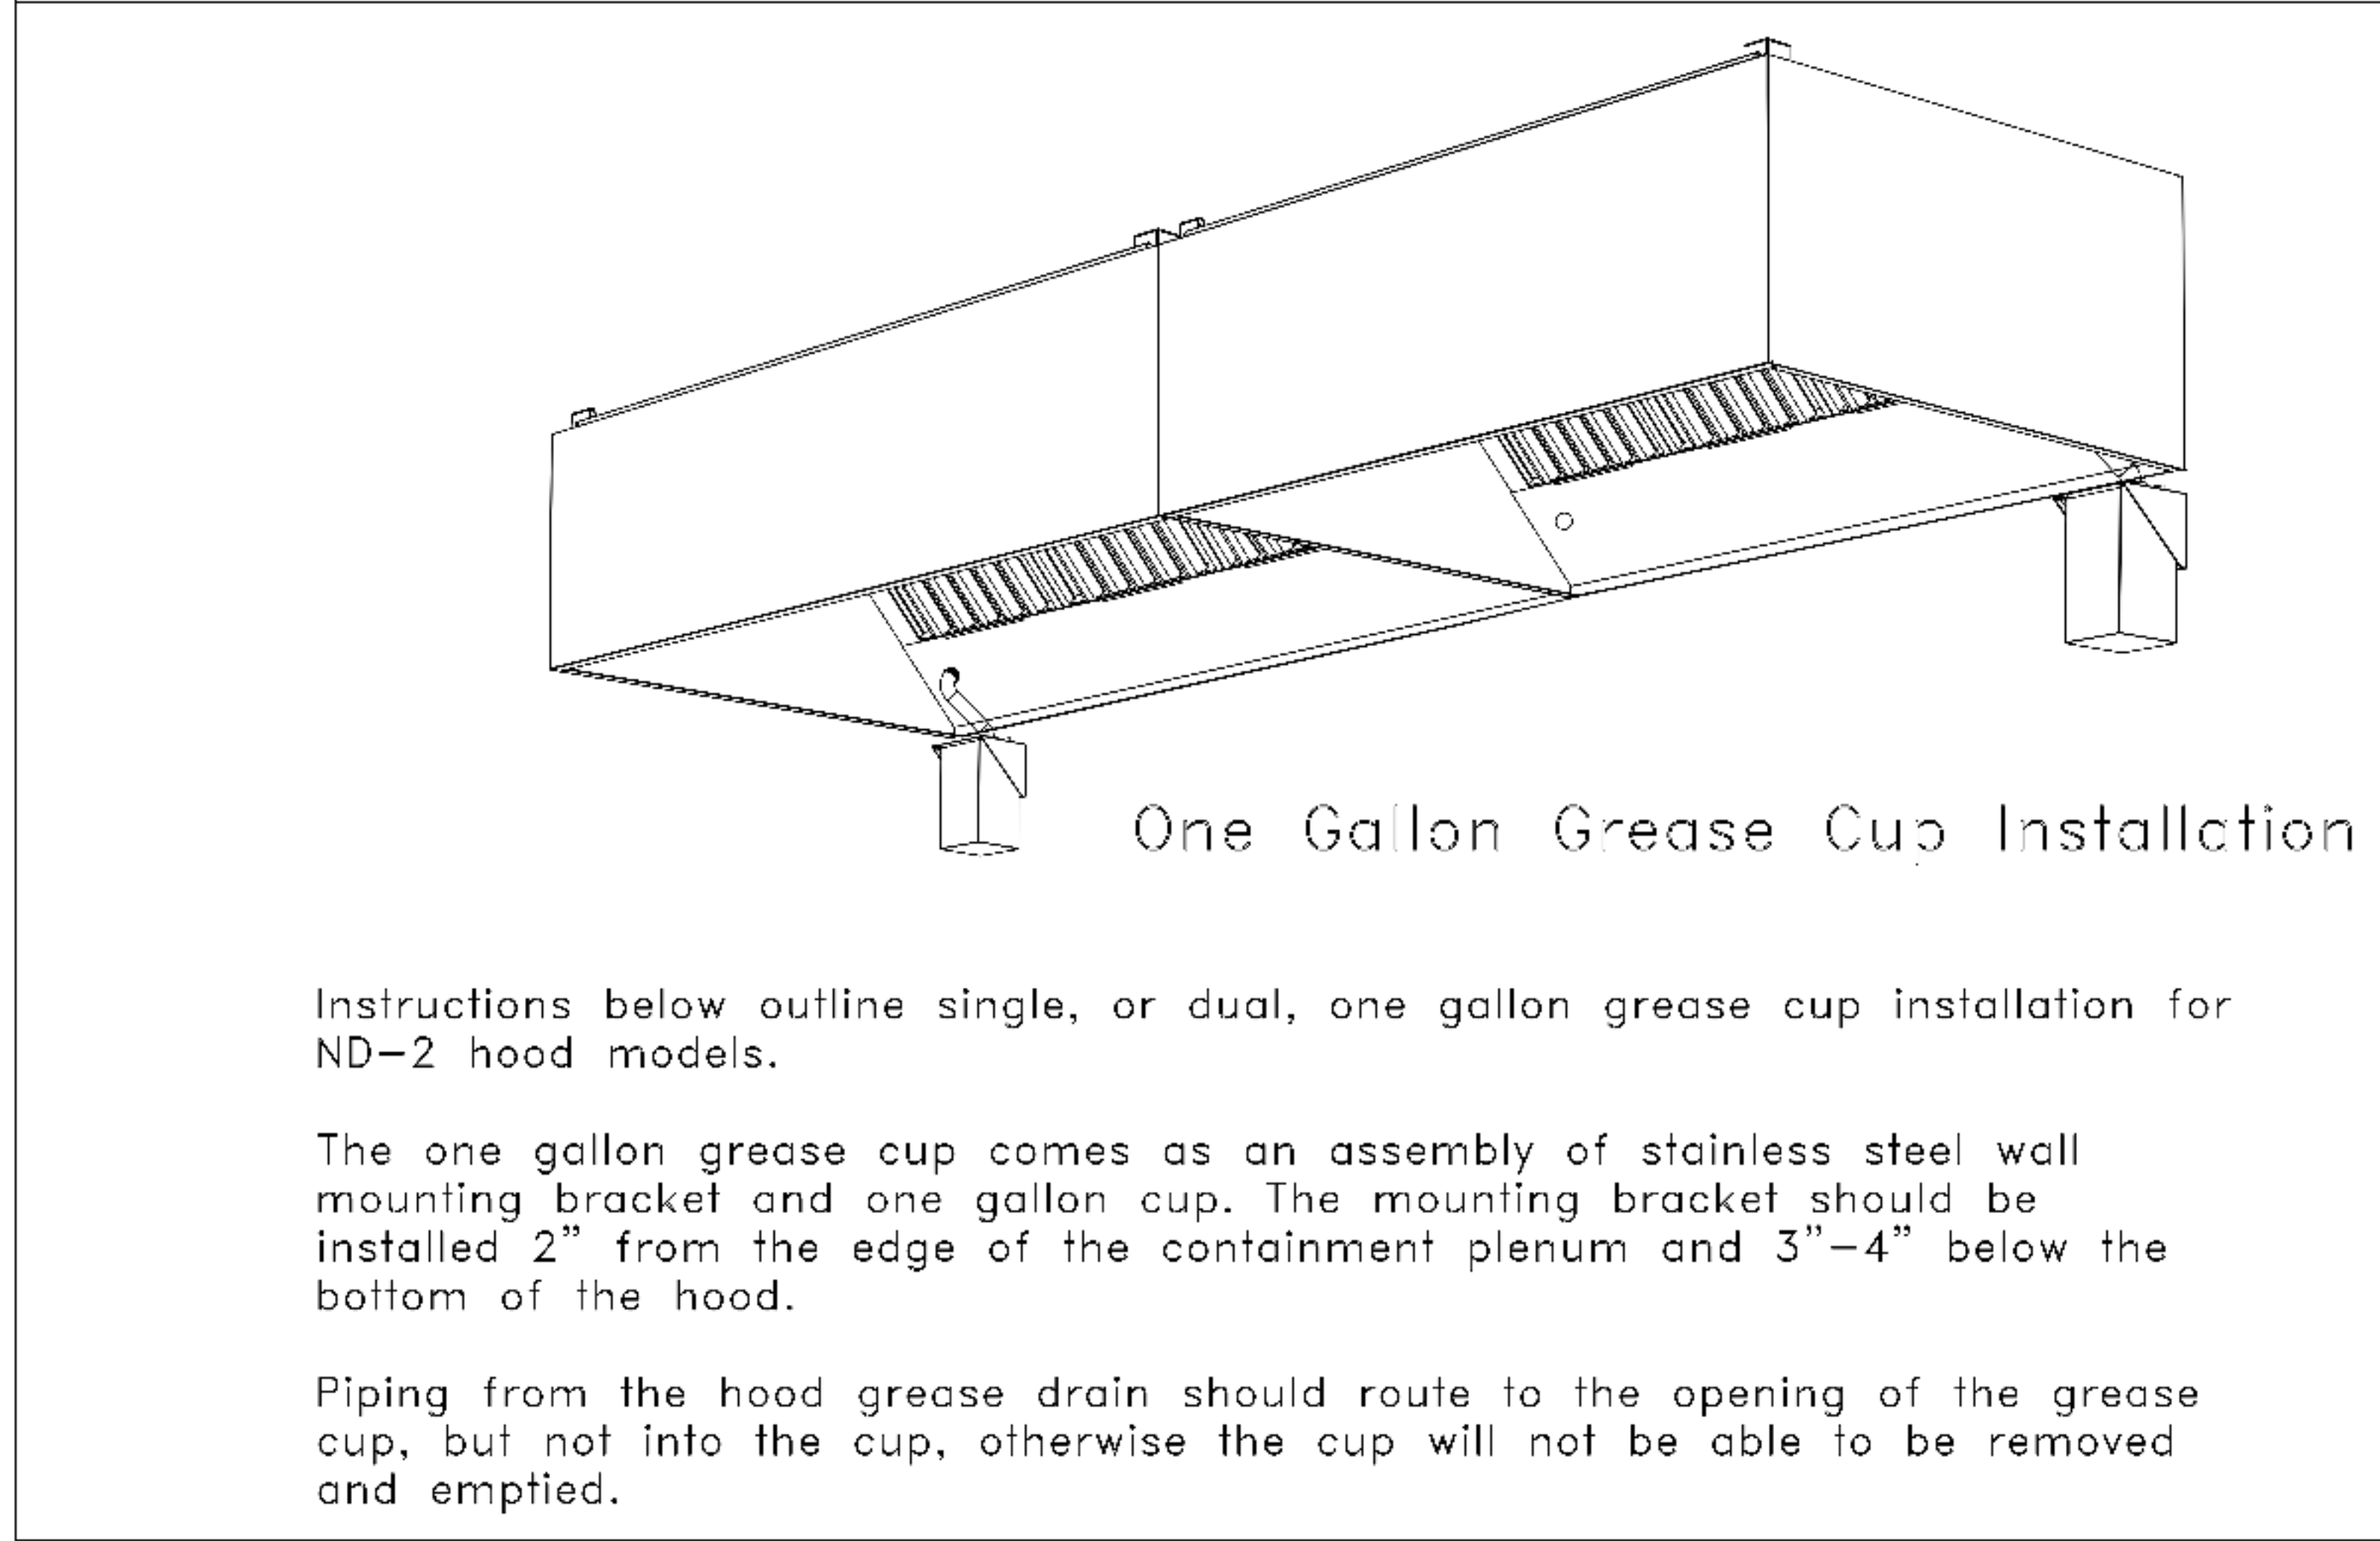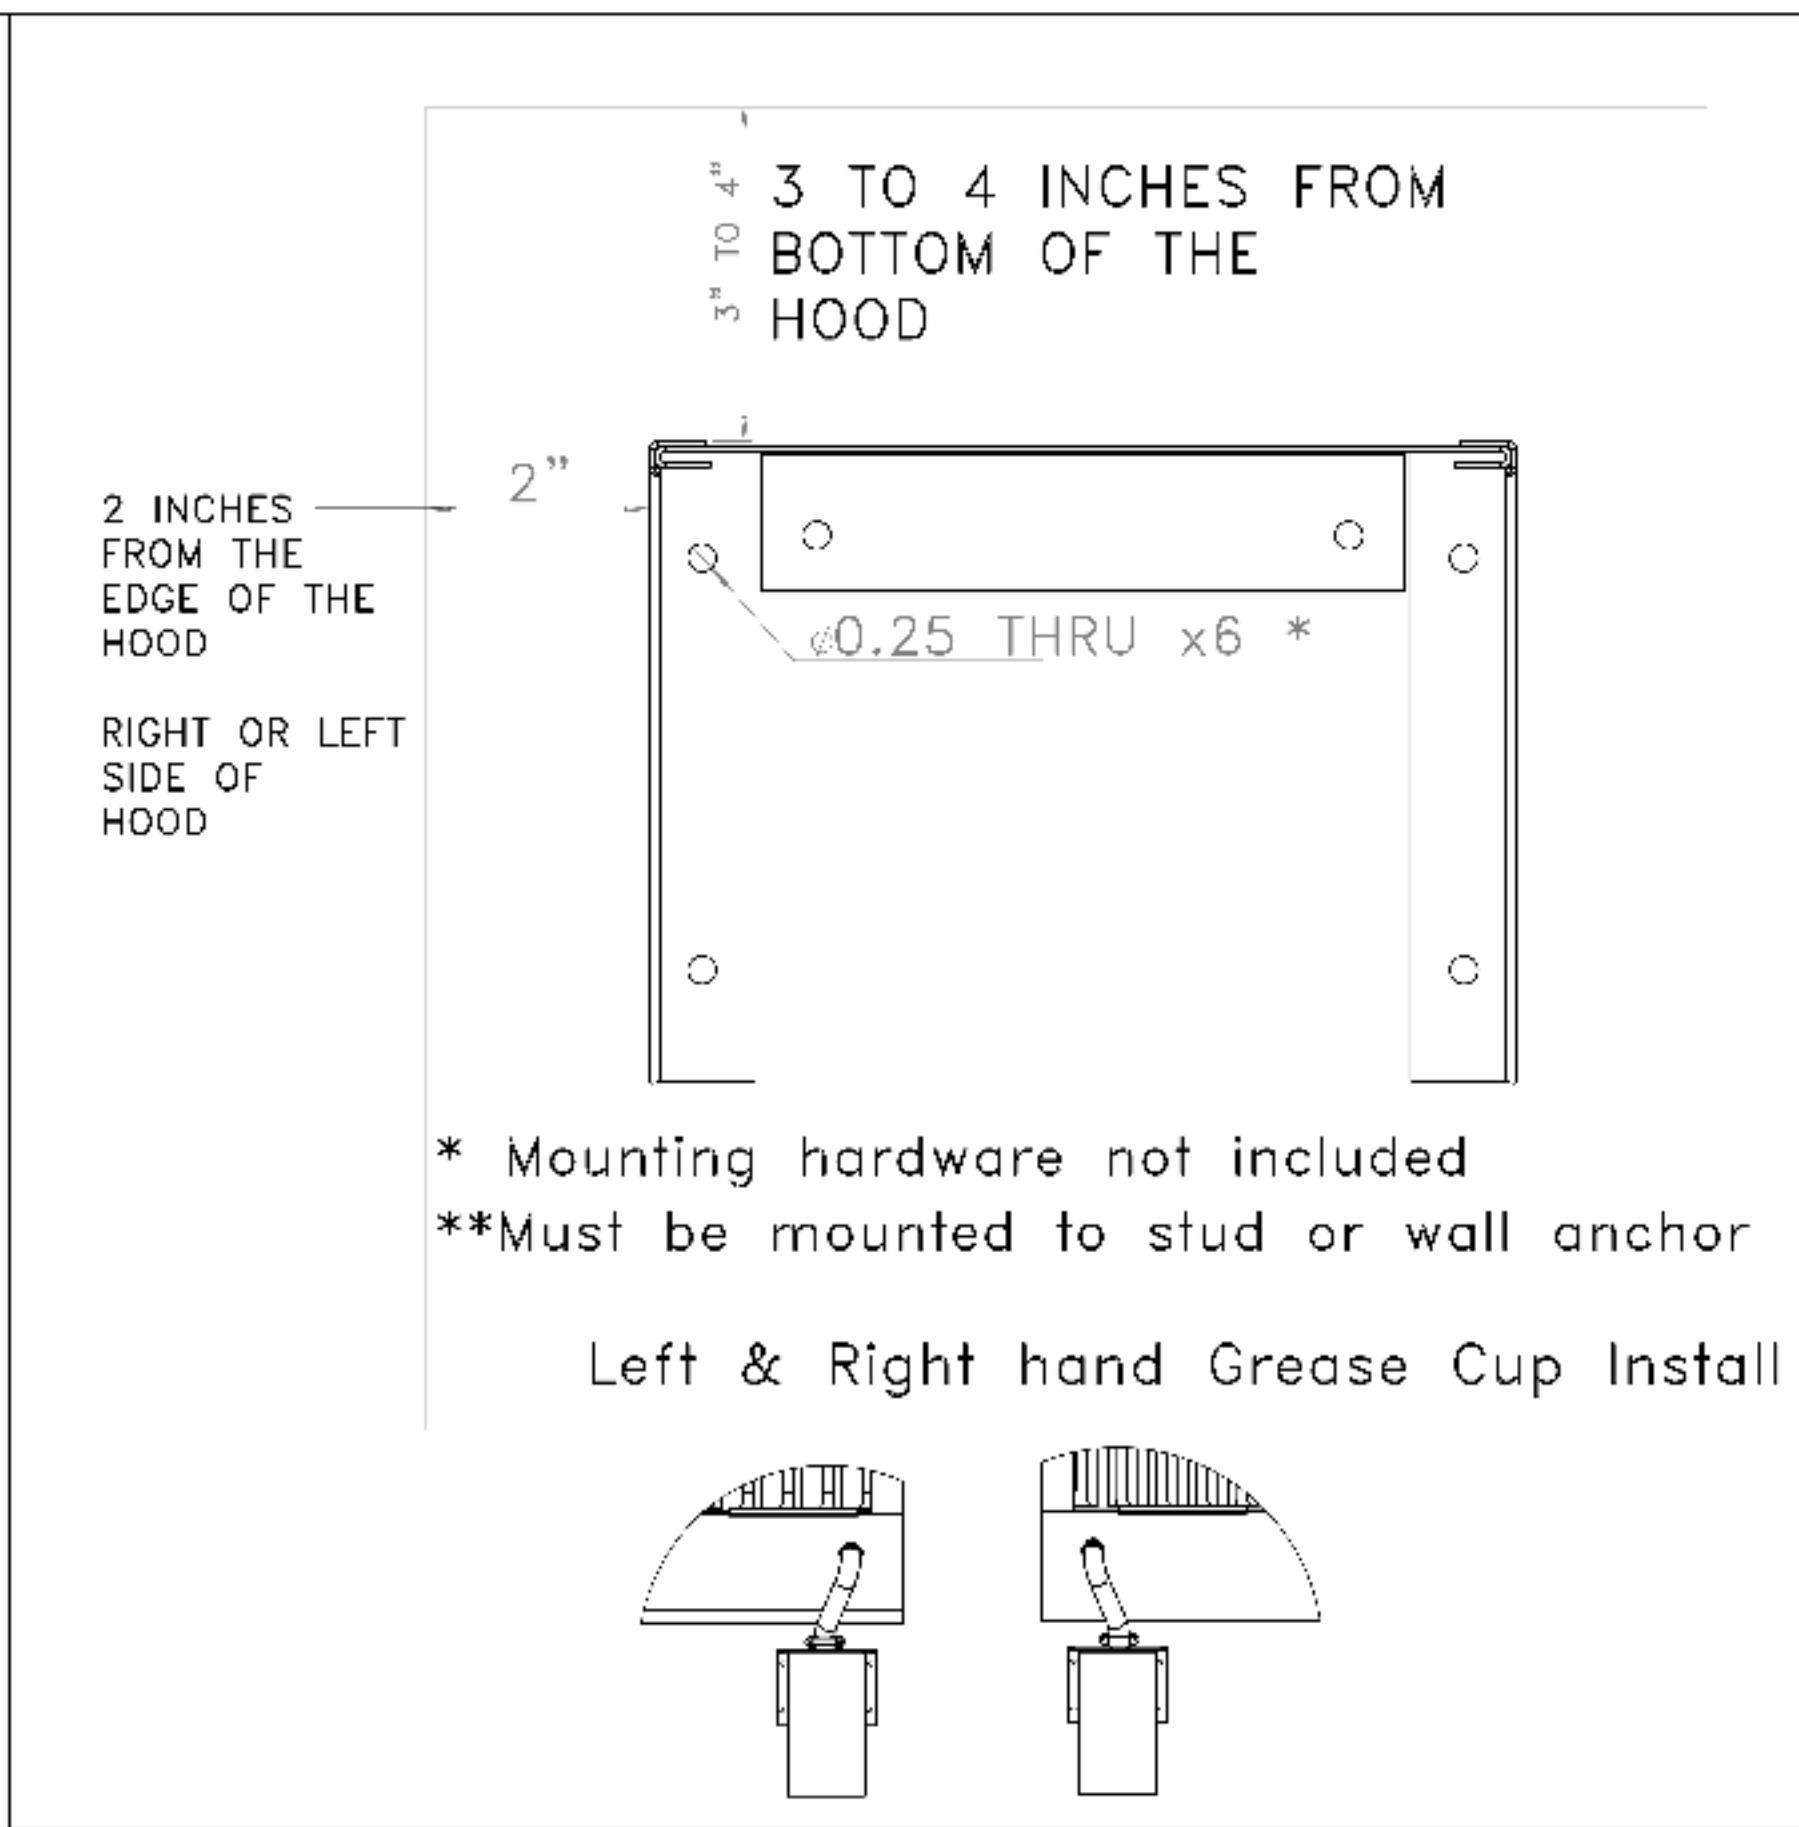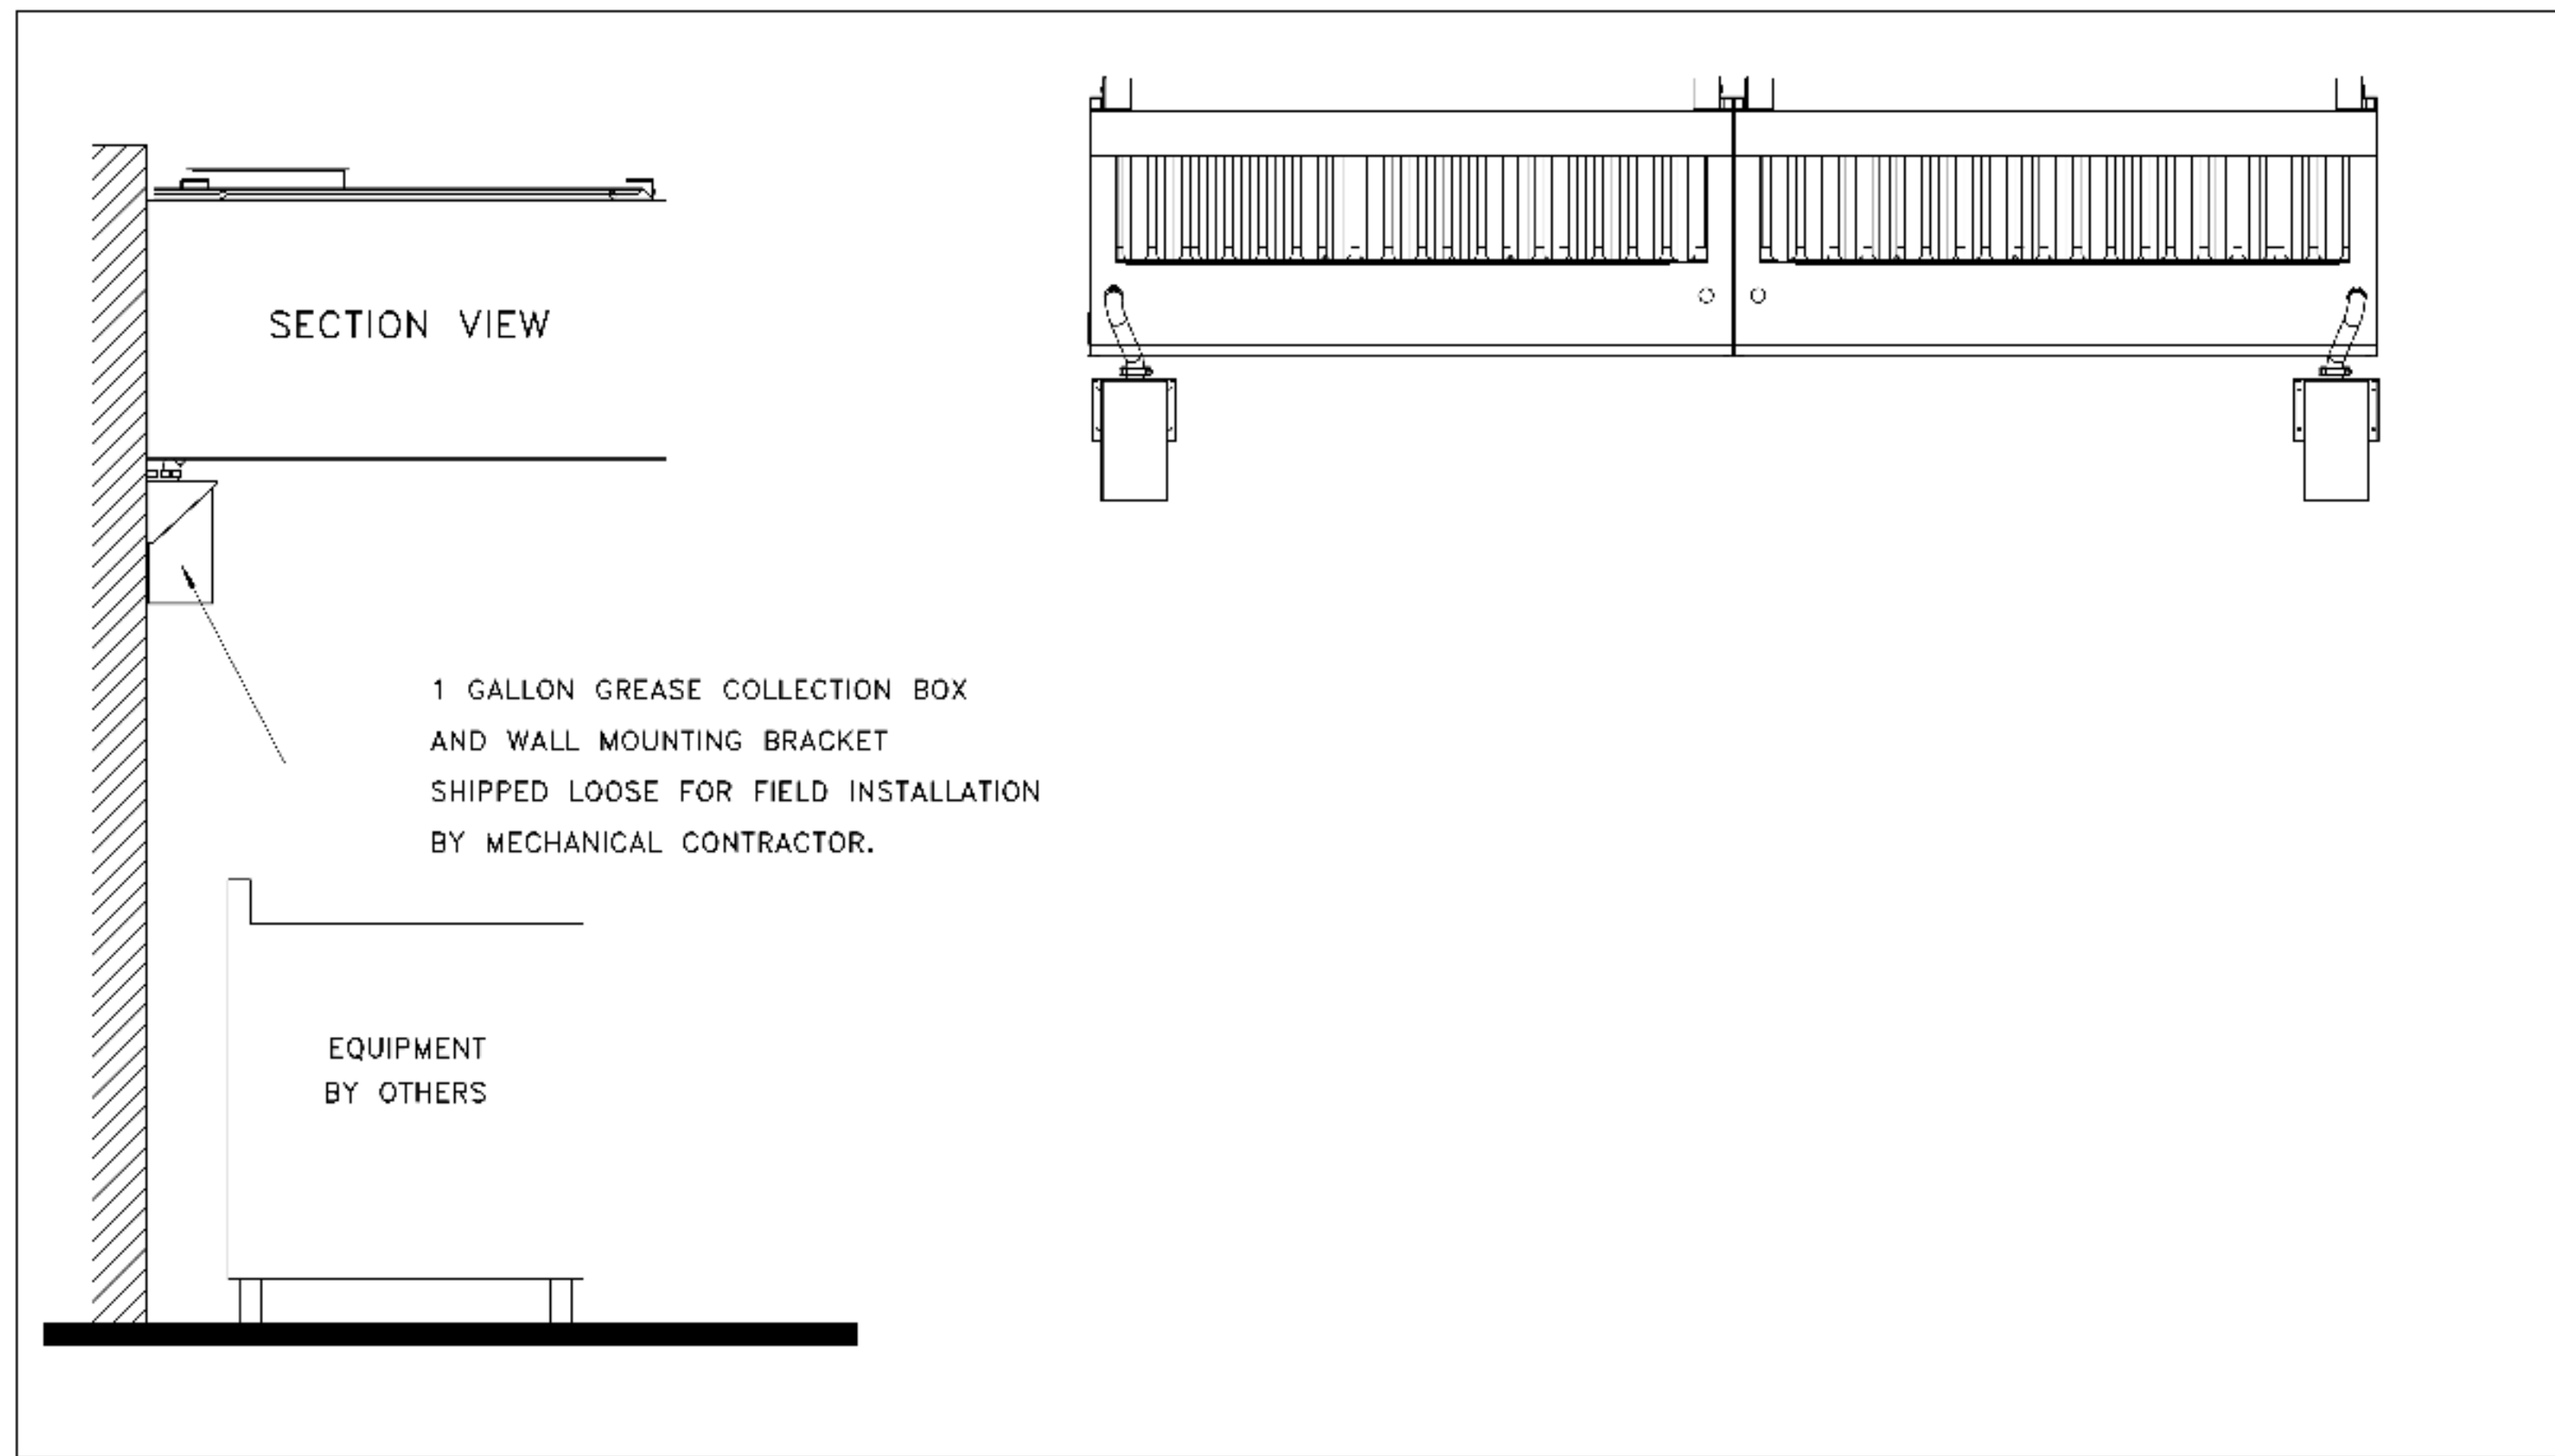

REVISIONS	
NO.	DESCRIPTION

CAPTIVE

Eastern PA Mechanical

225 E. City Line Avenue, Suite #103, Bala Cynwyd, PA, 19004
PHONE: (267) 604-4128 FAX: (267) 604-4128
WWW.CAPTIVEAIR.COM
EPA108@captivemechanical.com

Shack-Atlanta, Athens, GA

DATE: 5/22/2025

DWG.#: 7544342

DRAWN BY: Joe Shillo

SCALE: 3/4" = 1'-0"

MASTER DRAWING

SHEET NO. 7

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

Autodesk DocuShare - Athens, GA/Share Shack Athens, GA - MEP.rvt

5310 E. HIGH STREET SUITE 350
PHOENIX, AZ 85054
TJ 480.448.6250
WWW.SARGARCH.COM



CONSULTANTS:

rtm

14901 Quorum Drive, Suite 905, Dallas, TX 75241 | 947.756.4180

SEAL SIGNATURE:

NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS

161 ALPS RD
ATHENS, GA 30606
SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: xx
CHECKED BY: xx
PROJECT NO: 25-088

M707


DOAS/RTU FAN SCHEDULE - JOB#7544347

FAN UNIT NO	TAG	QTY	DOAS/RTU MODEL #	MANUFACTURER	ELECTRICAL INFORMATION										COOLING INFORMATION					RE-HEAT INFORMATION				GAS HEAT INFORMATION				FRL VOLUME ROOM VOLUME			NOTES									
					BLOWER	N/L INN AIR CFM	MAX OUTSIDE AIR CFM	UNITAL CFM	WELL-1 (LBS)	ESP	HP	PHASE	VOLT	MCA	MDCP	MULTIPLY AIR DB W3	WELL AIR DB W3	LEAVING AIR DB W3	DP	TOTAL SENS	SEER	SHRGR	DISC INLET DB W3	DISC INLET W3 DESIRED	DISC INLET W3 MAX	MOISTURE RECOVERY RATE	GAS TYPE	WPU 3TUS	WPU 1TUS	WPU 1TUS RISE		HEATING WPU GAS PRESSURE	HEATING WPU GAS PRESSURE	CLAMP AREA (FT2)	AIR LIFT (CFM)	HEIGHT (FT)				
1	RTU-2 (KITCHEN)	1	CAS-HVAC3-1250-24-1ST	CAPTIVEAIRE	24V-3-RTU	1350	1950	3503	2665	1000	5.00	3	208	74.2A	60A	95.4°F	74.6°F	86.4°F	72.2°F	51.6°F	51.6°F	51.7°F	234.1 YBH	132.4 YBH	138	83	73.0°F	60.1°F	71 W3H	129.6 MBH	61.5 LBS/HR	NATURAL	201483	632V1	42°F	7 IN. W.C. - 14 IN. W.C.	572.7	1331	7.2	1.8,3.4,4.6,7.8,9,9.11,12.13,14,15,16,17,18,19

NOTES:
 1. INVERTER SCROLL COMPRESSOR WITH UNICOMATED L.L. SENSE. DIGITAL EX SINGLE SCROLL NOT AN APPROVED EQUAL
 2. DIRECT DRIVE PLENUM BLOWER, BELT DRIVEN BLOWERS ARE NOT ACCEPTABLE
 3. VENTILATED UNIT MUST BE 18" OR GREATER BY MANUFACTURER
 4. REFRIGERATION PRESSURE MAINTAINING ON HIGH AND LOW PRESSURE SIDE OF SYSTEM INCLUDED THROUGH DIGITAL INTERFACE
 5. EC MOTOR CONDENSING FANS
 6. L.L.S. MOTOR CONDENSING VALVE (XV NOT ACCEPTABLE)
 7. SUCTION LINE ACCUMULATOR
 8. FACTORY CONDENSING UNIT 5 YEAR PARTS WARRANTY, 25 YEAR WARRANTY ON STAINLESS STEEL UNIT (EXCHANGER)
 9. AVERAGING INAKE, EVAP AND DISCHARGE TEMPERATURE SENSORS (DISCHARGE SENSOR TO BE FACTORY MOUNTED WITHIN UNIT)
 10. 2" EXTERIOR GAS VALVE (CONSTRUCTION W/ 8-1/2" NODD STEEL-PERMANENT GAS EXTERIOR W/ TAGG TAST)
 11. 80% EFFICIENT FURNACE, WITH MODULATING BURNER TO MAINTAIN CONSTANT COMBUSTION EFFICIENCY ACROSS FIRING RANGE, 64 TURNDOWN WITH NG AND 50 TURNDOWN WITH LP
 12. SUPPLY CFM MONITORING INTEGRAL TO UNIT WITH CFM MEASUREMENT INCLUDED THROUGH DIGITAL INTERFACE
 13. 1/2" L.S. MODULATING GAS VALVE
 14. 15 DEGREE LOW AMBIENT OPERATION
 15. UNIT CONTROL FROM CONDENSING UNIT
 16. RTU ECONOMIZER WITH DIFFERENTIAL ENTHALPY CONTROL
 17. METRIC RETURN DAMPER

NO	EN FAN	TAG	WEIGHT	ITEM	SIZE
1	# 1	RTU-2 (KITCHEN)	134 LBS	CJRB	59 500" X 910" X 14 000" INSULATED

FAN UNIT NO	TAG	QTY	DESCRIPTION
1	RTU-2 (KITCHEN)	1	INLET PRESSURE GAUGE, 0-35"
		1	MANIFOLD PRESSURE GAUGE, 0 TO 10" W.C. FURNACE
		1	COOLING OVERRIDE
		1	STOP POINT ELECTRICAL CONNECTION FOR RTU TRANSFORMER USED IF A NON-REV
		1	PRESSURE CONTROLS THIS UNIT, THE 405, 447, 449, OR 450 PROVIDE OPTION MUST BE SPECIFIED THIS UNIT STARTS IN PREPARE
		1	CONSTRUCTION NOTE - MODIFIES START-UP SETTINGS TO ALLOW TEMPERING A BUILDING STILL UNDER CONSTRUCTION
		1	RTU BLOWER DOOR SWITCH
		1	1/2" DOWN EXCHANGER
		1	2" EXTERIOR GAS VALVE FOR RTU (QTY 4)
		1	2" EXTERIOR GAS VALVE FOR RTU (QTY 4)
		1	JVLVHLSA 3141
		1	TOTAL CFM MONITORING
		1	VFD FACTORY MOUNTED AND WIRED IN RTU COMMERCIAL CONTROL VESTIBULE
		1	COOLING SCHEDULING
		1	INFACTORY UNIT SET TO 100°F
		1	FREESTAT
		1	DISCHARGE FREESTAT SET TO 24.5°F
		1	CASLINK BURNING MONITORING SYSTEM (OPTIONAL OR CEI W/ A CONNECTION REQUIRED)
		1	RTU CURB DUCT HANGER
		1	120V FIRE INPUT
		1	COMMERCIAL SMOKE DETECTOR/ALARM INTERLOCK - ALARM SUPPLIED BY LISTED
		1	DIODED FUSE SWITCH - NOTIFICATION ON UNIT
		1	RTU CONDENSATE OUTLET (GFCD), IS APP - REQUIRES SEPARATE 120V CONNECTION. THE UNIT'S REPT/FACTORY, EXTERIOR AND J-BIX
		1	15 TON MODULATING CEILING OPTION, 208/230V, R454B REFRIGERANT, VARIABLE SPEED COMPRESSOR, COM CONDENSING FANS
		1	LOW AMBIENT COOLING OPERATION - DOWN TO OF AMBIENT
		1	R454B LEAK DETECTOR OPTION FOR RTU
		1	1/2" L.S. MODULATING GAS VALVE WITH SMOKE DETECTOR CONTROL (OPTIONAL)
		1	RTU ECONOMIZER - DIFFERENTIAL ENTHALPY CONTROL
		1	RTU ECONOMIZER BAROMETRIC RELIEF
		1	1/2" METAL MULTIFUNCTIONS EXTERIOR OUTDOOR INTAKE
1	RTU INTAKE/RETURN DAMPER - MANUAL CONTROL VIA UNIT		
1	RTU HAZ. GUARD		
1	24VDC FURNACE EXHAUST FURNACE - MANUAL CONTROL, 2000 DIM MAX 41"		
1	RTU RETURN RETURN		
1	VAV PACKAGE W/ MANUAL/DOE CONTROL (STI VFD INCLUDED)		
1	5 YEAR EXTERIOR UNIT PARTS WARRANTY, 25 YEAR EXTERIOR UNIT PARTS WARRANTY WITH 1/2" L.S. MONITORING AND CAPTIVEAIRE SERVICE CONTRACT, 25 YEAR STAINLESS STEEL FURNACE (25 YEAR WARRANTY (SEE MANUFACTURER DETAILS))		
1	EXTERIOR GAS CONNECTION PROVIDED BY FACTORY WITH O-RING SEAL AND ANTI-RETENTION INVERT		

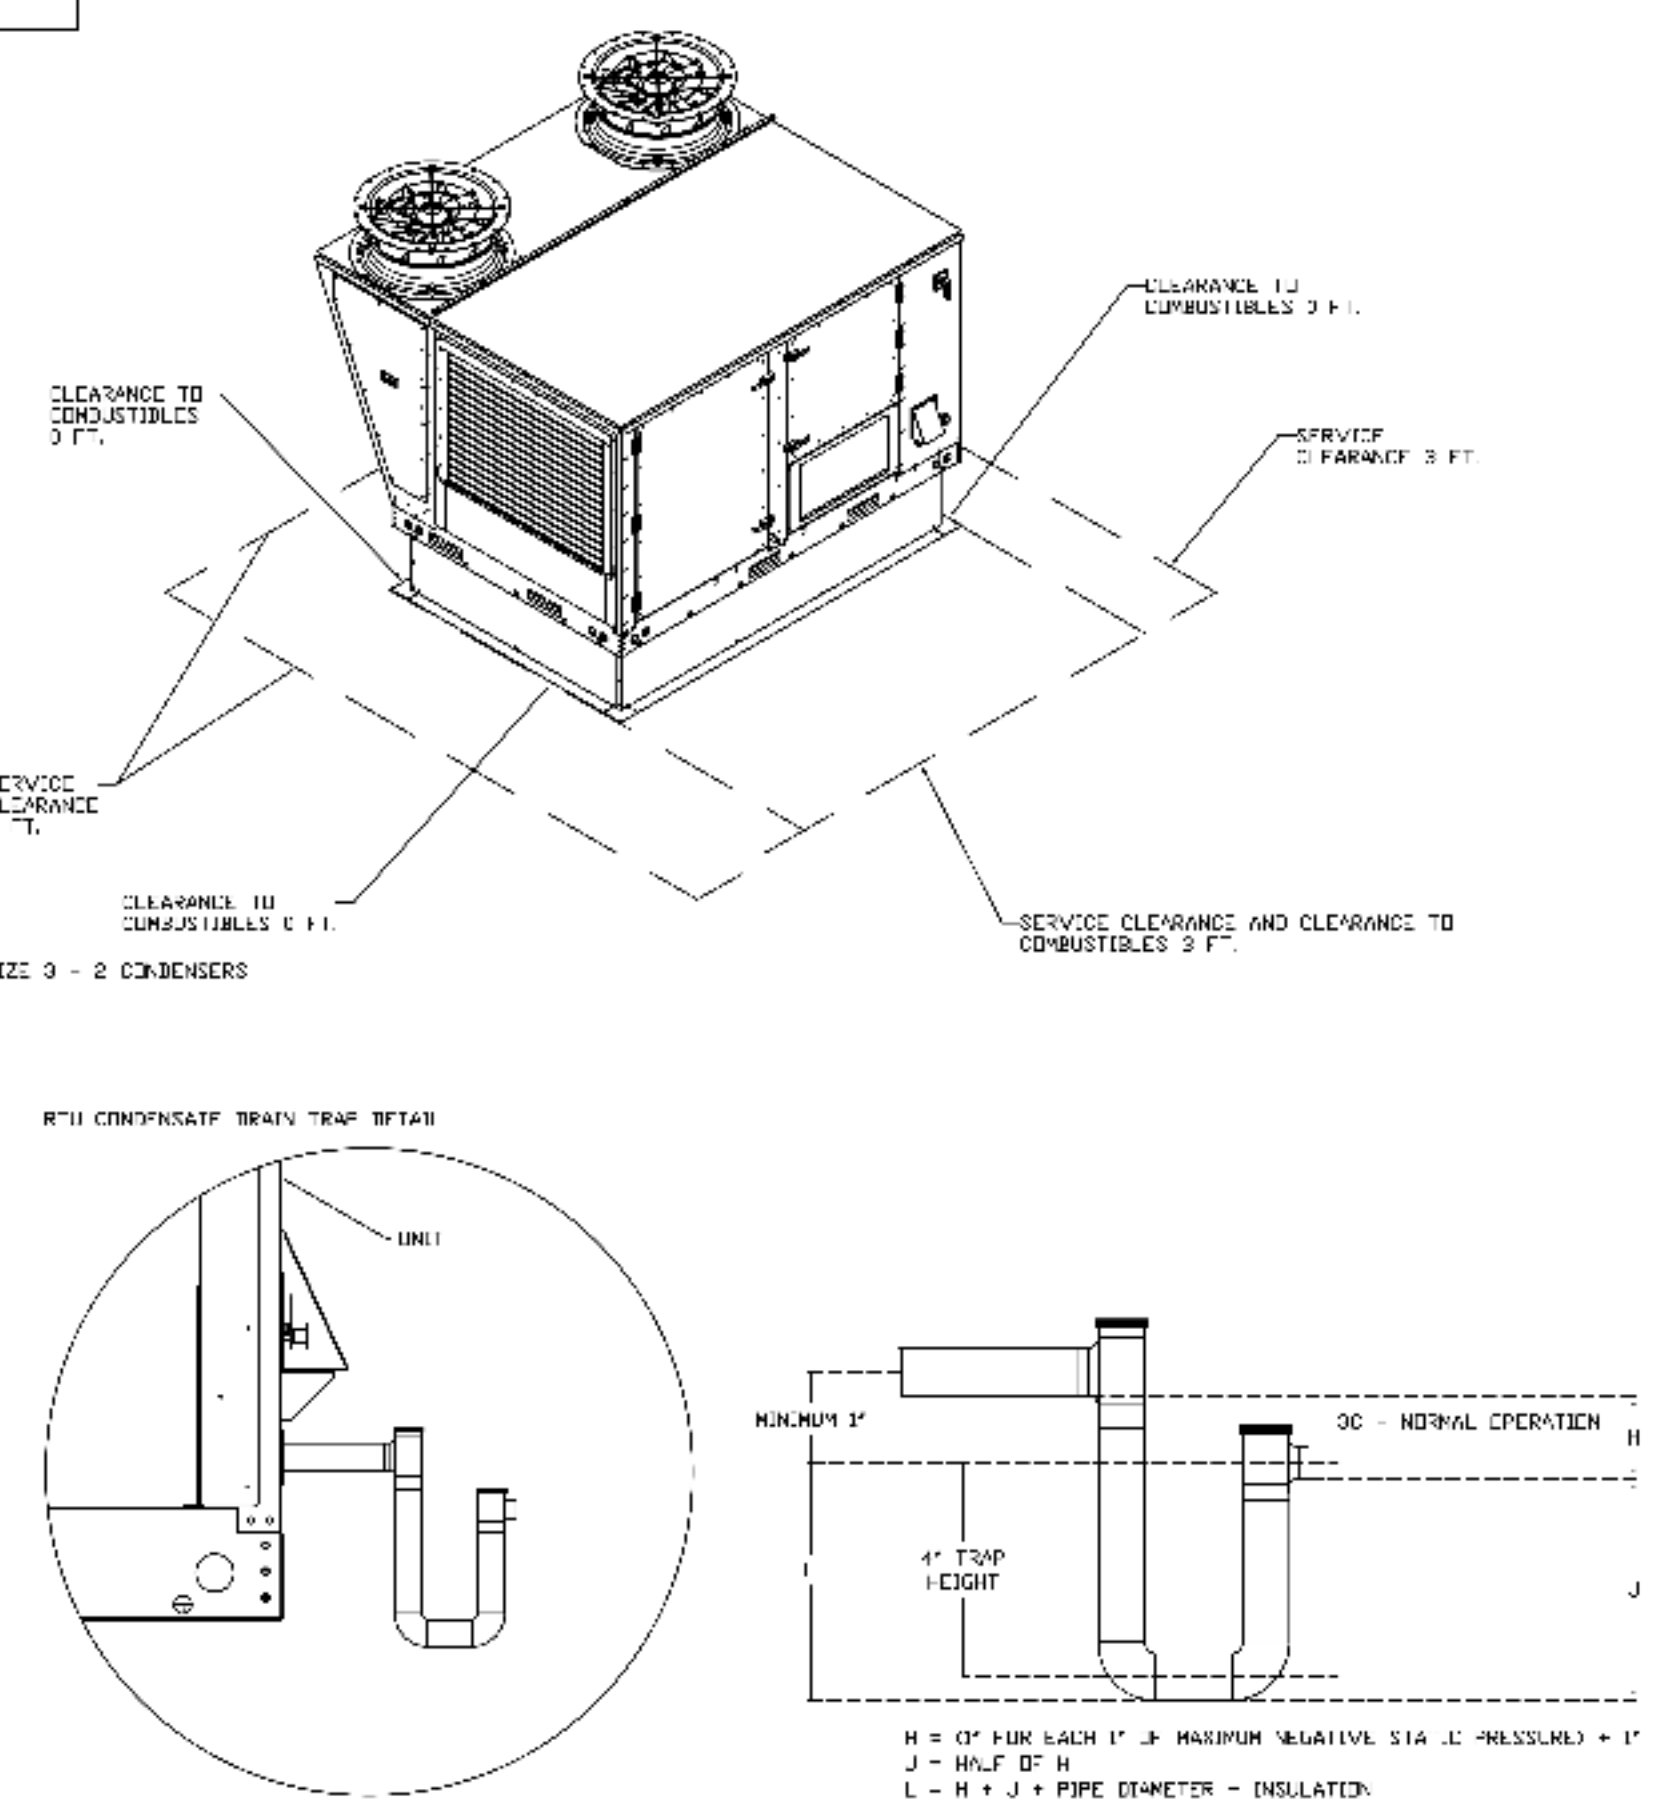

UNIT NUMBER	UNIT #	UNIT LOCATION	TEMP AVERAGING	MODBUS ADDRESS
FAN #1	UNIT #1	KITCHEN	NO AVERAGED	55
FAN #1	UNIT #2	SPACE	AVERAGED	56
FAN #1	UNIT #3	OFFICE	NO AVERAGED	57

REVISIONS

NO.	DESCRIPTION	DATE

CAPTIVEAIRE
 Eastern PA Mechanical
 225 E. City Line Avenue, Suite #103, Boca Cays, FL 33433
 PHONE: (888) 504-4125 EMAIL: reg@captivateair.com

Shake Shack - Athens, GA (HVAC)
 ATHENS, GA, 30606

DATE: 5/25/2025
 DWG.#: 7544347
 DRAWN BY: Joe Shilka
 SCALE: 1/2" = 1'-0"
 MASTER DRAWING
 SHEET NO.


THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

5310 E HIGH STREET SUITE 350
 PHOENIX, AZ 85054
 T: 480.448.6250
 WWW.SARGARCH.COM



CONSULTANTS:

 14901 Quorum Drive, Suite 905, Dallas, TX 75244 (947) 756-4190

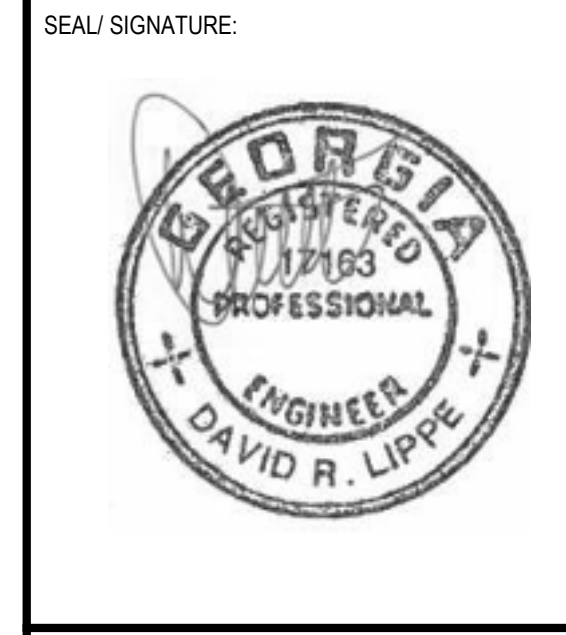

NO.	BY	DATE	DESCRIPTION



SHAKE SHACK - ATHENS









161 ALPS RD
 ATHENS, GA 30606
 SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY:	XX
CHECKED BY:	XX
PROJECT NO:	25-088

M708

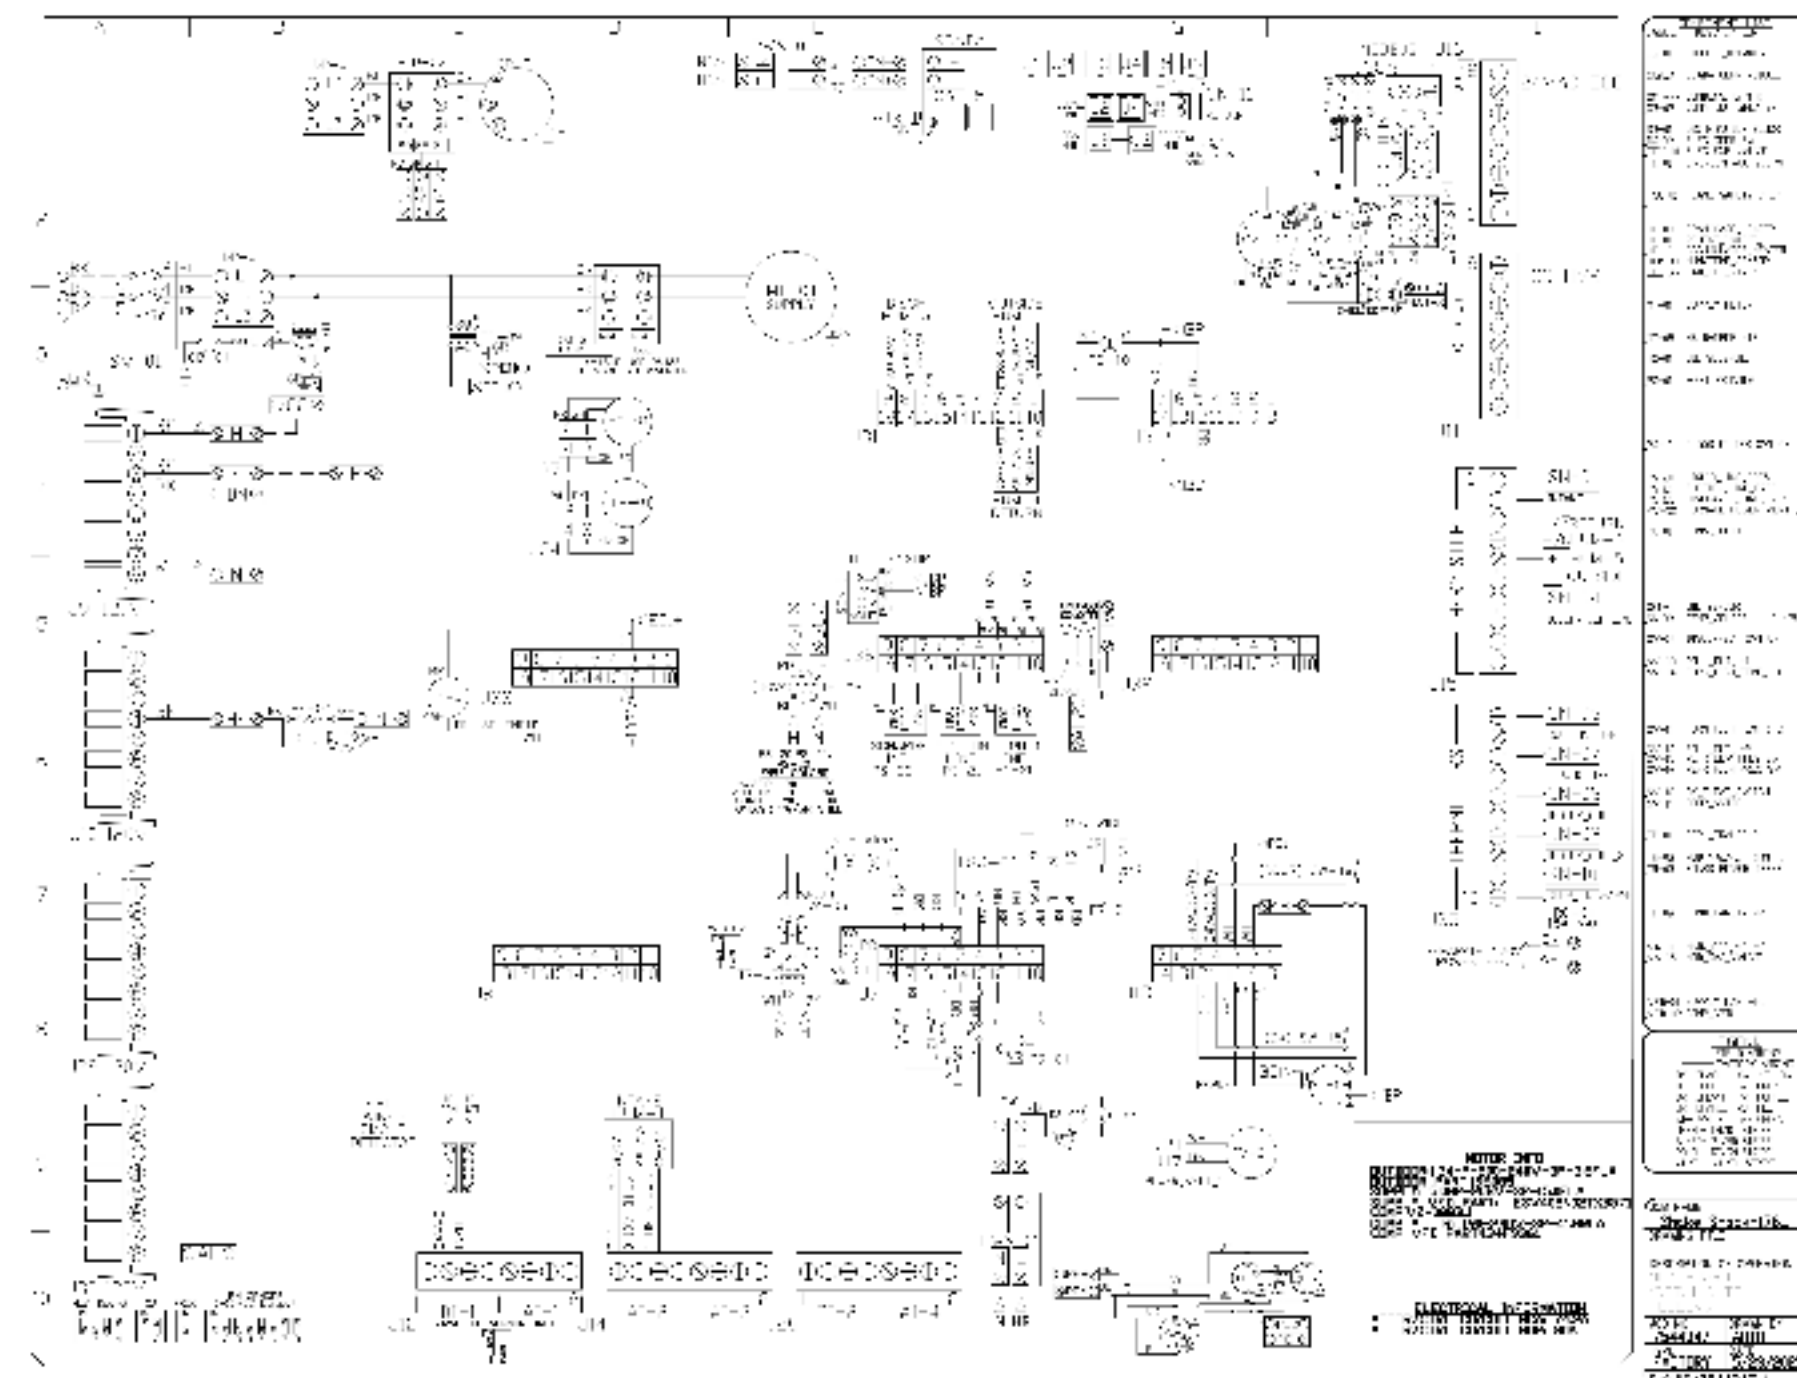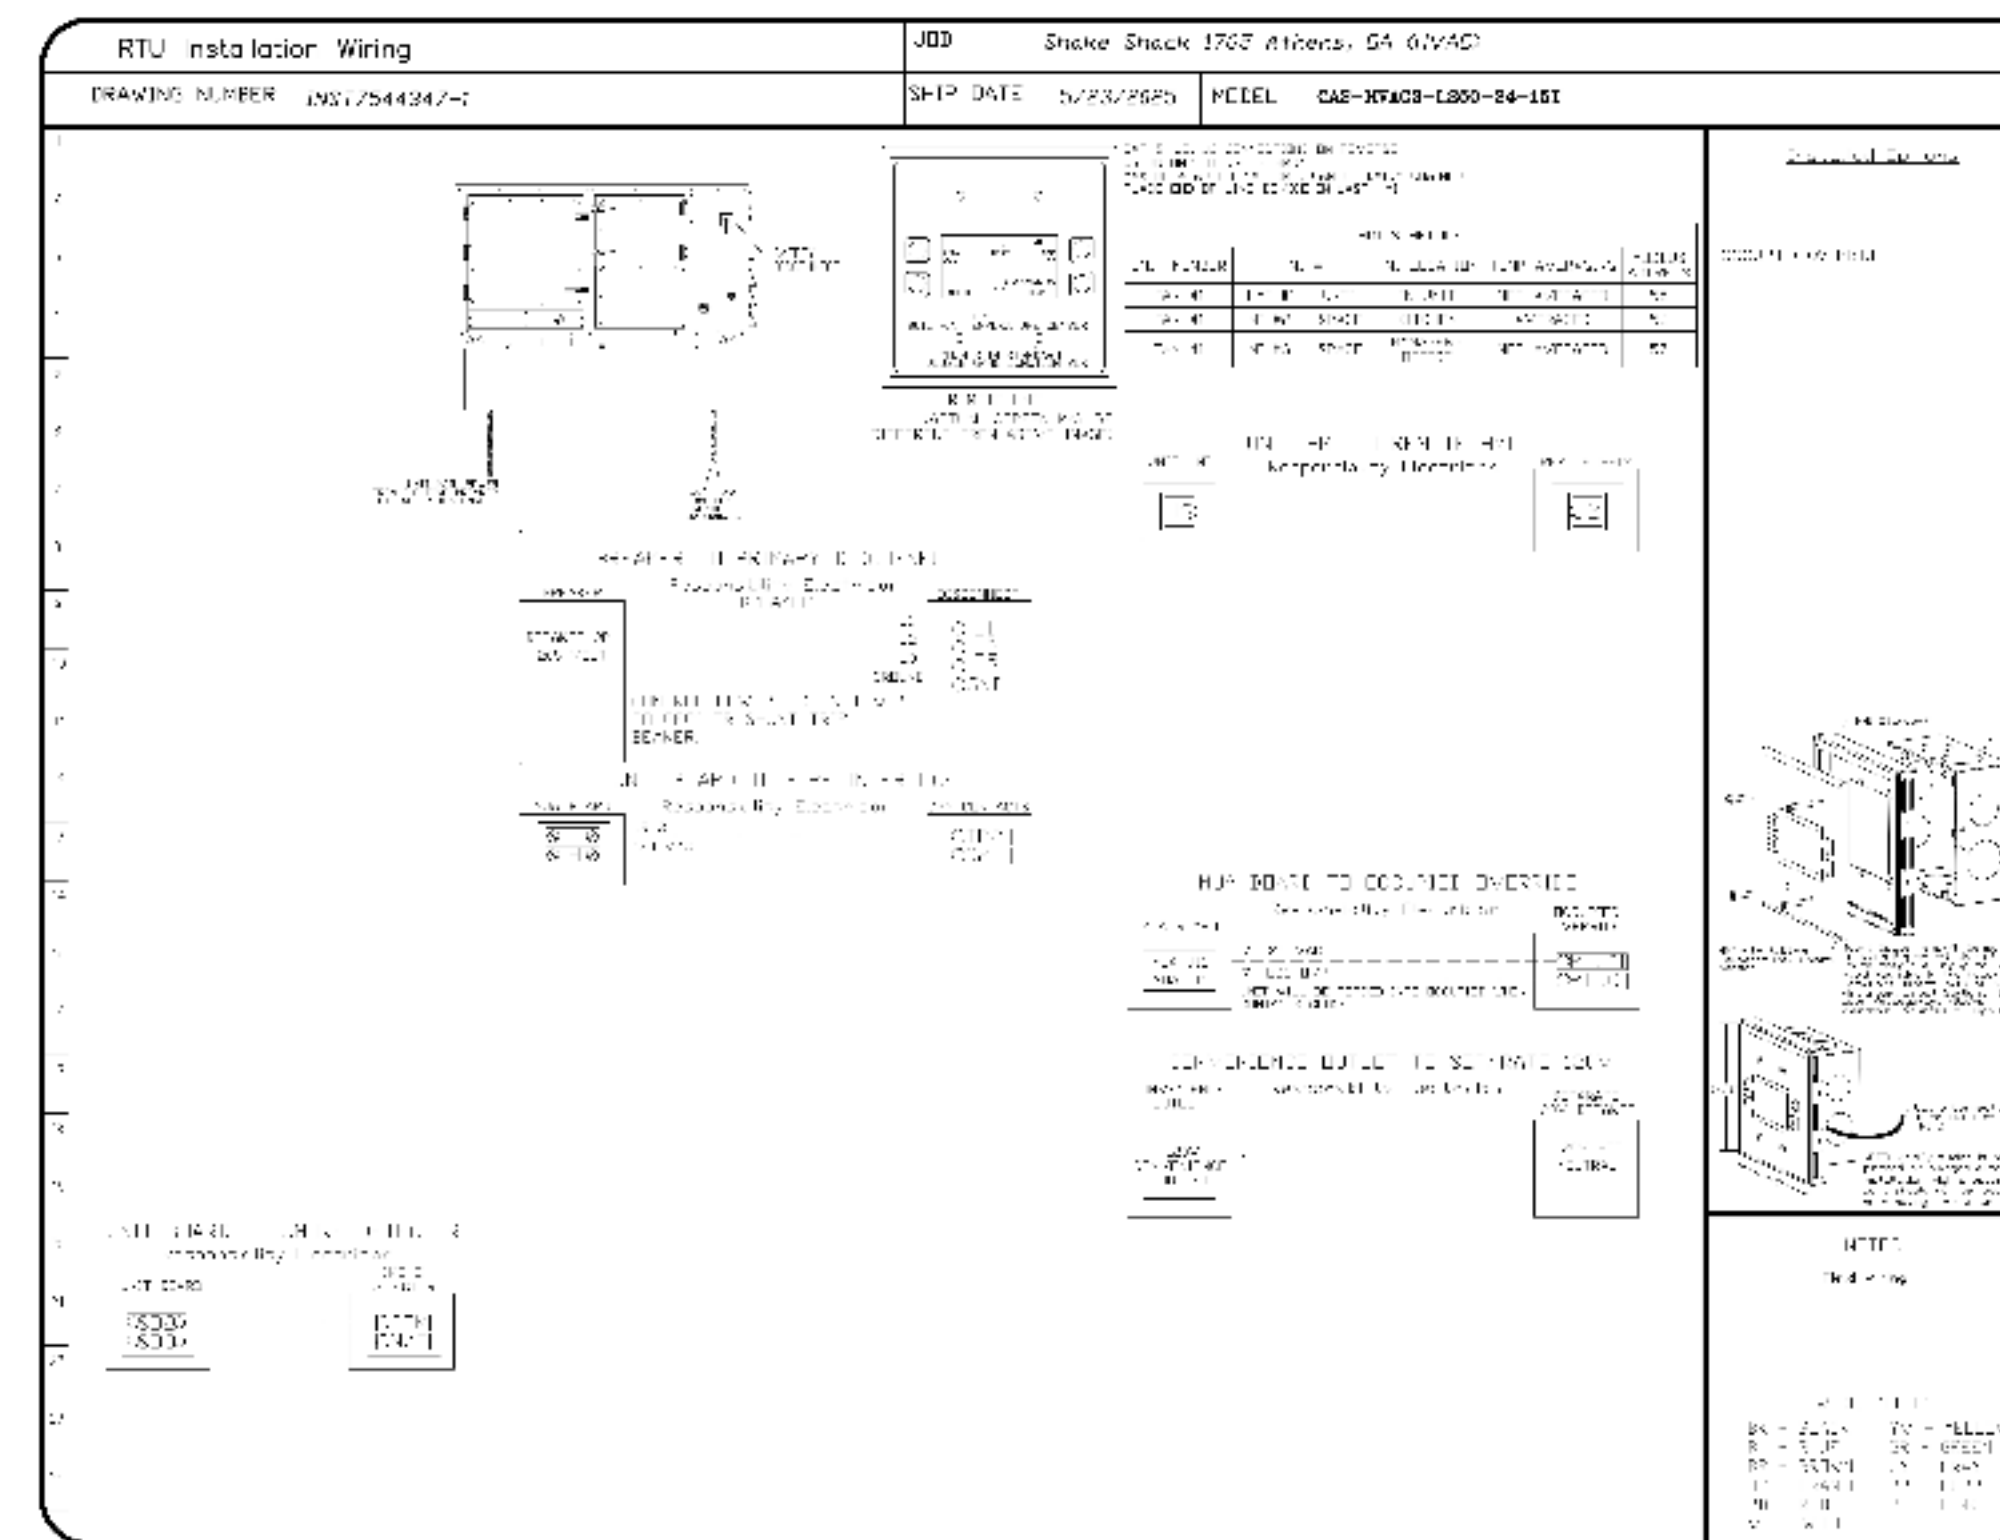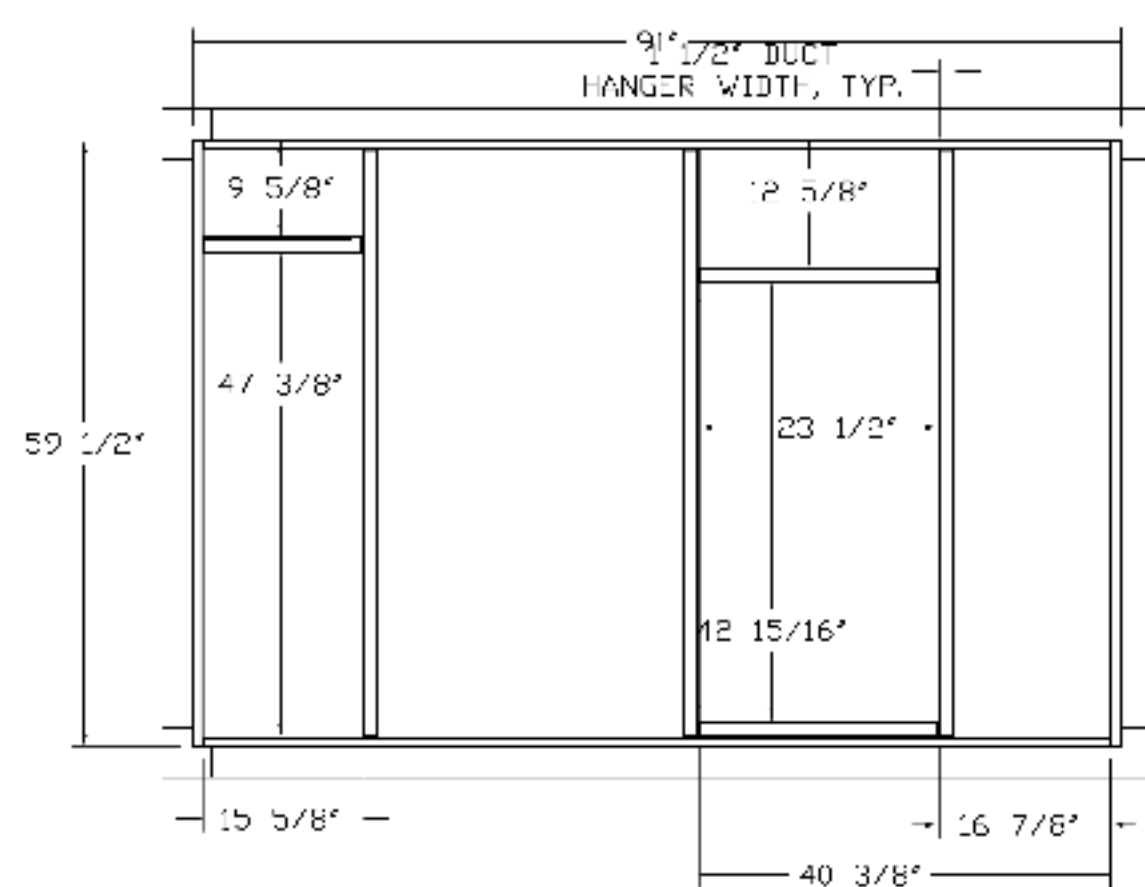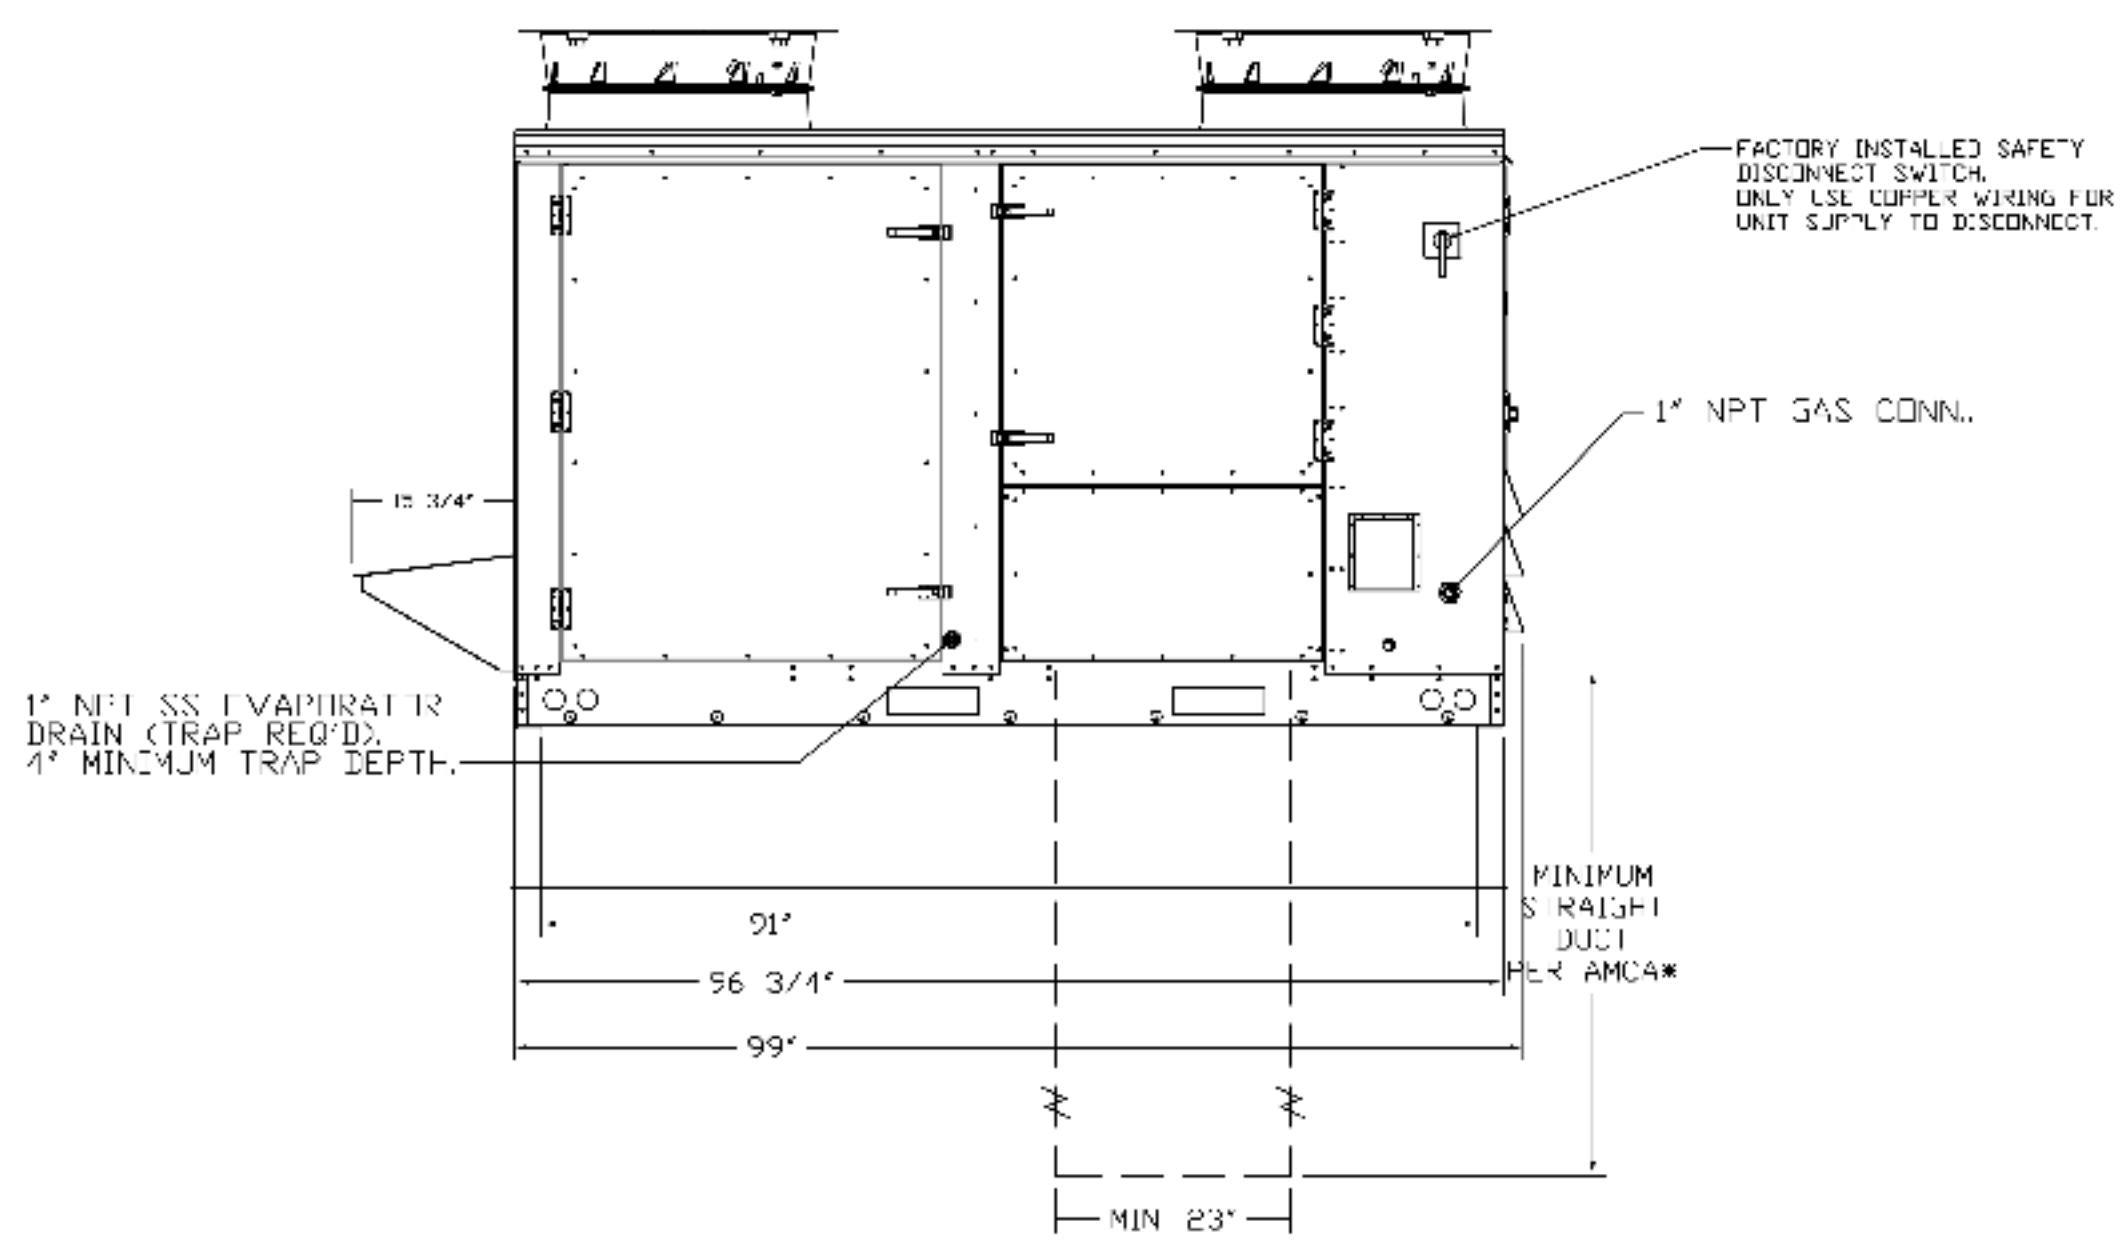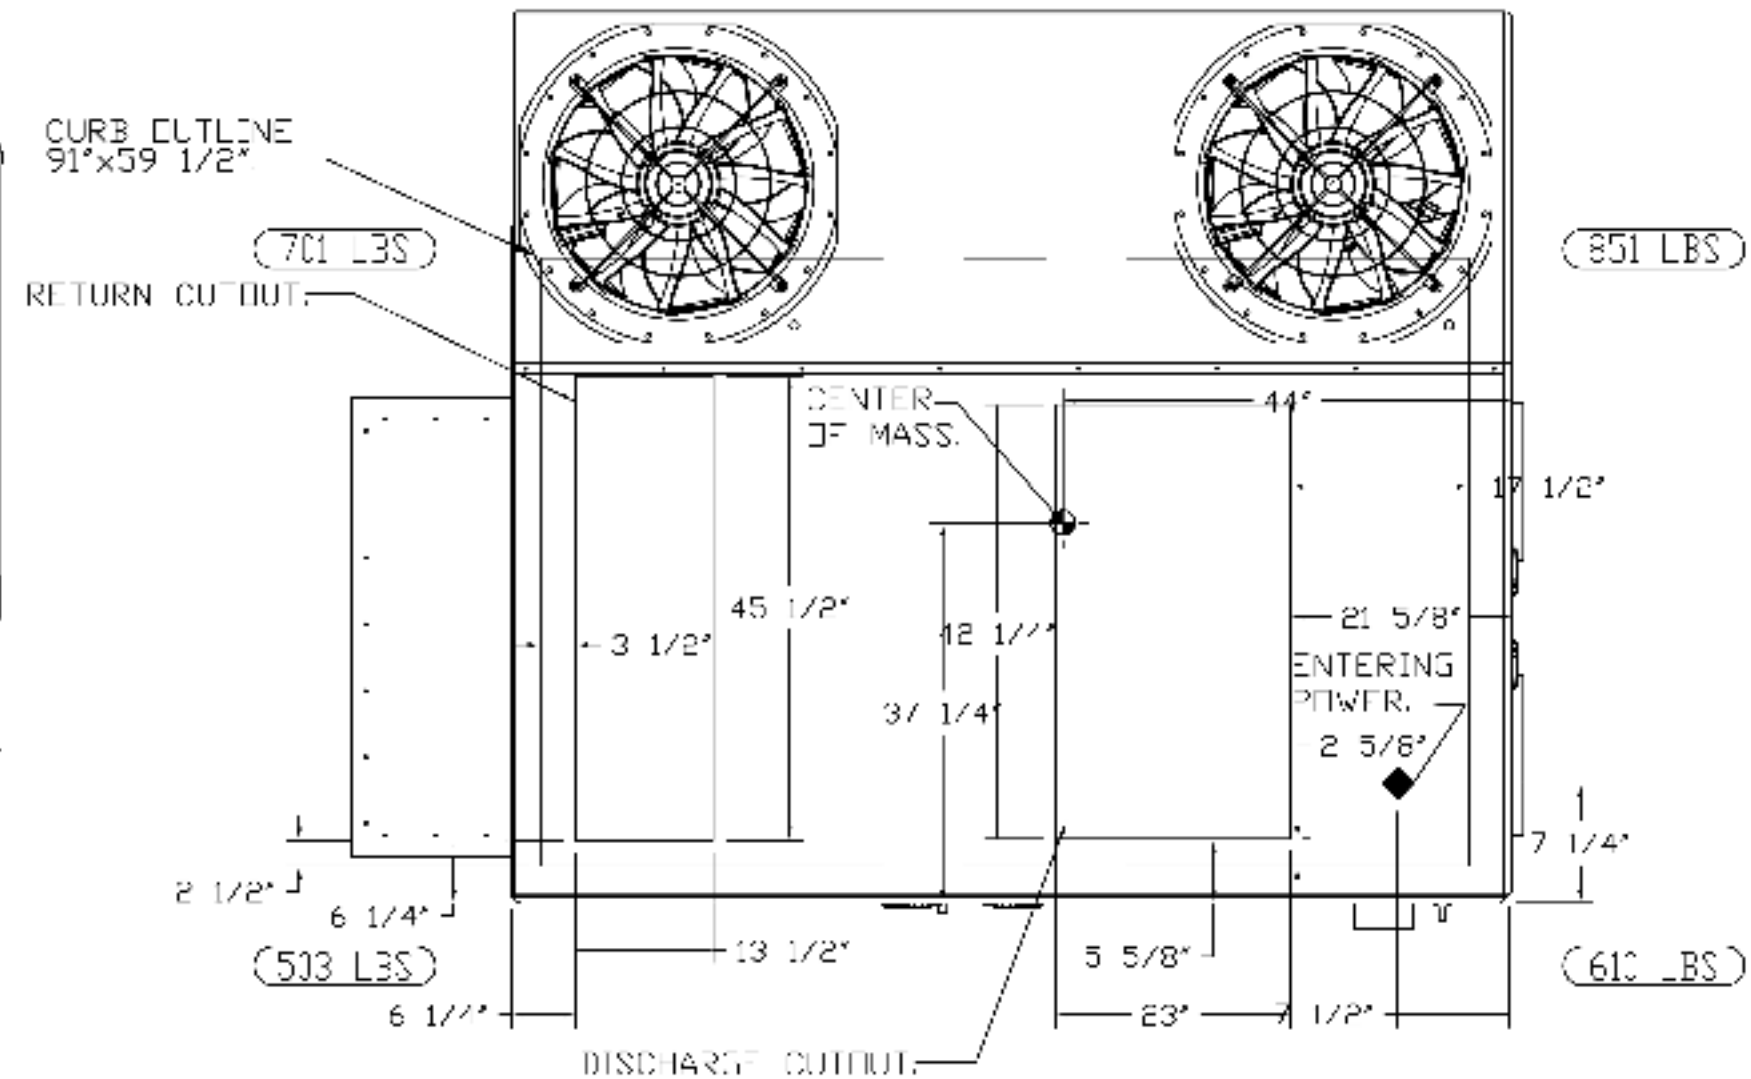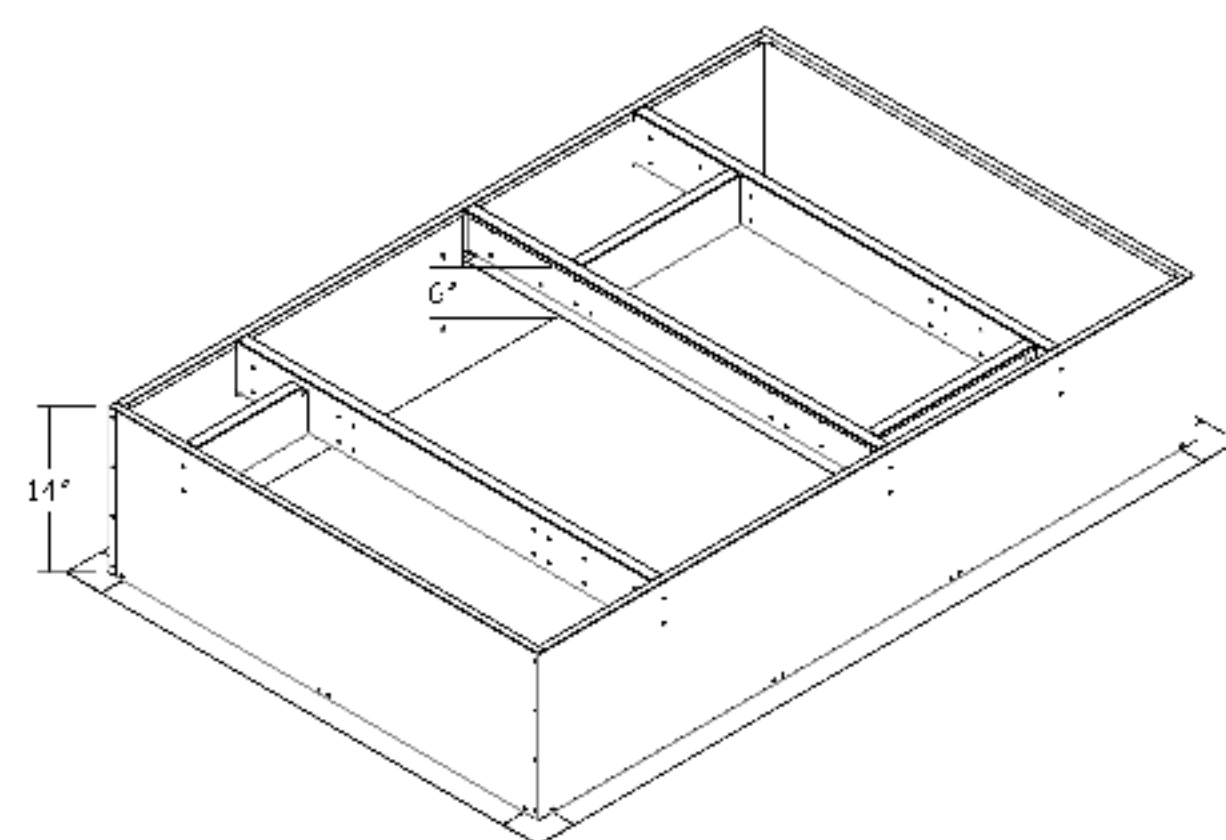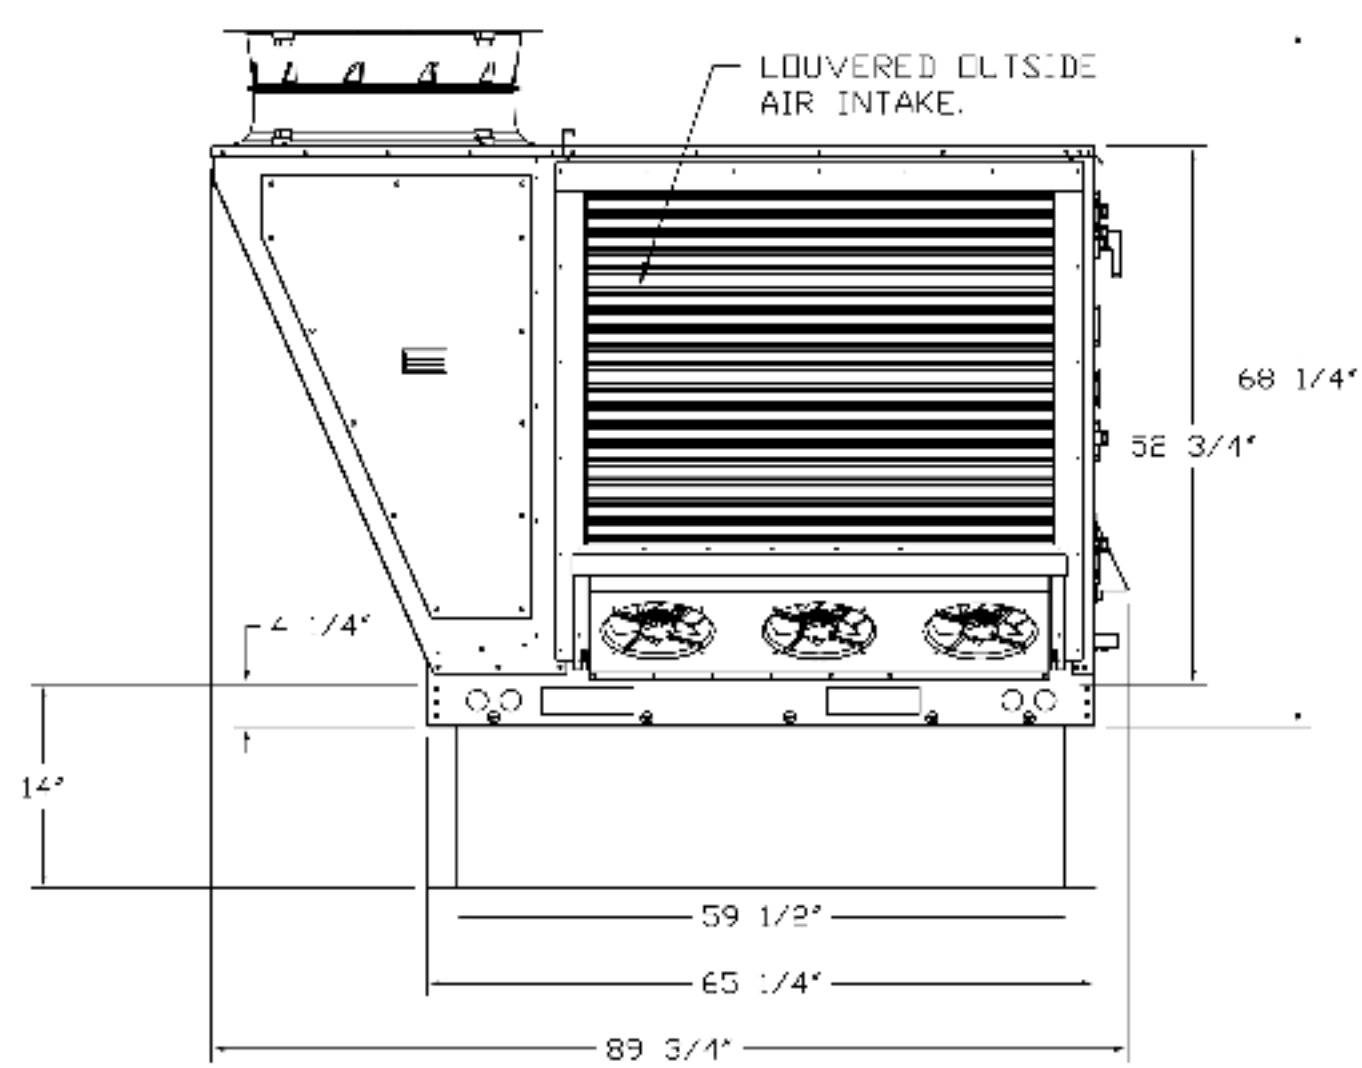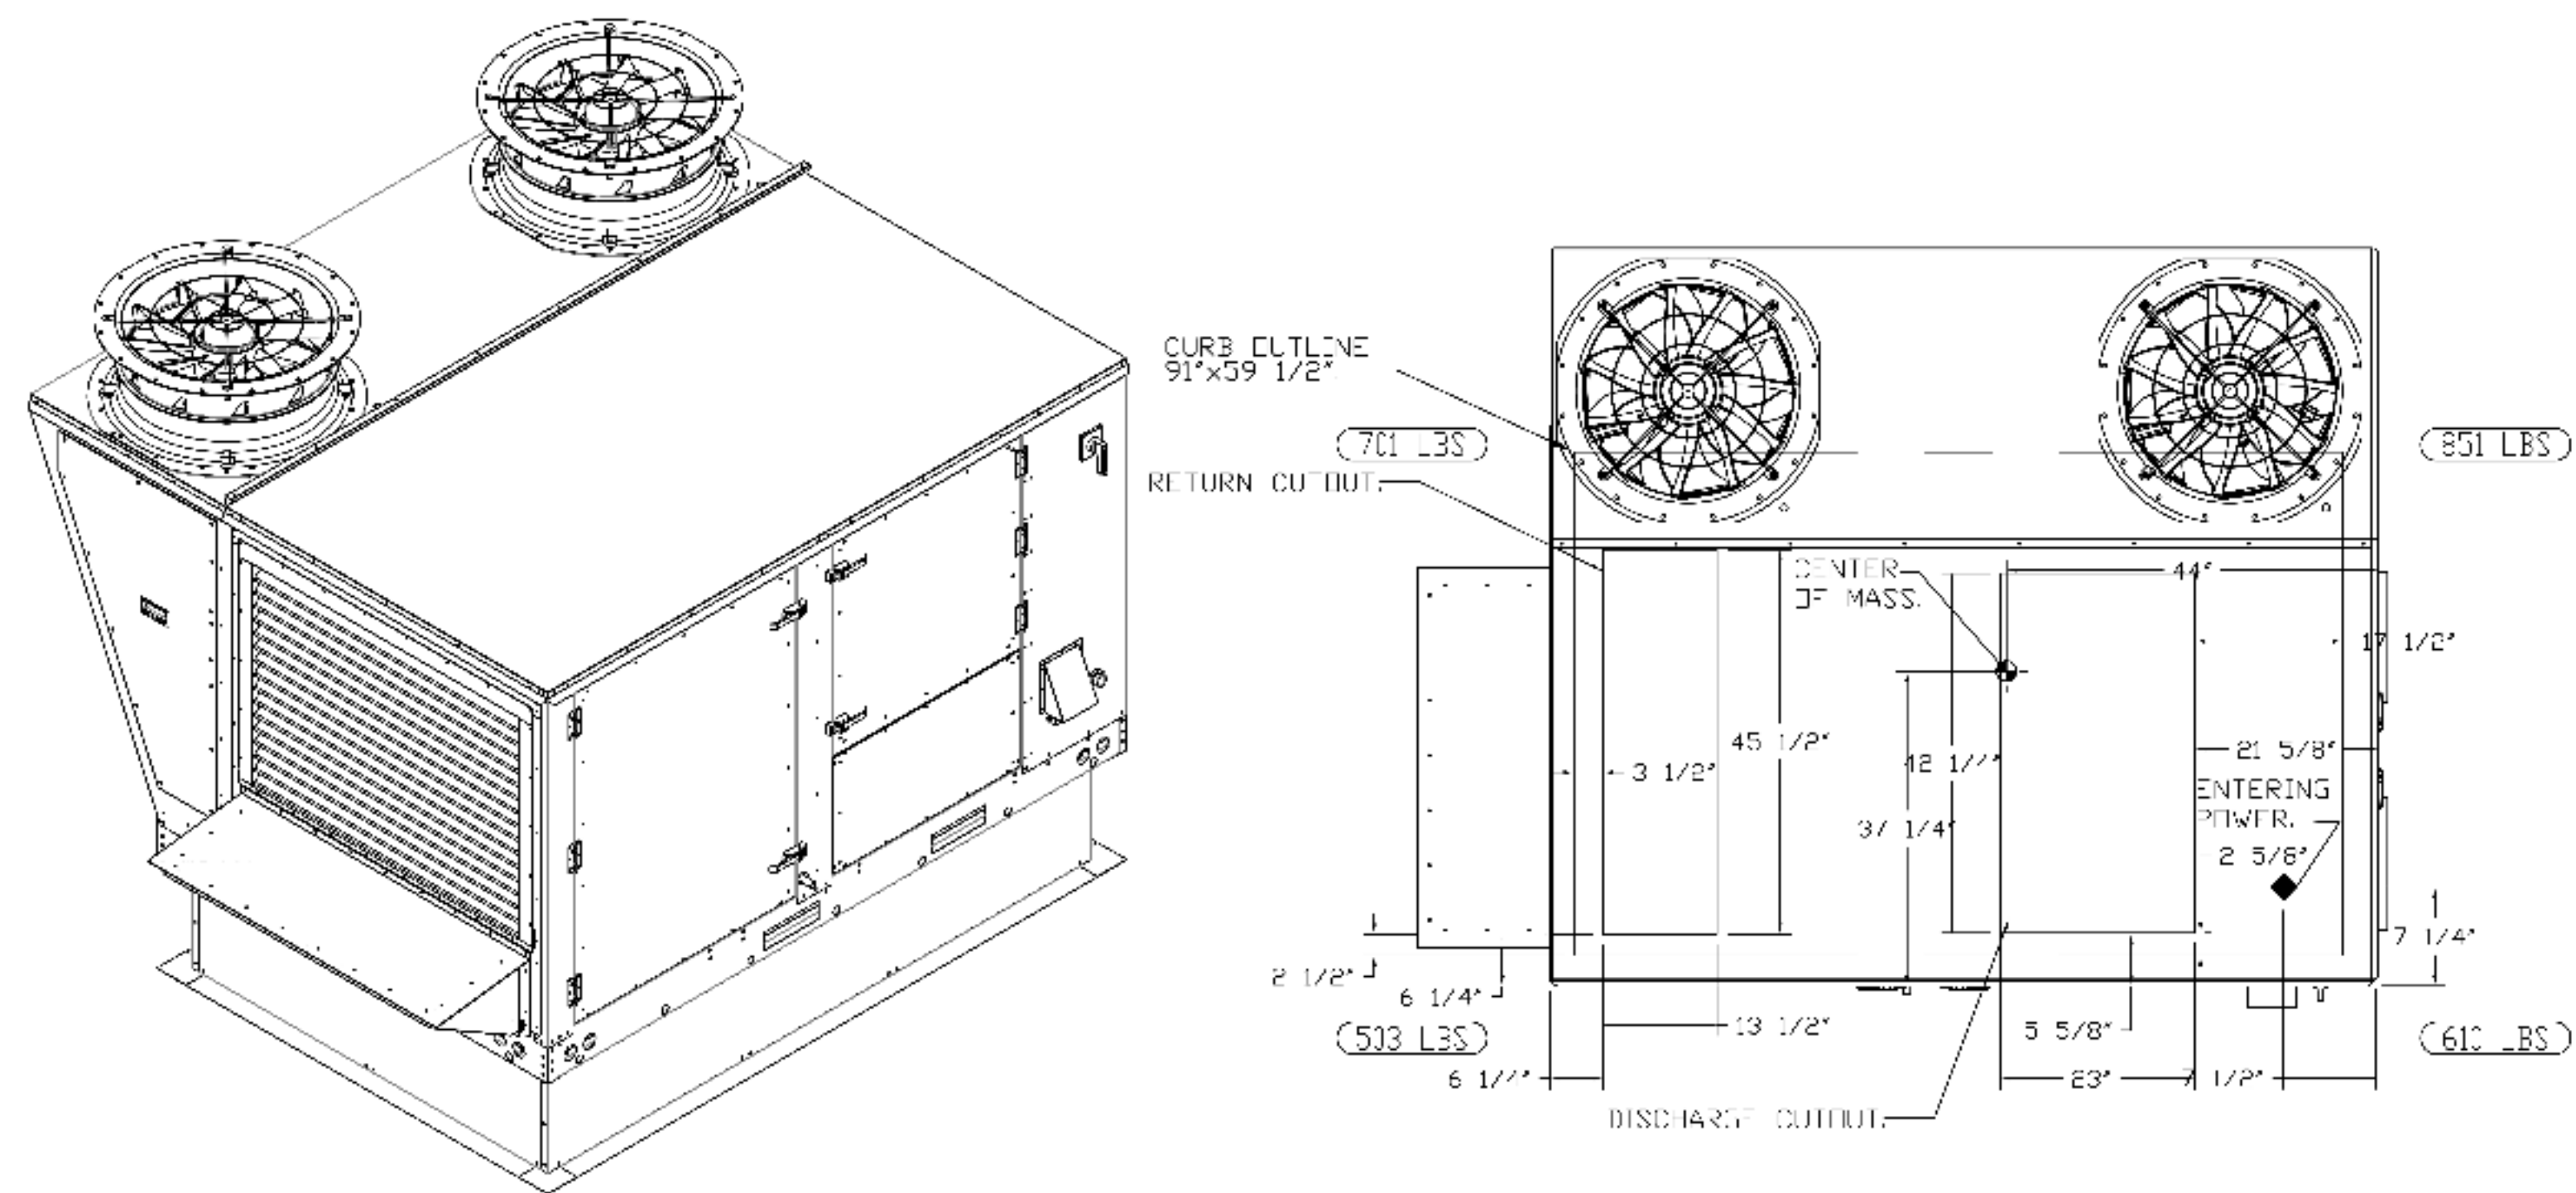

REVISIONS	DESCRIPTION	DATE
1		
2		
3		

CAPTIVE
 Eastern PA Mechanical
 225 E. City Line Avenue, Suite #103, Beas Cymys, PA, 19008
 PHONE: (267) 504-4125
 EMAIL: rgr10@captiveme.com

Shake Shack - 165-4th St., CA (HVAC)
 ATHENS, GA, 30606

DATE: 5/25/2025
 DWG.#: 7544347
 DRAWN BY: Joe Shilka
 SCALE: 1/2" = 1'-0"
 MASTER DRAWING
 SHEET NO. 2

- FAN #1: CAS-HVAC3-1250-24MF-15T - HEATER (RTU-2 (KITCHEN))
- NOTES
 1. DO NOT OBSTRUCT OUTSIDE AIR INLET, OUTSIDE AIR COIL OR OUTSIDE AIR FAN.
 2. () DENOTES CURVE WEIGHT.
 3. ROOF OPENING MUST BE 2" SMALLER THAN CURB DIMENSIONS IN BOTH DIRECTIONS.
 4. CONNECTION FROM BREAKER TO UNIT'S SAFETY DISCONNECT SWITCH TO BE COPPER WIRE ONLY.
 5. EXTERIOR GAS CONNECTION PROVIDED BY FACTORY WITH QUICK SEAL AND ANTI-ROTATION BRACKET.
- *NOTE: INTEGRAL CO2 MONITORING AND CONTROL CAPABILITIES FOR ALL SPACE MOUNTED THERMOSTATS.

THIS DIAGRAM REPRESENTS THE INPUT TO THE ENGINEERING TASKS FOR THE KITCHEN AIR CONDITIONING AND VENTILATION / EXHAUST SYSTEM. THE SYSTEM IS PROVIDED BY THE OWNER OR KITCHEN EQUIPMENT SUPPLIER AND IS SOLELY FOR THE CONTRACTOR'S REFERENCE FOR MANUFACTURER'S INSTALLATION DETAILS. SOME MISCELLANEOUS ITEMS OR ACCESSORIES SHOWN MAY BE REQUIRED TO BE SUPPLIED BY THIS CONTRACTOR.

5310 E. HIGH STREET SUITE 350
 PHOENIX, AZ 85054
 T: 480.448.6250
 WWW.SARGARCH.COM

SARGARCH

CONSULTANTS:
rtm
 14901 Quorum Drive, Suite 905, Dallas, TX
 75244 | 947.756.4180

SEAL SIGNATURE:

 DAVID R. LIPPE

NO.	BY	DATE	DESCRIPTION
1			

SHAKE SHACK

SHAKE SHACK - ATHENS

161 ALPS RD
 ATHENS, GA 30606
 SHACK #1765

PERMIT/BID SET

CAPTIVE AIRE DRAWINGS

DRAWN BY: XX
 CHECKED BY: XX
 PROJECT NO: 25-088

M709