

9/16 per Pablo OK



"TO COOK NICELY!"

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
California, Colorado, Florida, Georgia, Illinois,
Massachusetts, New Jersey, Ohio, Texas, Washington

Gas Ranges (4, 6, & 10 Burner models)

MODELS:

ATO-4B/ATO-6B/ATO-10B

ATO-4B



ATO-6B



ATO-10B



Standard Features

- Stainless steel exterior including front, back sides, kick plate, back guard and over shelf
- Heavy duty 12" X 12" removable, cast iron top grates
- Drip tray provided under burners to catch grease drippings
- 25,000 BTU top burners & 27,000 BTU oven burners
- Oven temperature range between 175°F to 550°F
- Standing pilot for open top burners
- Oven pilot with 100% safety shut off
- Enamel interior oven for easy cleaning
- Multiple position oven rack guides
- One (1) chrome oven rack per oven standard
- Available in Natural and Propane
- 3/4" NPT rear gas connection and regulator provided
- Four (4) casters standard

Optional Accessories

- Leg kit part #: 301110006



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)



Conforms to ANSI
STD Z83.11-2009 (2011)
Certified to CSA
STD 1.86-2009 (2011)
Conforms to NSF-ANSI STD4



ATOSA USA





"TO COOK NICELY!"


Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Model	Gas type	Ignition	Burner name	Per BTU B.T.U./h	Number of Burners	Total BTU B.T.U./h	Oven size(inch)	Valve types	Net weight (lbs)	Gross weight (lbs)
ATO-4B	NG	Manually	Hot plates	25,000	4	124,000	20×26×14	Pilot light	326.1	427.5
			Oven	24,000	1					
	LP	Manually	Hot plates	23,000	4	116,000				
			Oven	24,000	1					
ATO-6B	NG	Manually	Hot plates	25,000	6	177,000	26 ¹ / ₂ ×26×14	Pilot light	440	567.9
			Oven	27,000	1					
	LP	Manually	Hot plates	23,000	6	165,000				
			Oven	27,000	1					
ATO-10B	NG	Manually	Hot plates	25,000	10	304,000	26 ¹ / ₂ ×26×14	Pilot light	732	897.3
			Oven	27,000	2					
	LP	Manually	Hot plates	23,000	10	284,000				
			Oven	27,000	2					

PLAN VIEW

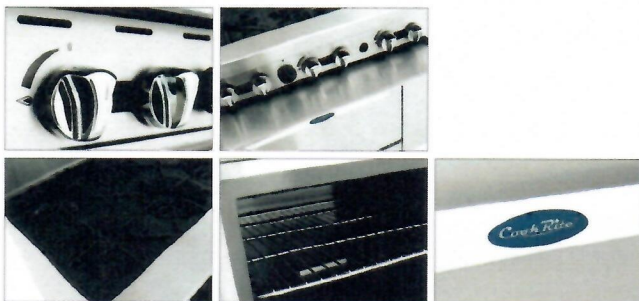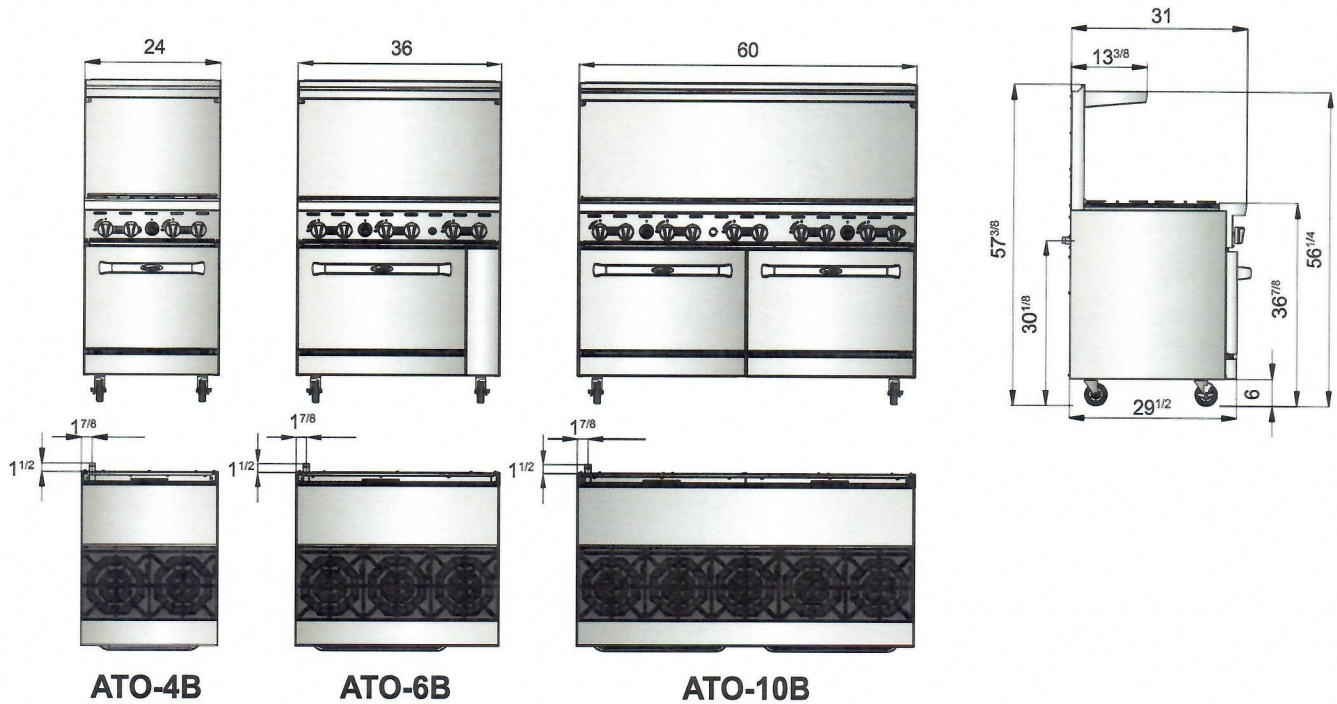

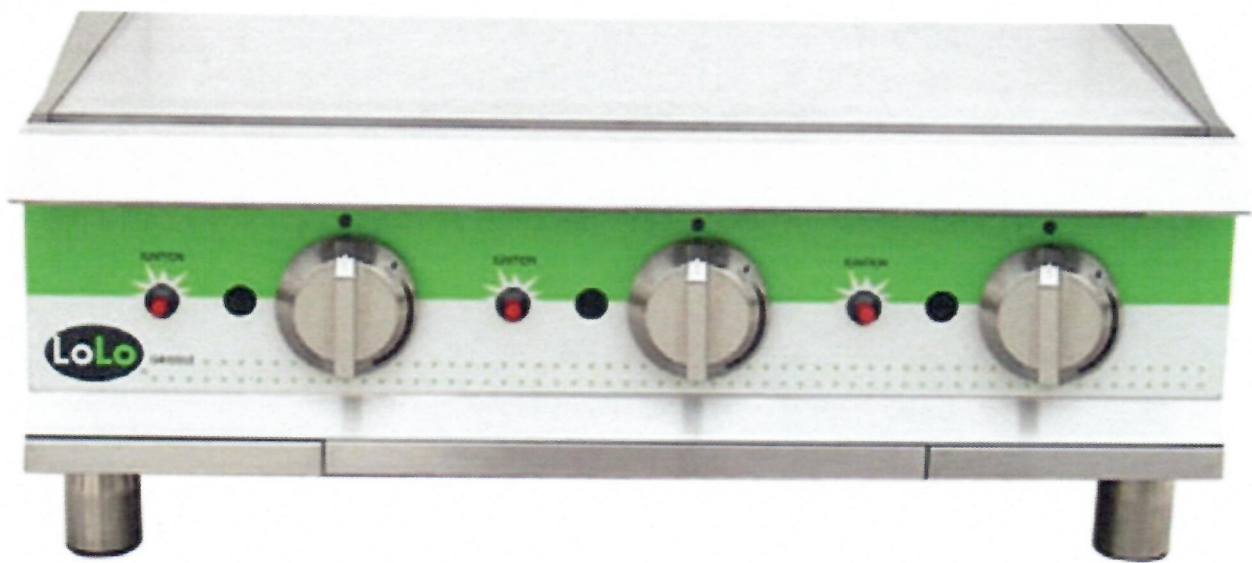

**LoLo LG36TPF – Gas Griddle –
36.5" Wide – Thermostat
Control (1" Steel Plate – 3
Controls – 90,000 Btu)**

Call for pricing

Categories: [Griddles & Grills](#), [Kitchen Equipment](#)

Description

Reviews (0)

adjustable 4" high legs. The cooktop is made of 1" thick ground and polished stainless steel and measures a full 20" deep. Stainless steel U-shaped burners guarantee even heating, delivering cooking temperatures of 210° to 570° F. This griddle has dual ignition via piezo lighter or match to standing pilot. A built-in rear 4" splash with tapered sides comes standard. This countertop griddle has a 3-3/4" wide front grease trough that feeds into a large capacity removable drip tray. This griddle offers accurate thermostatic temperature control with a modulating gas valve. No electrical connection required for controls or ignition.

Charbroiler.gas countertop

3:11 p. m.





BKI SIMPSONVILLE, S.C. **Standex**
 www.bkideas.com

MODEL	DR-34	SERIAL	113719		
PRODUCT CODE	952002D	WIRE DIAG.	SB95139800		
SERIES	A	VOLTS	208	KV	6
AMP.	18	MOTOR VOLTS/AMPS	/		
PHASE	3	WIRE	3	HERTZ	60
DO NOT INSTALL CLOSER TO A WALL OF COMBUSTIBLE MATERIAL THAN INDICATED:					
	BACK	10.5"	SIDE	1"	
CONNECT TO 25 AMPERE CIRCUIT BREAKER OR FUSE					
FOR SUPPLY CONNECTION USE WIRES SUITABLE FOR AT LEAST 90°C.	COPPER WIRE ONLY TO BE USED FOR FIELD WIRING	CAUTION CONNECT ONLY TO A CIRCUIT WHERE THE POTENTIAL TO GROUND DOES NOT EXCEED 180V.			
ON THREE PHASE MACHINE IF HIGH LEG EXISTS FROM PANEL CONNECT TO BLUE INTERNAL WIRE.					
UL LISTED	4/12/02 DATE OF MANUFACTURE	UL LISTED	NSF CLASSIFIED		
LISTED COMMERCIAL COOKING APPLIANCE 604 G.					

ISE 7-37
EMER.
741510

Autissenne/Electric



ATOSA USA

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

MODELS:

ATFS-40 / ATFS-50 / ATFS-75

Fryers

Standard Features

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame, standby pilots
- High quality thermostat maintains select temperature automatically between 200°F-400°F
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Safety valve with an automatic voltage stabilizing function
- Self-reset high temperature limiting device
- Two (2) Nickel plated baskets with coated handles standard
- Wire mesh crumb screen and basket hanger standard
- Available in Natural & Propane Gas
- 3/4 " NPT rear gas connection and regulator
- Four (4) Casters standard

Accessories:

- Four (4) Legs

ATFS-40**ATFS-50****ATFS-75**

1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)
 5 YEARS OIL TANK WARRANTY



Conforms to ANSI
 STD Z88.116-2009 (2011)
 Conforms to CSA
 C173.146-2009 (2011)
 Conforms to NSF/ANSI 510.4





ATOSA USA

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Burners and Control Method	Gas type	Intake-tube pressure (in. W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Basket Dimensions	Net weight (LBS)	Gross weight (LBS)
ATFS-40	3 Burners Independent Manual Control	NG	4	34,000	102,000	4" w.c.	13 ^{3/10} x 6 ^{1/2} x 5 ^{9/10}	131	159.6
		LP	10	30,000	90,000	10" w.c.			
ATFS-50	4 Burners Independent Manual Control	NG	4	34,000	136,000	4" w.c.	13 ^{3/10} x 6 ^{1/2} x 5 ^{9/10}	143	171.1
		LP	10	30,000	120,000	10" w.c.			
ATFS-75	5 Burners Independent Manual Control	NG	4	34,000	170,000	4" w.c.	13 ^{3/10} x 9 ^{3/10} x 5 ^{9/10}	168	199.5
		LP	10	30,000	150,000	10" w.c.			

PLAN VIEW

