

Marra Forni Rotator RT 90, 110, 130, 150

Gas Models: between 8" W.C to 10" W.C



Standard Tile Color Options



Black Standard Facade
Stainless Steel Upgrade Available



Rotator Gas Oven Models

Marra Forni 90 (RT90G)
Marra Forni 110 (RT110G)
Marra Forni 130 (RT130G)
Marra Forni 150 (RT150G)

Rotators operate on a Gas or combination Wood+Gas burner system.

For an additional cost, upgrade to stainless steel or apply black powder coating to the metal facade.

Quick Specs	Rotator 90*	Rotator 110*	Rotator 130*	Rotator 150*
Height	81.5"	81.5"	81.75"	81.75"
Width	60.5"	68.38"	76.45"	84.32"
Depth	58.5"	66.24"	74.12"	81.99"
Cooking Surface	6.8 sq. ft.	10.2 sq. ft.	14.3 sq. ft.	15.5 sq. ft.
BTUs (NAT)	84,000	84,000	84,000	84,000
AMPs	120V / 12AMPs	120V / 12AMPs	120V / 12AMPs	120V / 12AMPs
NPT	3/4"	3/4"	3/4"	3/4"
Oven Weight	3,142 lbs.	3,666 lbs.	5,118 lbs.	7,000 lbs.
Crated Weight	3,442 lbs.	3,999 lbs.	5,418 lbs.	7,400 lbs.
Crate W x D x H	83" x 73" x 87"	83" x 73" x 86"	96" x 87" x 90"	96" x 87" x 90"
Pizza Capacity 8"	8	10	12	14
Pizza Capacity 10"	7	9	11	13
Pizza Capacity 12"	6	8	10	12
Pizza Capacity 16"	2	3	5	7

*Denotes Internal Model Number of the Oven. Oven sizes refer to dome interior size. All ovens Freight Class 77.5.

Marra Forni Rotator RT 150

Rotator RT 150 (RT150G) Gas Model, also available as "RT150WG" Wood+Gas Fired Model



*Tile work shown in photo is custom and is not included in standard tile options.

Standard Tile Color Options



Black Standard Facade

Stainless Steel Upgrade Available

This oven is available in standard tile finishes of Red, White, Brown, Blue or Black at no additional cost. See our Tile Catalog for more custom design options at marraforni.com/tiles.

Features

- Refractory brick with 4" of layered insulation in the dome, 8" in the deck.
- Fire-rated tile exterior over clay dome
- 59.06 inch / 150 cm - diameter deck
- Oven mouth measures 26" x 9.5"
- 8" diameter S/S flue collar
- Turbo Burner
- 14" landing at the opening
- 2 year deck warranty
- Mechanical Thermostat (0 - 1000°F)

Gas Requirements

- 120V / Single Phase/ 12AMPs
- 84,000 BTUs per burner
- 1 gas connection 3/4" NPT NPT per burner
- The oven is vented through an 6" round flue collar interconnected to an exhaust system integral with the oven hearth. The Neapolitan gas-fired oven can be direct vented via a grease rated chimney or with a listed type 1 exhaust hood (or equivalent).

Quick Specs	Rotator 150
Height	81.75"
Width	84.32"
Depth	81.99"
Cooking Surface	15.5 sq. ft.
BTUs (NAT)	84,000
AMPs	120V / 12AMPs
NPT	3/4"
Oven Weight	7,000 lbs.
Crated Weight	N/A
Crated W x D x H	N/A
Pizza Capacity 8"	16
Pizza Capacity 10"	14
Pizza Capacity 12"	12
Pizza Capacity 16"	8

*Oven sizes refer to dome interior size. All ovens Freight Class 77.5 and ETL, and VPN approved. Oven must be shipped LTL.

Marra Forni Rotator RT 150WG

Rotator RT 150WG (RT 150WG) Wood+Gas Fired Model



*Tile work shown in photo is custom and is not included in standard tile options.

Standard Tile Color Options



Black Standard Facade
Stainless Steel Upgrade Available

Features

- Refractory brick with 4" of layered insulation in the dome, 8" in the deck.
- Fire-rated tile exterior over clay dome
- 59.1 inch / 150 cm - diameter dome
- Oven mouth measures 24" x 9.5"
- 8" diameter S/S flue collar
- Turbo Burner
- 14" landing at the opening
- 2 year deck warranty
- Mechanical Thermostat (0 - 1000°F)

Gas Requirements

- 120V / Single Phase/ 12AMPs
- 84,000 BTUs per burner
- 1 gas connection 3/4" NPT NPT per burner
- The oven is vented through an 6" round flue collar interconnected to an exhaust system integral with the oven hearth. The Neapolitan gas-fired oven can be direct vented via a grease rated chimney or with a listed type 1 exhaust hood (or equivalent).

This oven is available in standard tile finishes of Red, White, Brown, Blue or Black at no additional cost. See our Tile Catalog for more custom design options at marraforni.com/tiles.

Quick Specs	Rotator WG150
Height	78.25"
Width	88"
Depth	82"
Cooking Surface	15.5 sq. ft.
BTUs (NAT)	84,000
AMPs	120V / 12AMPs
NPT	3/4"
Oven Weight	7,000 lbs.
Crated Weight	N/A
Crated W x D x H	N/A
Pizza Capacity 8"	14-16
Pizza Capacity 10"	12-14
Pizza Capacity 12"	8-12
Pizza Capacity 16"	7-8

*Oven sizes refer to dome interior size. All ovens Freight Class 77.5 and ETL, and VPN approved. Oven must be shipped LTL.

Marra Forni Flue Pipe and Fan


Marra Forni offers state of the art flue pipes for all of our ovens. DWKL is the designation model number for Marra Forni's Double Wall conical Grease Duct and Chimney system. The -LT variation has a different inner thickness. For the purpose of these installation instructions, both DWKL and the DWKL-Lt will be treated together. Differences in UL listing, installation, and weights will be shown where needed.

Specs

- UL-1978 Standard, Grease Duct for liquid tight joints and 2000°F for 30 minutes
- ULC-S662, (Canadian) Standard for Factory-Built Grease
- UL-2561 Standard, 1400F Chimney Listing/ ULC/ORDC959 Industrial Type 760°C Chimney
- UL-103 Standard, Building Heating Appliance Chimney Listing
- ULC/ORD-C959 Industrial Type 540°C Chimney
- UL-103 Standard, Additional Positive Pressure Listing up to 90" W.C.
- UL-103 Standard, Additional Type HT Listing, 1000°F and 2100°F for 10 minutes
- 0.035" Thick 444 stainless steel inner liner, 1.5" ceramic fiber blanket compressed to 1.25", and 430 stainless steel outer jacket with all stainless steel supports and accessories.

Benefits

- Powered exhaust on Rotator ovens
- Grade 444 stainless steel
- High temperature ducting
- Easy to Install
- Easy to Clean
- 25 Year Warranty

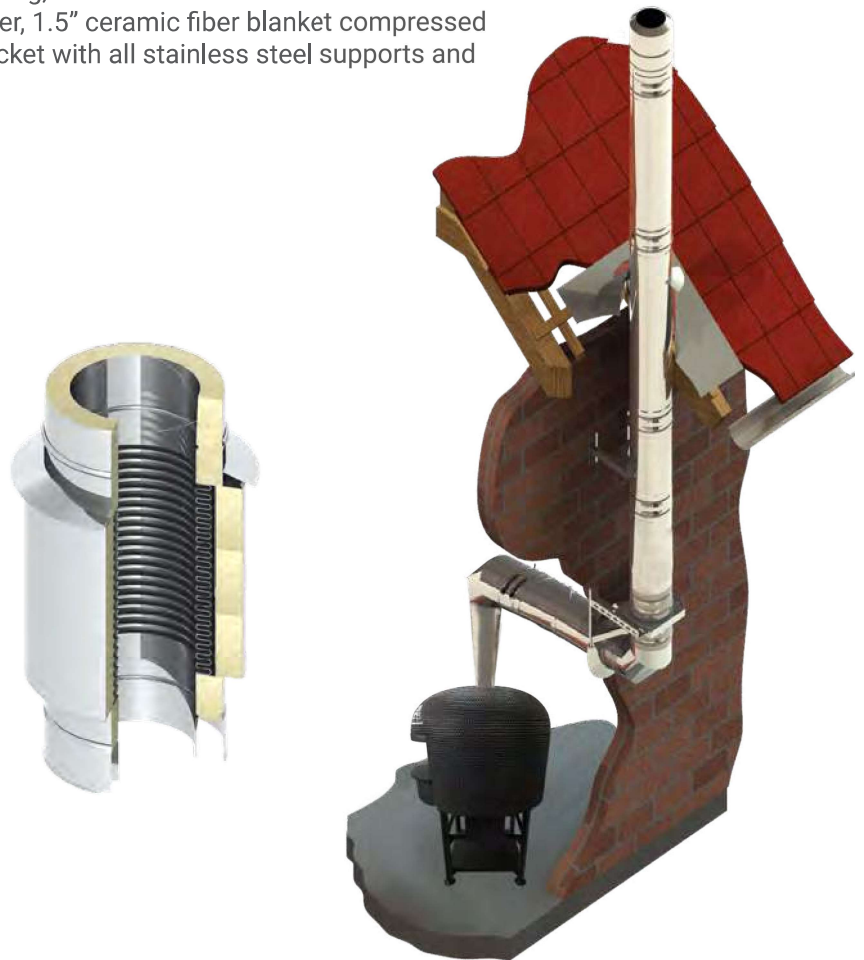

*Contact sales rep for more information regarding flue pipes. inquires@marraforni.com