

MECHANICAL SHEET INDEX

M001	MECHANICAL GENERAL INFORMATION
M101	MECHANICAL FLOOR PLAN
M150	MECHANICAL ROOF PLAN
M501	MECHANICAL DETAILS
M502	MECHANICAL DETAILS
M590	MECHANICAL SPECIFICATIONS
M591	MECHANICAL SPECIFICATIONS
M592	MECHANICAL SPECIFICATIONS
M601	MECHANICAL SCHEDULES
M630	MECHANICAL ENERGY CODE COMPLIANCE
M631	MECHANICAL ENERGY CODE COMPLIANCE
M701	HALTON DRAWINGS
M702	HALTON DRAWINGS
M703	HALTON DRAWINGS
M704	HALTON DRAWINGS

RESPONSIBILITY MATRIX

DESCRIPTION	FURNISHED		INSTALLED		REMARKS
	GC	OWNER	GC	OWNER	
DIVISION 23: HEATING, VENTILATING, AND AIR CONDITIONING					
23.1 HVAC DUCTWORK AND PIPING IDENTIFICATION					
HVAC DUCTWORK SYSTEM IDENTIFICATION	•		•		
PIPING SYSTEM IDENTIFICATION	•		•		
UTILITY SHUT OFF IDENTIFICATION IN KITCHEN	•		•		
VALVE TAGS AND CHART	•		•		
HVAC DAMPER IDENTIFICATION	•		•		
23.2 ROOF CURBS					
ROOFTOP UNIT CURBS	•		•		
CONDENSING UNIT RAILS	•		•		
KITCHEN EXHAUST FAN CURBS	•		•		
KITCHEN EXHAUST FAN CURB EXTENSIONS	•		•		
23.3 HVAC DUCTWORK SYSTEM COMPONENTS					
HVAC DUCTWORK	•		•		
GREASE DUCTWORK INSIDE TENANT SPACE	•		•		
OUTSIDE AIR DUCTWORK INSIDE TENANT SPACE	•		•		
INSULATION AND FIRE WRAP	•		•		
DAMPERS	•		•		
SMOKE DETECTORS	•		•		
SUPPLY, RETURN, AND EXHAUST GRILLS AND REGISTERS	•		•		
23.4 MECHANICAL PIPING SYSTEM COMPONENTS					
WALK-IN COOLER AND FREEZER WATER COOLED CONDENSERS	•		•		1
REFRIGERANT PIPING FOR HVAC EQUIPMENT	•		•		
VALVES AND ACCESSORIES (E.G. AIR VENTS)	•		•		
23.5 HVAC EQUIPMENT					
SUPPLY FAN	•		•		
KITCHEN EXHAUST FAN	•		•		
DUCTED AND NON-DUCTED HEATING AND COOLING UNITS	•		•		
CONDENSING UNITS	•		•		
23.6 KITCHEN EXHAUST WITH FIRE SUPPRESSION SYSTEM					
HOOD CONTROL PANEL	•		•		
KITCHEN EXHAUST HOOD	•		•		
STRUCTURAL SUPPORT	•		•		
ELECTRICAL AND CONTROL WIRING	•		•		
ANSUL SYSTEM	•		•		2
ANSUL WIRING AND UTILITIES CONNECTION	•		•		
ANSUL GAS VALVE	•		•		
23.7 COMMISSIONING ACTIVITIES					
GREASE EXHAUST WATER LEAKAGE TEST	•		•		
TEST AND BALANCE (TAB) REPORT	•		•		

GENERAL NOTES:
 1. INFORMATION CONTAINED WITHIN IS BASED ON THE EXECUTED WORK LETTER DATE...
 2. REFER TO FINAL WORK LETTER FOR ALL LANDLORD / TENANT SCOPE OF WORK...

REMARKS:
 1. WALK-IN COOLER AND FREEZER SUPPLIED BY VENDOR NO. 27. GENERAL... INSTALLATION AND FINAL CONNECTION.
 2. GENERAL CONTRACTOR TO COORDINATE AND FACILITATE SYSTEM SIGN-OFF.

SUBMITTAL MATRIX

SUBMITTAL DESCRIPTION	Required Review Time (Business Days)	Architect of Record	Shake Shack	Physical Sample Required	Submittal for Record	Submittal for Record Only
Ductwork Layout (if there are significant changes in field)	5	X			X	
HVAC Equipment (if Carrier - Submitted by Owner Vendor directly to Owner/AOR prior to construction)	5	X			X	
MEP Tests, Start-Up, and Programming Reports	5	X			X	

GENERAL NEW NOTES:

- PRIOR TO SUBMITTING BID, VISIT THE JOB SITE AND BECOME FULLY ACQUAINTED WITH THE EXISTING CONDITIONS OF THE PROJECT. REVIEW THE GENERAL NOTES, SPECIFICATIONS AND OTHER DRAWINGS AND REQUIREMENTS WHICH MAY NOT BE SPECIFICALLY CALLED OUT IN THIS PORTION OF THE CONSTRUCTION DOCUMENTS. NOTIFY ARCHITECT, ENGINEER AND/OR OWNER OF CONFLICTS OR DISCREPANCIES PRIOR TO SUBMISSION OF BID.
- EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS AND SITE VISITS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITIONS. FIELD VERIFY EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. COORDINATE NEW WORK AND DEMOLITION WITH OTHER DISCIPLINES AND EXISTING CONDITIONS PRIOR TO CONSTRUCTION.
- COORDINATE THE INSTALLATION OF THE MECHANICAL SYSTEMS WITH OTHER TRADES TO ENSURE A NEAT AND ORDERLY INSTALLATION. INSTALL DUCTWORK AND PIPING AS TIGHT TO STRUCTURE AS POSSIBLE. COORDINATE WITH OTHER TRADES TO AVOID CONFLICTS. COORDINATE INSTALLATION OF DUCTWORK AND PIPING TO AVOID CONFLICTS WITH ELECTRICAL PANELS, LIGHTING FIXTURES, ETC. ANY MODIFICATIONS REQUIRED DUE TO LACK OF COORDINATION WILL BE THE RESPONSIBILITY OF THE CONTRACTOR AT NO EXTRA COST TO THE OWNER.
- WHERE SHUTDOWN OF EXISTING SYSTEMS IS REQUIRED DURING NEW WORK, COORDINATE SHUTDOWN TIME AND DURATION WITH THE OWNER TO MINIMIZE DOWNTIME. NOTIFY OWNER SEVEN (7) DAYS PRIOR TO INTERRUPTION OF SERVICE.
- DURING INSTALLATION OF NEW WORK, AVOID DAMAGING EXISTING SURFACES AND EQUIPMENT TO REMAIN. REPAIR DAMAGE CAUSED DURING CONSTRUCTION AT NO EXTRA COST TO THE OWNER.
- PROVIDE TEMPORARY BARRIERS TO CONTAIN DUST AND DEBRIS RESULTING FROM THE PERFORMANCE OF THE WORK TO THE AREA WHERE WORK IS BEING PERFORMED.
- ALL MECHANICAL EQUIPMENT SHOWN ON THE MECHANICAL PLANS SHALL BE PROVIDED BY DIVISION 23 UNLESS OTHERWISE NOTED.
- NEW MECHANICAL EQUIPMENT, DUCTWORK AND PIPING ARE SHOWN AT APPROXIMATE LOCATIONS. FIELD MEASURE FINAL DUCTWORK AND PIPING LOCATIONS PRIOR TO FABRICATION AND MAKE ADJUSTMENTS AS REQUIRED TO FIT THE DUCTWORK AND PIPING WITHIN THE AVAILABLE SPACE. VERIFY THAT FINAL EQUIPMENT LOCATIONS MEET MANUFACTURER'S RECOMMENDATIONS REGARDING SERVICE CLEARANCE AND PROPER AIRFLOW CLEARANCE AROUND EQUIPMENT.
- REFER TO ARCHITECTURAL DRAWINGS FOR RELATED CONSTRUCTION DETAILS AS APPLICABLE TO THE HVAC SYSTEM. VERIFY CHASES AND PENETRATIONS SHOWN ON ARCHITECTURAL DRAWINGS THAT ARE INTENDED FOR DUCTWORK AND PIPING MEET REQUIREMENTS.
- COORDINATE LOCATION OF ROOF MOUNTED HVAC EQUIPMENT AND ROOF PENETRATIONS WITH THE ARCHITECTURAL AND STRUCTURAL DRAWINGS.
- INDOOR AIR QUALITY MEASURES: PROTECT INSIDE OF (INSTALLED AND DELIVERED) DUCTWORK AND HVAC UNITS FROM EXPOSURE TO DUST, DIRT, PAINT AND MOISTURE. REPLACE INSULATION THAT HAS BECOME WET AT ANY TIME DURING CONSTRUCTION. DRYING THE INSULATION IS NOT ACCEPTABLE. SEAL ANY TEARS OR JOINTS OF INTERNAL FIBERGLASS INSULATION. REMOVE DEBRIS FROM CEILING/RETURN AIR PLENUM INCLUDING DUST. AN INDEPENDENT, PROFESSIONAL DUCT CLEANING COMPANY SHALL VACUUM CLEAN ANY DUCTWORK CONNECTED TO HVAC UNITS THAT WERE OPERATED DURING THE CONSTRUCTION PERIOD AFTER NEW FILTERS ARE INSTALLED AND PRIOR TO TURNING SYSTEM OVER TO THE OWNER. THE INTERNAL SURFACES AND ASSOCIATED COILS OF ANY HVAC UNITS THAT WERE OPERATED SHALL ALSO BE CLEANED.
- INSTALL DUCTWORK AND PIPING PARALLEL TO BUILDING COLUMN LINES UNLESS OTHERWISE SHOWN OR NOTED.
- OVERHEAD HANGERS AND SUPPORTS FOR EQUIPMENT, DUCTWORK AND PIPING SHALL BE FASTENED TO BUILDING JOISTS OR BEAMS. DO NOT ATTACH HANGERS AND SUPPORTS TO THE ABOVE FLOOR OR ROOF EXCEPT WHERE CONCRETE INSERTS IN CONCRETE SLABS ARE ALLOWED BY THE SPECIFICATIONS.
- COORDINATE LOCATION OF EQUIPMENT SUPPORTS WITH LOCATION OF EQUIPMENT ACCESS PANELS/DOORS TO ENABLE SERVICE OF EQUIPMENT AND/OR FILTER REPLACEMENT.
- SEAL PENETRATIONS THROUGH THE BUILDING COMPONENTS IN ACCORDANCE WITH THE CONTRACT SPECIFICATIONS. FIREPROOF PENETRATIONS THROUGH FIRE RATED COMPONENTS IN ACCORDANCE WITH UL REQUIREMENTS.
- COORDINATE THE EXACT MOUNTING SIZE AND FRAME TYPE OF DIFFUSERS, REGISTERS AND GRILLES WITH THE SUPPLIER TO MEET THE CEILING, WALL AND DUCT INSTALLATION REQUIREMENTS.
- ADJUST LOCATION OF CEILING DIFFUSERS, REGISTERS AND GRILLES AS REQUIRED TO ACCOMMODATE FINAL CEILING GRID AND LIGHTING LOCATIONS.
- PAINT PORTIONS OF DUCTWORK AND INSULATION THAT ARE EXPOSED TO VIEW BY THE INSTALLATION OF DIFFUSERS, REGISTERS, AND GRILLES IN CEILINGS OR WALLS FLAT BLACK. PORTIONS INCLUDE BOTH THE INTERIOR OF UNLINED DUCTWORK AND THE EXTERIOR OF DUCTWORK AND INSULATION.
- LOCATE AND SET TEMPERATURE SENSORS AND THERMOSTATS AT LOCATIONS SHOWN ON PLANS. VERIFY EXACT LOCATIONS WITH ARCHITECT PRIOR TO INSTALLATION. INSTALL DEVICES WITH TOP OF DEVICE AT MAXIMUM 48" AFF TO MEET ADA REQUIREMENTS UNLESS NOTED OTHERWISE ON PLANS. PROVIDE INSULATED BACKING FOR THERMOSTATS MOUNTED ON EXTERIOR BUILDING WALLS. INSTALL WIRING IN CONDUIT PROVIDED BY DIVISION 26. AT A MINIMUM, PROVIDE CONDUIT IN THE WALL FROM THE JUNCTION BOX TO 6" ABOVE THE CEILING.
- COORDINATE THE LOCATION AND ELEVATION OF WALL-MOUNTED DEVICES WITH PRESENTATION BOARDS, DISPLAY CABINETS, SHELVES OR OTHER COMPONENTS SHOWN ON THE ARCHITECTURAL DRAWINGS THAT ARE TO BE INSTALLED UNDER OTHER DIVISIONS. CONTRACTOR WILL NOT BE REIMBURSED FOR RELOCATION OF WALL-MOUNTED DEVICES CAUSED BY A LACK OF COORDINATION.
- PROVIDE A MANUAL BALANCING DAMPER IN EACH DUCT TAKEOFF FROM SUPPLY, RETURN, OUTDOOR AND EXHAUST AIR DUCTS.
- PROVIDE A PREFABRICATED 45 DEGREE, HIGH EFFICIENCY, RECTANGULAR/ROUND BRANCH DUCT TAKEOFF FITTING FOR BRANCH DUCT CONNECTIONS AND TAKE-OFFS TO INDIVIDUAL DIFFUSERS, REGISTERS AND GRILLES. PROVIDE WITH INTEGRAL MANUAL BALANCING DAMPER AND LOCKING QUADRANT WHERE INDICATED ON PLANS.
- BRANCH DUCTWORK TO AIR OUTLETS SHALL BE SAME SIZE AS OUTLET NECK SIZE UNLESS OTHERWISE NOTED.
- REFER TO SPECIFICATIONS FOR DUCTWORK AND PIPING INSULATION REQUIREMENTS. DUCT SIZES ON MECHANICAL PLANS INDICATE CLEAR INSIDE AIRFLOW DIMENSIONS. INCREASE SHEET METAL SIZES ACCORDINGLY TO ACCOUNT FOR THICKNESS OF DUCT LINER.
- FLEXIBLE DUCTWORK SHALL NOT EXCEED 5'-0" IN LENGTH AND SHALL BE INSTALLED AND SUPPORTED TO AVOID SHARP BENDS AND SAGGING. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- PROVIDE EQUIPMENT VENTS AND FLUES PER EQUIPMENT MANUFACTURERS RECOMMENDATIONS AND EQUIPMENT SPECIFICATIONS. KEEP PENETRATIONS THROUGH ROOF A MINIMUM OF 10'-0" FROM HVAC EQUIPMENT FRESH AIR INLETS AND 2'-0" FROM ROOF PARAPETS.
- PROVIDE TYPE I GREASE HOOD EXHAUST DUCTWORK OF MINIMUM 1/8 GAUGE BLACK IRON WITH LIQUID TIGHT WELDS, WITH ACCESS PANELS FOR GREASE CLEANING AS REQUIRED BY NFPA 96 AND LOCAL CODES. SLOPE DUCT BACK TOWARDS HOOD AT MINIMUM OF 1/4" PER LINEAL FOOT MAINTAINING 18" CLEARANCE TO COMBUSTIBLE MATERIALS. INSTALL GREASE DUCTS IN AN APPROVED FIRE-RATED ENCLOSURE SEPARATED FROM THE EXHAUST DUCT BY A MINIMUM OF 6" AND MAXIMUM OF 12". VENTILATE ENCLOSURE TO THE OUTSIDE AIR IF REQUIRED BY CODE. AS AN OPTION, IF APPROVED BY LOCAL CODES, PROVIDE AN APPROVED WRAP SYSTEM IN LIEU OF THE RATED DUCT ENCLOSURE SYSTEM. DUCT WRAP SYSTEM SHALL MEET UL REQUIREMENTS FOR GREASE DUCT ENCLOSURES.
- PROVIDE A NEW SET OF AIR FILTERS IN UNITS PRIOR TO TESTING, ADJUSTING AND BALANCING AND BEFORE TURNING SYSTEM(S) OVER TO OWNER.
- FIELD VERIFY THAT THE EXISTING EQUIPMENT INCLUDING ACCESSORIES BEING REUSED FOR THIS PROJECT IS NOT DAMAGED AND IS IN GOOD WORKING ORDER. REPORT ANY DEFICIENCIES TO THE OWNER OR ARCHITECT. SUBMIT TO THE OWNER AND ARCHITECT A WRITTEN REPORT DESCRIBING TESTS PERFORMED TO VERIFY OPERATION AND RESULTS OF THE TESTS.
- CLEAN EXISTING EQUIPMENT AND EQUIPMENT COMPONENTS BEING REUSED FOR THIS PROJECT. PROVIDE NEW FILTERS FOR EXISTING AIR HANDLING EQUIPMENT PRIOR TO STARTUP OF EQUIPMENT. NEW FILTERS SHALL BE COMPATIBLE WITH THE EXISTING EQUIPMENT AND EQUAL IN PERFORMANCE TO THE EXISTING FILTERS AT NEW CONDITION UNLESS OTHERWISE NOTED. CLEAN STRAINERS IN PIPING SYSTEMS PRIOR TO STARTING PUMPS.
- TEMPORARY INSTALLATIONS OF INFECTION CONTROL MEASURES DURING CONSTRUCTION SHALL BE COORDINATED WITH THE FACILITY'S INFECTION CONTROL STAFF. PRIOR TO CONSTRUCTION PROVIDE ALL REQUIRED TEMPORARY INSTALLATIONS, INCLUDING DETAILS OF THE INFECTION CONTROL MEASURES SUCH AS TEMPORARY BARRIERS AND MEMBRANES, PORTABLE EXHAUST FANS AND TEMPORARY DUCTWORK. TEMPORARY INSTALLATIONS MUST NOT HAVE A NEGATIVE IMPACT ON EXISTING SYSTEMS NOR CAUSE UNSAFE CONDITIONS. TEMPORARY INSTALLATIONS SHALL MAINTAIN ADEQUATE EGRESS AND SHALL NOT OBSTRUCT EXISTING EXITS. CREATE A FIRE HAZARD OR REDUCE REQUIRED FIRE RESISTANCE. TEMPORARY VENTILATION SYSTEMS SHALL NOT CAUSE THE AIR BALANCE OF ADJACENT ROOMS OR SPACES TO BE IMPACTED OR ALTER THE PERFORMANCE OF PERMANENT BUILDING VENTILATION SYSTEMS. AIRFLOW MEASUREMENTS SHALL BE TAKEN TO VERIFY ADJACENT ROOMS OR SPACES ARE NOT IMPACTED.

MECHANICAL SYMBOLS

THIS IS A MASTER LEGEND AND NOT ALL SYMBOLS OR ABBREVIATIONS ARE USED		V2.06	
STANDARD MOUNTING HEIGHT		HVAC DUCTWORK AND ACCESSORIES	
<p>THERMOSTATS (USER ADJUSTABLE)(TOP OF DEVICE) 48" 48"</p> <p>INSTALL DEVICES AT THE MOUNTING HEIGHTS SHOWN ABOVE UNO IN THE CONSTRUCTION DOCUMENTS. MOUNTING HEIGHTS LISTED ABOVE OR ELSEWHERE IN THE CONSTRUCTION DOCUMENTS ARE AFF OR AFG TO BOTTOM OF DEVICE UNO. ALL DEVICES SHALL BE INSTALLED IN COMPLIANCE WITH CURRENT ADA AND LOCAL REQUIREMENTS.</p>	<p>LINEAR SLOT DIFFUSER</p> <p>INSULATED FLEXIBLE DUCT (MAX. 5'-0" LONG)</p> <p>BRANCH DUCT WITH 45° RECTANGLE-ROUND BRANCH FITTING AND MANUAL VOLUME DAMPER</p> <p>ELBOW WITH TURNING VANES</p> <p>BRANCH DUCT WITH BELL-MOUTH FITTING & MANUAL VOLUME CONTROL DAMPER</p> <p>RETURN, EXHAUST, OR OUTSIDE AIR DUCT UP</p> <p>RETURN, EXHAUST, OR OUTSIDE AIR DUCT DOWN</p> <p>SUPPLY AIR DUCT UP</p> <p>SUPPLY AIR DUCT DOWN</p> <p>EQUIPMENT WITH FLEXIBLE DUCT CONNECTION</p> <p>10" (NECK SIZE) CSD-1 (TYPE) 300 CFM (CFM OF SUPPLY DIFFUSER OR REGISTER)</p> <p>24x24 (NECK SIZE) CEG-1 (TYPE) 800 CFM (CFM OF EXHAUST GRILLE)</p> <p>MANUAL VOLUME DAMPER</p> <p>SQUARE TO ROUND TRANSITION</p> <p>DUCT MOUNTED SMOKE DETECTOR (SD=SUPPLY/RD=RETURN)</p> <p>ROUND DUCT TAG INDICATING DIAMETER</p> <p>RECTANGULAR DUCT TAG INDICATING INTERNAL DUCT DIMENSIONS.</p> <p>FLAT OVAL DUCT TAG INDICATING INTERNAL DUCT DIMENSIONS</p>	<p>DIRECTION OF FLOW</p> <p>CONTROL VALVE</p> <p>THREE-WAY CONTROL VALVE</p> <p>SHUTOFF VALVE</p> <p>CHECK VALVE</p> <p>BALANCING VALVE WITH PRESSURE PORTS</p> <p>TRIPLE DUTY VALVE WITH PRESSURE PORTS</p> <p>STRAINER</p> <p>STRAINER WITH BLOWDOWN VALVE</p> <p>RELIEF / SAFETY VALVE</p> <p>SOLENOID VALVE</p> <p>PRESSURE REDUCING VALVE</p> <p>GAS PRESSURE REGULATOR</p> <p>THERMOSTATIC MIXING VALVE</p> <p>PIPE ANCHOR</p> <p>EXPANSION JOINT</p> <p>PIPE GUIDE</p> <p>PIPING SUPPORT</p> <p>F & T TRAP</p> <p>BUCKET TRAP</p> <p>THERMOSTATIC TRAP</p> <p>BACKFLOW PREVENTER</p> <p>PRESSURE GAUGE</p> <p>THERMOMETER</p> <p>PRESSURE AND TEMPERATURE TEST PLUG</p> <p>UNION</p> <p>FLANGE CONNECTION</p> <p>VACUUM RELIEF VALVE</p> <p>AUTOMATIC AIR VENT</p> <p>MANUAL AIR VENT</p> <p>PRESSURE / VACUUM SWITCH</p> <p>CLEANOUT</p> <p>CAP</p> <p>ELBOW UP</p> <p>ELBOW DOWN</p> <p>TEE UP</p> <p>TEE DOWN</p> <p>ELBOW UP WITH SHUT-OFF VALVE (SOV)</p> <p>ELBOW DOWN WITH SHUT-OFF VALVE (SOV)</p> <p>TEE UP WITH SHUT-OFF VALVE (SOV)</p> <p>TEE DOWN WITH SHUT-OFF VALVE (SOV)</p> <p>REDUCER</p> <p>RECIRCULATION PUMP</p> <p>P-TRAP</p> <p>GAS COCK</p> <p>TOP BEAM CLAMP</p> <p>TRAPEZE HANGER</p> <p>FLEXIBLE CONNECTION</p>	
ANNOTATION		HVAC CONTROL DEVICES	
<p>MECHANICAL PLAN NOTE CALLOUT</p> <p>MECHANICAL EQUIPMENT DESIGNATION (CONTRACTOR FURNISHED AND INSTALLED UNLESS NOTED OTHERWISE)</p> <p>CONNECTION POINT OF NEW WORK TO EXISTING</p> <p>DETAIL REFERENCE. UPPER NUMBER INDICATES DETAIL NUMBER LOWER NUMBER INDICATES SHEET NUMBER</p> <p>SECTION CUT DESIGNATION</p>	<p>HWP HEATING WATER PUMP</p> <p>IN WC INCHES OF WATER COLUMN</p> <p>L LOUVER</p> <p>LAT LEAVING AIR TEMPERATURE</p> <p>LDB LEAVING DRY BULB LOW PRESSURE</p> <p>LP LEAVING WET BULB LEAVING WATER TEMPERATURE</p> <p>LWT LEAVING WATER TEMPERATURE</p> <p>MAU MAKE-UP AIR UNIT</p> <p>MAX MAXIMUM</p> <p>MBH 1000 BTU PER HOUR</p> <p>MD MOTORIZED DAMPER</p> <p>MFR MANUFACTURER</p> <p>MIN MINIMUM</p> <p>NA NOT APPLICABLE</p> <p>NC NORMALLY CLOSED</p> <p>NO NORMALLY OPEN</p> <p>NOM NOMINAL</p> <p>NOISE CRITERIA</p> <p>NF NON-FUSED</p> <p>NOT IN CONTRACT</p> <p>OA OUTSIDE AIR</p> <p>PICV PRESSURE INDEP. CONTROL VALVE</p> <p>PROVIDE FURNISH AND INSTALL</p> <p>QTY QUANTITY</p> <p>RA RETURN AIR</p> <p>RC ROOM CRITERIA</p> <p>RD RETURN DUCT</p> <p>REA RELIEF AIR</p> <p>RF RETURN FAN</p> <p>RFR REFRIGERANT</p> <p>RH RELATIVE HUMIDITY</p> <p>RH ROOF HOOD</p> <p>RPM REVOLUTIONS PER MINUTE</p> <p>RTU ROOFTOP UNIT</p> <p>SA SUPPLY AIR</p> <p>SCP STEAM CONDENSATE PUMP</p> <p>SD SMOKE DUCT DETECTOR</p> <p>SD SUPPLY DUCT</p> <p>SF SUPPLY FAN</p> <p>SH SENSIBLE HEAT CAPACITY</p> <p>SOW SCOPE OF WORK</p> <p>SP STATIC PRESSURE</p> <p>ST STEAM TRAP</p> <p>STM STEAM</p> <p>TBD TO BE DETERMINED</p> <p>TEMPERATURE CONTROLS CONTRACTOR</p> <p>TEMPERATURE CONTROL PANEL</p> <p>TF TRANSFER FAN</p> <p>TFA TO FLOOR ABOVE</p> <p>TFB TO FLOOR BELOW</p> <p>TH TOTAL HEAT CAPACITY</p> <p>TSP TOTAL STATIC PRESSURE</p> <p>TEMPERATURE TRANSMITTAL</p> <p>TYP TYPICAL</p> <p>UF UNDERFLOOR</p> <p>UG UNDERGROUND</p> <p>UIS UNDERSLAB</p> <p>UH UNIT HEATER</p> <p>UNO UNLESS NOTED OTHERWISE</p> <p>VAV VARIABLE AIR VOLUME</p> <p>VEL VELOCITY</p> <p>VFD VARIABLE FREQUENCY DRIVE</p> <p>VRF VARIABLE REFRIGERANT FLOW</p> <p>VRV VARIABLE REFRIGERANT VOLUME</p> <p>W/ WITH</p> <p>W/O WITHOUT</p> <p>WB WET BULB</p> <p>WC WATER COLUMN</p> <p>WPD WATER PRESSURE DROP</p> <p>XP EXPLOSION PROOF</p>	<p>⊕ HUMIDISTAT</p> <p>⊖ THERMOSTAT</p> <p>CO CARBON MONOXIDE SENSOR</p> <p>CO2 CARBON DIOXIDE SENSOR</p> <p>DP DIFFERENTIAL PRESSURE SENSOR</p> <p>FS FLOW SWITCH</p> <p>HS HUMIDITY SENSOR</p> <p>PS PULL STATION</p> <p>RT REMOTE TESTING STATION WITH INDICATING LIGHT</p> <p>SP STATIC PRESSURE</p> <p>TS TEMPERATURE SENSOR</p>	
ABBREVIATIONS		ALL DUCT DIMENSIONS SHOWN ON DRAWINGS ARE INSIDE DIMENSIONS. REFER TO DUCTWORK SPECIFICATIONS FOR DUCTWORK INSULATION AND LINER INFORMATION.	

BAI Architecture

800 South Figueroa St.
 Los Angeles, CA 90017
 212.537.1090

2150033580
 NJ CORPORATE NO: 24282794340
 EXPIRES 8/31/2022

CONSULTANTS:

HENDERSON ENGINEERS
 8345 LENEZA DRIVE, SUITE 300
 LENOEXA, KS 66214
 TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
 JOSHUA N. HOVER

24282794340

STATE OF NEW JERSEY
 No. 24282794340
 LICENSED PROFESSIONAL ENGINEER

DATE: 04/06/2022

2	2022-04-06	ISSUED FOR CONSTRUCTION
1	2022-02-23	FIELD NOTICE 1
1	2021-11-15	PERMIT/BID SET

SHAKE SHACK

Shake Shack #1407 - Newport Centre


30 MALL DR WEST, UNIT VC17A
 JERSEY CITY, NJ 07310
 SHACK #1407

ISSUE FOR CONSTRUCTION SET

MECHANICAL GENERAL INFORMATION

DRAWN BY: MJW
 CHECKED BY: MDM
 JOB NO: 2150033580

M001

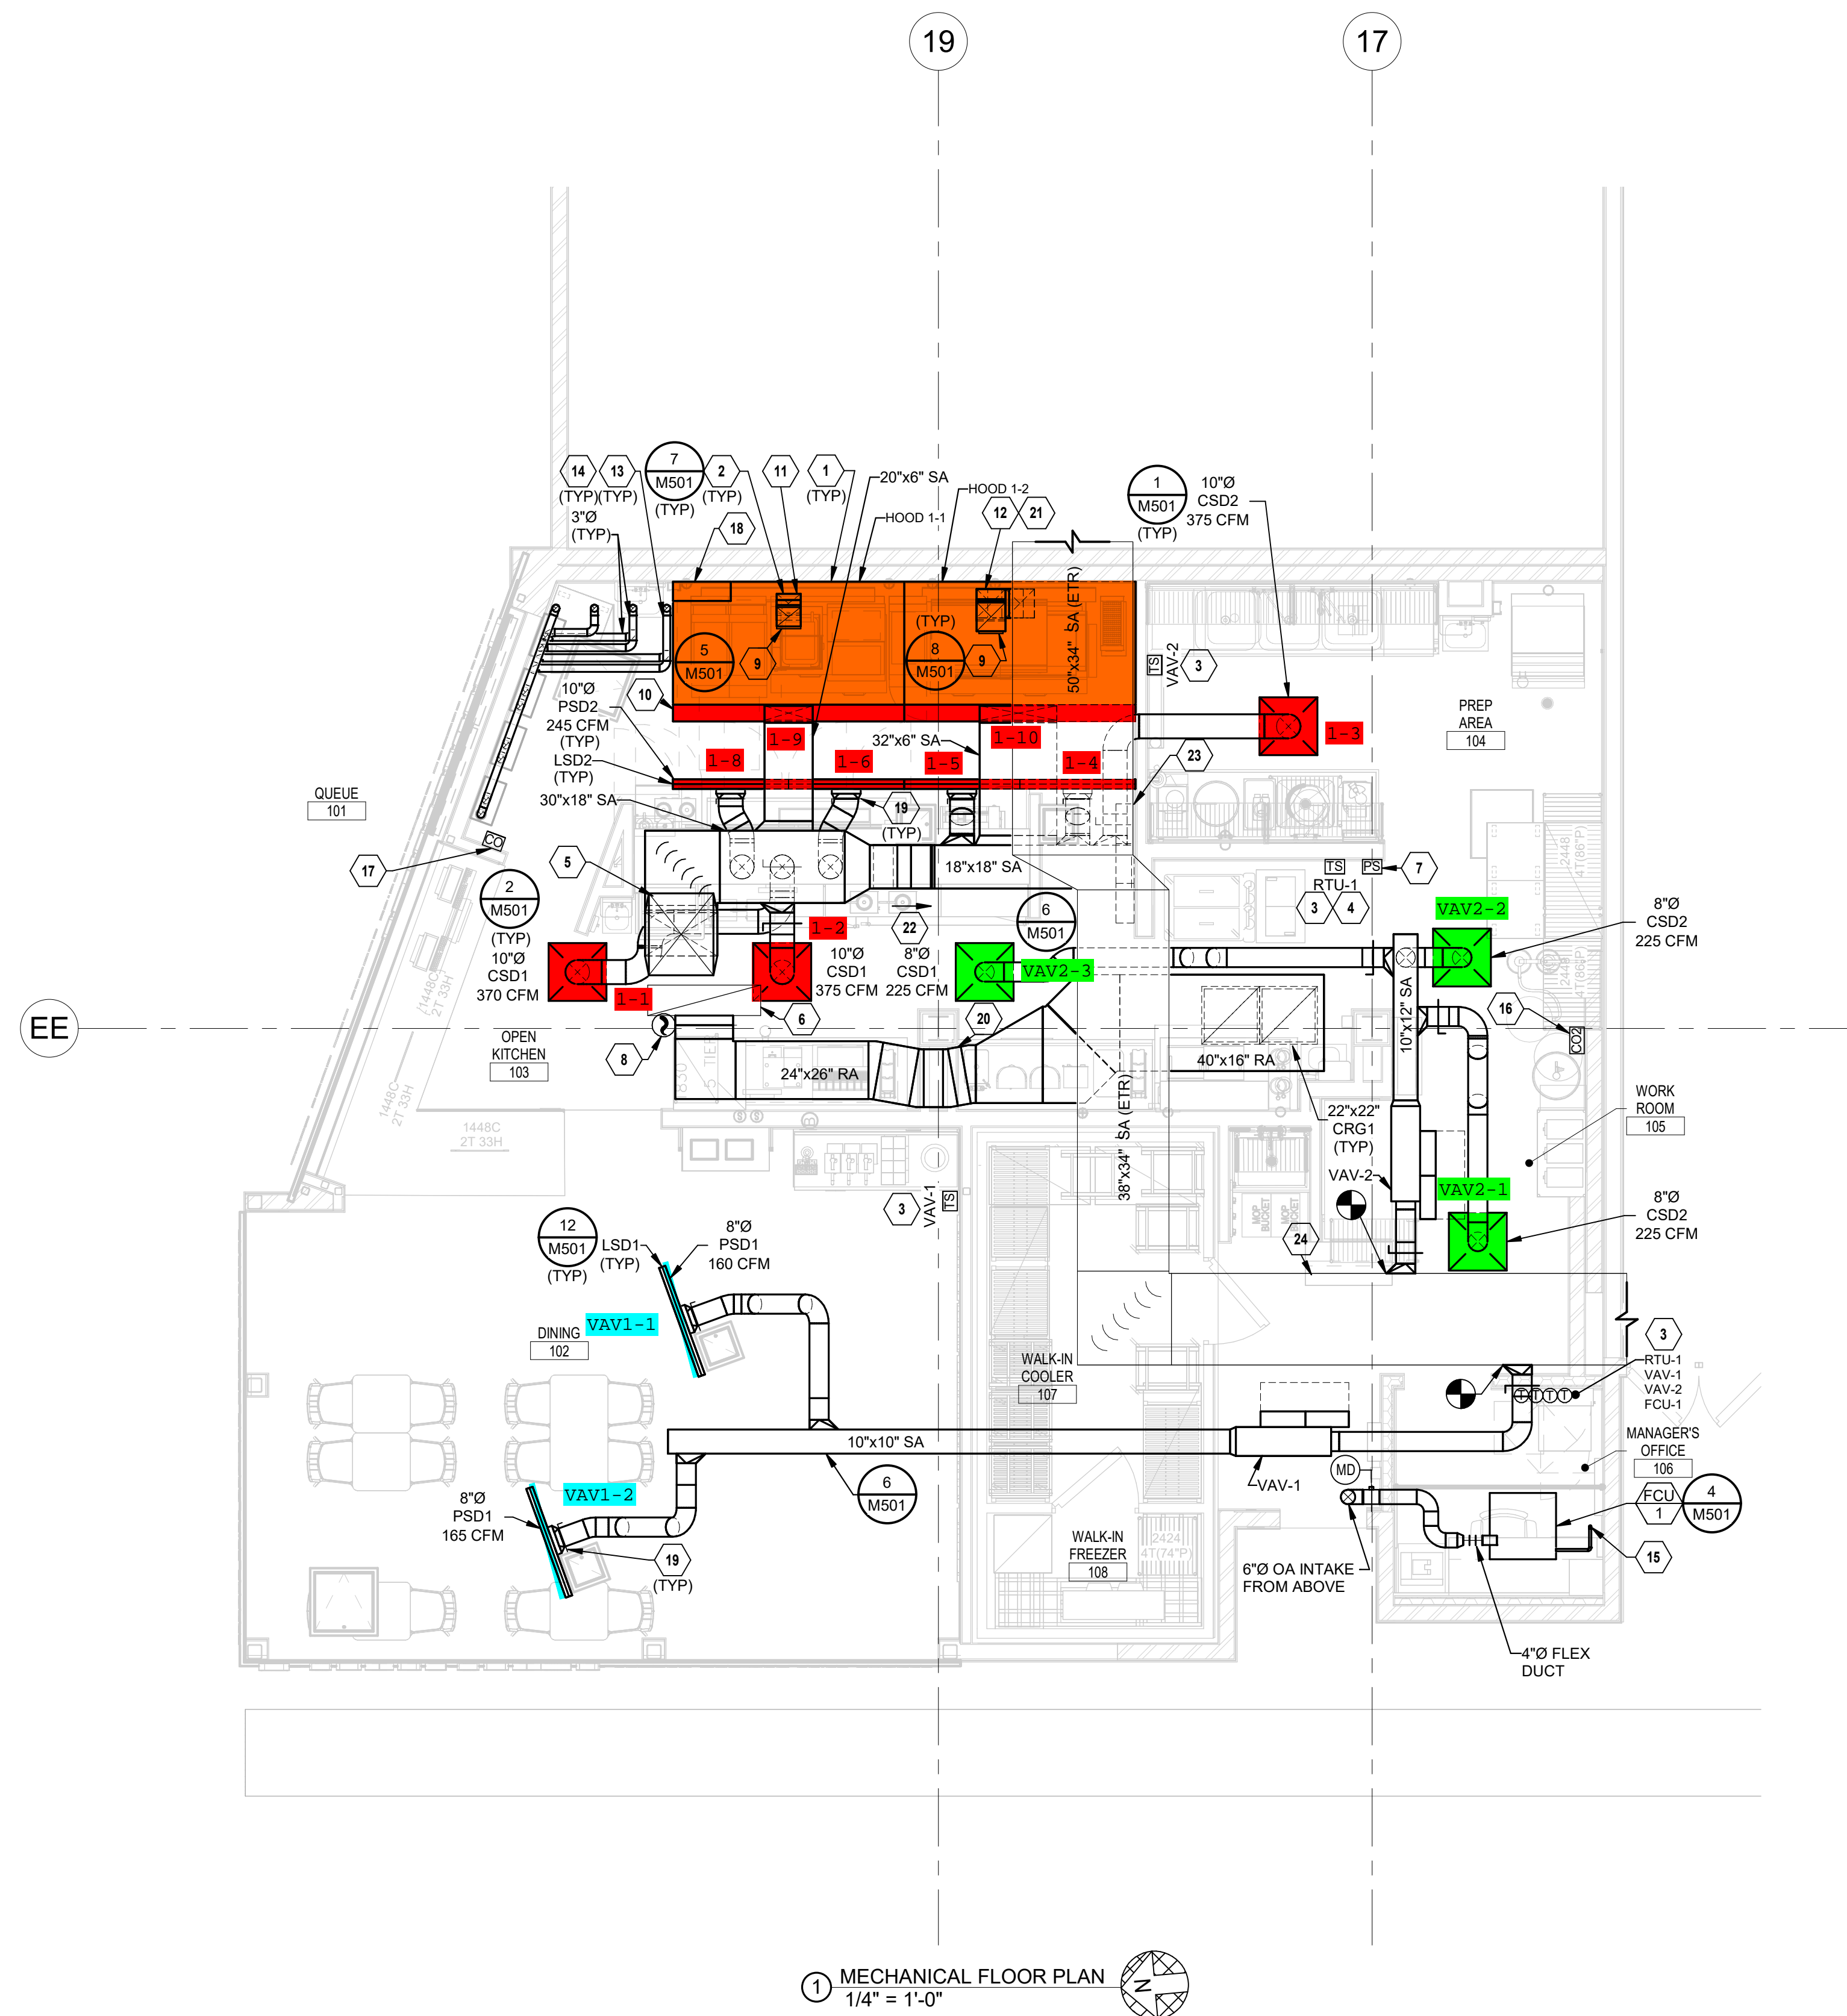

MECHANICAL GENERAL NOTES:

- DO NOT ROUTE ANY DUCTWORK OR PIPING ABOVE ELECTRICAL PANELS.
- REFER TO SHEET M001 FOR ADDITIONAL GENERAL NOTES AND REQUIREMENTS.
- REFER TO DETAILS AND SCHEDULES SHEETS FOR FURTHER INFORMATION.
- MOUNT ALL THERMOSTATS AND SENSORS CONTROLLING HVAC EQUIPMENT AT 48" AFF UNLESS OTHERWISE NOTED.

MECHANICAL PLAN NOTES:


- TYPE I HOODS SHALL BE FURNISHED COMPLETE WITH INTERNALLY PIPED FIRE SUPPRESSION SYSTEM AND EXTERNAL FOAM SUPPLY BOTTLES WITH REMOTE PULL CONTROLS AND IN COMPLIANCE WITH NFPA 96, DIVISION 23 SHALL COORDINATE COMPLETE INSTALLATION WITH FIRE PROTECTION CONTRACTOR TO MEET APPROVAL OF LOCAL INSPECTOR AND CODE COMPLIANCE INCLUDING TESTING.
- TYPE I GREASE HOOD EXHAUST DUCTWORK SHALL BE MINIMUM 18 GAUGE STEEL OR MINIMUM 18 GAUGE STAINLESS STEEL WITH LIQUID TIGHT WELDS. INSTALL ACCESS PANELS FOR CLEANING AS REQUIRED BY NFPA 96 AND LOCAL CODES. TRANSITION GREASE DUCTWORK AS REQUIRED TO HOOD AND FAN CONNECTIONS. PROVIDE 45° MAX OFFSETS AS REQUIRED TO COORDINATE WITH STRUCTURE. PROVIDE RADIUS ELBOWS WITHOUT TURNING VANES. SLOPE HORIZONTAL GREASE DUCT BACK TOWARDS HOOD AT MINIMUM OF 1/4" PER LINEAL FOOT. GREASE DUCTS SHALL BE CONTAINED IN A UL APPROVED GREASE DUCT WRAP SYSTEM.
- MOUNT THERMOSTATS AND TEMPERATURE SENSOR(S) ON WALL. LOCATE THERMOSTAT IN OFFICE AND TEMPERATURE/HUMIDITY SENSORS IN ZONE. THERMOSTATS AND SENSOR(S) SHALL BE LABELED TO MATCH THE UNIT TAG AND CORRESPOND TO THE ELECTRICAL LEGEND IN THE ELECTRICAL PANELBOARD SERVING THE EQUIPMENT. COORDINATE COLOR WITH ARCHITECT.
- COMBINATION TEMPERATURE SENSOR AND HUMIDITY SENSOR.
- PROVIDE SA DUCT THROUGH ROOF, FULL SIZE OF UNIT OPENING, AND CONNECT TO UNIT WITH FLEXIBLE CONNECTOR.
- PROVIDE RA DUCT THROUGH ROOF, FULL SIZE OF UNIT OPENING, AND CONNECT TO UNIT WITH FLEXIBLE CONNECTOR.
- INSTALL HOOD FIRE SUPPRESSION MANUAL PULL STATION COORDINATE EXACT LOCATION AND REQUIREMENTS WITH FIRE SUPPRESSION SYSTEM INSTALLER AND THE AUTHORITY HAVING JURISDICTION.
- INSTALL DUCT SMOKE DETECTOR IN RETURN AIR PLENUM.
- INSTALL 'DUCTMATE ULTIMATE DOOR' GREASE DUCT ACCESS PANELS FOR CLEANING IN LOCATION SHOWN AT A MINIMUM AND AS REQUIRED BY NFPA 96 AND LOCAL CODES.
- REFER TO HALTON SHEETS FOR INFORMATION REGARDING HOOD MAKEUP AIR PLENUM.
- 10"x8" GREASE DUCT UP THRU ROOF TO KEF-1, REF M150 FOR CONTINUATION. PROVIDE TRANSITION AS REQUIRED TO MAKE FULL SIZE CONNECTION TO FAN.
- 12"x12" GREASE DUCT UP THRU ROOF TO KEF-2, REF M150 FOR CONTINUATION. PROVIDE TRANSITION AS REQUIRED TO MAKE FULL SIZE CONNECTION TO FAN.
- PROVIDE COMBUSTION AIR AND EXHAUST PIPE AND ROUTE TO CONCENTRIC VENT THROUGH ROOF.
- PROVIDE WITH CONCENTRIC VENT ITEM NUMBER 397006.
- REFRIGERANT PIPING UP TO CONDENSING UNIT ON ROOF. 2-PIPE REFRIGERANT LINESHOWN AS SINGLE PIPE FOR CLARITY. REFERENCE MANUFACTURER FOR PIPE SIZES AND FITTINGS.
- PROVIDE ANALOX AX60 OR APPROVED EQUAL CARBON DIOXIDE SENSOR WITH REMOTE ALARM REPEATER TO BE MOUNTED AT 18" AFF. PROVIDE CARBON DIOXIDE SENSOR WITH RELAY. RELAY SHALL BE INTERLOCKED WITH THE BUILDING FIRE ALARM SYSTEM. THE SENSOR SHALL BE EQUIPPED WITH A LOCAL AUDIBLE AND VISUAL ALARM. THE LOW LEVEL ALARM SHALL ACTIVATE THE LOCAL AUDIBLE AND VISUAL ALARM. THE HIGH LEVEL ALARM SHALL ACTIVATE RELAY. INSTALL SENSOR PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- CARBON MONOXIDE DETECTOR FURNISHED BY OWNER. INSTALL AT 5'-0" AFF. COORDINATE FINAL LOCATION WITH OWNER REPRESENTATIVE.
- INSTALL HOOD CONTROL PANEL ABOVE THE HOOD IN THE PLENUM AREA PER MANUFACTURER'S INSTRUCTIONS. REFER TO HALTON DRAWINGS FOR MORE INFORMATION.
- PROVIDE SUPPLY PLENUM BOX WITH DAMPER AND WORM GEAR OPERATOR.
- ROUTE AND CONSTRUCT RETURN AIR DUCT BETWEEN STRUCTURAL JOISTS AND ROUTE AROUND BUILDING COLUMN AS SHOWN ON PLANS. TRANSITION DUCT TO ROUTE UNDERNEATH EXISTING DUCT THROUGH KITCHEN SPACE.
- ROUTE EA DUCT FROM HOOD COLLAR AROUND THE EXISTING TO REMAIN DUCT THROUGH KITCHEN SPACE AS REQUIRED.
- TRANSITION AND SLOPE DUCT DOWN AS SHOWN ON PLANS. ROUTE DUCT UNDERNEATH EXISTING DUCT THROUGH KITCHEN SPACE.
- INSTALL HOOD ANSUL PANELS AT 8'-0" A.F.F. PER MANUFACTURER'S INSTRUCTIONS. REFER TO HALTON DRAWINGS FOR MORE INFORMATION.
- CONTRACTOR TO CAP OFF EXISTING LOCATION(S) ON MAIN EXISTING DUCT FROM BRANCH DUCT FROM PREVIOUS OPERATION AS REQUIRED.

CONSULTANTS:

HENDERSON
ENGINEERS
8345 LENEXA DRIVE, SUITE 300
LENEXA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003580
N.J. CORPORATE NO. 242427943400
EXPIRES 8/31/2022

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
2462564200

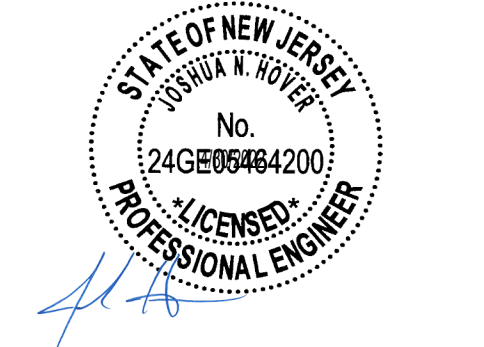

DATE 04/06/2022

2	2022-04-06	ISSUED FOR CONSTRUCTION
1	2022-02-23	FIELD NOTICE 1
	2021-11-15	PERMIT/BD SET

NO.	BY	DATE	DESCRIPTION
-----	----	------	-------------



Shake Shack #1407 - Newport Centre

30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR CONSTRUCTION SET

MECHANICAL FLOOR PLAN

DRAWN BY: MJW
CHECKED BY: MDM
JOB NO: 2150003580

M101

ALL GREASE DUCT TO BE WATER TESTED BY ENVIROMATIC AT MECHANICAL CONTRACTOR'S EXPENSE. CONTACT OWNER'S NATIONAL ACCOUNT VENDOR.

ENVIROMATIC
DON PFLEDERER
1.800.325.8476
inspections@enviromatic.com

THE BUILDINGS HVAC SYSTEMS SHALL BE BALANCED BY NATIONAL TAB (NO EXCEPTIONS) AND CONTRACTED BY THE GENERAL CONTRACTOR.


CONTACT:
WILL TURNBOUGH
will@natonaltab.com
855-682-6822 ext704

MECHANICAL GENERAL NOTES:

1. ALL VENT STACKS SHALL BE NO LESS THAN 12" FROM PARAPET, AT LEAST 10 FEET FROM OUTSIDE AIR INTAKES, AND ABOVE ROOF SURFACE 6" MINIMUM TO FULL HEIGHT OF PARAPET, WHICHEVER IS GREATER. CONTRACTOR SHALL PROVIDE BRACING AS SPECIFIED.
2. COORDINATE EXACT EQUIPMENT LOCATIONS WITH OTHER TRADES PRIOR TO INSTALLATION.
3. REFER TO SHEET M001 FOR ADDITIONAL GENERAL NOTES.
4. REFER TO DETAILS AND SCHEDULES SHEETS FOR FURTHER INFORMATION.

MECHANICAL PLAN NOTES:

1. AREA RESERVED FOR KITCHEN REFRIGERATION CONDENSER(S) PROVIDED BY THE KITCHEN EQUIPMENT CONTRACTOR. COORDINATE EQUIPMENT LOCATION AND CONDENSER INSTALLATION WITH KITCHEN EQUIPMENT CONTRACTOR.
2. MAINTAIN ALL OUTSIDE AIR INTAKES A MINIMUM OF 10'-0" RADIUS FROM EXHAUST, TYPICAL.
3. TURN DOWN 6" Ø INTAKE AND END OPEN OVER ROOF (MIN. 24") WITH INSECT SCREEN.
4. REFERENCE PLUMBING DRAWINGS FOR CONDENSATE DRAIN ROUTING AND TERMINATION REQUIREMENTS.
5. CONTRACTOR SHALL VERIFY WITH EQUIPMENT SUPPLIER EXACT ROUTING AND SIZE OF INSULATED REFRIGERANT PIPING. INSTALL PER MANUFACTURER'S INSTRUCTIONS.
6. CONTRACTOR TO COORDINATE WITH NATIONAL TAB TO PROVIDE UV-FIN INDOOR AIR PURIFICATION SYSTEM, MODEL PHI-PKG-24V. INSTALL IN UNIT BLOWER COMPARTMENT PER MANUFACTURER'S INSTRUCTIONS.

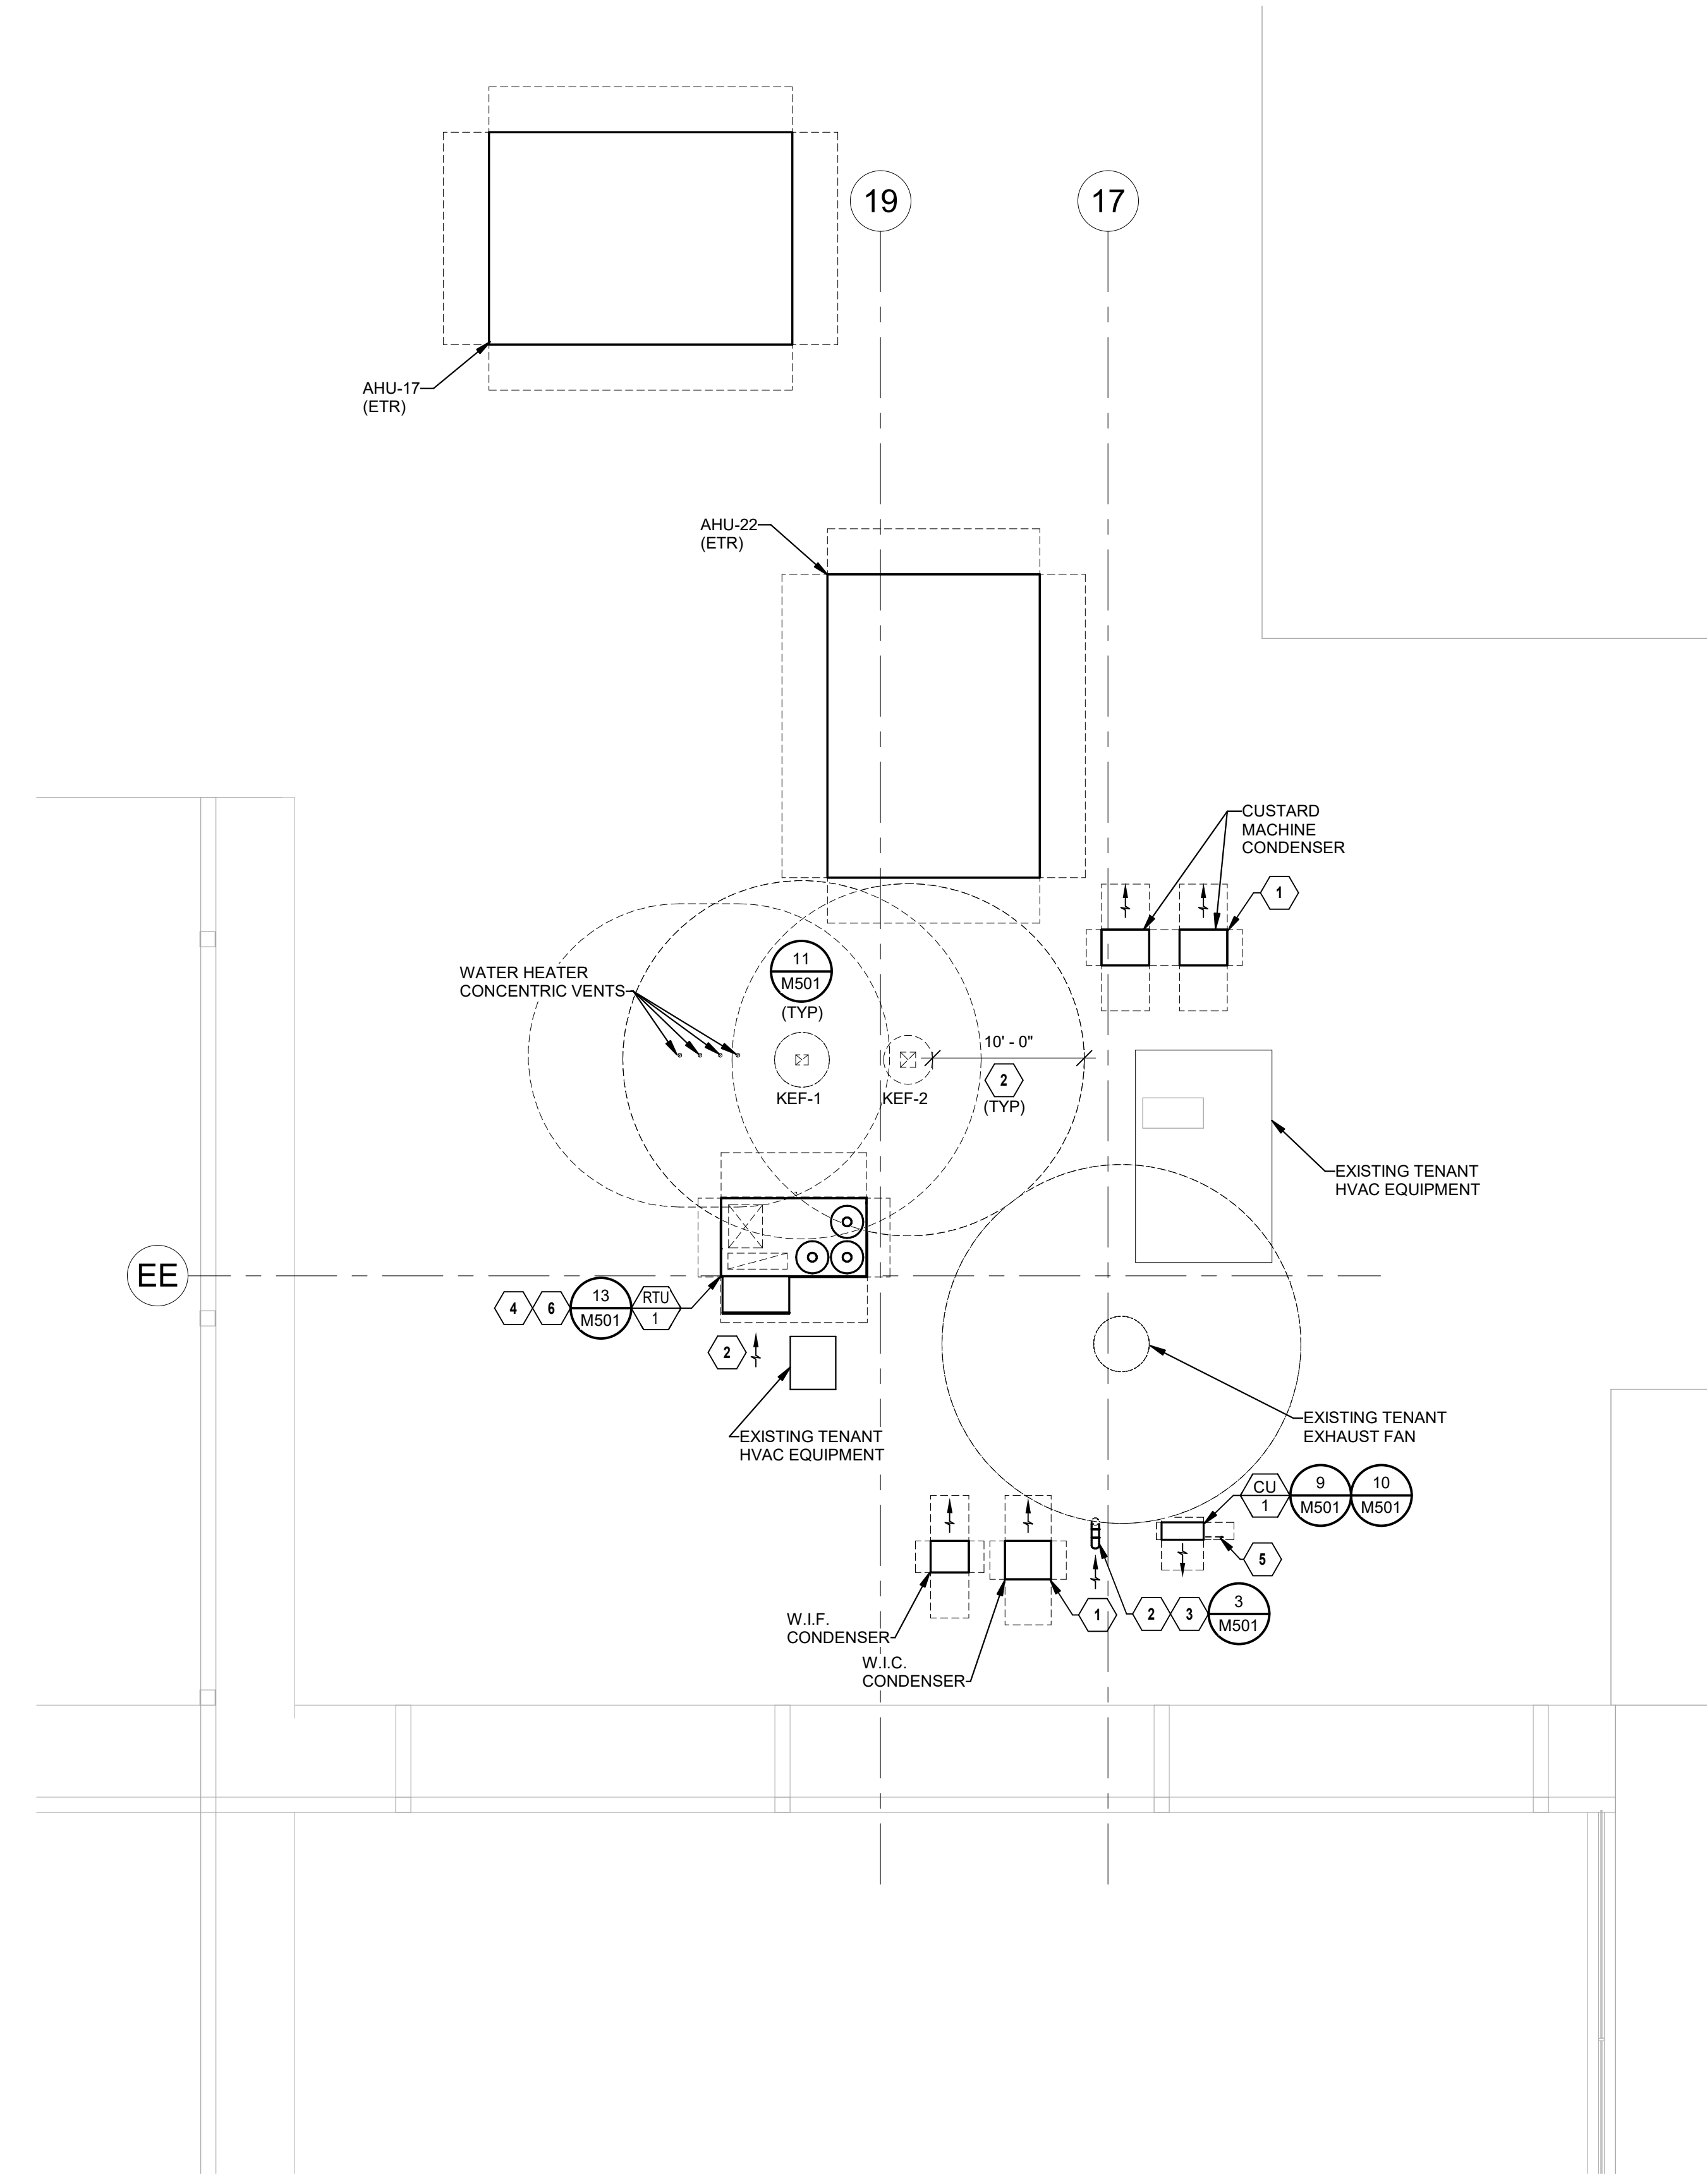


1 MECHANICAL ROOF PLAN
1/8" = 1'-0"

CONSULTANTS:

HENDERSON
ENGINEERS
8345 LENEKA DRIVE, SUITE 300
LENEKA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003880
N.J. CORPORATE NO. 24CA27943400
EXPIRES 8/31/2022

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
24GEB0648200



DATE 04/06/2022

2	2022-04-06	ISSUED FOR CONSTRUCTION
1	2022-02-23	FIELD NOTICE 1
	2021-11-15	PERMIT/BID SET

NO.	BY	DATE	DESCRIPTION
-----	----	------	-------------



Shake Shack #1407 -
Newport Centre


30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR
CONSTRUCTION SET


MECHANICAL ROOF PLAN

DRAWN BY:	MJV
CHECKED BY:	MDM
JOB NO:	2150003880


M150

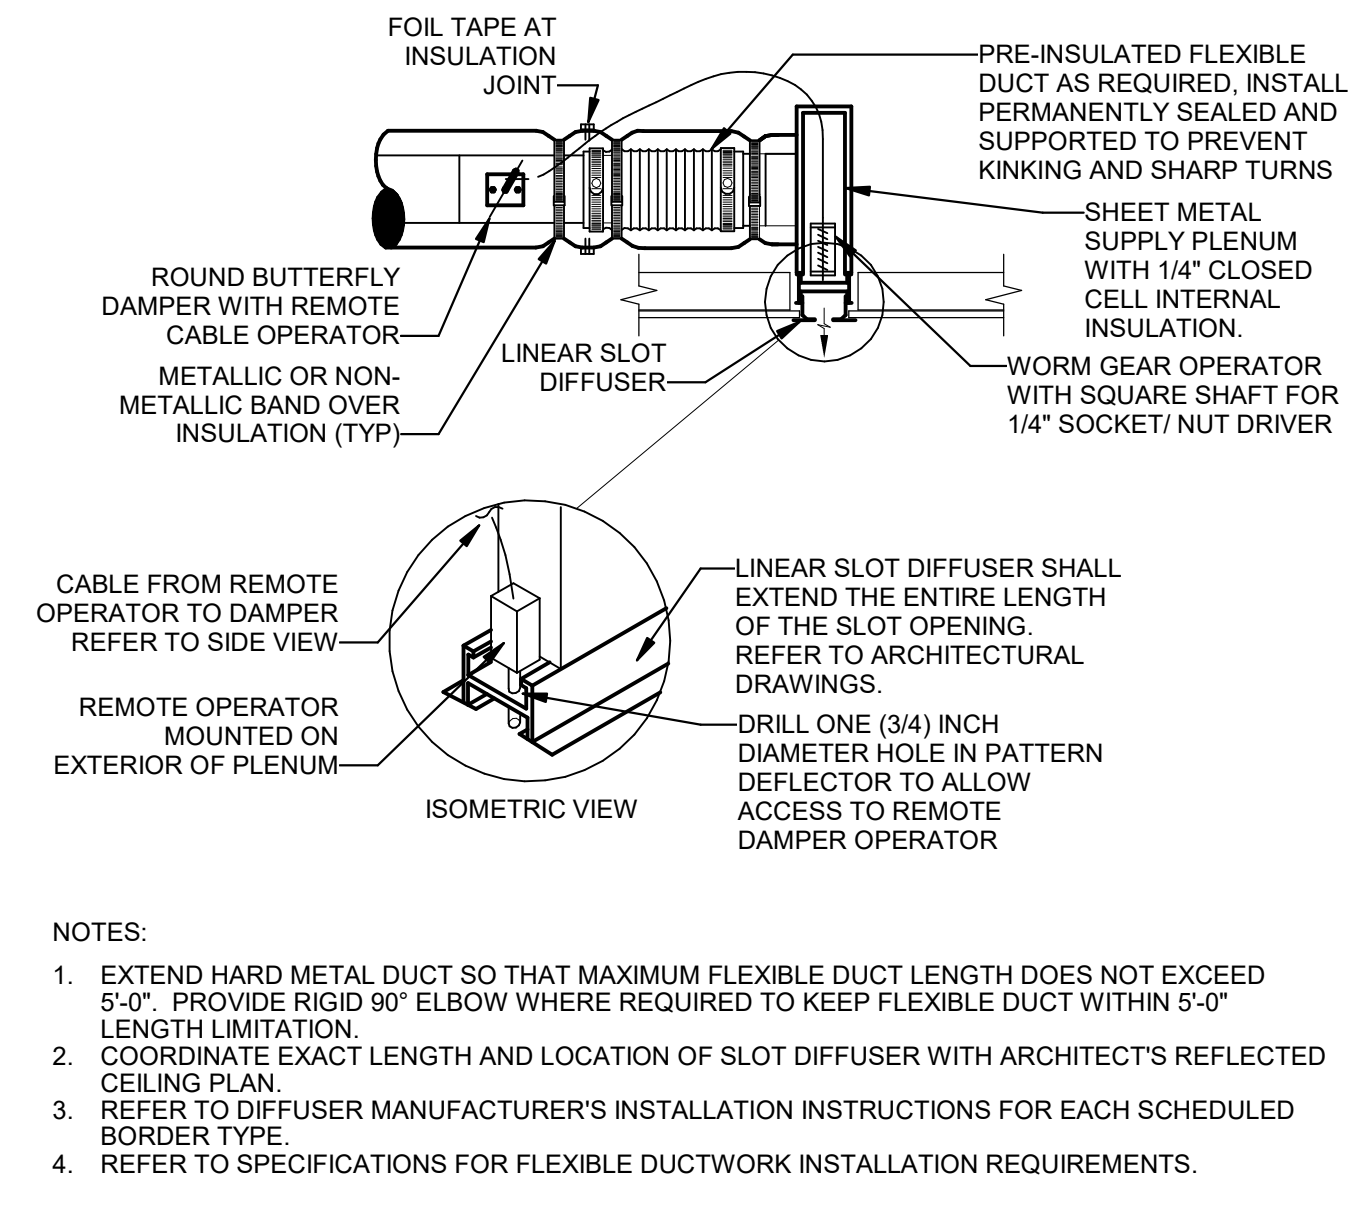


12 LINEAR SLOT DIFFUSER IN GYP CEILING DETAIL NTS

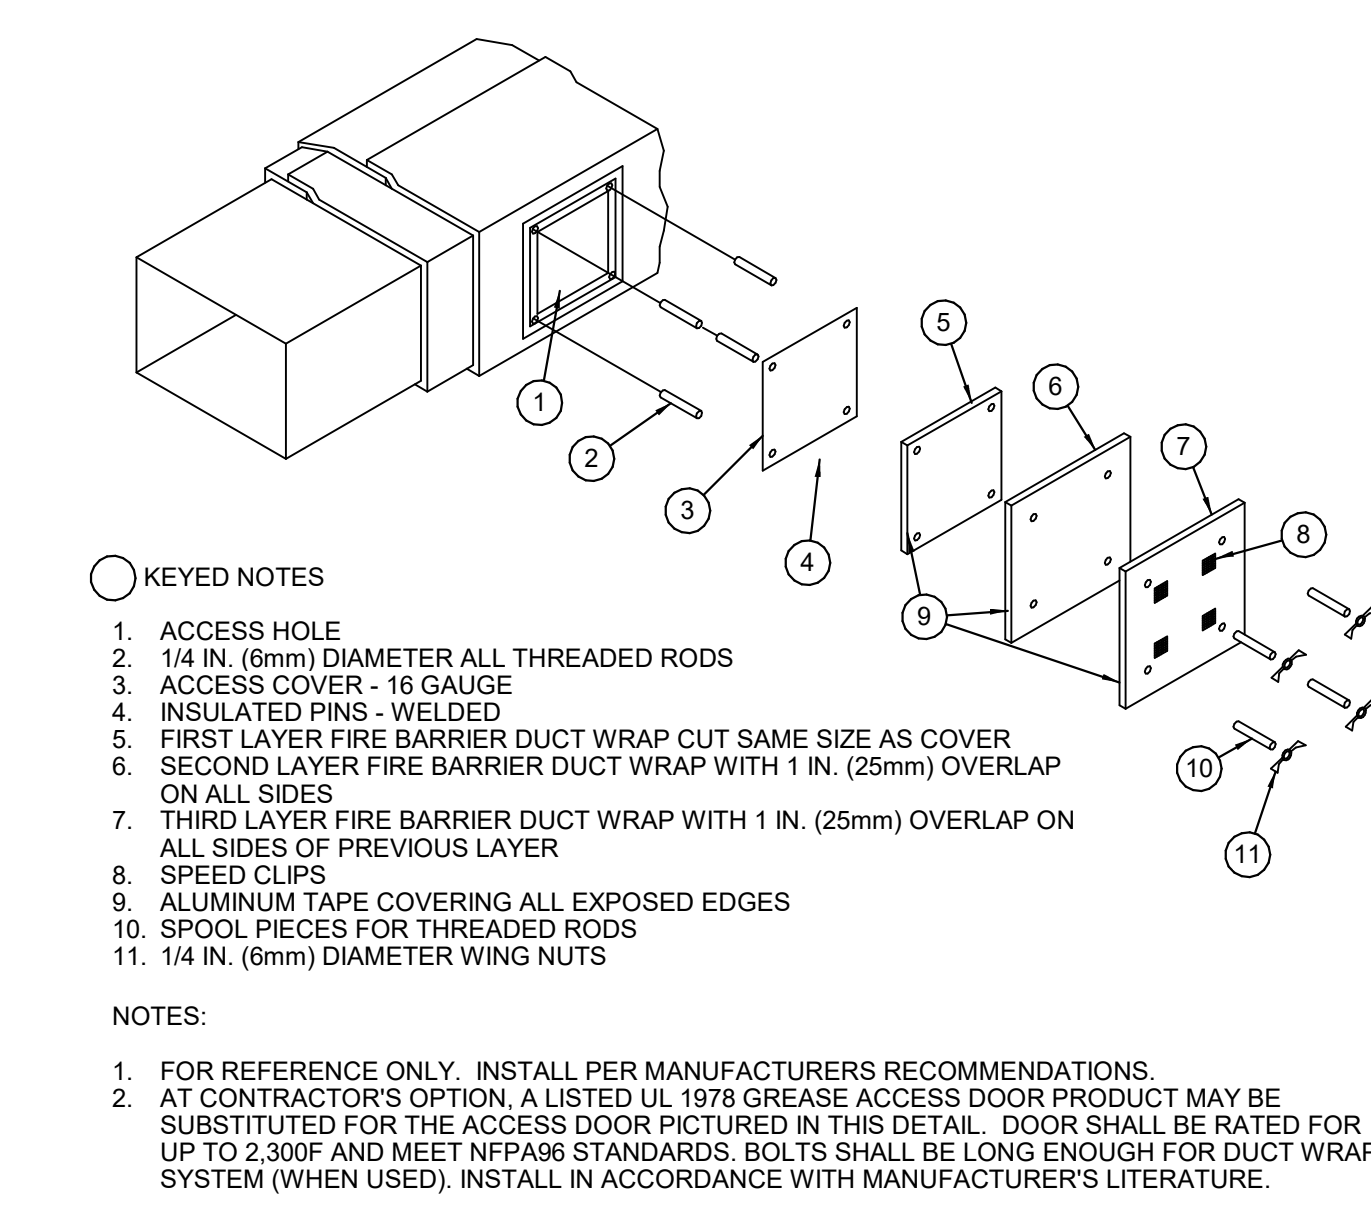


11 UPBLAST GREASE EXHAUST FAN DETAIL NTS

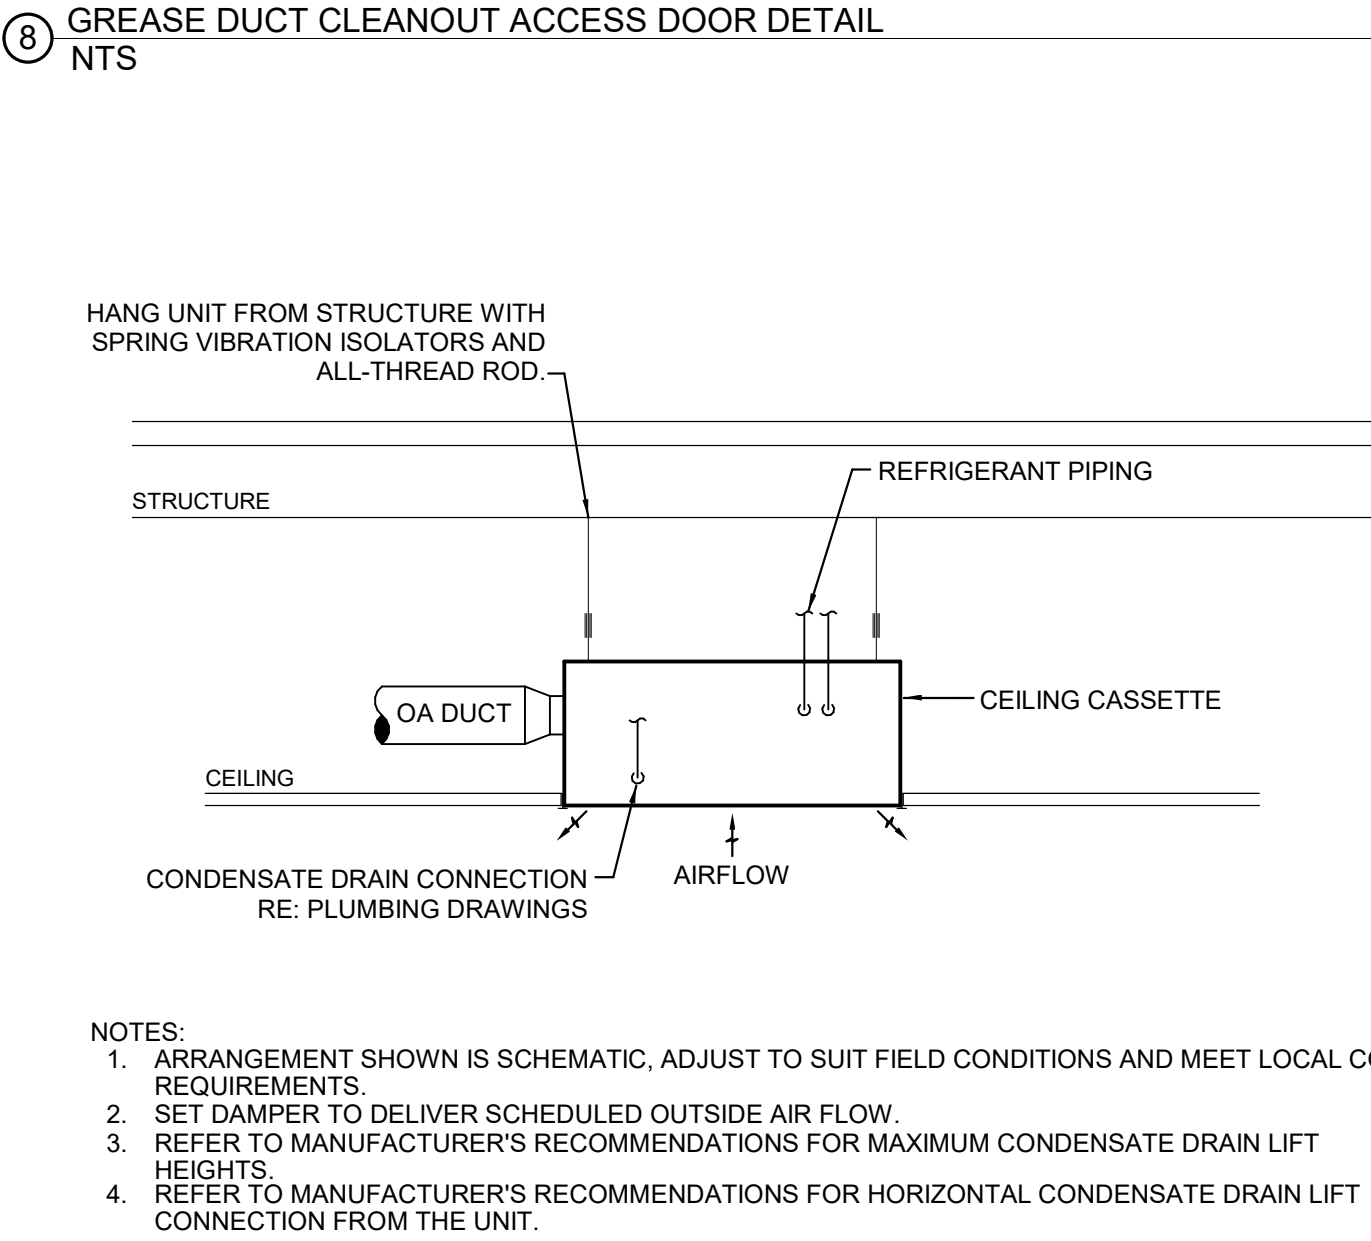


8 GREASE DUCT CLEANOUT ACCESS DOOR DETAIL NTS

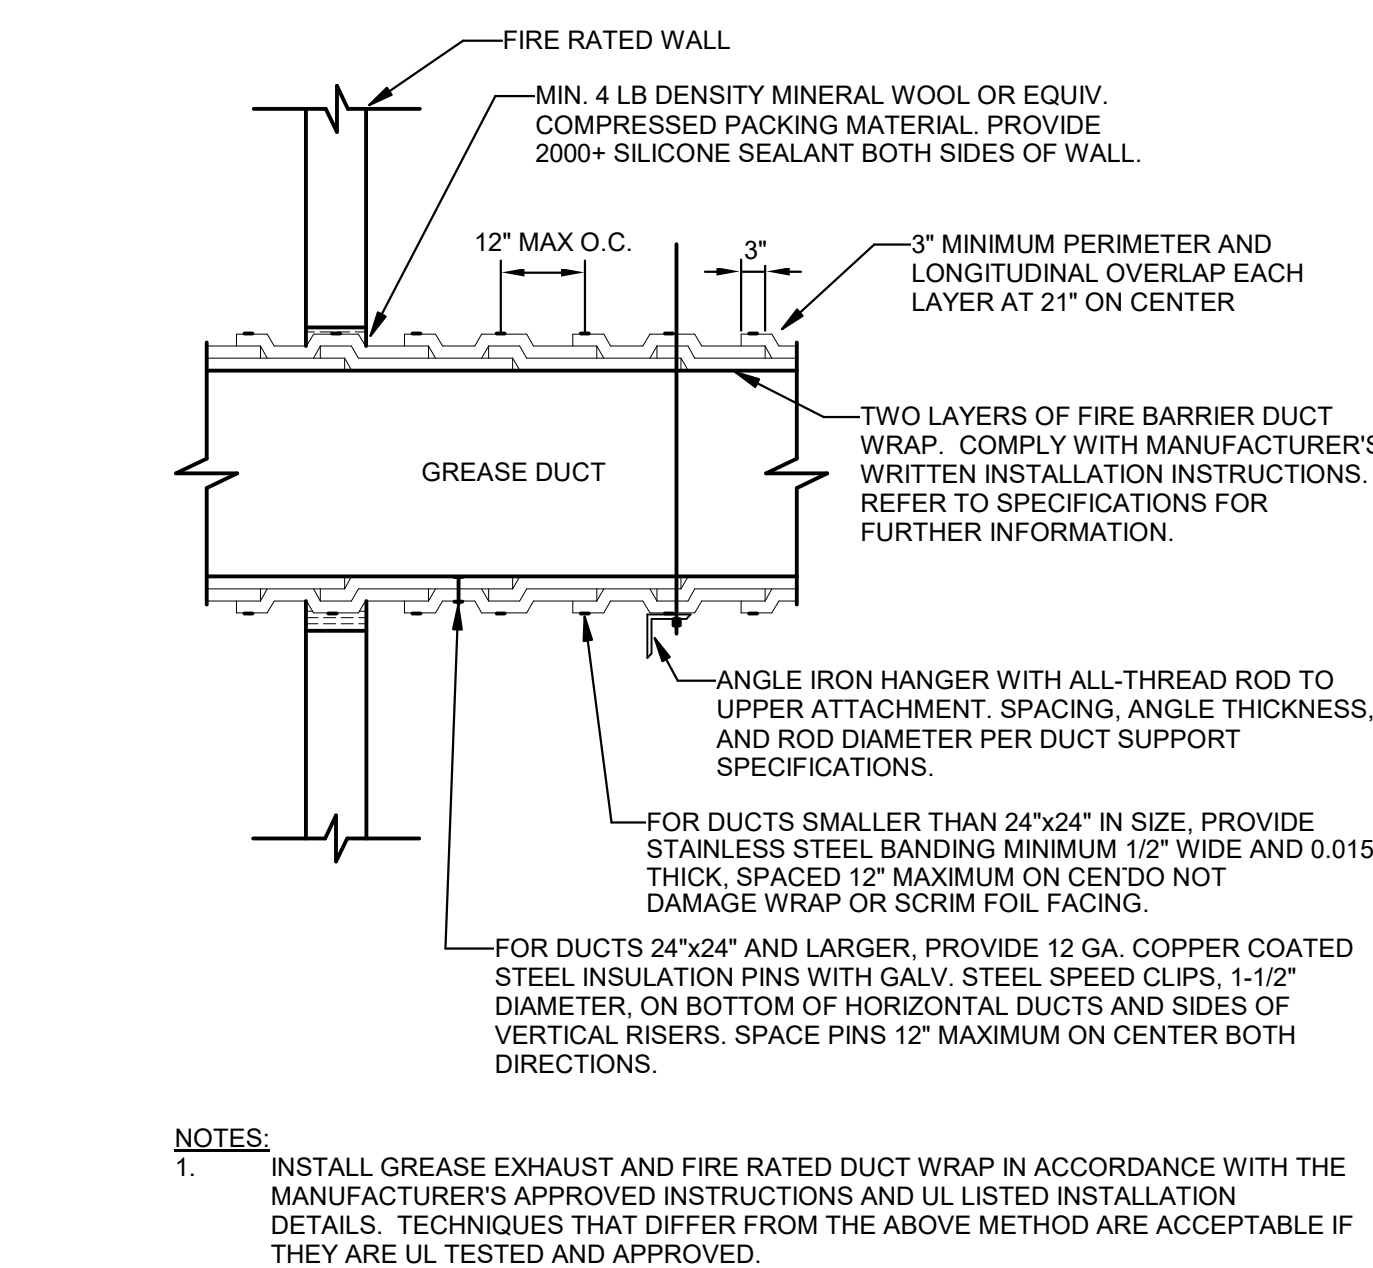

10 CONDENSING UNIT SUPPORT DETAIL NTS

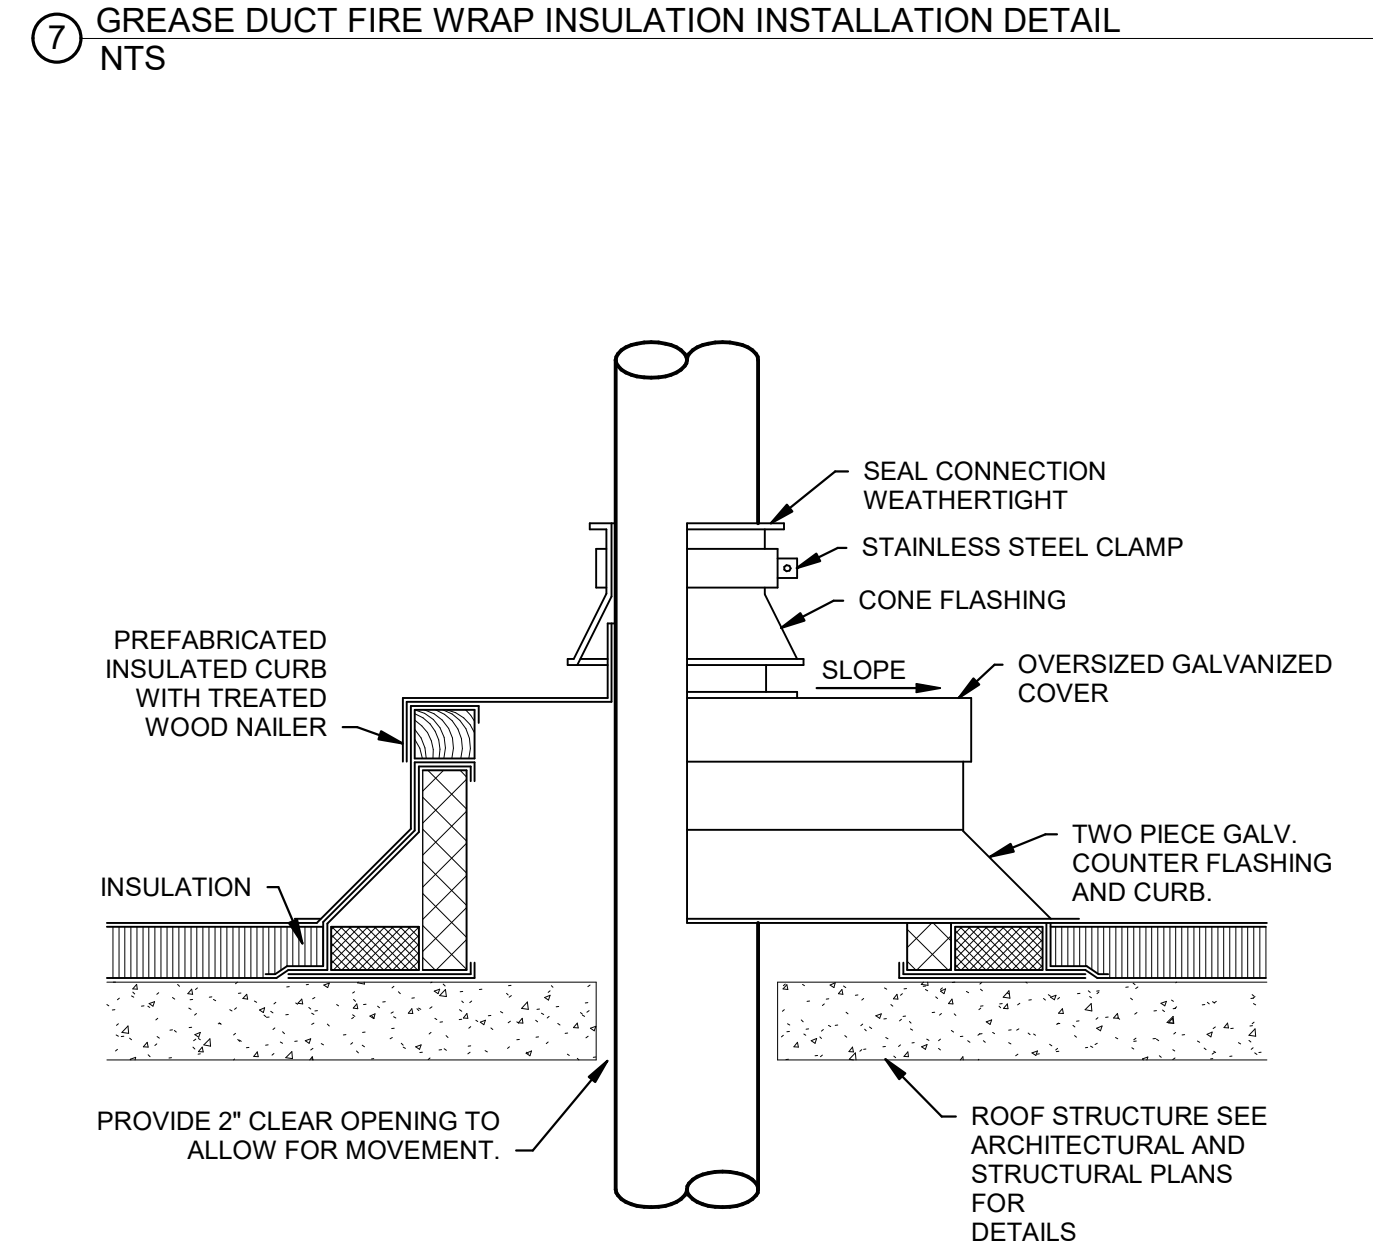


7 GREASE DUCT FIRE WRAP INSULATION INSTALLATION DETAIL NTS

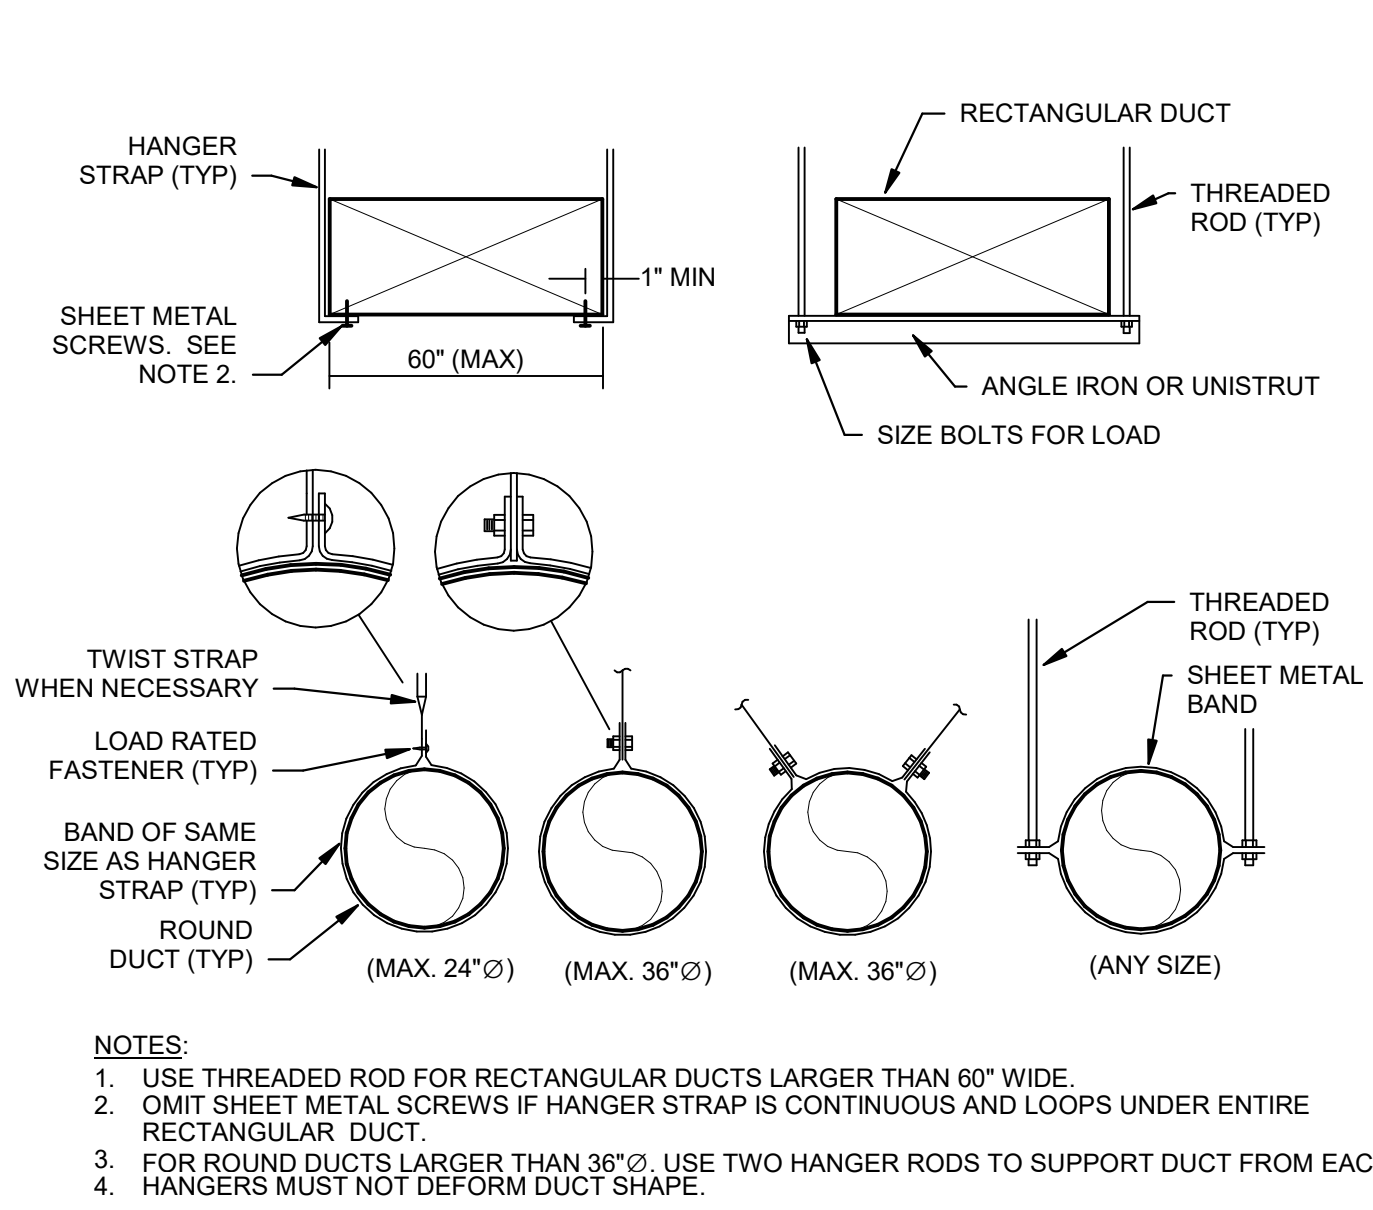

6 DUCT HANGER LOWER ATTACHMENT DETAILS NTS




3 HARD CEILING DIFFUSER DETAIL NTS

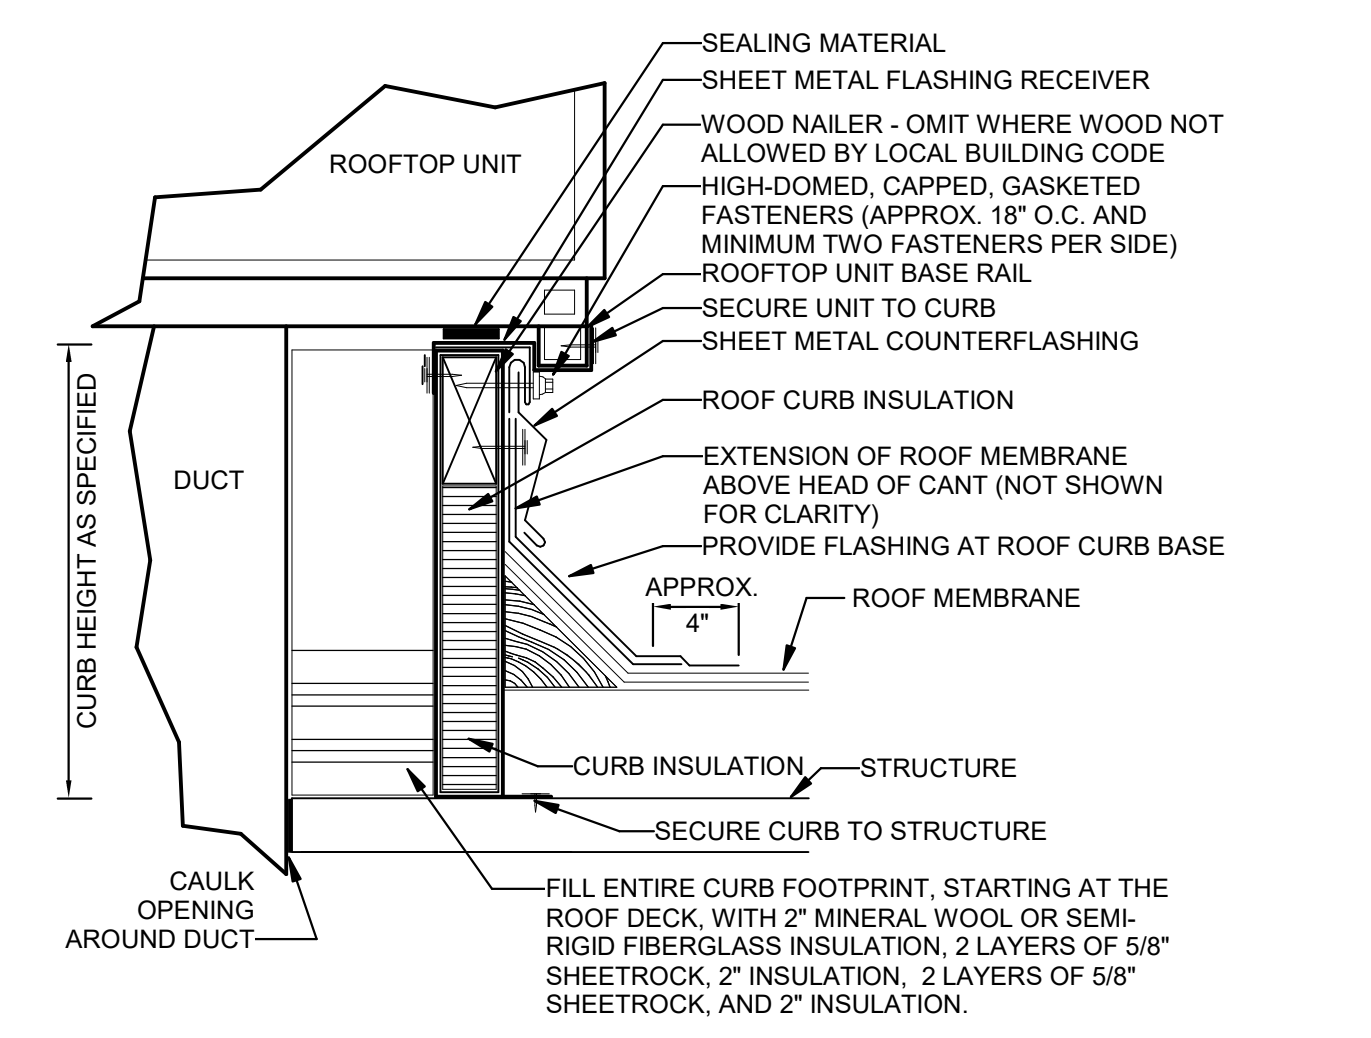


NOTES:
 1. CUT METAL DECKING TO ALLOW CURB INSTALLATION ON STEEL FRAMING. AFTER CURB IS SET IN PLACE, TRIM REMAINING METAL DECKING AND INSTALL WITHIN CURB. TACK WELD DECKING TO SUPPORT STEEL. DO NOT WELD INTERIOR DECKING TO ROOF CURB. PROVIDE ADDITIONAL CROSS FRAMING TO SUPPORT INTERIOR DECKING AND FILL MATERIAL AS REQUIRED.
 2. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS FOR ROOF CURBS, ANCHORING AND SEISMIC/WIND RESISTANCE.

13 ROOF CURB DETAIL NTS

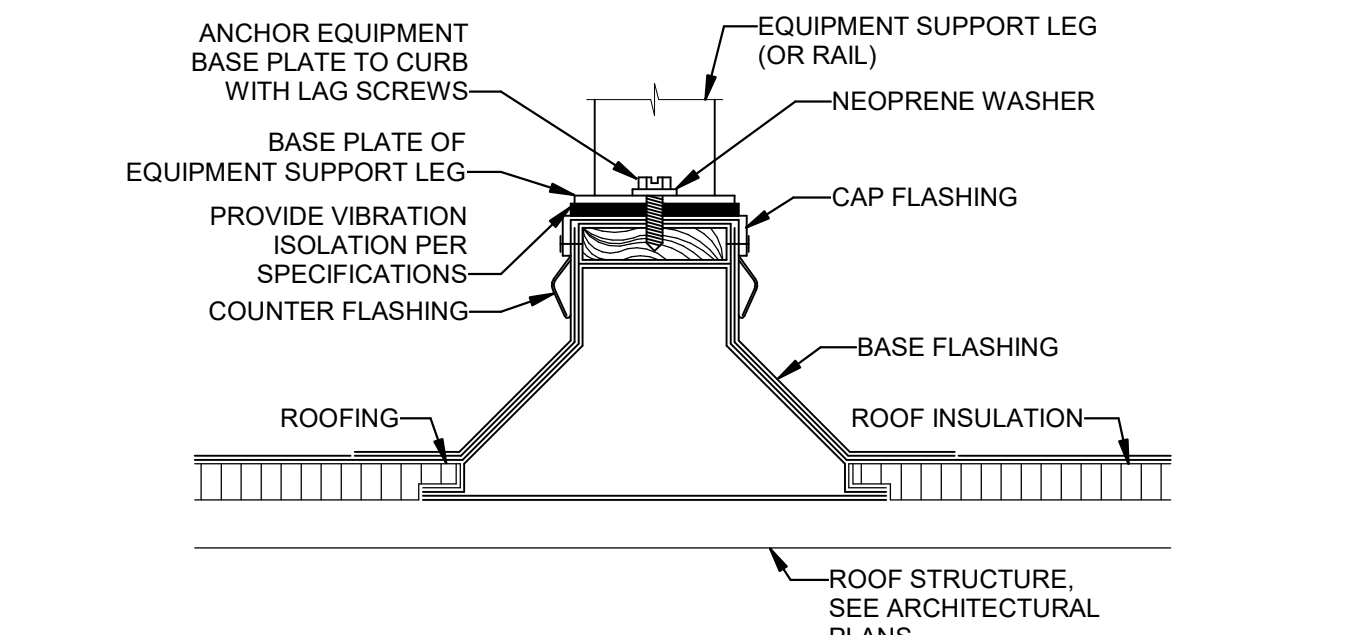


NOTES:
 1. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS FOR EQUIPMENT SUPPORTS, ANCHORING AND SEISMIC/WIND RESISTANCE.

9 ROOF EQUIPMENT SUPPORT RAIL DETAIL NTS

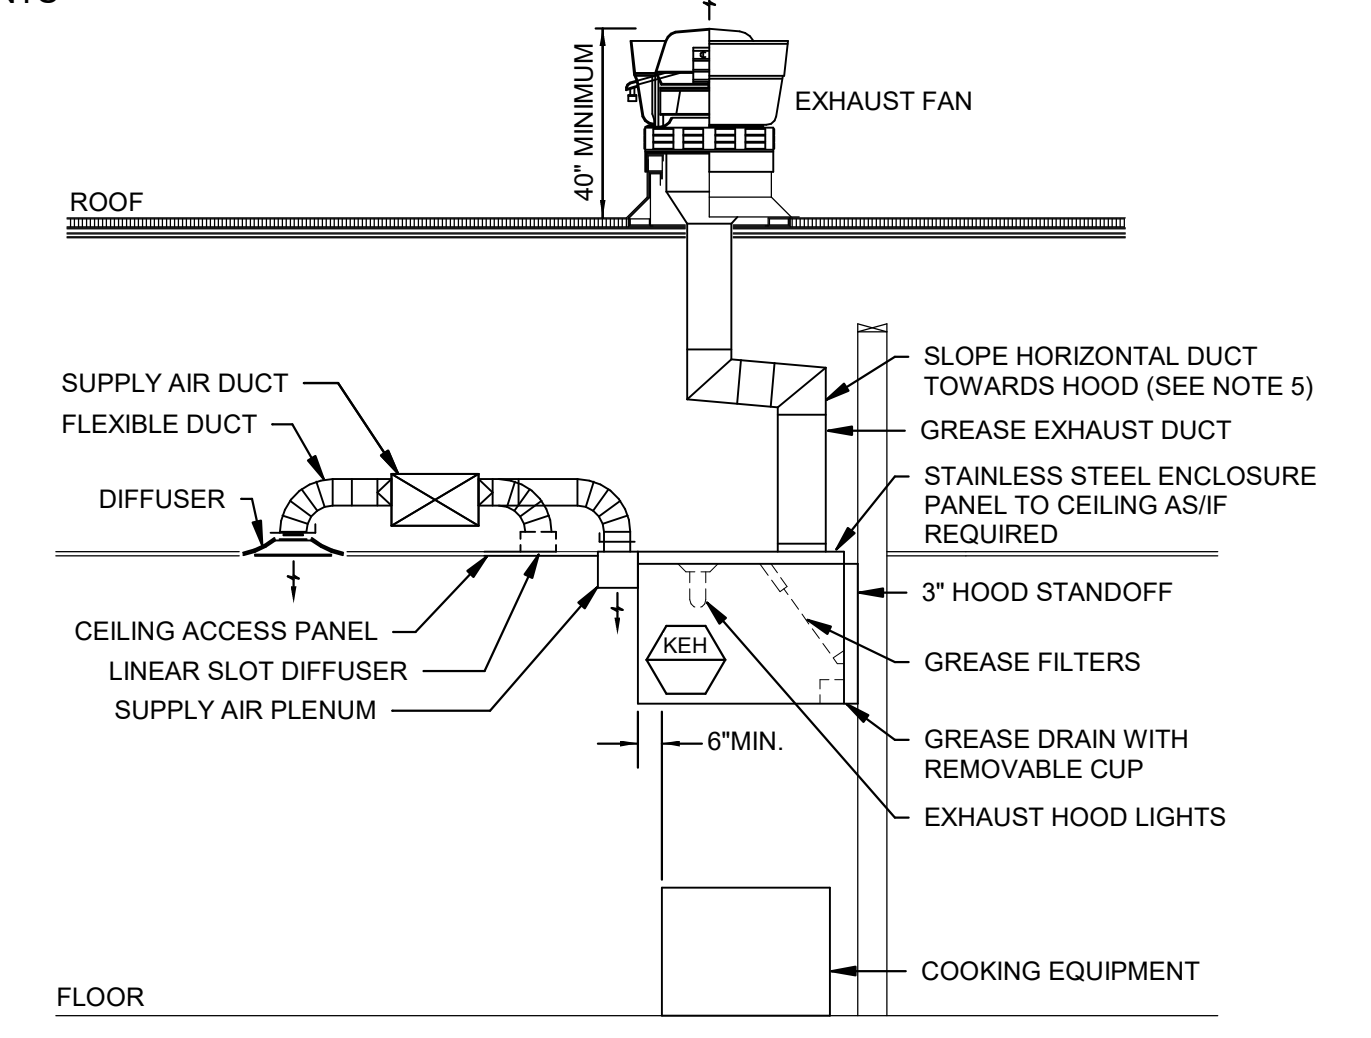

NOTES:
 1. SUBMIT SHOP DRAWINGS OF ALL HOOD SYSTEMS TO CITY FOR APPROVAL PRIOR TO INSTALLATION.
 2. TOTAL HOOD SYSTEM TO BE IN COMPLETE CONFORMANCE WITH NFPA, AND ALL LOCAL CODES AND REGULATIONS.
 3. COORDINATE ALL FIRE PROTECTION SYSTEMS WITH FIRE PROTECTION CONTRACTOR WHO SHALL ALSO BE RESPONSIBLE FOR ALL PERMITS AND TESTING REQUIRED.
 4. PROVIDE WRAP SYSTEM WHERE APPROVED BY LOCAL CODES IN lieu OF RATED ENCLOSURE.
 5. PROVIDE ACCESS PANELS AS REQUIRED BY LOCAL CODE AND PER PLAN.
 6. HOODS SHALL EXTEND MINIMUM 6\"/>

5 KITCHEN EXHAUST HOOD ELEVATION DETAIL NTS

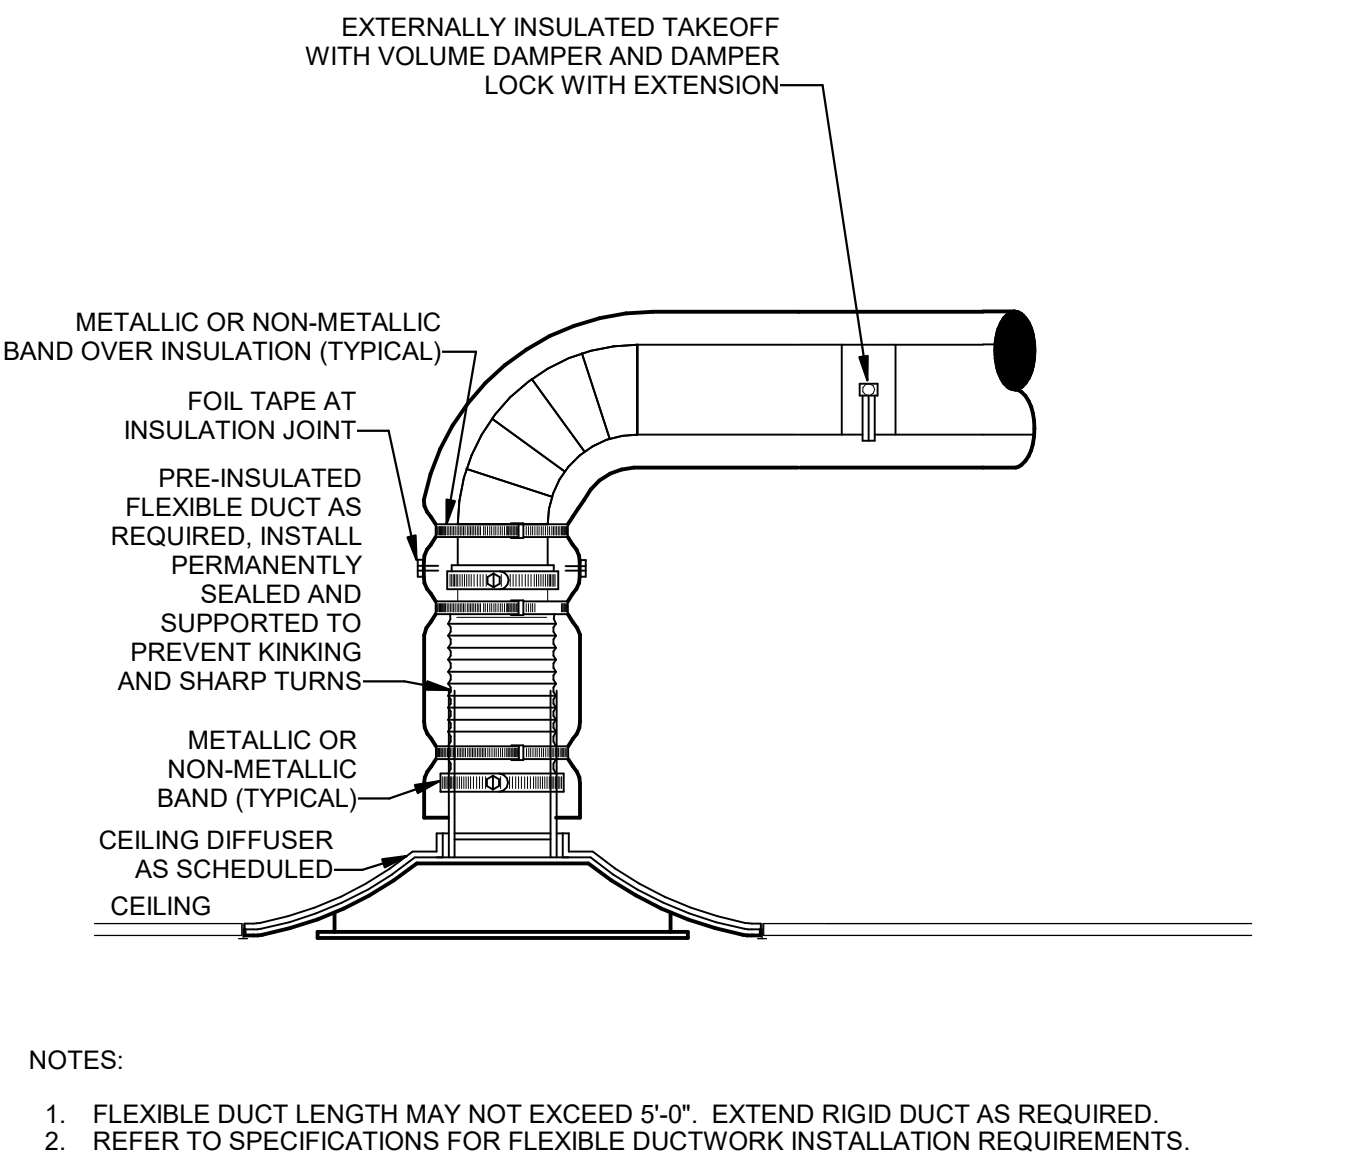

4 CEILING CASSETTE DETAIL NTS

CONSULTANTS:
HENDERSON ENGINEERS
 8345 LEXENA DRIVE, SUITE 300
 LEXENA, KS 66214
 TEL 913.742.5000 FAX 913.742.5001
 WWW.HENDERSONENGINEERS.COM
 2150003580
 NJ CORPORATION NO. 24C27943400
 EXPIRES 8/31/2022

SEAL SIGNATURE:
 PROFESSIONAL ENGINEER
 JOSHUA N. HOVER
 246564000



DATE: 04/06/2022

2	2022-04-06	ISSUED FOR CONSTRUCTION
1	2022-02-23	FIELD NOTICE 1
	2021-11-15	PERMIT/BD SET

SHAKE SHACK

Shake Shack #1407 - Newport Centre


30 MALL DR WEST, UNIT VC17A
 JERSEY CITY, NJ 07310
 SHACK #1407

ISSUE FOR CONSTRUCTION SET


MECHANICAL DETAILS

DRAWN BY: MJW
 CHECKED BY: MDM
 JOB NO: 2150003580


M501

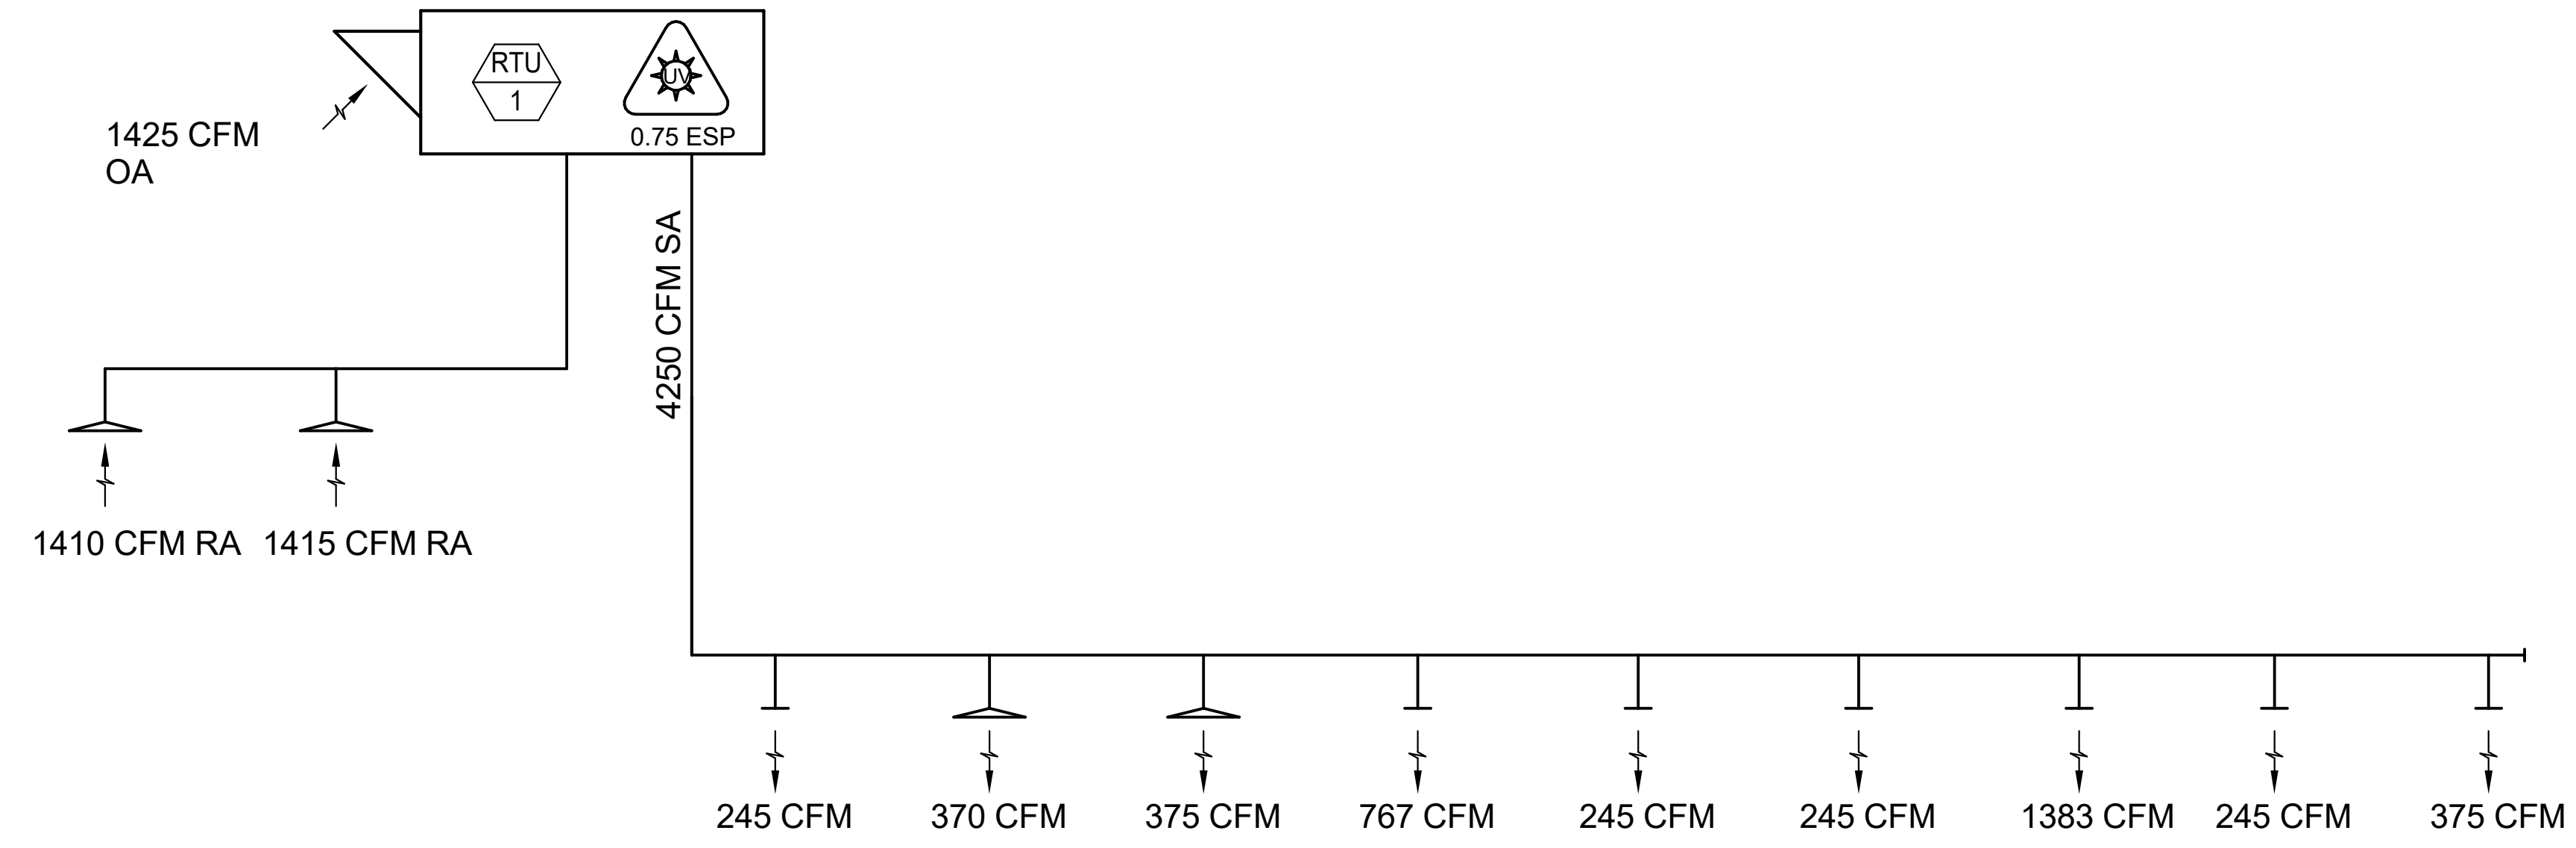


① RTU-1 ONE-LINE DIAGRAM
NTS

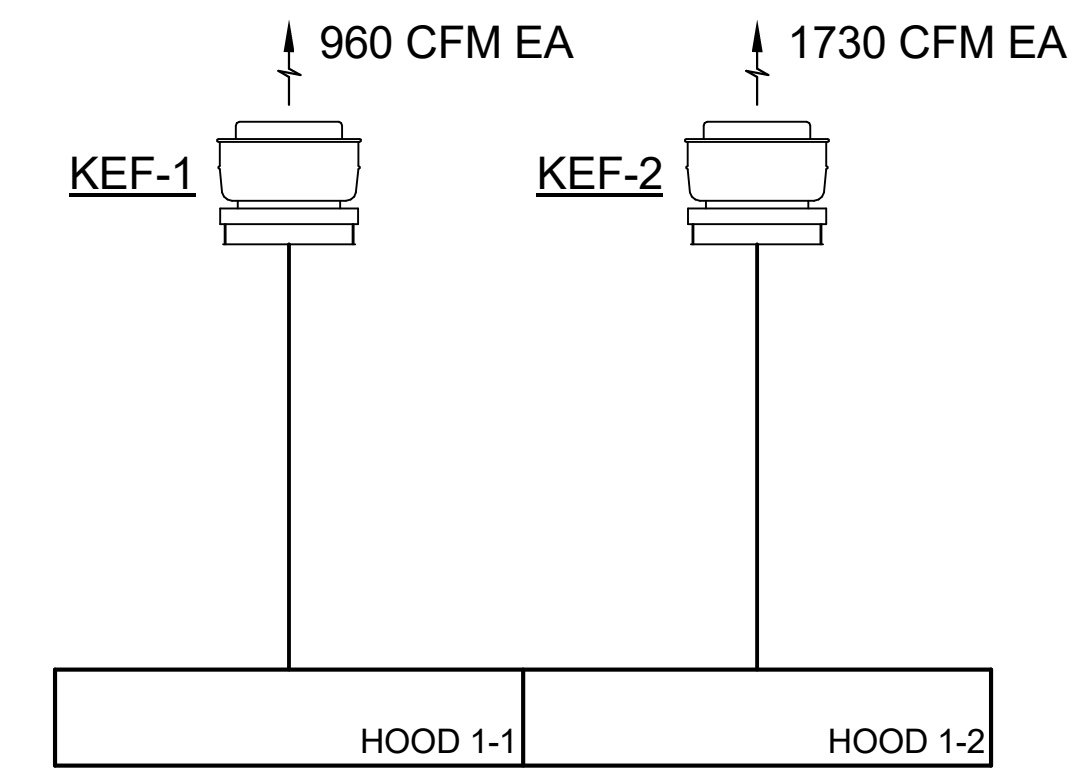

② KEF-1 & KEF-2 ONE-LINE DIAGRAM
NTS

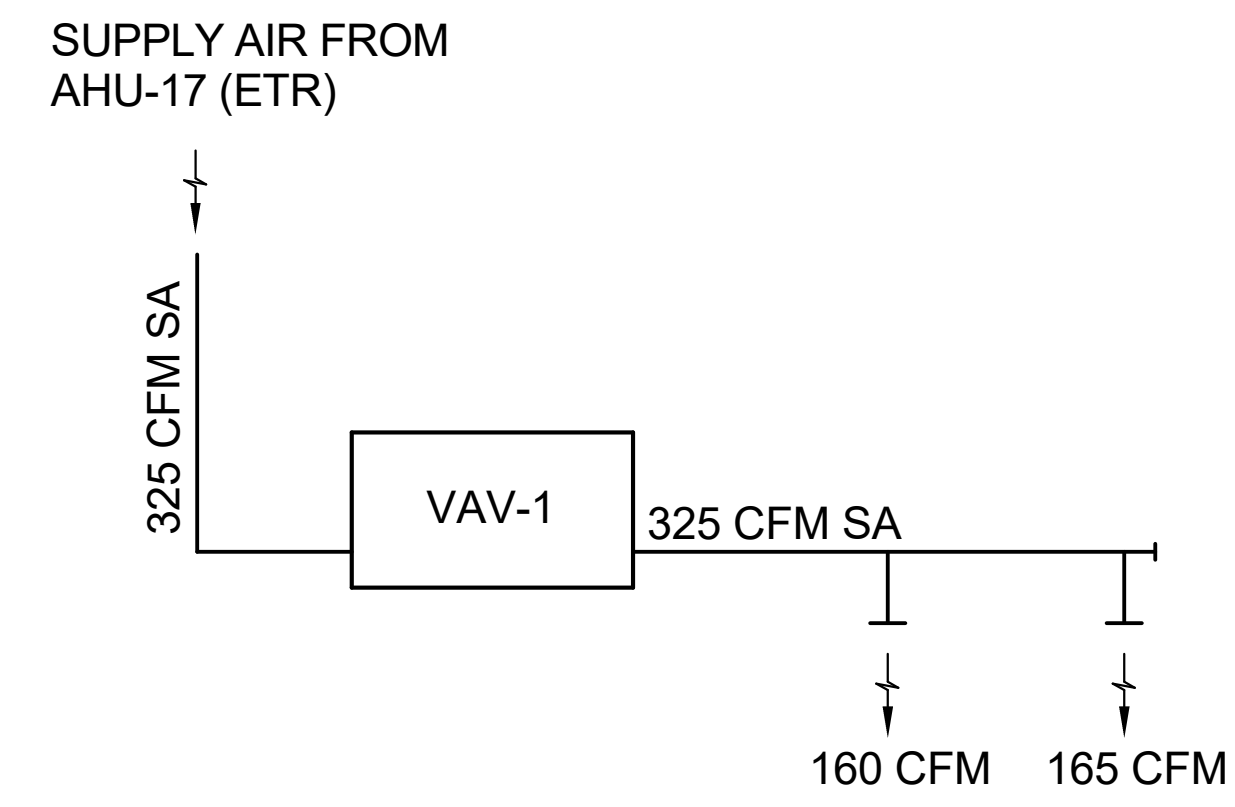

③ VAV-1 ONE-LINE DIAGRAM
NTS

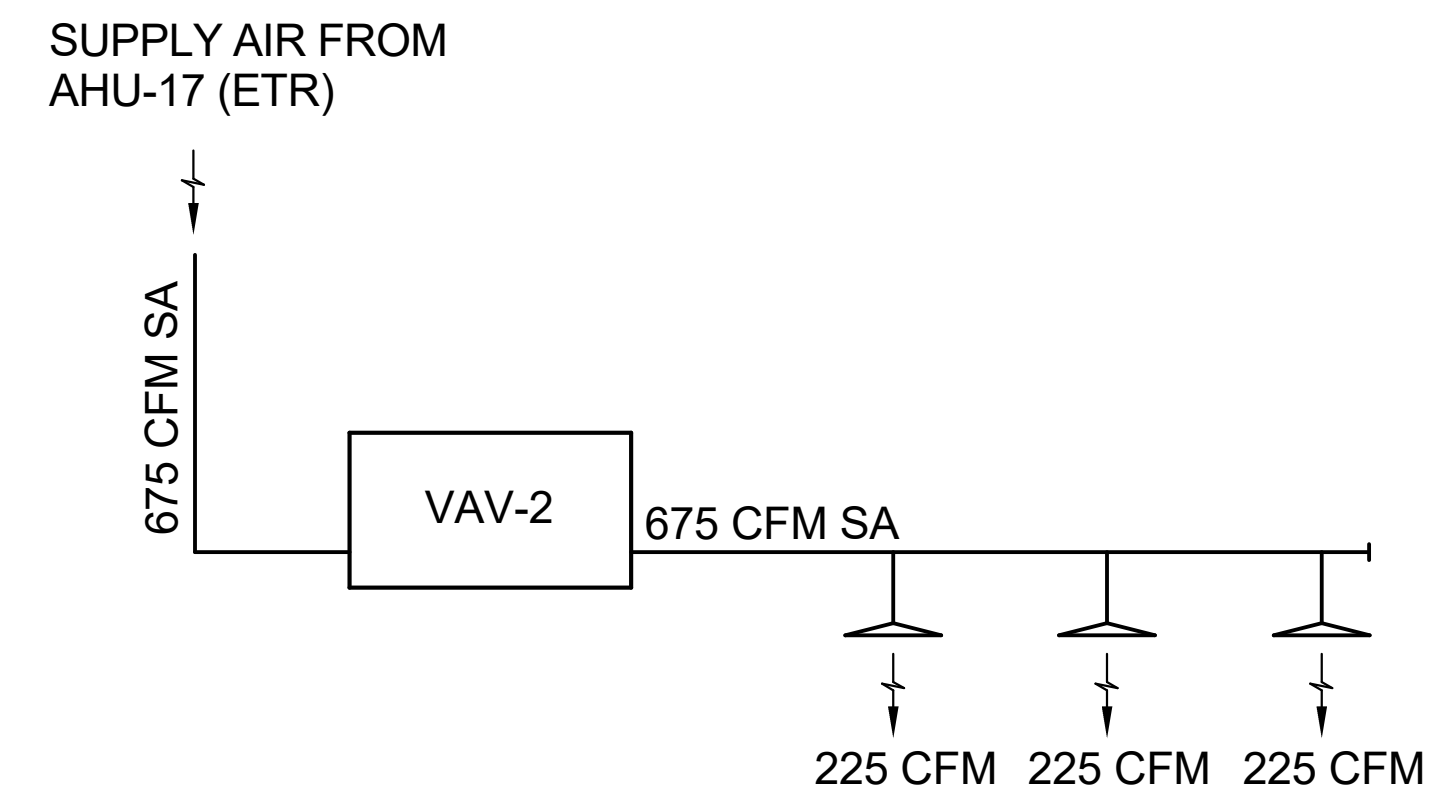


④ VAV-2 ONE-LINE DIAGRAM
NTS

CONSULTANTS:

HENDERSON
ENGINEERS
8345 LENEKA DRIVE, SUITE 300
LENEKA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003580
N.J. CORPORATE NO: 24GA27943400
EXPIRES 8/31/2022

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
24GEB064200



DATE: 04/06/2022

NO.	BY	DATE	DESCRIPTION
2		2022-04-06	ISSUED FOR CONSTRUCTION
1		2022-02-23	FIELD NOTICE 1
		2021-11-15	PERMIT/BID SET



Shake Shack #1407 -
Newport Centre

30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR
CONSTRUCTION SET

MECHANICAL DETAILS

DRAWN BY:	MJW
CHECKED BY:	MDM
JOB NO:	2150003580

M502

3.8 PIPING GENERAL

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. Start-Up Checks: These procedures apply to all installed piping systems, including underground site utilities.
 - 1. Inspect all piping for proper installation, adequate support (with appropriate vibration isolation where applicable) and adequate isolation valves for required service.
 - 2. Provide notifications of pipe cleaning and flushing activities.
 - 3. Flush and clean all piping and clean all strainers. Provide documentation of all related procedures.
 - 4. Ensure adequate drainage is provided at low points and venting is provided at high points.
 - 5. Ensure facilities to effectively drain and fill the system are in place.
 - 6. Ensure air is thoroughly removed from the system as applicable.
 - 7. Provide notification of pressure testing.
 - 8. Pressure and/or leak test all applicable systems in accordance with the requirements in the applicable Division 23 specification.
 - 9. Sterilize applicable piping systems as specified in the individual sections and as required by regulatory authorities.
 - 10. Submit pressure test reports that document the pressure testing results with certification of the results. Include drawings/diagrams indicating sections of pipe that are tested with the corresponding report.
 - 11. Set and adjust fill, pressure, or level controls to the required setting.

3.9 AC MOTORS

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. Start-Up Checks: Perform the following checks during start-up and as specified in manufacturer's instructions:
 - 1. Verify proper alignment, installation, and rotation.
 - 2. Verify properly sized overloads are in place.
- c. Start-Up Tests: Perform the following tests, measurements, or procedures during start-up and as specified in the manufacturer's instruction:
 - 1. Measure voltage available to all phases. Measure amps and RPM after motor has been placed in operation and is under load.
 - 2. Record all motor nameplate data.

3.10 PACKAGED HEATING AND COOLING UNITS

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. Refer to AC Motors in this section.
- c. General: Provide the services of a factory-authorized service representative to test and inspect unit installation, provide startup service, and to demonstrate and train Owner's maintenance personnel is required by the Owner.
- b. Start-Up Checks: Perform the following inspections/checks during start-up:
 - 1. Test controls and demonstrate compliance with requirements. Replace damaged or malfunctioning controls and equipment.
 - 2. Install new filters after start-up.

3.11 TERMINAL UNITS

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. Start-Up Checks: Perform the following inspections/checks during start-up:
 - 1. After construction is completed, including painting if applicable, clean unit exposed surfaces.
 - 2. Clean factory-finished surfaces. Repair any marred or scratches surfaces with manufacturer's touch-up paint.
 - 3. Verify adequate access for maintenance.
 - 4. Check power and control voltages.
 - 5. Check rotation of fan where applicable.
 - 6. Check operation of water leak sensors.
 - 7. Check calibration and operation of the controlling elements.
 - 8. Check control valves for required close-off and fail position.
 - 9. Install new filter units for terminals requiring same.

3.12 FANS

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. General: Provide the services of a factory-authorized service representative to test and inspect exhaust fan installation, provide startup service, and to demonstrate and train Owner's maintenance personnel is required by the Owner.
- c. Start-Up Checks: Perform the following inspections/checks during start-up:
 - 1. Inspect the field assembly of components and installation of the units, piping, ductwork, and electrical connections.
 - 2. Clean unit cabinet interiors to remove foreign material and construction dirt and dust. Vacuum clean fan wheel, fan cabinet, coils entering air face. Ensure volatile irritants are contained and kept out of occupied spaces.
 - 3. Adjust and lubricate dampers and linkages for proper damper operation.
 - 4. Verify the unit is secure on mountings and supporting devices and connections for ductwork, and electrical are complete. Verify proper thermal overload protection is installed in motors, starters, and disconnects.
 - 5. Ensure vibration isolation integrity is maintained with the fan installation and associated connections.
 - 6. Lubricate bearings, pulleys, belts, and other moving parts with factory-recommended lubricants.
 - 7. Stroke all dampers to ensure free and full travel.

3.13 DUCTWORK ACCESSORIES

- a. Include all applicable "Start-Up Checks Common to All Systems".
- b. Start-Up Checks: Perform the following checks during start-up and as specified:
 - 1. Cleaning: Clean factory-finished surfaces. Repair any marred or scratches surfaces with manufacturer's touch-up paint.
- c. Start-Up Tests: In addition to specifications, perform the following as a minimum:
 - 1. Operate installed ductwork accessories to demonstrate compliance with requirements. Test for air leakage while system is operating. Repair or replace faulty accessories, as required to obtain proper operation and leak proof performance.
 - 2. Label access doors in accordance with Division 21 Section "Mechanical Identification"
 - 3. Adjusting: Adjust ductwork accessories for proper settings, install fusible links in-fire dampers and adjust for proper action.

END OF SECTION 23

BAI Architecture


www.baimeyer.com
LA
800 South Figueroa St.
Los Angeles, CA 90017
212.337.1090
BOSS
60 Sleeper St.
Boston, MA 02210
617.542.1105

CONSULTANTS:

HENDERSON
ENGINEERS
8345 LENEKA DRIVE, SUITE 300
LENEKA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003580
N.J. CORPORATE NO. 242A27943400
EXPIRES 8/31/2022

SEAL/SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
24GEB0484200

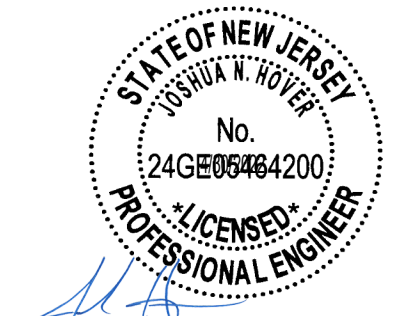

DATE 04/06/2022

2	2022-04-06	ISSUED FOR CONSTRUCTION
1	2022-02-23	FIELD NOTICE 1
	2021-11-15	PERMIT/BID SET

NO.	BY	DATE	DESCRIPTION
-----	----	------	-------------



Shake Shack #1407 -
Newport Centre

30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR
CONSTRUCTION SET

MECHANICAL
SPECIFICATIONS

DRAWN BY:	MJW
CHECKED BY:	MDM
JOB NO:	2150003580

M592

ROOFTOP UNIT CONTROL MATRIX

CONTROL FEATURE	UNITS	RTU-1 DINGING SETPOINT OR Y/N	NOTES
SETPOINTS			
COOLING - OCCUPIED SETPOINT	"F	75	
COOLING - UNOCCUPIED SETPOINT	"F	80	
HEATING - OCCUPIED SETPOINT	"F	70	
HEATING - UNOCCUPIED SETPOINT	"F	60	
DEHUMIDIFICATION SETPOINT - HUMIDITY SENSOR FEEDBACK	% RH	50%	B
PROGRAMMED CONTROL FEATURES			
HVAC SYSTEM OCCUPIED/UNOCCUPIED MODE - PROGRAMMABLE THERMOSTAT		Y	B
REMOTE TEMPERATURE SENSOR		Y	B
EQUIPMENT ACCESSORIES AND CONTROL MODULES			
OUTSIDE AIR DAMPER - MOTOR OPERATED (MODULATING)		Y	L
INTEGRATED ECONOMIZER - FIXED ENTHALPY ENABLE (OA ENTHALPY < RA ENTHALPY)		Y	E
ECONOMIZER FAULT DETECTION AND DIAGNOSTICS (FDD) SYSTEM	BTULB	Y	F, G
RELIEF - CONSTANT VOLUME POWERED EXHAUST FAN		Y	H
COOLING COIL (DX - STAGED)		Y	M
DEHUMIDIFICATION - HOT GAS REHEAT		Y	O
HEATING COIL (NATURAL GAS)		Y	M
SUPPLY FAN CONTROL METHODS			
ON DURING OCCUPIED HOURS		Y	
CYCLE WITH LOADS DURING UNOCCUPIED HOURS		Y	
VARIABLE VOLUME - STAGED FAN CONTROL IN RESPONSE TO ACTIVE COOLING COIL STAGES		Y	M, Q
SAFETIES, INTERLOCKS, AND ALARMS			
GAS VALVE SAFETY		Y	F
SUPPLY AIR SMOKE DETECTOR - SAFETY SHUTDOWN		Y	U
FIRE ALARM CONTROL PANEL - SAFETY SHUTDOWN INTERLOCK		Y	
KITCHEN EXHAUST SYSTEM INTERLOCK		Y	S

DIV. 23 CONTRACTOR SHALL PROVIDE CONTROL PANEL(S), WIRING, THERMOSTAT(S), TEMPERATURE SENSOR(S), HUMIDISTAT(S), AND/OR CO2 SENSOR(S) WHERE SHOWN ON THE DRAWINGS AND AS REQUIRED TO FACILITATE THE SCHEDULED CONTROL MODULES AND SEQUENCES OF OPERATION. EACH UNIT SHALL CONTROL BASED ON ITS OWN INTERNAL SAFETIES, TIME DELAYS, AND SEQUENCES UNLESS NOTED OTHERWISE. COORDINATE WITH OWNER FINAL BUILDING AND EQUIPMENT SCHEDULES DURING STARTUP. REFERENCE DIVISION SPECIFICATIONS FOR INDIVIDUAL DEVICE REQUIREMENTS.

- NOTES:
- B. DIVISION 23 CONTRACTOR SHALL PROVIDE DEVICE.
 - IF SETPOINT VALUE IS LISTED, IT INDICATES ECONOMIZER HIGH-LIMIT SHUTOFF. UNIT SHALL BE IN ECONOMIZER IF CONDITIONS ARE LESS THAN SETPOINT. THE FOLLOWING SENSORS SHALL DETERMINE ECONOMIZER ON POINT: OUTSIDE AIR TEMPERATURE; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE. RETURN AIR TEMPERATURE; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE. OUTSIDE AIR HUMIDITY; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE.
 - RETURN AIR HUMIDITY; DIVISION 23 PROVIDED AS PART OF ECONOMIZER CONTROL MODULE.
 - F. DEVICE SHALL BE FACTORY MOUNTED AND PRE-WIRED FOR OPERATION SUBJECT TO THE ONBOARD CONTROLLER.
 - G. PROVIDE UNIT WITH AN FDD SYSTEM CONSISTING OF PERMANENTLY INSTALLED OUTSIDE AIR, SUPPLY AIR, AND RETURN AIR TEMPERATURE SENSORS. THE UNIT CONTROLLER SHALL AT A MINIMUM BE CAPABLE OF PROVIDING SYSTEM STATUS OF ECONOMIZER, COMPRESSOR, HEATING, MIXED AIR LOW LIMIT ALARM, AND SENSOR VALUES. EACH OPERATING MODE SHALL BE CAPABLE OF INDEPENDENTLY OPERATING FOR TESTING. THE SYSTEM SHALL REPORT FAULTS TO AN APPLICATION ACCESSIBLE BY SERVICE PERSONNEL. THE FOLLOWING FAULTS SHALL BE DETECTED: AIR TEMPERATURE SENSOR FAILURE, ECONOMIZER ENABLE/DISABLED WHEN ECONOMIZER SHOULD BE OFFON, RESPECTIVELY, DAMPER NOT MODULATING, AND EXCESS OUTSIDE AIR.
 - H. POWERED EXHAUST FAN SHALL STAGE ON AND OFF ACCORDING TO DAMPER POSITION.
 - L. EQUIPMENT MANUFACTURER SHALL PROVIDE MODULATING DAMPER AND CONTROLS CAPABLE OF ADJUSTING THE DAMPER POSITION TO MAINTAIN THE SCHEDULED OUTSIDE AIR ON THE DRAWINGS ACROSS ALL FAN SPEEDS. DIV. 23 CONTRACTOR SHALL PROGRAM MULTIPLE DAMPER POSITION SETPOINTS IN THE FIELD DURING TESTING AND BALANCING TO MAINTAIN MINIMUM VENTILATION WHEN NOT IN ECONOMIZER. DAMPER SHALL BE CLOSED DURING UNOCCUPIED HOURS.
 - M. UNITARY CONTROLLER SHALL MODULATE AND/OR CYCLE SUPPLY FAN SPEED SETTING AND COIL CAPACITY STAGES SUBJECT TO THE INTERNAL SAFETIES AND SEQUENCES TO MAINTAIN SCHEDULED SETPOINTS.
 - O. PROGRAM DEHUMIDIFICATION SEQUENCE BASED ON ZONE AIR HUMIDITY.
 - Q. PROVIDE STAGED FAN CONTROL WITH MINIMUM 2 FAN SPEEDS. LOW SPEED SHALL NOT EXCEED 86% OF FULL SPEED AND SHALL DRAW NO MORE THAN 40% OF FAN POWER AT FULL SPEED. COMPRESSORS SHALL BE CONTROLLED TO MATCH CAPACITY OF 3-STAGE SUPPLY FAN SUCH THAT LEAVING AIR TEMPERATURE REMAINS CONSTANT.
 - S. INTERLOCK RTU WITH KITCHEN EXHAUST HOOD SYSTEM(S) TO SHUT DOWN UPON SIGNAL FROM HOOD FIRE EXTINGUISHING SYSTEM. INTERLOCK RTU WITH KITCHEN EXHAUST FAN TO ENERGIZE WHEN HOOD SYSTEM IS ENERGIZED FOR PRESSURIZATION.
 - U. DIVISION 23 CONTRACTOR SHALL PROVIDE DEVICE.

ROOFTOP UNIT SCHEDULE (DX COOLING, NATURAL GAS HEAT)

MARK	MANUFACTURER	MODEL	NOMINAL TONS	UNIT TYPE	COOLING COIL										HEAT EXCHANGER						MIN O/A CFM	VIPH	MCA	MOCP	DISC TYPE	WEIGHT (LBS)	NOTES					
					CFM	ESP (IN)	BHP	NOM HP	VFD (Y/N)	TH (MBH)	SH (MBH)	EAT (°F DB)	LAT (°F WB)	REFR TYPE	MIN EFF (EER)	MIN NO STAGES	MIN OUT (MBH)	NOM INPUT (MBH)	MIN EFF (%)	EAT (°F DB)								LAT (°F DB)	MIN NO STAGES			
RTU-1	CARRIER	48HCFE14	12.5	SINGLE ZONE	4,250	0.75	1.9	-	N	123.6	90.7	80.4	67.9	61.0	59.1	R410A	12.2	13.0	2	196	240	81	61.1	93.3	23	1425	4603	32	40	NF	2050	A - Q

* EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T002 / VENDOR LIST FOR MORE INFORMATION. MODEL NUMBERS AND NOMINAL TONS LISTED SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER, MODEL NUMBERS, OR NOMINAL TONS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

- NOTES:
- A. REFER TO ROOFTOP UNIT CONTROL MATRIX FOR CONTROL FEATURES, MODULES, AND ACCESSORIES THAT SHALL BE PROVIDED WITH THE EQUIPMENT.
 - B. EQUIPMENT SIZED FOR 85°F AMBIENT TEMPERATURE.
 - C. PROVIDE 2" NEW & EFFICIENT BLEATED THROWAWAY AIR FILTERS.
 - D. PROVIDE FACTORY MOUNTED DISCONNECT INSTALLED ON SERVICE SIDE OF UNIT.
 - E. STARTERS FOR ALL MOTORS SHALL BE FURNISHED INTEGRAL WITH UNIT.
 - F. PROVIDE SINGLE POINT POWER CONNECTION.
 - G. COORDINATE SIZE OF CONDUCTOR TERMINATION LUGS WITH CONDUCTOR SIZES SHOWN ON ELECTRICAL DRAWINGS.
 - H. PROVIDE 125 VAC, 20 AMP DUPLEX CONVENIENCE RECEPTACLE MOUNTED TO UNIT READY FOR FIELD WIRING WITH A COVER UL LISTED FOR WET AND DAMPER LOCATIONS WHEN IN USE.
 - I. SPECIFIED FAN ESP ACCOUNTS FOR DUCT LOSSES EXTERNAL TO UNIT.
 - J. PROVIDE MOTOR HORSEPOWER TO OVERCOME INTERNAL UNIT STATIC PRESSURE DROP PLUS SPECIFIED EXTERNAL STATIC PRESSURE DROP. NOMINAL MOTOR HP SHALL BE NO LARGER THAN THE FIRST AVAILABLE NOMINAL MOTOR SIZE GREATER THAN THE REQUIRED BHP.
 - K. PROVIDE INSULATED ROOF CURB WITH MINIMUM HEIGHT REQUIRED TO MAINTAIN BOTTOM OF EQUIPMENT A MINIMUM OF 18 INCHES ABOVE FINISHED ROOF SURFACE. PROVIDE SLOPED CURB IF NEEDED TO MATCH ROOF SLOPE.
 - L. COORDINATE WITH ROOF INSULATION THICKNESS AND ROOF TAPER AT INSTALLED LOCATION. COORDINATE CURB TYPE WITH DRAWINGS.
 - M. SCHEDULED WEIGHT IS THE MAXIMUM ALLOWABLE OPERATING WEIGHT OF THE EQUIPMENT AND CURB.
 - N. COOLING COIL LAT IS LEAVING AIR TEMPERATURE OF COIL.
 - O. PROVIDE GUARDS TO PROTECT CONDENSER COIL FROM HAIL OR OTHER DAMAGE.
 - P. PROVIDE HEATER TO MEET OR EXCEED SCHEDULED MINIMUM MBH OUTPUT. NOMINAL INPUT IS BASED ON LISTED MANUFACTURER'S STANDARD PRODUCT. COORDINATE EQUIPMENT GAS LOAD WITH PLUMBING CONTRACTOR IF DIFFERENT FROM THAT SCHEDULED. MEET MINIMUM EFFICIENCY SCHEDULED.
 - Q. CONTRACTOR TO COORDINATE WITH NATIONAL TAB TO PROVIDE UV PH INDOOR AIR PURIFICATION SYSTEM, PH CELL MODEL NO. PH-100424 IN BLOWER CABINET.
 - R. SCHEDULED WEIGHT IS THE MAXIMUM ALLOWABLE OPERATING WEIGHT OF THE EQUIPMENT AND CURB.
 - S. COOLING COIL LAT IS LEAVING AIR TEMPERATURE OF COIL.
 - T. PROVIDE GUARDS TO PROTECT CONDENSER COIL FROM HAIL OR OTHER DAMAGE.
 - U. PROVIDE HEATER TO MEET OR EXCEED SCHEDULED MINIMUM MBH OUTPUT. NOMINAL INPUT IS BASED ON LISTED MANUFACTURER'S STANDARD PRODUCT. COORDINATE EQUIPMENT GAS LOAD WITH PLUMBING CONTRACTOR IF DIFFERENT FROM THAT SCHEDULED. MEET MINIMUM EFFICIENCY SCHEDULED.
 - V. CONTRACTOR TO COORDINATE WITH NATIONAL TAB TO PROVIDE UV PH INDOOR AIR PURIFICATION SYSTEM, PH CELL MODEL NO. PH-100424 IN BLOWER CABINET.
 - W. PROVIDE A FACTORY APPLIED COIL CORROSION COATING TO CONDENSER COIL WHICH IS CAPABLE OF WITHSTANDING GREATER THAN 6,000 HOURS OF THE ASTM B117 SALT SPRAY TEST.

VARIABLE AIR VOLUME TERMINAL SCHEDULE (ELECTRIC HEAT)

MARK	SERVED FROM	ZONE SERVED	MANUFACTURER	MODEL	INLET SIZE (IN)	PRIMARY CFM	MAX HEAT CFM	HEATING COIL				CP TRANS	SOUND POWER		CONTROL TYPE		NOTES		
								EAT	LAT	MBH	KW		STEPS	HTG CTRL	VOLT / PHASE	RADIATED		DISCHARGE	SINGLE MAX, SINGLE MIN
VAV-1	AHU-17	DINING	E.H. PRICE	SDVS	6	325	325	52	71.4	6.8	2.0	2	STAGED	208V / 3PH	INTEGRAL	--	23	SINGLE MAX, SINGLE MIN	A - L
VAV-2	AHU-17	BOHSTORAGE	E.H. PRICE	SDVS	8	675	675	52	70.7	13.6	4.0	2	STAGED	208V / 3PH	INTEGRAL	--	26	SINGLE MAX, SINGLE MIN	A - L

MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

- NOTES:
- A. INSTALL FLEXIBLE DUCT CONNECTOR AT INLET CONNECTION.
 - B. PROVIDE INTEGRAL DISCONNECT SWITCH.
 - C. PROVIDE CONTROL POWER (CP) TRANSFORMER FACTORY INSTALLED. COORDINATE PRIMARY POWER WITH ELECTRICAL DRAWINGS.
 - D. BOX NOT TO EXCEED SCHEDULED DISCHARGE OR RADIATED SOUND NC LEVEL USING 0.5 INCH PRESSURE DROP.
 - E. PROVIDE FACTORY-INSTALLED, PRESSURE INDEPENDENT, ELECTRONIC CONTROL PACKAGE.
 - F. PROVIDE FACTORY FURNISHED, FIELD INSTALLED TEMPERATURE SENSOR AT VAV BOX INLET AND INTEGRAL CONTROLS FOR AUTOMATIC CHANGEOVER BETWEEN HEATING AND COOLING MODE.
 - G. PROVIDE BOX WITH EITHER RIGHT HAND OR LEFT HAND CONFIGURATION AS SHOWN ON DRAWINGS.
 - H. PROVIDE FACTORY MOUNTED STARTER AND DISCONNECT SWITCH INSTALLED ON SERVICE SIDE OF UNIT.
 - I. PROVIDE BOX WITH SINGLE POINT ELECTRICAL CONNECTION.
 - J. INLET SIZE SHOWN IS THE MINIMUM ALLOWABLE INLET SIZE. NO SMALLER SIZES SHALL BE ACCEPTED.
 - K. PROVIDE HEATER TO MEET OR EXCEED SCHEDULED MINIMUM MBH OUTPUT. NOMINAL KW IS BASED ON LISTED MANUFACTURER'S STANDARD PRODUCT. COORDINATE EQUIPMENT POWER SUPPLY WITH ELECTRICAL CONTRACTOR IF DIFFERENT FROM THAT SCHEDULED.
 - L. VAV BOXES SHALL BE SIZED TO MEET THE SCHEDULED VALUES BASED ON THE FOLLOWING PRIORITIES: 1 - HEATING COIL CAPACITY, 2 - LEAVING AIR TEMPERATURE.

FAN COIL UNIT SCHEDULE (HEAT PUMP)

MARK	MANUFACTURER	MODEL	SUPPLY FAN				COOLING COIL				HEAT PUMP/HEATING COIL				MIN O/A CFM	VIPH	MCA	MOCP	DISC TYPE	WEIGHT (LBS)	NOTES		
			CFM	ESP (IN)	NOM HP	TH (MBH)	SH (MBH)	EAT (°F DB)	LAT (°F WB)	REFR TYPE	MIN OUT (MBH)	NOM INPUT (MBH)	MIN EFF (SEER)	EAT (°F DB)								LAT (°F DB)	MIN NO STAGES
FCU-1	CARRIER	40MBCQ18-3	420	0.025	0.06	10.9	9.4	76.5	63.2	56.1	54.4	R410A	12.2	13.5	62.4	90	40	208V1	N/A	N/A	N/A	46	A - 1

* EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T002 / VENDOR LIST FOR MORE INFORMATION. MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

- NOTES:
- A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
 - B. ASSOCIATED CONDENSING UNIT SHALL BE BY THE SAME MANUFACTURER.
 - C. FOR COOLING, EQUIPMENT SIZED FOR 100°F AMBIENT TEMPERATURE. HEAT PUMP HEATING CAPACITY BASED ON AMBIENT TEMPERATURE LISTED.
 - D. PROVIDE UNIT WITH CLEANABLE AIR FILTERS.
 - E. PROVIDE WITH 7-DAY PROGRAMMABLE THERMOSTAT WITH STAGED HEATING AND COOLING CAPABILITY AS REQUIRED FOR OPERATION OF HEATING AND COOLING CONTROLS.
 - F. PROVIDE FACTORY MOUNTED STARTER AND DISCONNECT SWITCH INSTALLED ON SERVICE SIDE OF UNIT.
 - G. PROVIDE SINGLE POINT POWER CONNECTION.
 - H. PROVIDE WITH SPRING VIBRATION ISOLATION AND ALL-THREAD HANGING RODS.
 - I. REFERENCE PLUMBING PLANS FOR CONDENSATE DRAIN PIPING FROM UNIT.

EXISTING AIR HANDLING UNIT SCHEDULE (FOR REFERENCE ONLY)

MARK	MANUFACTURER	MODEL	COOLING COIL (WATER)										MIN O/A CFM	VIPH	MCA	MOCP	NOTES					
			CFM	ESP (IN)	NOM HP	TH (MBH)	SC (MBH)	EAT (°F DB)	LAT (°F WB)	REFR TYPE	MIN EFF (EER)	MIN NO STAGES						EWT (°F DB)	LWT (°F DB)	FLOW (GPM)		
AHU-17	ETR	ETR	35,000	2.25	40	1303	1096	81.0	64.6	52.0	51.9	ETR	ETR	ETR	44.0	60	165	3500	4803	ETR	ETR	A - C

- NOTES:
- A. SCHEDULED EQUIPMENT IS EXISTING TO REMAIN AND SHOWN FOR REFERENCE ONLY.
 - B. PROVIDE NEW FILTERS FOR EXISTING AIR HANDLING EQUIPMENT PRIOR TO STARTUP OF EQUIPMENT. NEW FILTERS SHALL BE COMPATIBLE WITH THE EXISTING EQUIPMENT AND EQUAL IN PERFORMANCE TO THE EXISTING FILTERS AT NEW CONDITION UNLESS OTHERWISE NOTED.
 - C. CONTRACTOR SHALL FIELD VERIFY THAT THE EXISTING UNIT INCLUDING ITS ACCESSORIES BEING RESUSED IS NOT DAMAGED AND IS IN GOOD WORKING ORDER. REPORT ANY DEFICIENCIES TO THE OWNER OR ARCHITECT. CONTRACTOR SHALL SUBMIT TO THE OWNER AND ARCHITECT A WRITTEN REPORT DESCRIBING TESTS PERFORMED. TO VERIFY OPERATION AND RESULTS OF THE TESTS.

HEAT PUMP CONDENSING UNIT SCHEDULE

MARK	SERVICE	MANUFACTURER	MODEL	REFR TYPE	COOLING CAPACITY				HEATING CAPACITY				MIN O/A CFM	VIPH	MCA	MOCP	DISC TYPE	WEIGHT (LBS)	NOTES
					TH (AMBIENT)	MIN EFF (EER)	CAP (MBH)	MIN EFF (SEER)	TH (AMBIENT)	MIN EFF (SEER)	COP 47°F	MIN EFF (SEER)							
CU-1	FCU-1	CARRIER	38MARBO18AA3	R410A	10.9	91.0	19.0	12.2	13.5	3.3	18	25	208V1	102.5	A - 1				

* EQUIPMENT SHALL BE OBTAINED THROUGH SHAKE SHACK NATIONAL ACCOUNT. REFER TO T002 / VENDOR LIST FOR MORE INFORMATION. MODEL NUMBERS SHALL NOT BE CONSIDERED COMPLETE AND MATERIAL SHALL NOT BE ORDERED BY MANUFACTURER AND MODEL NUMBERS ONLY. REVIEW THE COMPLETE DESCRIPTION, NOTES AND SPECIFICATIONS TO DETERMINE THE EXACT MATERIAL AND ACCESSORIES TO BE ORDERED. THE MANUFACTURERS LISTED ARE THE BASIS FOR THE DESIGN.

- NOTES:
- A. EQUIPMENT FURNISHED AND INSTALLED PER THE RESPONSIBILITY SCHEDULE. REF ARCHITECTURAL DRAWINGS.
 - B. EQUIPMENT CAPACITY SCHEDULED IS MINIMUM CAPACITY THAT MUST BE PROVIDED AT AMBIENT TEMPERATURE INDICATED.
 - C. CONTRACTOR SHALL VERIFY WITH EQUIPMENT SUPPLIER EXACT QUANTITY AND SIZE OF REFRIGERANT PIPING.
 - D. PROVIDE LIQUID LINE FILTER DRYER AND SIGHT GLASS.
 - E. PROVIDE PREFABRICATED EQUIPMENT SUPPORT RAILS.
 - F. PROVIDE FACTORY MOUNTED DISCONNECT INSTALLED ON SERVICE SIDE OF UNIT.
 - G. STARTERS FOR ALL MOTORS SHALL BE FURNISHED INTEGRAL WITH UNIT.
 - H. COORDINATE SIZE OF CONDUCTOR TERMINATION LUGS WITH CONDUCTOR SIZES SHOWN ON ELECTRICAL DRAWINGS.
 - I. PROVIDE A FACTORY APPLIED COIL CORROSION COATING TO CONDENSER COIL WHICH IS CAPABLE OF WITHSTANDING GREATER THAN 6,000 HOURS OF THE ASTM B117

PROJECT DESIGN CONDITIONS

CLIMATE CONDITIONS				BUILDING...											
WEATHER STATION:	NEW YORK CENTRAL PARK NY			MONDAY - FRIDAY	TBD BY OWNER										
CLIMATE ZONE	4A			SATURDAY	TBD BY OWNER										
HEATING (DB):	99.6%	13.5	"F	SUNDAY	TBD BY OWNER										
COOLING (DB/MCW):	0.4%	91.0	"F	HOLIDAY	TBD BY OWNER										
SPACE / UNIT DESCRIPTION	SET POINTS								SPACE OPERATING HOURS				NOTES		
	COOLING / DE-HUMIDIFICATION				HEATING				OCCUPIED / UNOCCUPIED						
	OCC	UNOCC	MAX	MIN	OCC	UNOCC	MIN	MAX	CONTROL METHOD	BASE PPM	MAXIMUM PPM	M-F	SAT	SUN	
OFFICES	75	80	NA	NA	70	80	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C
STOCKROOM/STORAGE	75	80	NA	NA	70	80	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C
FOOD PREP AREAS	75	80	50%	NA	70	80	NA	NA	NA	NA	NA	TBD	TBD	TBD	A, B, C

NOTES:

- A. ZONE LEVEL SET POINT CONDITIONS SHALL BE AS SCHEDULED UNLESS OTHERWISE SCHEDULED OR NOTED ON THE DRAWINGS FOR ROOM SPECIFIC SPACE CONDITIONS.
- B. ZONE LEVEL OCCUPANCY HOUR SCHEDULE SHALL BE PER BUILDING OPERATING HOURS UNLESS OTHERWISE SCHEDULED.
- C. ZONE LEVEL CONTROLS SHALL BE CAPABLE OF OPERATING WITH INDEPENDENT OCCUPANCY SCHEDULES.

BUILDING AIR BALANCE SUMMARY ECONOMIZER MODE

UNIT NO.	SUPPLY (CFM)	OUTDOOR (CFM)	EXHAUST (CFM)	PERCENT O/A/S/A
RTU-1	2,848	2,848	--	100%
VAV-1	325	33	--	10%
VAV-2	675	68	--	10%
FCU-1	420	40	--	10%
KEF-1	--	--	960	--
KEF-2	--	--	1,730	--
POWER EXHAUST RTU-2	--	--	1,423	--
TOTALS	4,268	2,988	4,113	--
OUTDOOR AIR SHARED WITH OPEN MALL (CFM)				1125
PRESSURIZATION AIR (TRANSFER AIR FROM MALL) (CFM)				-225
SPACE PRESSURIZATION WITH RESPECT TO MALL				-5.8%

BUILDING AIR BALANCE SUMMARY NORMAL OPERATION

UNIT NO.	SUPPLY (CFM)	OUTDOOR (CFM)	EXHAUST (CFM)	PERCENT O/A/S/A
RTU-1	4,250	1,425	--	34%
VAV-1	325	33	--	10%
VAV-2	675	68	--	10%
FCU-1	420	40	--	10%
KEF-1	--	--	960	--
KEF-2	--	--	1,730	--
TOTALS	5,670	1,565	2,690	--
OUTDOOR AIR SHARED WITH OPEN MALL (CFM)				1125
PRESSURIZATION AIR (TRANSFER AIR FROM MALL) (CFM)				-225
SPACE PRESSURIZATION WITH RESPECT TO MALL				-9.1%

OUTSIDE AIR REQUIREMENTS, IMC-2018 (IP)

SYSTEM DESIGNATION	SYSTEM TAB NAME OR LIST SINGLE	SINGLE-ZONE SYSTEMS ONLY		MULTI-ZONE SYSTEMS ONLY		FLOOR AREA SERVED BY SYSTEM [A] (SF)	SYSTEM AVERAGED AREA-BASED OUTDOOR AIR RATE (CFM/SF)	SYSTEM POPULATION (PEOPLE)	SYSTEM AVERAGED PEOPLE-BASED OUTDOOR AIR RATE (CFM/PP)	REQUIRED O/A INTAKE FLOW [W] (CFM)	REQUIRED DCV O/A INTAKE FLOW [W] (CFM)	DESIGN O/A INTAKE FLOW [W] (CFM)	NOTES
		SINGLE-ZONE SYSTEM ASSOCIATED VENTILATION RATE (CFM/PERSON)	SINGLE-ZONE WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS [E]	SYSTEM VENTILATION EFFICIENCY [EV]									
RTU-1	SINGLE ZONE	KITCHENBOH	0.80	-	413	0.120	6	7.50	118	N/A	1,425	A	
VAV-1	SINGLE ZONE	DINING	0.80	-	428	0.180	20	7.50	284	N/A	33	B	
VAV-2	SINGLE ZONE	BOHSTORAGE	0.80	-	408	0.120	6	7.50	118	N/A	68	A	
FCU-1	SINGLE ZONE	OFFICE	0.80	-	54	0.080	2	5.00	17	N/A	40	A	
TOTALS										536	0	1,566	

- GENERAL NOTES:
- VENTILATION CALCULATIONS BASED ON IMC-2018.
 - SYSTEM POPULATIONS BASED ON MAX SEATING AND/OR CODE MAXIMUM VALUES.
 - SINGLE ZONE SYSTEMS (W1 + W2): SYSTEM VENTILATION EFFICIENCY CALCULATION IS NOT REQUIRED FOR SINGLE ZONE SYSTEMS. WORST CASE AIR DISTRIBUTION EFFECTIVENESS BETWEEN HEATING AND COOLING MODES OF OPERATION IS SHOWN IN TABLE.
 - 100% O/A SYSTEMS (W1 + W2 + W3): WHEN ONE AIR HANDLER SUPPLIES ONLY OUTDOOR AIR TO ONE OR MORE ZONES, EACH ZONE IS INDIVIDUALLY CALCULATED WITH ITS WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS (HEATING/COOLING).
 - MULTI-ZONE RECIRCULATING SYSTEMS: CALCULATOR USED TO DETERMINE VENTILATION AIRFLOW IN COMPLIANCE WITH IMC-2018 V1P AND ASHRAE 62.1-2018 APPENDIX A. VENTILATION RATE SHOWN IS ACTUAL CALCULATED WITH CORRECTION FACTORS INCLUDED. EACH ZONE IS CALCULATED WITH ITS WORST CASE ZONE AIR DISTRIBUTION EFFECTIVENESS (HEATING/COOLING) AS PART OF CALCULATIONS TO FIND EV.

- NOTES:
- A. BOH VENTILATION AIR PROVIDED BY RTU-1 AND VAV-2.
 - B. DINING VENTILATION AIR PROVIDED BY VAV-1 AND VIA OPEN AIR TRANSFER FROM OPEN MALL SERVED BY EXISTING AHU. EXCESS OUTDOOR AIR AVAILABLE IN OPEN MALL FOR TRANSFER NOT LESS THAN 2100CFM.

BAI Architecture

300 South Figueroa St.
Los Angeles, CA 90017
212.337.1090

HENDERSON ENGINEERS
8345 LENEZA DRIVE, SUITE 300
LENEZA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM

2150003580
NJ CORPORATION NO. 24C2794340

COMcheck Software Version 4.1.5.3
Mechanical Compliance Certificate

Project Information

Energy Code: 90.1 (2016) Standard
Project Title: Shake Shack
Location: Jersey City, New Jersey
Climate Zone: 4a
Project Type: New Construction

Construction Site: Jersey City, NJ

Owner/Agent: Shake Shack

Designer/Contractor: Henderson Engineers Inc.
Lenexa, KS

Mechanical Systems List

Quantity System Type & Description

- 1 RTU-1 (Single Zone)
Heating: 1 each - Central Furnace, Gas, Capacity = 195 kBtu/h
Proposed Efficiency = 81.00% EI, Required Efficiency: 80.00 % EI (or 78% AFUE)
Cooling: 1 each - Single Package DX Unit, Capacity = 124 kBtu/h, Air-Cooled Condenser, Air Economizer
Proposed Efficiency = 12.20 SEER, Required Efficiency: 11.00 SEER - 12.7 IEER
Fan System: RTU-1 (Quorum - Compliance (Shake HP method)) - Passes
- Fans:
RTU1 Supply, Constant Volume, 4250 CFM, 3.7 motor nameplate hp, 1.9 design brake hp (2.9 max. BHP), 0.0 fan efficiency grade
- 1 CU-1/FCU-1 (Single Zone)
Split System Heat Pump
Heating Mode Capacity = 12 kBtu/h
Proposed Efficiency = 8.20 HSPF, Required Efficiency = 8.20 HSPF
Cooling Mode Capacity = 11 kBtu/h
Proposed Efficiency = 13.00 SEER, Required Efficiency: 14.00 SEER
Fan System: FCU-1 (Office - Compliance (Motor nameplate HP method)) - Passes
- Fans:
FCU1 Supply, Constant Volume, 420 CFM, 0.1 motor nameplate hp, 0.0 fan efficiency grade
- 4 Water Heater 1:
Gas Instantaneous Water Heater, Capacity: 0 gallons, Input Rating: 199 kBtu/h w/ Circulation Pump
No minimum efficiency requirement applies

Mechanical Compliance Statement

Compliance Statement: The proposed mechanical design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed mechanical systems have been designed to meet the 90.1 (2016) Standard requirements in COMcheck Version 4.1.5.3 and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Malvin Warrick - Mechanical Designer

Signature: *Malvin Warrick* Date: 4/6/2022

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 1 of 13

Section # & Req.ID	Mechanical Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
6.4.1.4, 6.4.1.5 [ME1]	HVAC equipment efficiency verified. Non-MAECA HVAC equipment labeled as meeting 90.1.	Efficiency: _____	Efficiency: _____	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	See the Mechanical Systems list for values.
6.4.3.4.1 [ME3]	Stair and elevator shaft vents have motorized dampers that automatically close.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.4.2, 6.4.3.4.3 [ME4]	Outdoor air and exhaust systems have motorized dampers that automatically shut when not in use and meet maximum leakage rates. Check gravity dampers where allowed.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.4.5 [ME3]	Enclosed parking garage ventilation has automatic contaminant detection and capacity to stage or modulate fans to 50% or less of design capacity.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.4.4 [ME5]	Ventilation fans >0.75 hp have automatic controls to shut off fan when not required.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.8 [ME6]	Demand control ventilation provided for spaces >500 R2 and >25 people/1000 ft2 occupant density and served by systems with air side economizer, auto modulating outside air damper control, or design airflow >3,000 cfm.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.3.2.1 [ME4]	DX cooling systems >= 75 kBtu/h (>= 65 kBtu/h effective 1/2016) and chilled-water and evaporative cooling fan motor hp >= % designed to vary supply fan airflow as a function of load and comply with operational requirements.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met. See the Mechanical Systems list for values.
6.4.4.1.1 [ME7]	Insulation exposed to weather protected from damage. Insulation outside of the conditioned space and associated with cooling systems is vapor retardant.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.4.1.2 [ME8]	HVAC ducts and plenums insulated per Table 6.8.2. Where ducts or plenums are installed in or under a slab, verification may need to occur during Foundation Inspection.	R: _____	R: _____	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.4.1.3 [ME9]	HVAC piping insulation thickness. Where piping is installed in or under a slab, verification may need to occur during Foundation Inspection.	_____ in.	_____ in.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 5 of 13

COMcheck Software Version 4.1.5.3
Inspection Checklist
Energy Code: 90.1 (2016) Standard

Requirements: 100.0% were addressed directly in the COMcheck software
Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

Section # & Req.ID	Plan Review	Complies?	Comments/Assumptions
4.2.2, 6.4.4.2.1, 6.7.2 [PR2]	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the mechanical systems and equipment and document where exceptions to the standard are claimed. Load calculations per acceptable engineering standards and handbooks.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
4.2.2, 7.7.1, 10.4.2 [PR3]	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the service water heating systems and equipment and document where exceptions to the standard are claimed. Hot water system sized per manufacturer's sizing guide.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
4.2.2, 8.4.1.1, 8.7 [PR6]	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the electrical systems and equipment and document where exceptions are claimed. Feeder conductors sized in accordance with approved plans and branch circuits sized for maximum drop of 3%.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.7.2.4 [PMS]	Detailed instructions for HVAC systems commissioning included on the plans or specifications for projects >=50,000 ft2.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 2 of 13

Section # & Req.ID	Mechanical Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
6.4.4.1.4, 6.4.1.5 [ME1]	Thermally insensitive panel surfaces of sensible heating panels have insulation >= R-3.5.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.4.2.1 [ME1]	Ducts and plenums having pressure class ratings are Seal Class A construction.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.8.1.15, 6.8.1.16 [ME10]	Electrically operated DX-DOAS units meet requirements per Tables 6.8.1.15 and 6.8.1.16.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.4.2.2 [ME11]	Ductwork operating >3 in. water column requires air leakage testing.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.4.2.2 [ME11]	Ductwork operating >3 in. water column requires air leakage testing.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.2.3 [ME19]	Dehumidification controls provided to prevent reheating, recirculating, mixing of hot and cold airstreams or concurrent heating and cooling of the same airstream.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.2.4.1 [ME68]	Humidifiers with airstream mounted preheating jackets have preheat auto-shutoff valve set to activate when humidification is not required.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.2.4.2 [ME69]	Humidification system dispersion tube hot surfaces in the airstreams of ducts or air-handling units insulated >= R-0.5.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.2.5 [ME70]	Preheat coils controlled to stop heat output whenever mechanical cooling, including economizer operation, is active.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.2.6 [ME106]	Units that provide ventilation air to multiple zones and operate in conjunction with zone heating and cooling systems are prevented from using heating or heat recovery to warm supply air above 60°F when representative building loads or outdoor air temperature indicate that most zones demand cooling.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.3.6 [ME72]	Motors for fans >= 1/12 hp and < 1 hp are electronically-commutated motors or have a minimum motor efficiency of 70%. These motors are also speed adjustable for either balancing or remote control.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 6 of 13

Section # & Req.ID	Footing / Foundation Inspection	Complies?	Comments/Assumptions
6.4.3.7 [FO3]	Freeze protection and snow/ice melting system sensors for future connection to controls.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 3 of 13

Section # & Req.ID	Mechanical Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
6.5.3.6 [ME72]	Motors for fans >= 1/12 hp and < 1 hp are electronically-commutated motors or have a minimum motor efficiency of 70%. These motors are also speed adjustable for either balancing or remote control.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.3.4 [ME108]	Parallel-flow fan-powered VAV air terminals have automatic controls to a) turn off the terminal fan except when space heating is required or if required for ventilation; b) turn on the terminal fan as the first stage of heating before the heating coil is activated; and c) during heating for warmup or setback temperature control, either operate the terminal fan and heating coil without primary air or reverse the terminal damper logic and provide heating from the central air handler through primary air.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.3.4 [ME108]	Parallel-flow fan-powered VAV air terminals have automatic controls to a) turn off the terminal fan except when space heating is required or if required for ventilation; b) turn on the terminal fan as the first stage of heating before the heating coil is activated; and c) during heating for warmup or setback temperature control, either operate the terminal fan and heating coil without primary air or reverse the terminal damper logic and provide heating from the central air handler through primary air.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.3.7 [ME109]	Required minimum outdoor air rate is the larger of minimum outdoor air rate or minimum exhaust air rate required by Standard 62.1, Standard 170, or applicable codes or accreditation standards. Outdoor air ventilation systems shall comply with one of the following: a) design minimum system outdoor air provided <= 135% of the required minimum outdoor air rate with a single set-point adjustment; or b) system includes exhaust air energy recovery complying with Section 6.5.6.1.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 7 of 13

Section # & Req.ID	Plumbing Rough-In Inspection	Complies?	Comments/Assumptions
7.4.4.2 [PL3]	Automatic time switches installed to automatically switch off the recirculating hot-water system or heat trace.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 4 of 13

Section # & Req.ID	Mechanical Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
6.5.3.7 [ME109]	Required minimum outdoor air rate is the larger of minimum outdoor air rate or minimum exhaust air rate required by Standard 62.1, Standard 170, or applicable codes or accreditation standards. Outdoor air ventilation systems shall comply with one of the following: a) design minimum system outdoor air provided <= 135% of the required minimum outdoor air rate with a single set-point adjustment; or b) system includes exhaust air energy recovery complying with section 6.5.6.1.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met. See the Mechanical Systems list for values.
6.5.3.3 [ME42]	Multiple zone VAV systems with DDC of individual zone boxes have static pressure setpoint reset controls.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met. See the Mechanical Systems list for values.
6.5.3.3 [ME42]	Multiple zone VAV systems with DDC of individual zone boxes have static pressure setpoint reset controls.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met. See the Mechanical Systems list for values.
6.5.4.2 [ME23]	HVAC pumping systems with >= 3 control valves designed for variable fluid flow (see section details).			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.6.1 [ME56]	Exhaust air energy recovery on systems meeting Tables 6.5.6.1.1, and 6.5.6.1.2.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.7.1 [ME100]	Conditioned supply air to space with mechanical exhaust <= the greater of criteria of supply flow, required ventilation rate, exhaust flow minus the available transfer air (see section details).			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.7.1 [ME100]	Conditioned supply air to space with mechanical exhaust <= the greater of criteria of supply flow, required ventilation rate, exhaust flow minus the available transfer air (see section details).			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.7.2.1 [ME57]	Kitchen hoods >5,000 cfm have make up air >=50% of exhaust air volume.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.7.3.4 [ME59]	Approved field test used to evaluate design air flow rates and demonstrate proper capture and containment of kitchen exhaust systems.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Observable <input type="checkbox"/> Not Applicable	Requirement will be met.

Project Title: Shake Shack
Data Filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\000Energy\COMcheck.cck
Report date: 04/06/22
Page 8 of 13

BAI Architecture


600 South Figueroa St.
Los Angeles, CA 90017
212.337.1090

CONSULTANTS:

HENDERSON ENGINEERS
8345 LENEXA DRIVE, SUITE 300
LENEXA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003580
NJ CORPORATE NO: 242A2794340
EXPIRES 8/31/2022

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
246564200

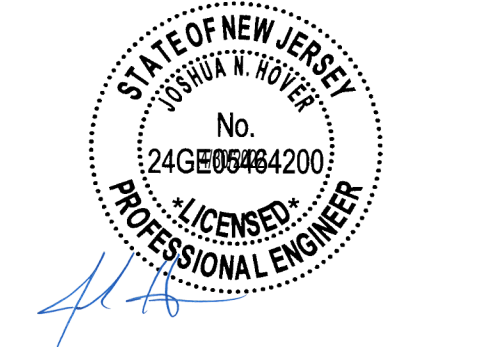

DATE: 04/06/2022

NO.	BY	DATE	DESCRIPTION
2		2022-04-06	ISSUED FOR CONSTRUCTION
1		2022-02-23	FIELD NOTICE 1
		2021-11-15	PERMIT/BIID SET

SHAKE SHACK

Shake Shack #1407 - Newport Centre

30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR CONSTRUCTION SET

MECHANICAL ENERGY CODE COMPLIANCE

DRAWN BY: MJW
CHECKED BY: MDM
JOB NO: 215003580

M630

Section # & Req.ID	Mechanical Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
6.5.8.1 (ME34)?	Unenclosed spaces that are heated use only radiant heat.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.9 (ME35)?	Hot gas bypass limited to: <=240 kBTU/h - 15% >240 kBTU/h - 10%			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
7.4.2 (ME36)?	Service water heating equipment meets efficiency requirements.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.9 (ME63)?	Heating for vestibules and air curtains with integral heating include automatic controls that shut off the heating system when outdoor air temperatures > 45F. Vestibule heating and cooling systems controlled by a thermostat in the vestibule with heating setpoint <= GDF and cooling setpoint >= 80F.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.5.10 (ME73)?	Doors separating conditioned space from the outdoors have controls that disable/reset heating and cooling system when open.			<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Shake Shack Report date: 04/06/22
Data filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\0000Energy\COMcheck.cck Page 9 of 13

Section # & Req.ID	Rough-In Electrical Inspection	Complies?	Comments/Assumptions
8.4.2 (EL10)?	At least 50% of all 125 volt 15- and 20-amp receptacles are controlled by an automatic control device.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Exception: Requirement does not apply.
8.4.3 (EL11)?	New buildings have electrical energy use measurement devices installed. Where tenant spaces exist, each tenant is monitored separately. In buildings with a digital control system the energy use is transmitted to control system and displayed graphically.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
10.4.1 (EL9)?	Electric motors meet requirements where applicable.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Shake Shack Report date: 04/06/22
Data filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\0000Energy\COMcheck.cck Page 10 of 13

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
6.4.3.1.2 (F13)?	Thermostatic controls have a 5 °F deadband.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.2 (F10)?	Temperature controls have setpoint overlap restrictions.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.3.1 (F12.1)?	HVAC systems equipped with at least zone automatic shutdown control.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.3.2 (F12.2)?	Setback controls allow automatic restart and temporary operation as required for maintenance.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.5 (F15)?	Heat pumps controls prevent supplemental electric resistance heat from coming on when not needed.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.12 (F1200)?	Air economizer has a fault detection and diagnostics (FDD) system (see details for configuration and operational requirements).	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.4.3.6 (F16)?	When humidification and dehumidification are provided to a zone, simultaneous operation is prohibited. Humidity control prohibits the use of fossil fuel or electricity to produce RH > 30% in the warmest zone humidified and RH < 60% in the coldest zone dehumidified.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.7.2.1 (F17)?	Furnished HVAC as-built drawings submitted within 90 days of system acceptance.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.7.2.2 (F18)?	Furnished O&M manuals for HVAC systems within 90 days of system acceptance.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.7.2.3 (F19)?	An air and/or hydronic system balancing report is provided for HVAC systems serving zones >5,000 R2 of conditioned area.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
6.7.2.4 (F110)?	HVAC control systems have been tested to ensure proper operation, calibration and adjustment of controls.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
7.4.4.3 (F11)?	Public lavatory faucet water temperature <=110°F.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Shake Shack Report date: 04/06/22
Data filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\0000Energy\COMcheck.cck Page 11 of 13

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
7.4.4.4 (F112)?	Controls are installed that limit the operation of a recirculation pump installed to maintain temperature of a storage tank.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.
10.4.3 (F124)?	Elevators are designed with the proper lighting, ventilation power, and standby mode.	<input type="checkbox"/> Complies <input type="checkbox"/> Does Not <input type="checkbox"/> Not Applicable	Requirement will be met.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Project Title: Shake Shack Report date: 04/06/22
Data filename: J:\Lenexa\Programs\P-T\Shake Shack\2150003580 Shake Shack 1407 - Newport Centre, NJ\0000Energy\COMcheck.cck Page 12 of 13

BAI Architecture


BOSS
LA
600 South Figueroa St.
Los Angeles, CA 90017
212.237.1090
www.bairgmeier.com

CONSULTANTS:

HENDERSON ENGINEERS
8345 LENEKA DRIVE, SUITE 300
LENEKA, KS 66214
TEL 913.742.5000 FAX 913.742.5001
WWW.HENDERSONENGINEERS.COM
2150003580
NJ CORPORATE NO: 242A27943400
EXPIRES 8/31/2022

SEAL SIGNATURE:

PROFESSIONAL ENGINEER
JOSHUA N. HOVER
2462549200

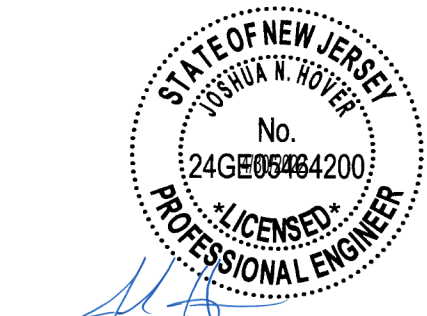

DATE 04/06/2022

NO.	BY	DATE	DESCRIPTION
2		2022-04-06	ISSUED FOR CONSTRUCTION
1		2022-02-23	FIELD NOTICE 1
		2021-11-15	PERMIT/BIID SET



Shake Shack #1407 -
Newport Centre

30 MALL DR WEST, UNIT VC17A
JERSEY CITY, NJ 07310
SHACK #1407

ISSUE FOR
CONSTRUCTION SET


MECHANICAL ENERGY
CODE COMPLIANCE

DRAWN BY: MJW

CHECKED BY: MDM

JOB NO: 2150003580

M631

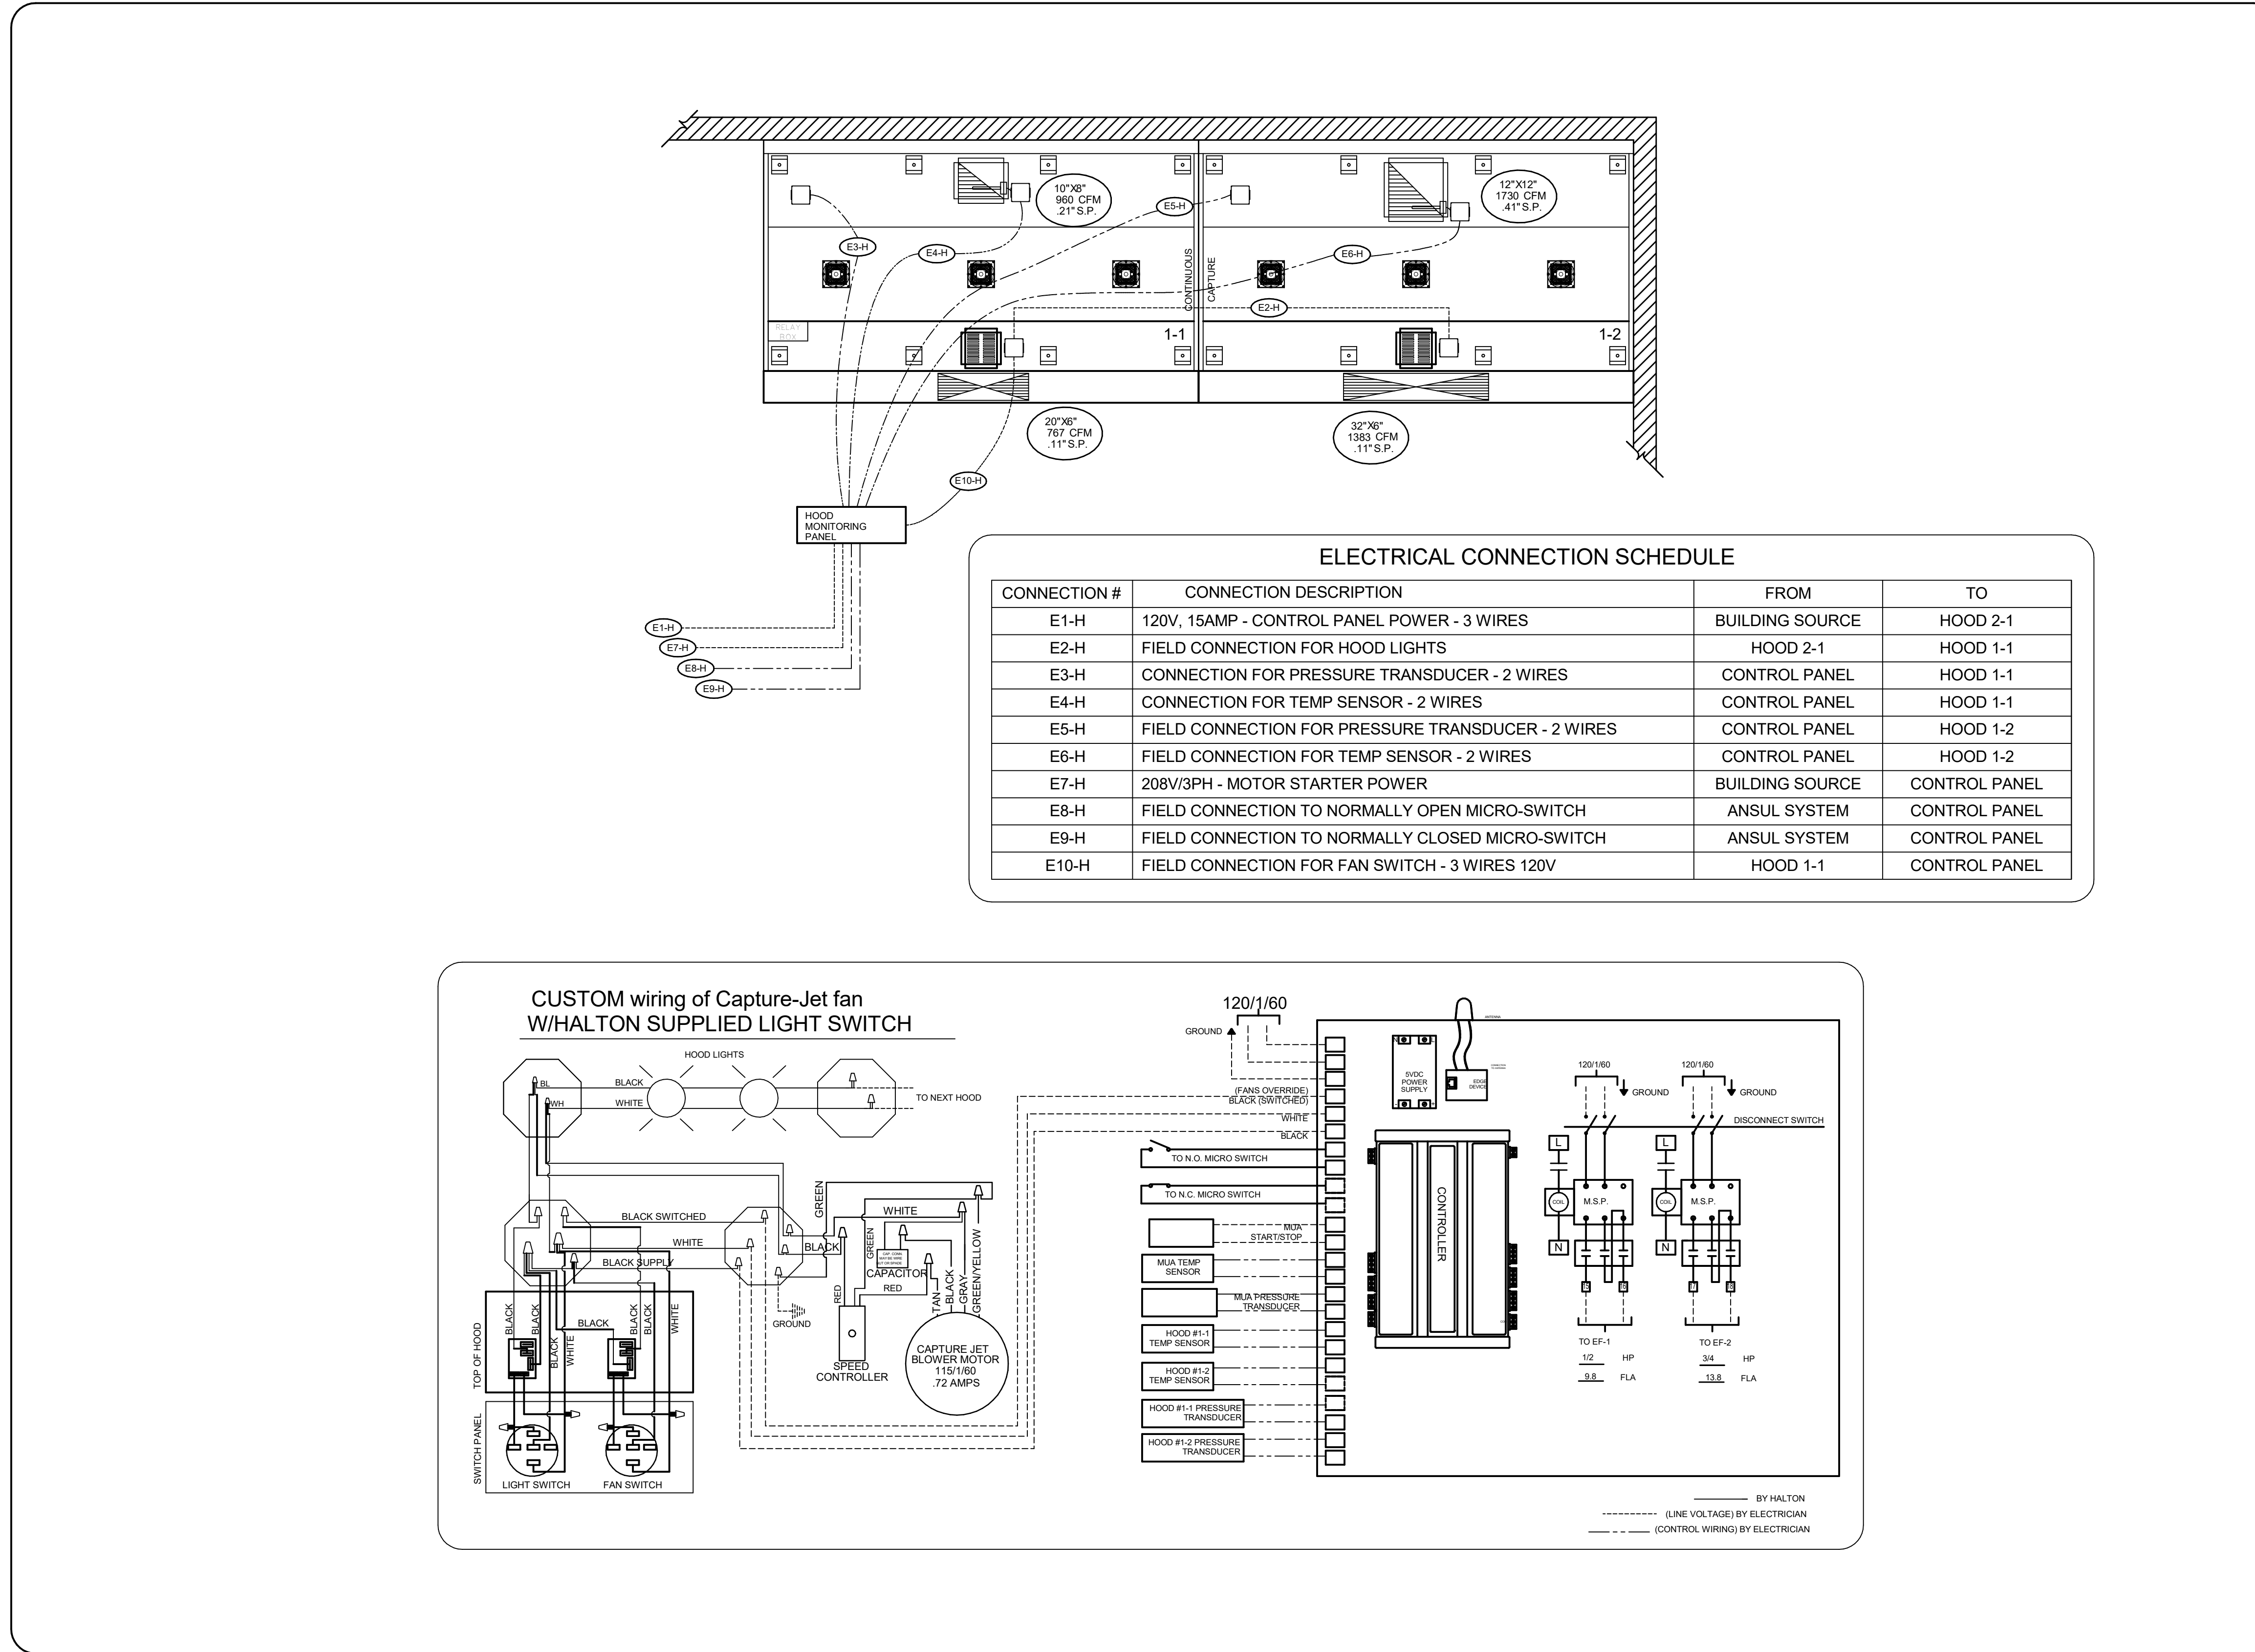

MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY BELOW:

WEBSITE: www.halton.com

HALTON CO. (USA)
 1000 W. 10TH ST.
 WATSONVILLE, CA 95076
 1-270-237-9900

DATE: 10/26/21
 BY: SKM

HALTON CO. (CANADA)
 1550-624-5001
 1550-624-5001

REVISION DESCRIPTION

YIELD BOX 14" X 14" X 1/2"
 REMOTE STARTER

PROJECT: SHAKE SHACK JERSEY CITY, NJ
 LOCATION: JERSEY CITY, NJ
 DRAWN BY: [blank]
 DATE: 10/26/21
 SCALE: NOT TO SCALE
 CONSULTANT:

DRAWING TITLE: DEMAND CONTROL DETAILS
 DRAWING NO: U21-678
 REV. NO: 1 SHEET NO: 4 of 4


Logo: Halton

NOTE:
 THE DOCUMENTATION CONTAINED ON THIS SHEET WAS NOT PREPARED BY HENDERSON ENGINEERS AND IS INCLUDED IN THIS SET FOR REFERENCE ONLY. HENDERSON ENGINEERS REVIEWED THE DOCUMENTATION ON THIS SHEET FOR GENERAL COMPLIANCE WITH DESIGN INTENT. SUPPLIER IS RESPONSIBLE THAT ALL FURNISHED EQUIPMENT ON THIS SHEET COMPLIES WITH APPLICABLE LOCAL, STATE, AND FEDERAL LAWS, CODES, AND REGULATIONS.

SEAL SIGNATURE:

FOR REFERENCE ONLY

NO.	BY	DATE	DESCRIPTION
2		2022-04-06	ISSUED FOR CONSTRUCTION
1		2022-02-23	FIELD NOTICE 1
		2021-11-15	PERMIT/IBID SET



Shake Shack #1407 - Newport Centre

30 MALL DR WEST, UNIT VC17A
 JERSEY CITY, NJ 07310
 SHACK #1407

ISSUE FOR CONSTRUCTION SET

HALTON DRAWINGS

DRAWN BY: _____
 CHECKED BY: _____
 JOB NO: 215003580

M704