

PlanGrid Task Report - Mar 20, 2025

Prepared by Ian Fuller

Mar 20, 2025

Description

3 tasks in this report.

Contents

#4 [CNTL 503] [NEW] DTT Stat not operational.....	2
#3 [CNTL 509] [NEW] Ansul pull labeling.....	3
#2 [EXHA 505] [NEW] Exhaust fan 1500F gasketing.....	4

#4 [CNTL 503] [NEW] DTT Stat not operational.

Status Open	Start Date Mar 18, 2025
Type Planned Work	Created Mar 18, 2025 2:52 PM ianf@nationaltab.com
Description DTT thermostat / fan is not powered, operational, or does not turn on / off according to set point at time of TAB inspection.	Last Updated Mar 18, 2025 2:55 PM

Photos



IMG_9698

Ian Fuller

Mar 18, 2025 2:55 PM

#3 [CNTL 509] [NEW] Ansul pull labeling.

Status	Start Date
Open	Mar 18, 2025
Type	Created
Planned Work	Mar 18, 2025 2:52 PM ianf@nationaltab.com
Description	Last Updated
Need to be labeled with red bakelite label with 1/4" high white letters indicating the hoods served.	Mar 18, 2025 2:55 PM

Photos




IMG_9704
Ian Fuller
Mar 18, 2025 2:55 PM

#2 [EXHA 505] [NEW] Exhaust fan 1500F gasketing.

Status	Start Date
Open	Mar 18, 2025
Type	Created
Planned Work	Mar 18, 2025 2:52 PM ianf@nationaltab.com
Description	Last Updated
Exhaust fan is missing 1500°F rated field provided/ installed gasketing at intake and/or discharge companion flange connections.	Mar 18, 2025 2:56 PM

Photos

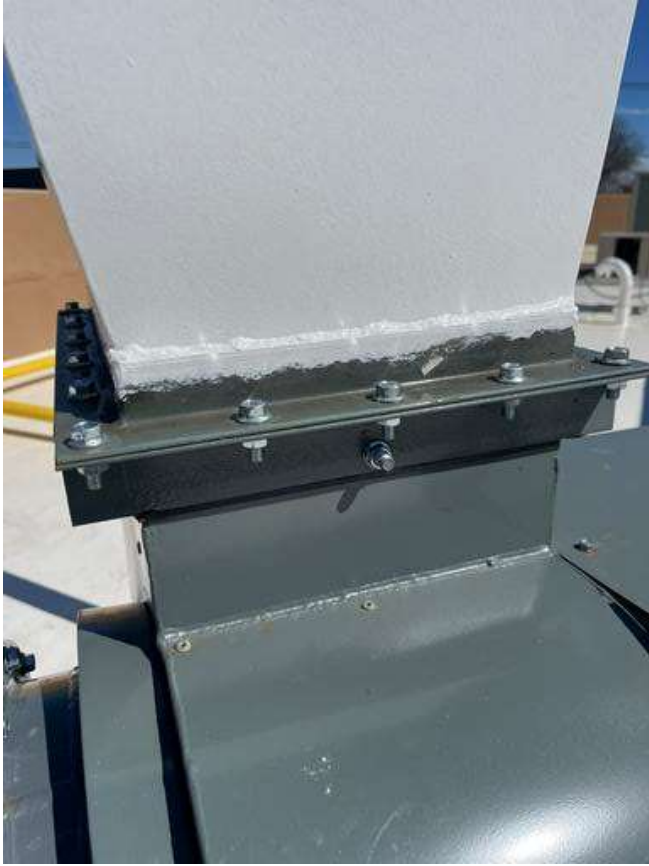

IMG_9729

Ian Fuller

Mar 18, 2025 2:56 PM



IMG_9728

Ian Fuller

Mar 18, 2025 2:56 PM