

DATE	DESCRIPTION
07/19/23	FINAL COORDINATION
07/28/23	ISSUE FOR PERMIT DRAWINGS

KEYED NOTES

- PROVIDE CONDENSING GAS FURNACE AND LOCATE ON ANGLE IRON FRAME ABOVE CEILING. MOUNT FRAME TO STRUCTURE WITH HEAT CLAMPS. THREE BRANCH VIBRATION ISOLATORS. ALL FILTER ACCESS TO BE ON THE SIDE OF FURNACE. ROUTE 2" COMBUSTION AIR INTAKE AND FLEX VENT TO CONDENSING UNIT THROUGH WALL. SIZE AND INSTALL PER MANUFACTURER'S INSTALLATION INSTRUCTIONS. LOCATE CONDENSING VENT KIT MINIMUM TEN FEET AWAY FROM AIR INTAKE AND EXHAUST VENTS AND PAINT TO MATCH WALL COLOR. ROUTE 1/2" CONDENSATE DRAIN LINE WITH TRAP TO FLOOR DRAIN. PROVIDE CONDENSATE PUMP AS REQUIRED. COORDINATE FLOOR DRAIN LOCATION WITH PLUMBING PLAN. FOR UNITS ABOVE CEILING, PROVIDE AUXILIARY DRAIN PAN WITH HIGH LEVEL ALARM UNDER FURNACE. IN ACCORDANCE WITH SECTION 907.3.3 OF IBC, HIGH LEVEL ALARM SHALL SHUT UNIT OFF UPON DETECTION OF CONDENSATE IN THE OVEYFLOW DRAIN PAN.
- EC TO FURNISH DUCT MOUNTED SMOKE DETECTOR AND PROVIDE COMPARTE REMOTE ANNUNCIATOR/TEST SWITCH. MC TO INSTALL SMOKE DETECTOR IN RETURN DUCT. PRIOR TO ANY OUTDOOR AIR CONNECTIONS, MC TO PROVIDE INTERLOCK WIRING BETWEEN SMOKE DETECTOR AND UNIT TO SHUT DOWN UNIT UPON DETECTION OF SMOKE. EC SHALL PROVIDE WIRING FOR FINAL CONNECTION TO THE FIRE ALARM SYSTEM, IF APPLICABLE, AND WIRING TO REMOTE ANNUNCIATOR/TEST SWITCH.
- PROVIDE THERMOSTAT AND MOUNT ON WALL 4 FEET A.F.F.
- PROVIDE COMBINATION THERMOSTAT, HUMIDISTAT AND CO2 SENSOR AND INSTALL ON WALL 4' A.F.F. CO2 SENSOR TO MODULATE OUTDOOR AIR DAMPER TO MAINTAIN MAXIMUM CO2 LEVELS OF 800 PPM, IN ACCORDANCE WITH SECTION 6.2.7 OF ASHRAE STANDARD 62.1.
- PROVIDE 1/2" GAS STEEL DUCT, WITH SEAMS WELDED LIQUID TIGHT, IN ACCORDANCE WITH SECTION 506.3 OF INTERNATIONAL MECHANICAL CODE AND DUCT AT 45° TOWARDS HOOD. PROVIDE CLEANOUT AT EVERY CHANGE OF DIRECTION, EVERY 20' HORIZONTALLY AND AS REQUIRED BY NFPA 96. PROVIDE 2 LAYERS OF 5M 65+ OR EQUIVALENT, FIRE BARRIER DUCT WRAP ON EXHAUST DUCT BETWEEN HOOD AND ROOF.
- TYPE I HOOD WITH ANGLU FIRE SUPPRESSION SYSTEM FURNISHED BY KITCHEN CONSULTANT AND INSTALLED BY MECHANICAL CONTRACTOR. MAKE ALL DUCT CONNECTIONS AS INDICATED AND INSTALL HOOD AT 8' A.F.F. REFER TO HOOD DRAWINGS FOR ADDITIONAL INFORMATION.
- PROVIDE NEW EXHAUST FAN, CONTROLLED BY LIGHT SWITCH, AND ROUTE EXHAUST DUCTWORK TO FLUSH MOUNT LOUVERED FLAPPER GRILLE. PAINT GRILLE TO MATCH WALL COLOR.
- PROVIDE NEW EXHAUST FAN, CONTROLLED BY LIGHT SWITCH, AND ROUTE 6" EXHAUST DUCT TO EACH RESTROOM EXHAUST FAN AND COMBINE INTO AN 8" EXHAUST DUCT. PROVIDE FLUSH MOUNT LOUVERED FLAPPER GRILLE. PAINT GRILLE TO MATCH WALL COLOR.
- PROVIDE TRANSFER GRILLE AND MOUNT HIGH ON BOTH SIDES OF WALL.
- INTERIALLY LINE FIRST 10 FEET OF SUPPLY, OUTSIDE AIR, AND RETURN AIR DUCTWORK WITH JOHN'S SPUNAL DUCTWORK TO PAINT GIP CALVALONTO TO ALLOW FOR FIELD PAINTING.
- PROVIDE NEW EXHAUST FAN, CONTROLLED BY LIGHT SWITCH, AND ROUTE EXHAUST DUCTWORK TO FLUSH MOUNT LOUVERED FLAPPER GRILLE. PAINT GRILLE TO MATCH WALL COLOR.
- PROVIDE IN-LINE DUCT HEATER AND INSTALL IN LOCATION INDICATED, IN ACCORDANCE WITH MANUFACTURER'S INSTALLATION INSTRUCTIONS.
- UNDERCUT DOOR 1" TO ALLOW FOR AIR TRANSFER INTO/OUT OF ROOM.
- 10"x14" LONG RETURN OVER WALL. BALANCE TO 320 CFM.
- PROVIDE NATURAL GAS UNIT HEATER WITH LINE MOUNTED THERMOSTAT. HEATER SHALL BE MOUNTED FROM STRUCTURE OR WALL. SET THERMOSTAT TO 60°F (ADJUSTABLE). ROUTE FLEX UP THRU ROOF. TERMINATE WITH B-VENT CAP. REFER TO DETAIL 12 ON SHEET M-4 FOR ADDITIONAL INFORMATION.
- DUCT CONSTRUCTION CONTINUED ON SHEET M-2.
- PROVIDE WALL MOUNTED DIGITAL THERMOSTAT TO CONTROL ELECTRIC ROOM THERMOSTAT (EF-23) AND MOUNT ON WALL 4' A.F.F.
- PROVIDE 24" X 24" RET. WIRE WALL LOUVER, EQUIPMENT TO RUSIN ELF-3750K, AND MOUNT HIGH ON WALL. COMPLETE WITH BRIDGECREAN. PROVIDE DUCTWORK PLENUM BOX BEHIND LOUVER AND SEAL WATER TIGHT.
- PROVIDE RETURN GRILLE AND INSTALL ON TOP OF RETURN DUCT. PROVIDE SHEET METAL AT END OF DUCT, SAME GAUGE AS DUCTWORK, AND SEAL AIR TIGHT.
- PROVIDE COMBINATION THERMOSTAT/HUMIDISTAT AND MOUNT ON WALL 4 FEET A.F.F.
- MOUNT AIR DEVICE ON TOP OF DUCT AND ANGLE TOWARDS CLEARSTORY GLAZING.
- PROVIDE NEW EXHAUST FAN, CONTROLLED BY WALL SWITCH, AND ROUTE EXHAUST DUCTWORK TO FLUSH MOUNT LOUVERED FLAPPER GRILLE. PAINT GRILLE TO MATCH WALL COLOR.
- PROVIDE WALL MOUNTED INFRARED ELECTRIC HEATER. INSTALL PER MANUFACTURER GUIDELINES.
- GAS WATER HEATER CONCENTRIC VENTS. REFER TO ROOF PLAN M-3 FOR CONTINUATION.
- ROUTE 4" WATER HEATER CONCENTRIC VENT KIT THROUGH WALL. SIZE AND INSTALL PER MANUFACTURER'S INSTALLATION INSTRUCTIONS (FOR FOUR CONCENTRIC TERMINATIONS). LOCATE CONCENTRIC VENT KIT MINIMUM TEN FEET AWAY FROM EXHAUST VENTS AND PAINT TO MATCH WALL COLOR. COORDINATE WITH PLUMBING CONTRACTOR AND SHEET P-1.
- BLANK OFF PORTION OF AIR DEVICE AS SHOWN.

GENERAL NOTES

- THE DRAWINGS ARE DIAGRAMMATIC IN NATURE. EXACT LOCATIONS OF DEVICES AND ROUTING OF DUCTWORK SHALL BE DETERMINED BY CONTRACTOR'S COORDINATION WITH ALL OTHER TRADES AND FIELD DETERMINATION OF FINAL CONSTRUCTION DETAILS. MINOR ADJUSTMENTS TO DUCT ROUTING AND CONFIGURATION TO AVOID INTERFERENCE WITH OTHER TRADES SHALL BE INCLUDED IN CONTRACTOR'S PRICE. CONTRACTOR SHALL OBTAIN ENGINEER'S APPROVAL IN WRITING FOR ANY MODIFICATIONS TO SYSTEM DESIGN PRIOR TO INSTALLATION.
- ALL EXPOSED MATERIALS AND EQUIPMENT SHALL BE INSTALLED AND SUPPORTED IN A FIRST CLASS AND WORKMANLIKE FASHION. DUCTWORK SHALL RUN PARALLEL AND/OR PERPENDICULAR TO MAIN BUILDING STRUCTURE. ANY WORK THAT IS CLASH OR WORKMANLIKE FASHION, IN THE ARCHITECT'S OPINION, SHALL BE REDONE AT THE CONTRACTOR'S EXPENSE.
- ALL DUCT JOINTS, SEAMS AND CONNECTIONS SHALL BE SECURELY FASTENED AND SEALED. DUCTS SHALL BE SUPPORTED WITH APPROVED HANGERS AT INTERVALS NOT EXCEEDING TEN FEET. DUCT COVERINGS AND LININGS SHALL HAVE A FLAME-SPREAD INDEX NOT MORE THAN 25 AND A SMOKE DEVELOPED INDEX NOT MORE THAN 20.
- PROVIDE VOLUME DAMPERS AT ALL ROUND BRANCH DUCT TAKE-OFFS THAT ARE ACCESSIBLE. PROVIDE TURNING VANES AT ALL 90 DEGREE SQUARE ELBOWS IN SUPPLY AIR DUCTS. PROVIDE 45 DEGREE HEE AT ALL RECTANGULAR SUPPLY AND RETURN BRANCH DUCT TAKE-OFFS.
- OUTDOOR AIR INTAKES SHALL BE 10'-0" MINIMUM AWAY FROM ANY EXHAUST AND PLUMBING VENT OUTLET.
- WIRE UP ALL LOW VOLTAGE (24V) THERMOSTATS.
- CONTRACTOR SHALL COORDINATE THE LOCATION OF ALL PIPES, DUCTWORK, UNITS, ETC. WITH ALL OTHER TRADES AND SHIFT LOCATION OR OFFSET WHERE NECESSARY. PROVIDE TRANSITIONS IN DUCTWORK TO AVOID CONFLICT WITH EXISTING DUCTWORK AND OTHER STRUCTURE.
- CONTRACTOR SHALL COORDINATE ALL AIR DEVICES WITH ELECTRICAL AND ARCHITECTURAL REFLECTED CEILING PLANS.
- COORDINATE LOCATION OF ALL EXTERIOR LOUVER OR OUTLET WITH ARCHITECTURAL ELEVATION PLAN.
- COORDINATE ROOF WORK WITH BUILDING OWNER'S ROOFING CONTRACTOR TO ASSURE THAT THE ROOF WARRANTY IS NOT VOIDED.
- INSTALL DUCTWORK AS HIGH AS POSSIBLE.
- EXHAUST AIR DUCTS SHALL BE EQUIPPED WITH BACKDRAFT DAMPERS.
- ALL DUCT OPENINGS AND OTHER AIR DISTRIBUTION OPENINGS SHALL BE COVERED DURING CONSTRUCTION EXCEPT FOR TESTING AND INSPECTION.
- PROVIDE BUILDING OWNER OR REPRESENTATIVE WITH DETAILED OPERATING AND MAINTENANCE INSTRUCTIONS AND WARRANTIES (TWENTY YEAR GUARANTEE FOR EACH SYSTEM. OEM INSTRUCTIONS SHALL BE CONSISTENT WITH OSHA REQUIREMENTS IN CFR TITLE 8, SECTION 5142 AND OTHER RELATED REGULATIONS.
- ALL DUCT ELBOWS SHALL BE LONG RADIUS OR MITERED.

HOOD AIR BALANCE REPORT

PRIOR TO THE HOOD FINAL INSPECTION, AN AIR BALANCE REPORT FOR THE HOOD WILL BE REQUIRED. THE REPORT SHALL INCLUDE THE MEASURED EXHAUST AIR QUANTITY (CFM), VELOCITY (FPM), MAKEUP AIR QUANTITY (CFM), OUTSIDE AIR (CFM) AND PRESSURE RELATIONSHIP BETWEEN THE SERVING AREA AND THE SALES AREA. THIS IS REQUIRED ON ALL HOODS.

ROOF PENETRATIONS

COORDINATE ROOF WORK WITH BUILDING OWNER'S ROOFING CONTRACTOR TO ASSURE THAT THE ROOF WARRANTY IS NOT VOIDED.

REGISTER DIRECTION NOTE

ALL REGISTERS OR GRILLES NEAR OPEN CASE REFRIGERATION SHALL BE INSTALLED IN SUCH A MANNER WHERE NO DIRECT AIRFLOW WILL BE BLOWN INTO CASES.

HVAC LEGEND


	DRAWING NOTE SYMBOL
	NEW RECTANGULAR DUCTWORK AND SIZE
	NEW ROUND DUCTWORK AND SIZE
	BALANCING/VOLUME DAMPER
	FLEX DUCT
	THERMOSTAT
	NEW SUPPLY AIR DIFFUSER AND CFM
	NEW PERFORATED SUPPLY AIR DIFFUSER AND CFM
	NEW RETURN GRILLE
	NEW EXHAUST FAN
	AIR FLOW DIRECTION
	SMOKE DETECTOR
	SUPPLY DUCT UP THROUGH ROOF
	RETURN/EXHAUST DUCT UP THROUGH ROOF
	MOTOR OPERATED DAMPER
	CHANGE IN ELEVATION

HVAC DESIGN CONDITIONS

COOLING	OUTDOOR = 92°FDB/74°FWB	HEATING	OUTDOOR = 1°FDB
	INDOOR = 72°FDB/50%RH		INDOOR = 70°FDB

FIRST FLOOR PLAN
SCALE: 1/8" = 1' - 0"

1

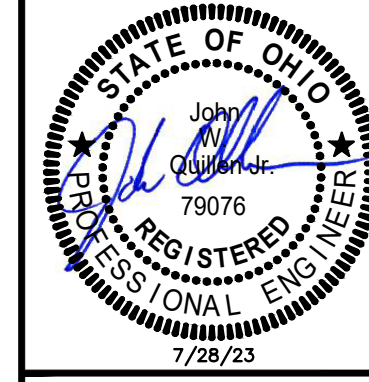


© 2023 MARQUE ENGINEERING, LLC
THE PLAN SHOWN IS THE PROPERTY OF MARQUE ENGINEERING, LLC. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. ANY REUSE OR MODIFICATION OF THIS PLAN WITHOUT THE WRITTEN PERMISSION OF MARQUE ENGINEERING, LLC IS STRICTLY PROHIBITED. THE ARCHITECT'S OPINION SHALL BE SOLELY RELIED UPON FOR THE DESIGN AND CONSTRUCTION OF THIS PROJECT. THE ARCHITECT'S OPINION SHALL BE SOLELY RELIED UPON FOR THE DESIGN AND CONSTRUCTION OF THIS PROJECT. THE ARCHITECT'S OPINION SHALL BE SOLELY RELIED UPON FOR THE DESIGN AND CONSTRUCTION OF THIS PROJECT.

MARQUE ENGINEERING
2230 PARK AVE., STE. 100, CINCINNATI, OH 45206
513.457.7131 - WWW.MARQUEENG.COM



DATE: 07/28/2023
BY: Steve Michaels
Download Link

DOROTHY LANE MARKET
7200 MASON-MONTGOMERY ROAD
MASON, OH 45040



PROJECT NO.
56307
PROJECT TITLE
DLM MASON OHIO STORE
DWG. TITLE

FIRST FLOOR PLAN

DWG. NO.
M-1



- ### KEYED NOTES
- PROVIDE NEW ROOFTOP UNIT AND CURB. ROUTE SUPPLY/RETURN DROPS DOWN THROUGH ROOF. REFER TO HVAC PLAN FOR CONTINUATION. COORDINATE ROOFTOP UNIT LOCATION WITH STRUCTURE BELOW. PROVIDE NEW THERMOSTAT, CONTROL WIRING, AND STAND ALONE CONTROLS FOR RTU OPERATION. ROUTE CONDENSATE TO ROOF. BALANCE SUPPLY AND OUTSIDE AIRFLOW AS SCHEDULED.
 - PROVIDE EXHAUST FAN AND INSTALL ON 20" HIGH INSULATED AND VENTILATED ROOF CURB. DISCHARGE OPENING SHALL BE NO LESS THAN 40" ABOVE THE ROOF. MAINTAIN MINIMUM 10' CLEARANCE FROM ANY OUTDOOR AIR INTAKES.
 - PROVIDE UTILITY EXHAUST FAN AND LOCATE ON ROOF ON ANVIL INTERNATIONAL HAYDON H-BLOCK OR EQUIVALENT. ROOFTOP SUPPORT SYSTEM. MAINTAIN UNIT MINIMUM REQUIRED SERVICE AND AIRFLOW CLEARANCE. MAINTAIN MINIMUM 10' CLEARANCE FROM ANY OUTDOOR AIR INTAKES. MECHANICAL CONTRACTOR TO CONFIRM FAN ORIENTATION AND FAN ROTATION PRIOR TO ORDERING FAN.
 - VENT CAP FOR RESTROOM BELOW. MAINTAIN MINIMUM 10' CLEARANCE FROM ANY OUTDOOR AIR INTAKES.
 - PROVIDE NEW MAKE UP AIR UNIT, CURB, CONTROL WIRING, AND STAND ALONE CONTROLS FOR UNIT OPERATION. ROUTE SUPPLY DUCT ALONG ROOF (MAU-1 ONLY). UTILIZE HAYDON H-BLOCK OR EQUIVALENT. DUCT SUPPORTS AND ROUTE DUCT THROUGH ROOF. UTILIZE ROOF CURB FOR DUCT PENETRATION. FLASH DUCT PENETRATION FOR A WEATHERPROOF SEAL. MAINTAIN MINIMUM 10' SEPARATION BETWEEN MAKEUP AIR UNIT INTAKE AND ALL EXHAUST FANS AND VENT THROUGH ROOFS.
 - PROVIDE NEW DEDICATED OUTSIDE AIR UNIT AND CURB. ROUTE SUPPLY DROPS DOWN THROUGH ROOF. REFER TO HVAC PLAN FOR CONTINUATION. COORDINATE ROOFTOP UNIT LOCATION WITH STRUCTURE BELOW. PROVIDE NEW THERMOSTAT, CONTROL WIRING, AND STAND ALONE CONTROLS FOR RTU OPERATION. ROUTE CONDENSATE TO ROOF. BALANCE SUPPLY AND OUTSIDE AIRFLOW AS SCHEDULED.
 - LOCATED FOR HUSSMAN CONDENSING UNIT AND RACKS. REFER TO HUSSMAN DRAWINGS FOR ADDITIONAL INFORMATION.
 - PROVIDE ANVIL INTERNATIONAL HAYDON H-BLOCK OR EQUIVALENT. ROOFTOP DUCT SUPPORT SYSTEM. COMPLETE WITH MOUNTING PIG FOR ALL EXTERIOR DUCTWORK. INSTALL DUCT SUPPORT IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES.
 - INSULATE ALL EXTERIOR DUCTWORK WITH RIGID FIBERGLASS BOARD INSULATION WITH OUTDOOR JACKET. INSULATION SHALL HAVE MINIMUM INSTALLED "R" VALUE OF 6.0. PROVIDE A SELF-ADHESIVE OUTDOOR JACKET FOR ALL EXPOSED DUCTWORK OUTSIDE. JACKET SHALL HAVE LAMINATED VAPOR BARRIER AND WATERPROOFING MEMBRANE CONSISTING OF A RUBBERIZED BUTYLDIENE RESIN ON A CROSS LAMINATED POLYETHYLENE FILM COVERED WITH STUCCO-EMBOSSED ALUMINUM-FOL. FACING.
 - PROVIDE 16 GA. STEEL DUCT WITH SEAMS WELDED LEAK TIGHT, IN ACCORDANCE WITH SECTION 308.3 OF INTERNATIONAL MECHANICAL CODE AND SLOPE DUCT AT 1/8" FT TOWARDS HOOD. PROVIDE CLEANOUT AT EVERY CHANGE OF DIRECTION, EVERY 20' HORIZONTALLY AND AS REQUIRED BY NFPA 96. PROVIDE 2 LAYERS OF 16 GA. OR EQUIVALENT FIRE BARRIER DUCT WRAP ON EXHAUST DUCT BETWEEN HOOD AND ROOF AS AN OPTION TO UTILIZING 16 GA STEEL DUCT. PROVIDE CAPTIVE AIRE MODEL 100 ROUND 20 GAUGE STAINLESS STEEL DOUBLE WALL DUCT SYSTEM.
 - VENT CAP FOR UNIT HEATERS BELOW. MAINTAIN MINIMUM 10' CLEARANCE FROM ANY OUTDOOR AIR INTAKES.

- ### GENERAL NOTES
- THE DRAWINGS ARE DIAGNOSTIC IN NATURE. EXACT LOCATIONS OF DEVICES AND ROUTING OF DUCTWORK SHALL BE DETERMINED BY CONTRACTOR AFTER COORDINATION WITH ALL OTHER TRADES AND FIELD DETERMINATION OF FINAL CONSTRUCTION DETAILS. MINOR ADJUSTMENTS TO DUCT ROUTING AND CONFIGURATION TO AVOID CONFLICT WITH BUILDING STRUCTURE OR OTHER TRADES SHALL BE INCLUDED IN CONTRACTOR'S PRICE. CONTRACTOR SHALL OBTAIN ENGINEER'S APPROVAL IN WRITING FOR ANY MODIFICATIONS TO THE DRAWINGS.
 - ALL EXPOSED MATERIALS AND EQUIPMENT SHALL BE INSTALLED AND SUPPORTED IN A FIRST-CLASS AND WORKMANLIKE FASHION. DUCTWORK SHALL RUN PARALLEL AND/OR PERPENDICULAR TO MAIN BUILDING STRUCTURE. ANY WORK THAT IS NOT DONE IN A FIRST-CLASS OR WORKMANLIKE FASHION, IN THE ARCHITECT'S OPINION, SHALL BE REDONE AT THE CONTRACTOR'S EXPENSE.
 - ALL DUCT JOINTS, SEAMS AND CONNECTIONS SHALL BE SECURELY FASTENED AND SEALED. DUCTS SHALL BE SUPPORTED WITH APPROVED HANGERS AT INTERVALS NOT EXCEEDING TEN FEET. DUCT COVERINGS AND LININGS SHALL HAVE A FLAME SPREAD INDEX NOT MORE THAN 25 AND A SMOKE DEVELOPED INDEX NOT MORE THAN 50.
 - PROVIDE VOLUME DAMPERS AT ALL ROUND BRANCH DUCT TAKE OFFS THAT ARE ACCESSIBLE. PROVIDE TURNING VANES AT ALL 90 DEGREE SQUARE ELBOWS IN SUPPLY AIR DUCTS. PROVIDE 45 DEGREE HEE AT ALL RECTANGULAR SUPPLY AND RETURN BRANCH DUCT TAKE OFFS.
 - OUTDOOR AIR INTAKES SHALL BE 10'-0" MINIMUM AWAY FROM ANY EXHAUST AND PLUMBING VENT OUTLET.
 - WIRE UP ALL LOW VOLTAGE (24V) THERMOSTATS.
 - CONTRACTOR SHALL COORDINATE THE LOCATION OF ALL PIPES, DUCTWORK, UNITS, ETC. WITH ALL OTHER TRADES AND SHIFT LOCATION OR OFFSET WHERE NECESSARY. PROVIDE TRANSITIONS IN DUCTWORK TO AVOID CONFLICT WITH EXISTING DUCTWORK AND OTHER STRUCTURES.
 - CONTRACTOR SHALL COORDINATE ALL AIR DEVICES WITH ELECTRICAL AND ARCHITECTURAL REFLECTED CEILING PLANS.
 - COORDINATE LOCATION OF ALL EXTERIOR LOUVER OR OUTLET WITH ARCHITECTURAL ELEVATION PLAN.
 - COORDINATE ROOF WORK WITH BUILDING OWNER'S ROOFING CONTRACTOR TO ASSURE THAT THE ROOF WARRANTY IS NOT VOIDED.
 - INSTALL DUCTWORK AS HIGH AS POSSIBLE.
 - EXHAUST AIR DUCTS SHALL BE EQUIPPED WITH BACKDRAFT DAMPERS.
 - ALL DUCT OPENINGS AND OTHER AIR DISTRIBUTION OPENINGS SHALL BE COVERED DURING CONSTRUCTION EXCEPT FOR TESTING AND INSPECTION.
 - PROVIDE BUILDING OWNER OR REPRESENTATIVE WITH DETAILED OPERATING AND MAINTENANCE INSTRUCTIONS AND WARRANTIES (WRITTEN GUARANTEE FOR EACH SYSTEM. O&M INSTRUCTIONS SHALL BE CONSISTENT WITH OSHA REQUIREMENTS IN CECR TITLE 8, SECTION 542 AND OTHER RELATED REGULATIONS.
 - ALL DUCT ELBOWS SHALL BE LONG RADIUS OR MITERED.

ROOF PENETRATIONS

COORDINATE ROOF WORK WITH BUILDING OWNER'S ROOFING CONTRACTOR TO ASSURE THAT THE ROOF WARRANTY IS NOT VOIDED.

HVAC LEGEND

	DRAWING NOTE SYMBOL
	NEW RECTANGULAR DUCTWORK AND SIZE
	NEW ROUND DUCTWORK AND SIZE
	SUPPLY DUCT UP THROUGH ROOF
	RETURN/EXHAUST DUCT UP THROUGH ROOF

HVAC DESIGN CONDITIONS

COOLING:	HEATING:
OUTDOOR + 92°FDB/74°FWB	OUTDOOR + 1°FDB
INDOOR + 72°FDB/52°WBH	INDOOR + 72°FDB

DATE	DESCRIPTION
07/19/23	FINAL COORDINATION
07/28/23	BID/FINISH DRAWINGS



© 2023 MARQUE ENGINEERING, LLC
 THE PLAN IS INTENDED UNDER FEDERAL, STATE AND LOCAL LAWS AND REGULATIONS. THE ORIGINAL CONTRACTOR'S RESPONSIBILITY IS TO VERIFY THE ACCURACY OF THE INFORMATION PROVIDED BY THE ARCHITECT. MARQUE ENGINEERING, LLC IS NOT RESPONSIBLE FOR ANY ERRORS OR OMISSIONS IN THIS DRAWING. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE ACCURACY OF THE INFORMATION PROVIDED BY THE ARCHITECT. MARQUE ENGINEERING, LLC IS NOT RESPONSIBLE FOR ANY ERRORS OR OMISSIONS IN THIS DRAWING. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE ACCURACY OF THE INFORMATION PROVIDED BY THE ARCHITECT.

MARQUE ENGINEERING
 2230 PARK AVE., STE. 100, CINCINNATI, OH 45206
 513-457-7131 - WWW.MARQUEENG.COM



By: Steve Michalek
 Download Link

DOROTHY LANE MARKET
 7200 MASON-MONTGOMERY ROAD
 MASON, OH 45040



PROJECT NO. 56307
 PROJECT TITLE DLM MASON OHIO STORE
 DWG. TITLE

ROOF PLAN

DWG. NO. M-3

ROOF PLAN SCALE: 1/8" = 1' - 0" 1