

1 HVAC FLOOR PLAN
M1.0 1/4" = 1'-0"

KEY NOTES


- 1 REMOTE TEST STATION FOR SMOKE DETECTORS FOR RTU-1, 2 & 3. TEST STATION TO BE MOUNTED ON THE WALL. SECURITY CONTRACTOR SHALL WIRE RTU FACTORY MOUNTED SMOKE DETECTORS TO SECURITY/FIRE ALARM PANEL. MECHANICAL CONTRACTOR SHALL PROVIDE TEST STATION AND WIRING BETWEEN COMPONENTS AS WELL AS WIRING TO SHUT DOWN THE RTU FAN UPON ACTIVATION OF THE SMOKE DETECTOR. G.C. TO TEST THE SMOKE DETECTOR FUNCTIONS WITH THE WAWA PROJECT MANAGER.
- 2 TRANSFER AIR DUCT ASSEMBLY.
- 3 PROVIDE SEALED 20" X 20" PLENUM BOX ASSEMBLY ABOVE TRANSFER GRILLE TO ALLOW FLEX TRANSFER DUCT CONNECTIONS.
- 4 WALL MOUNTED SENSOR(S) FOR EACH MECHANICAL UNIT PER ROOFTOP UNIT SCHEDULE ON SHEET M3.0 G.C. SHALL INSTALL AND WIRE TO UNIT. BAS CONTRACTOR SHALL CONNECT TO MECHANICAL UNIT ONLY.
- 5 WALL MOUNTED CO2 SENSOR TO RTU-1. SENSOR TO MONITOR CO2 LEVELS THROUGH REMOTE BAS INTERFACE.
- 6 ROUTE DUCT THROUGH ANGLED WEB MEMBER AND SUPPORT AT PANEL POINT.
- 7 DUCTWORK TO RUN WITHIN JOIST SPACING. MECHANICAL CONTRACTOR TO COORDINATE MECHANICAL WORK WITH ALL TRADES PRIOR TO INSTALLATION.
- 8 NOT USED.
- 9 CONNECT TO BOTTOM OF MAIN DUCT.
- 10 HEATER SHALL BE A MINIMUM OF 12" AWAY FROM ANY WALL.
- 11 NOT USED.
- 12 NOT USED.
- 13 NOT USED.
- 14 NOT USED.
- 15 EXHAUST DUCT UP TO ROOF MOUNTED EXHAUST FAN. SEE ROOF PLAN FOR CONTINUATION.
- 16 RETURN DUCT TO TRANSITION SIZE SHOWING ON PLANS.
- 17 SUPPLY DUCT TO TRANSITION SIZE SHOWING ON PLANS.
- 18 ROUTE DUCT BELOW JOIST GIRDER.

PERMITTING NOTE:

ALL REFRIGERATION EQUIPMENT INCLUDING WALK-IN COOLERS AND REFRIGERATORS WILL BE SUBMITTED UNDER A SEPARATE PERMIT.

SHEET GENERAL NOTE:

1. MECHANICAL CONTRACTOR SHALL ADJUST ALL LINEAR SLOT DIFFUSERS TO A GENERALLY VERTICAL FLOW. ADJUSTMENT SHALL BE MADE SO AS TO AVOID AIRFLOWS ON SENSORS, REFRIGERATION CASES, OR OPEN FOOD REFRIGERATION EQUIPMENT.

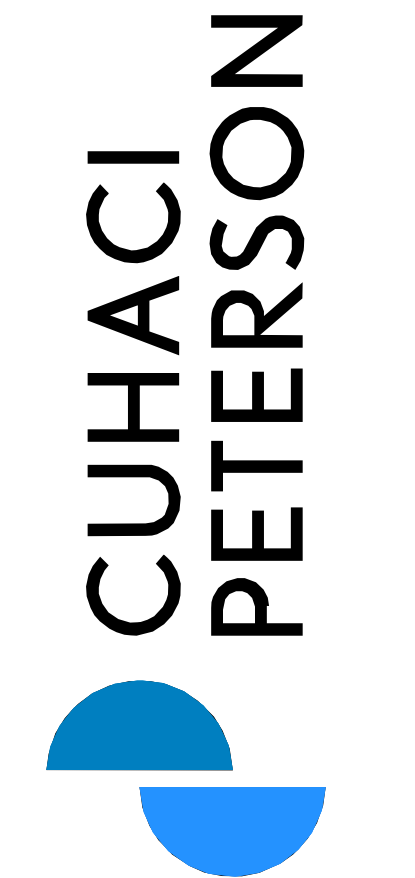

COPYRIGHT © All reports, plans, specifications, computer files, field data, notes and other documents are instruments of service prepared by CuHaci & Peterson, C.C. & P., as instruments of service remain the property of C.C. & P. C.C. & P. shall retain all common law, statutory and other reserved rights, including the copyright therein. Any use or reproduction of this document without written permission from C.C. & P. is a violation of Federal copyright laws.

CLIENT NAME
WAWA
260 W. BALTIMORE PIKE
WAWA, PA 19063


PROJECT NAME
W50FB PA v2022.1
STORE #8199
SEVEN BRIDGE ROAD & MUSIC CENTER
DRIVE, SMITHFIELD TOWNSHIP PA

SHEET TITLE
HVAC FLOOR PLAN


Revision Schedule	
No.	Description
1	PERMIT SET
2	PRE-BID SET

PROJECT NO. ZZ2052	DATE 03-01-2023	DRAWN JFG	CHECKED ESD
-----------------------	--------------------	--------------	----------------


BUILDING LOCATION	WIND SPEED ZONE (IBC FIGURE 1609A)
SMITHFIELD TOWNSHIP, PA.	110 MPH

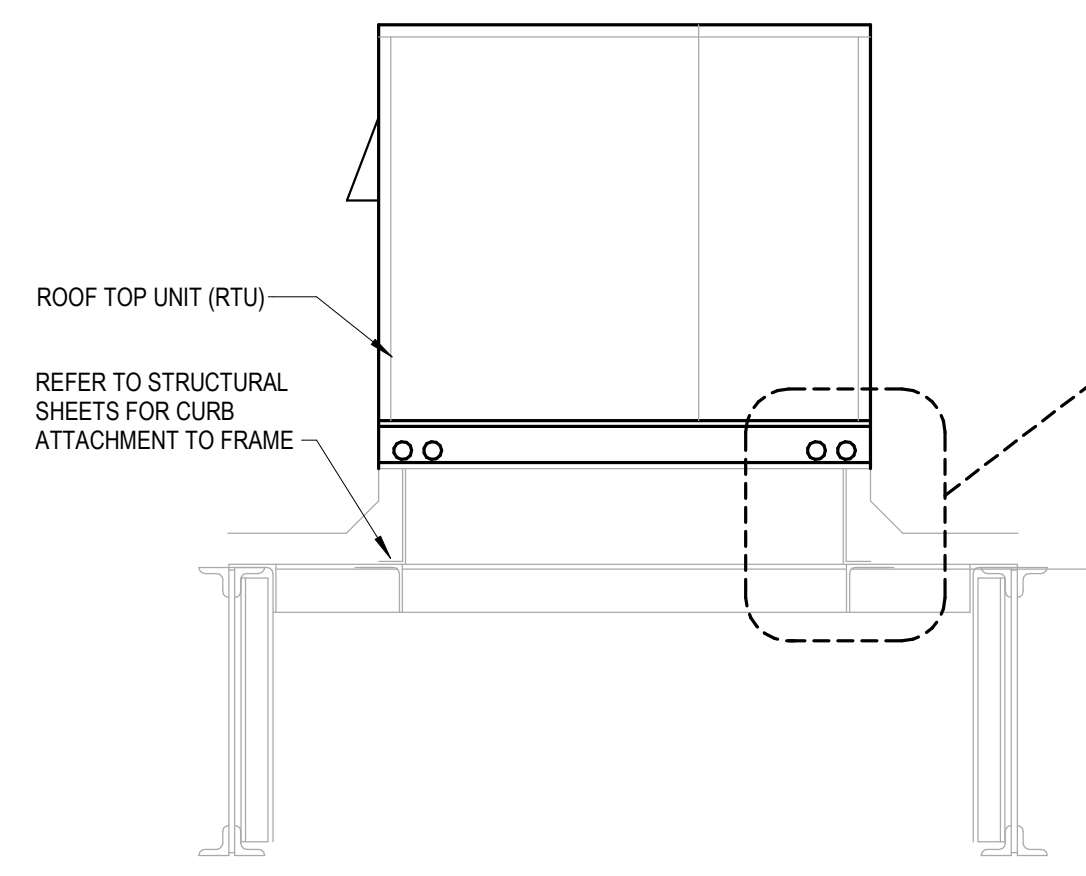


12 HVAC RTU TIE-DOWN DETAIL
M2.0 NOT TO SCALE

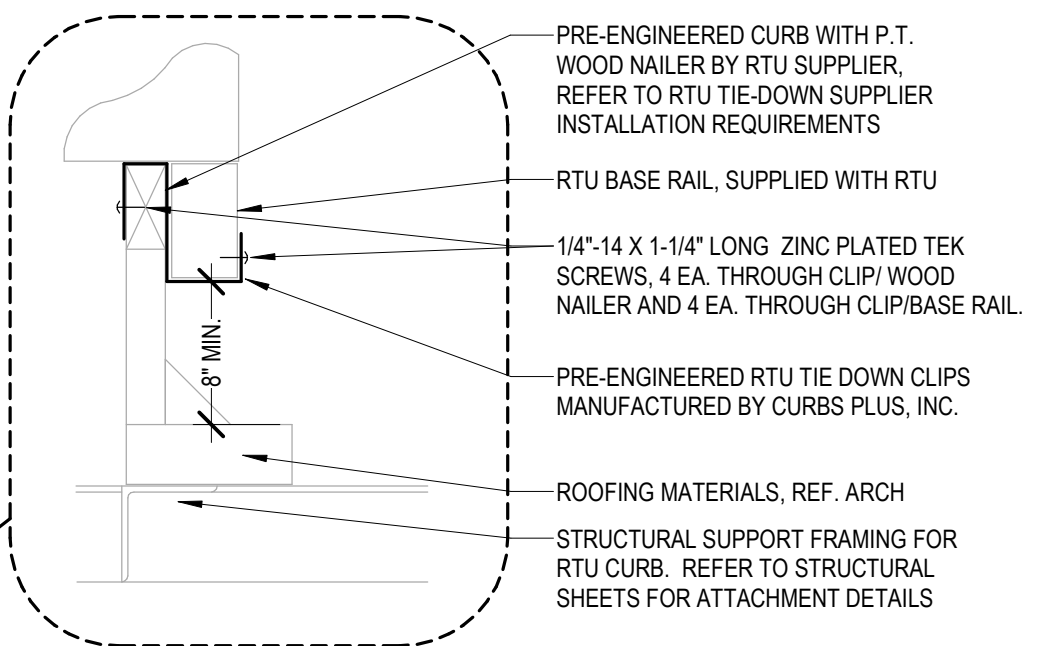


INSTALL TIE DOWN CLIPS PER MANUFACTURER'S INSTALLATION INSTRUCTIONS

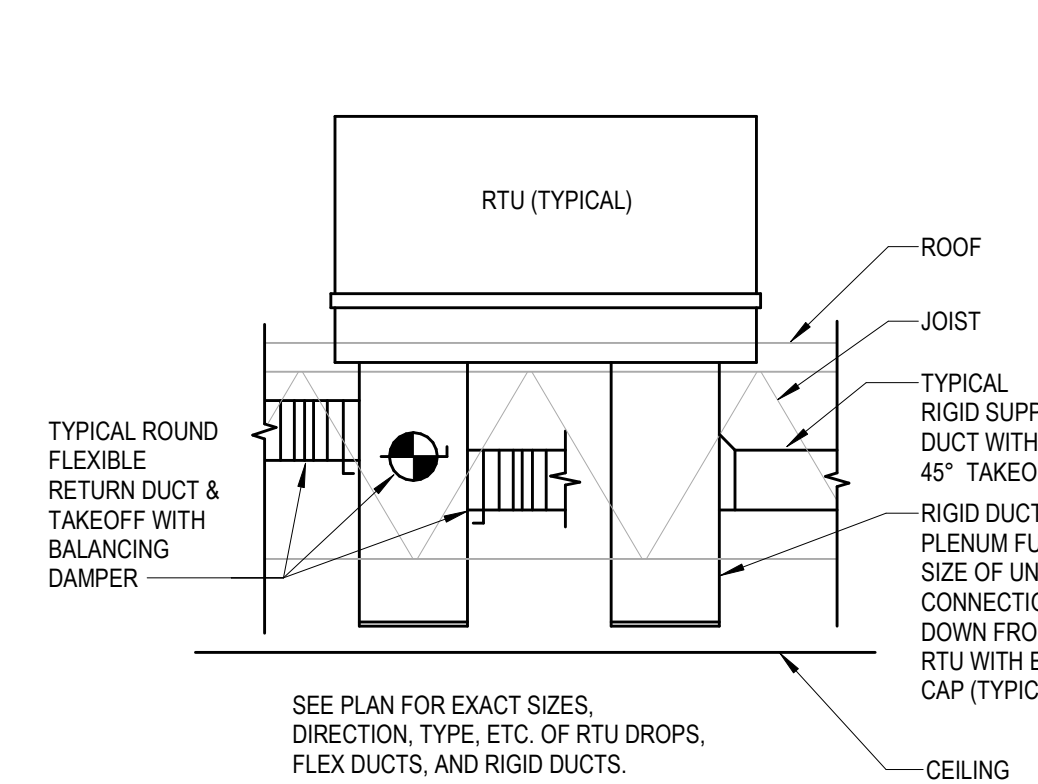


11 TYPICAL DUCT PLENUM DETAIL
M2.0 NOT TO SCALE

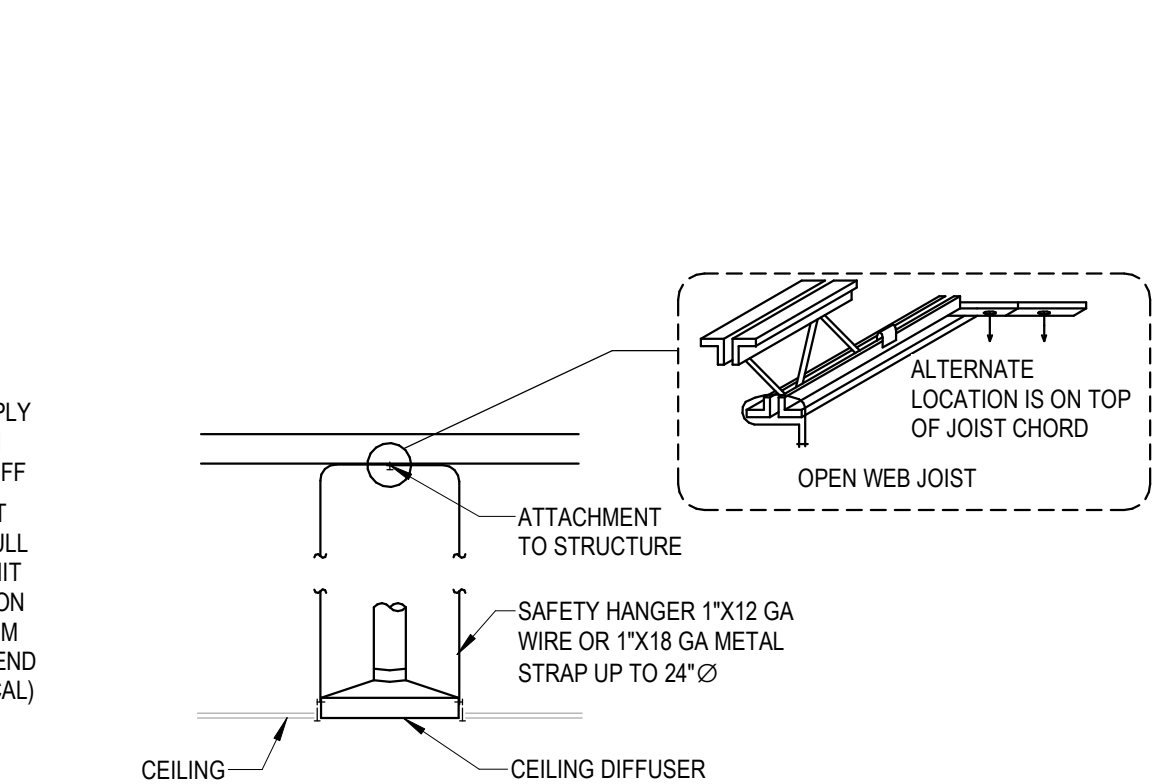

10 HVAC CEILING MOUNTED AIR DIFFUSER SUPPORT DETAIL
M2.0 NOT TO SCALE

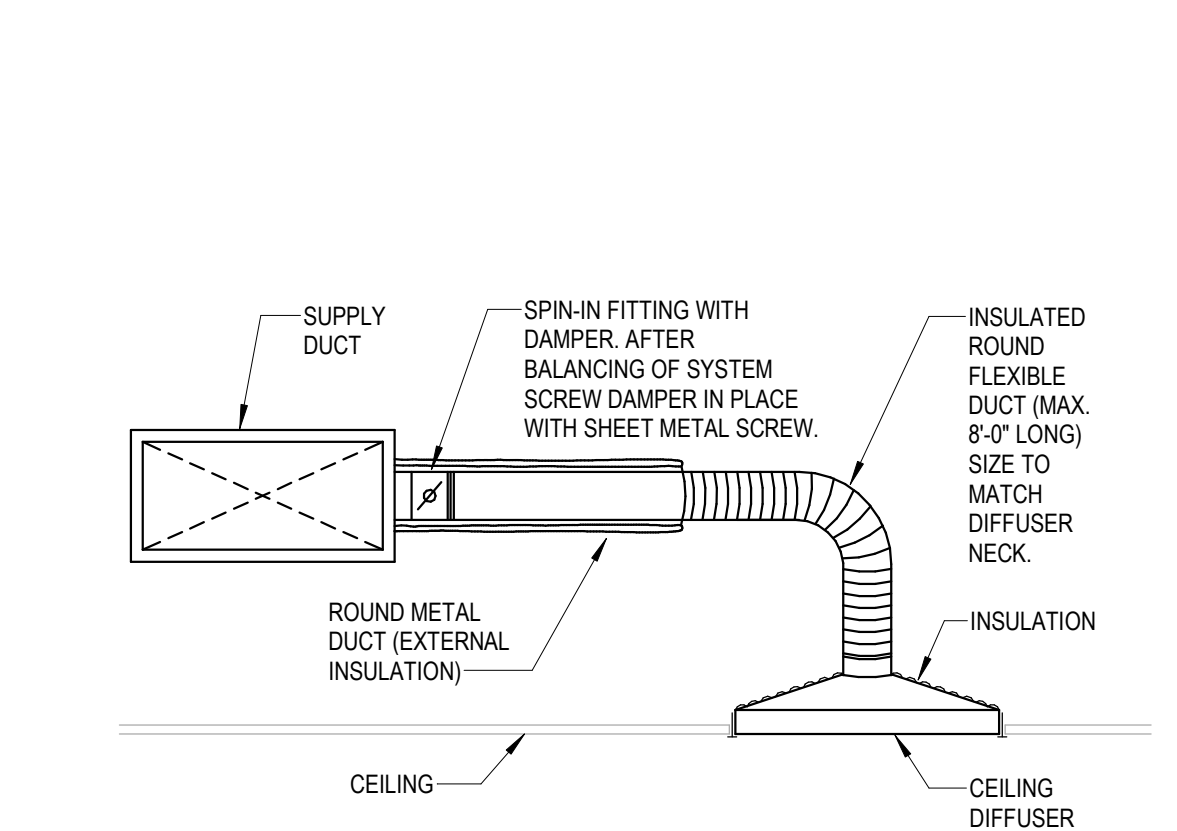


9 HVAC CEILING DIFFUSER RUNOUT DETAIL
M2.0 NOT TO SCALE

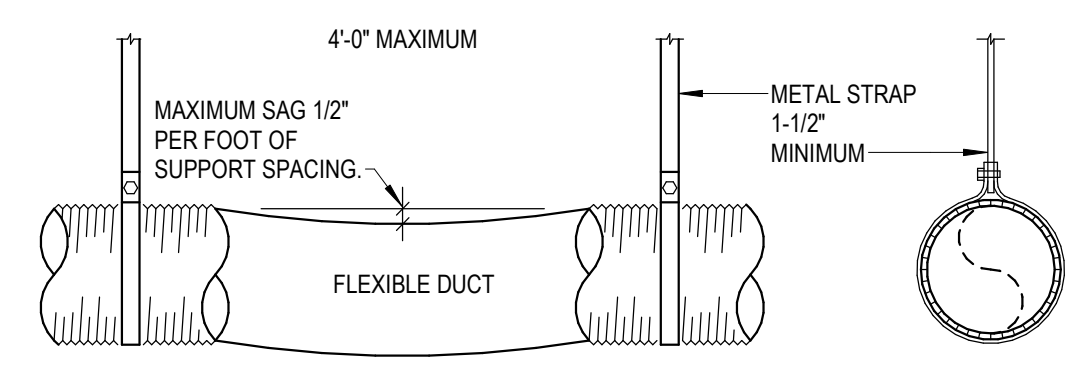


- NOTES:**
- DUCT SHOULD EXTEND STRAIGHT FOR SEVERAL INCHES FROM A CONNECTION BEFORE BENDING.
 - SUPPORT SYSTEM MUST NOT DAMAGE DUCT OR CAUSE OUTF OF ROUND SHAPE.


8 HVAC FLEX DUCT SUPPORT DETAIL
M2.0 NOT TO SCALE

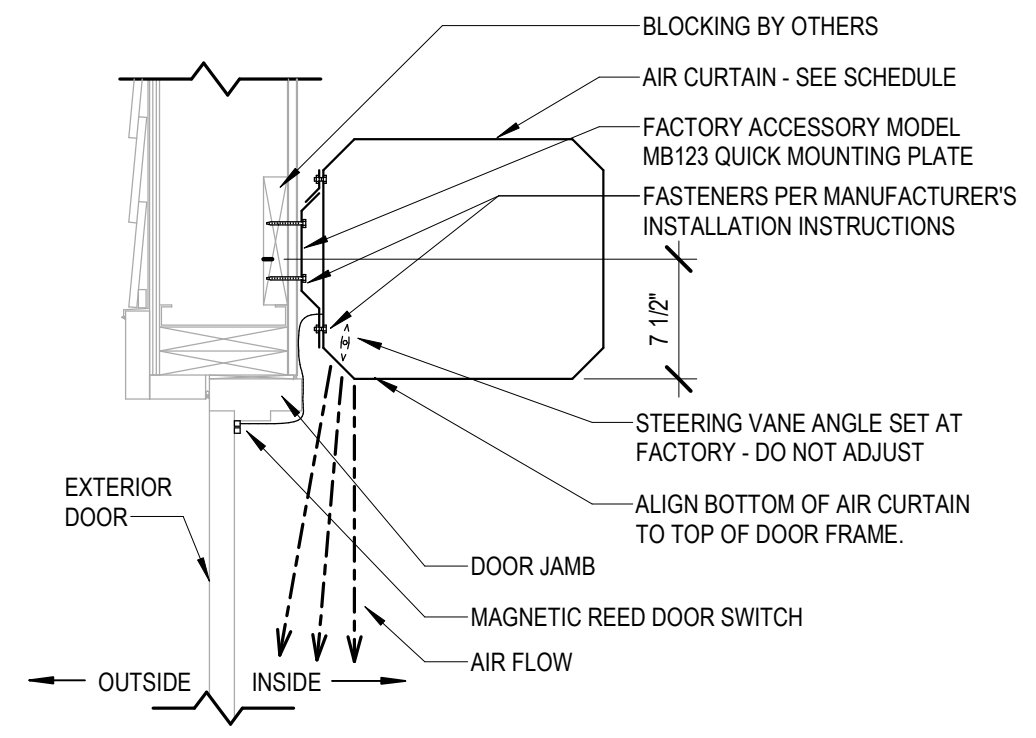


7 AIR CURTAIN INSTALLATION DETAIL
M2.0 NOT TO SCALE

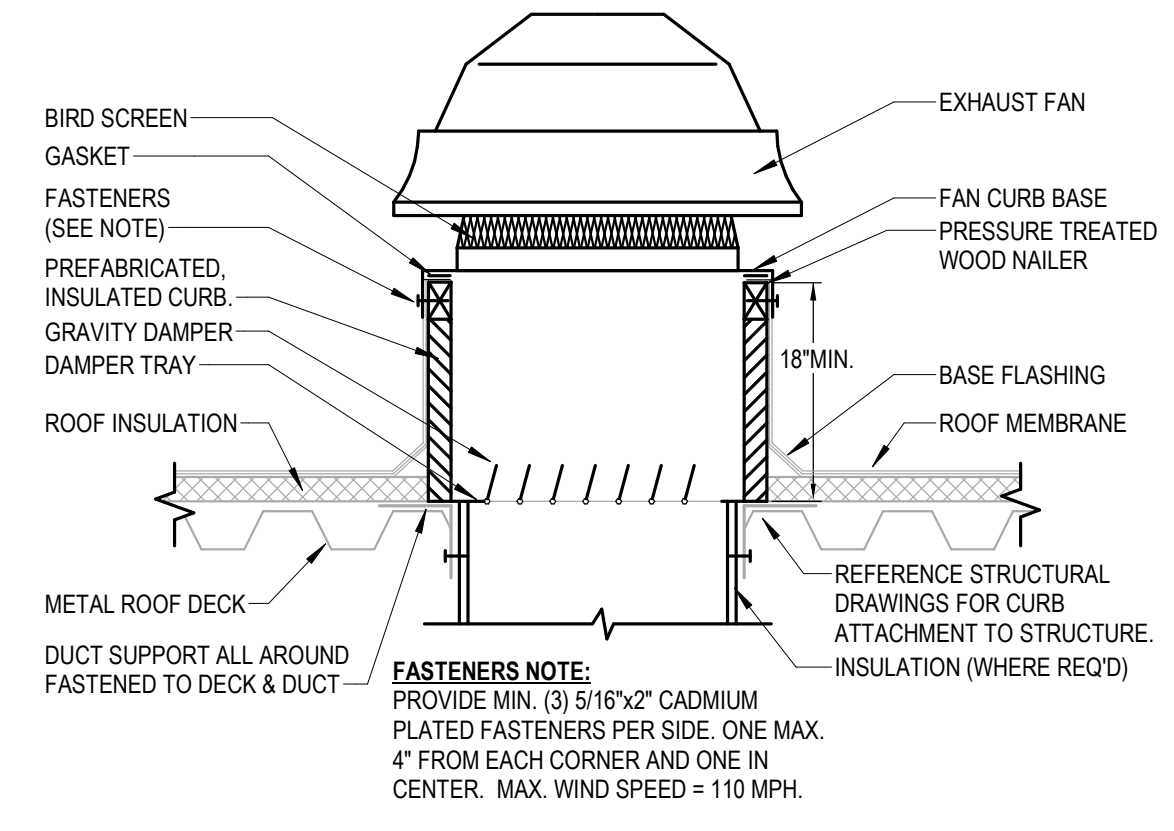

6 ROOF FAN MOUNTING DETAIL
M2.0 NOT TO SCALE

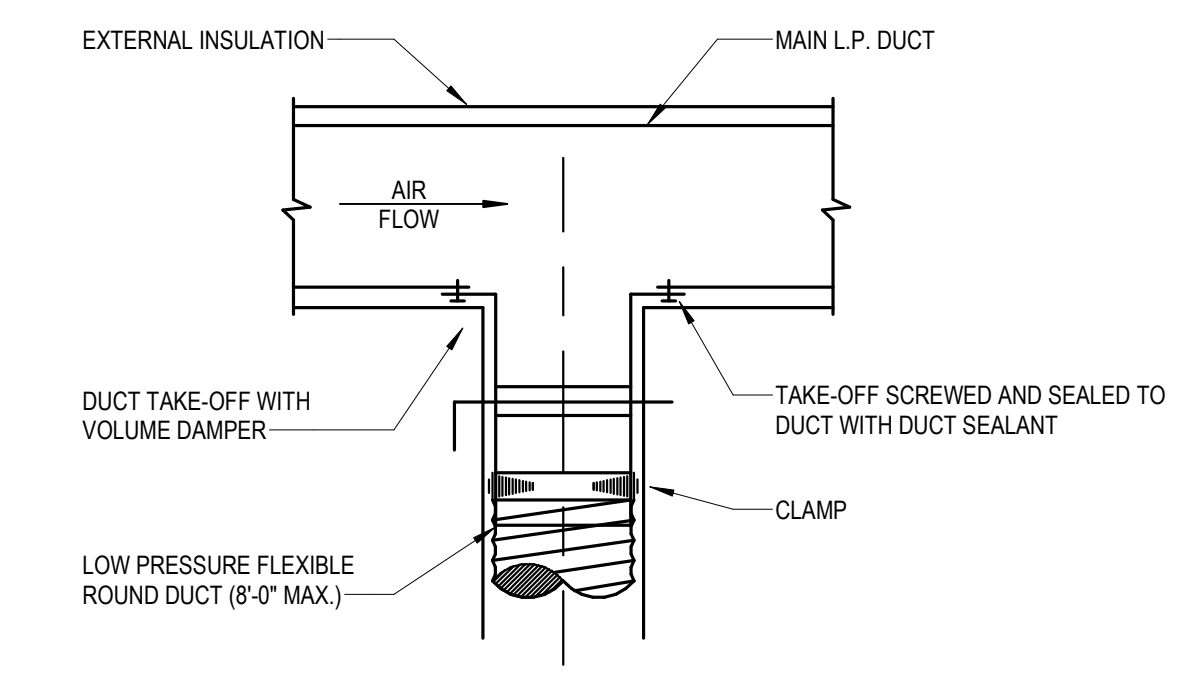


5 HVAC SUPPLY DIFFUSER TAKE OFF DETAIL
M2.0 NOT TO SCALE

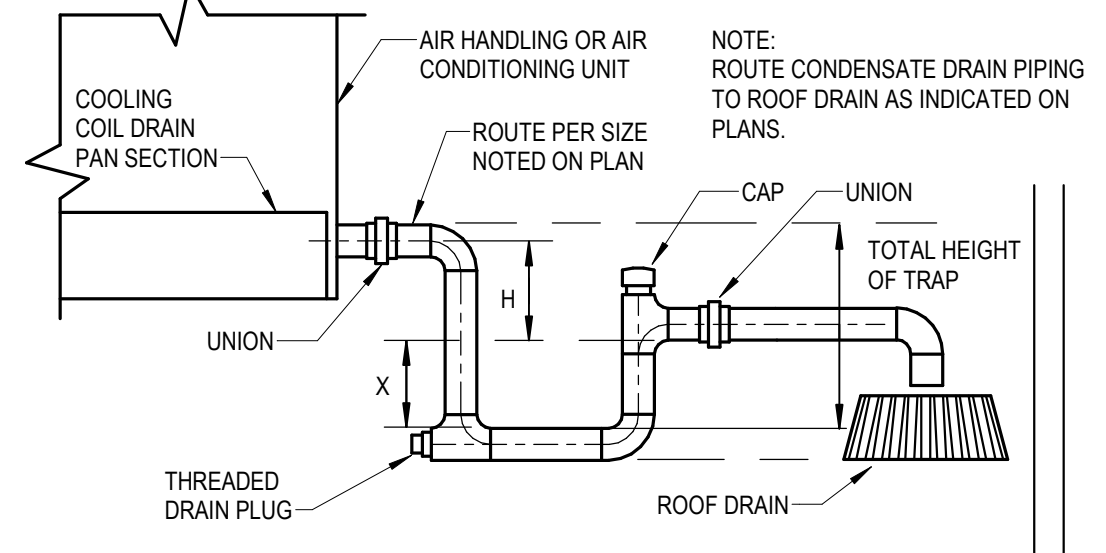

DRAIN TRAPPING HEIGHT		
FAN ARRANGEMENT	H	X
BLOW-THRU (POSITIVE STATIC PRESSURE)	A	B
DRAW-THRU (NEGATIVE STATIC PRESSURE)	D	C


- A = MINIMUM 1"
B = AT LEAST 1" PLUS CASING STATIC PRESSURE
C = 1/2" D"
D = AT LEAST 1" PLUS CASING STATIC PRESSURE

4 HVAC CONDENSATE DRAIN DETAIL
M2.0 NOT TO SCALE

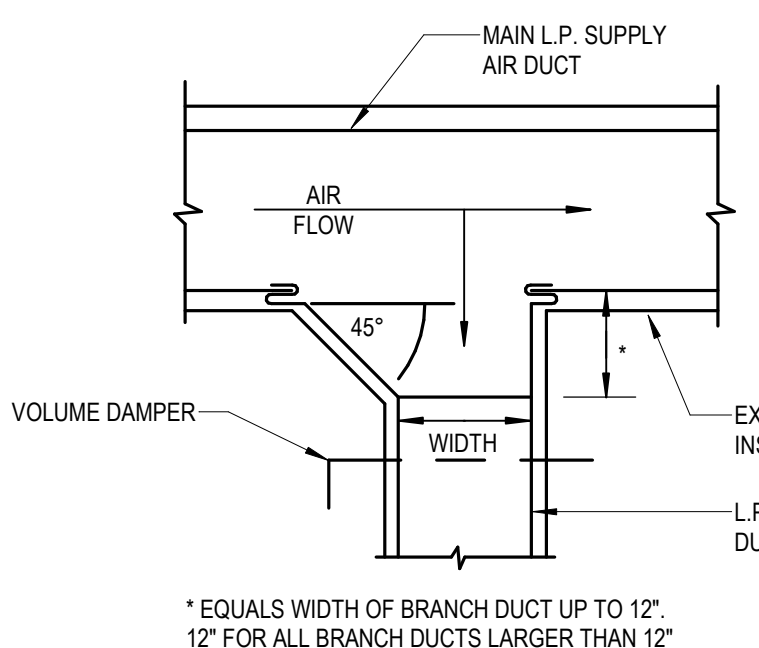


- NOTES:**
- GENERAL ARRANGEMENT SHOWN. INSTALL ALL FIRE DAMPERS IN STRICT ACCORDANCE WITH ALL INSTALLATION PROCEDURES REQUIRED BY THE UNDERWRITERS LABORATORY INC. AS FURNISHED BY DAMPER MFR.
 - WHERE FIRE DAMPER IS TO BE MOUNTED WITHIN EXISTING CEILING, WALL OR FLOOR, CUT OPENING AS REQUIRED TO MAINTAIN CLEARANCES STIPULATED BY THE MFR. BETWEEN WALL OR FLOOR AND SLEEVE.
 - GAUGE OF SHEETMETAL SLEEVE, MOUNTING ANGLES, METHODS OF ATTACHMENT, ETC. AS DIRECTED BY FIRE DAMPER MFR.

3 HVAC LOW PRESSURE SUPPLY BRANCH DUCT DETAIL
M2.0 NOT TO SCALE

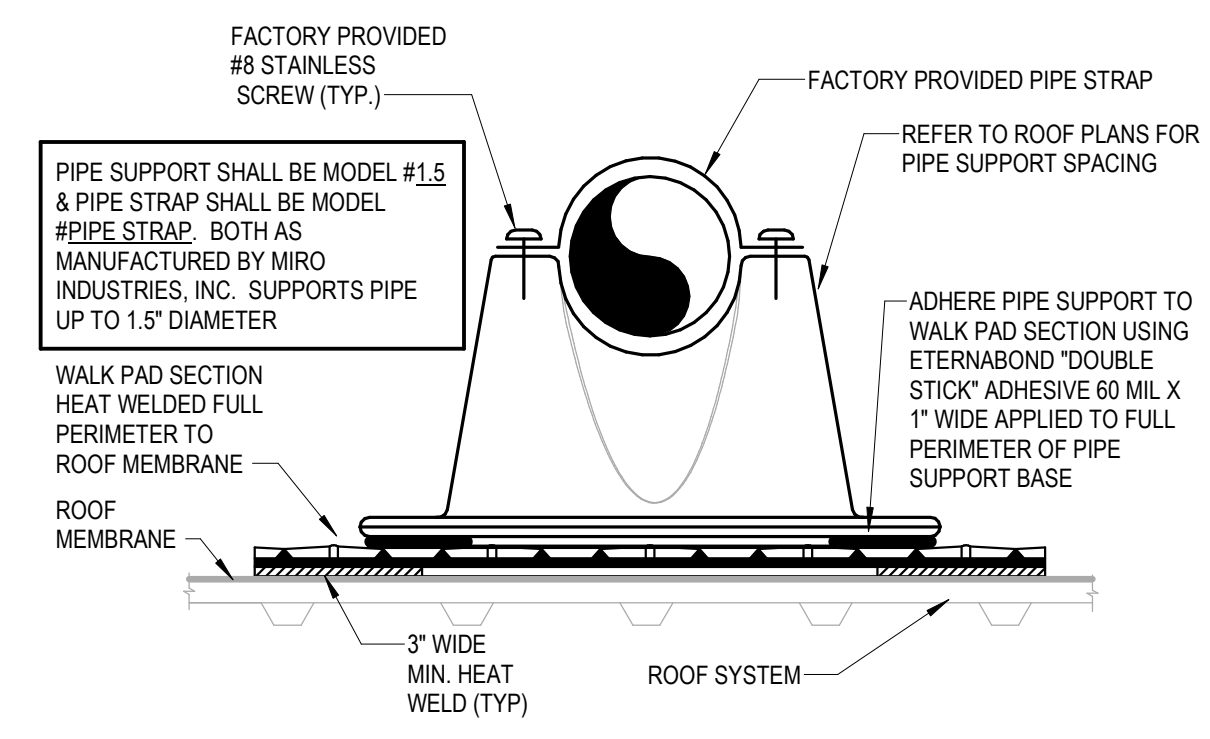

2 PIPE ROOF SUPPORT DETAIL
M2.0 NOT TO SCALE

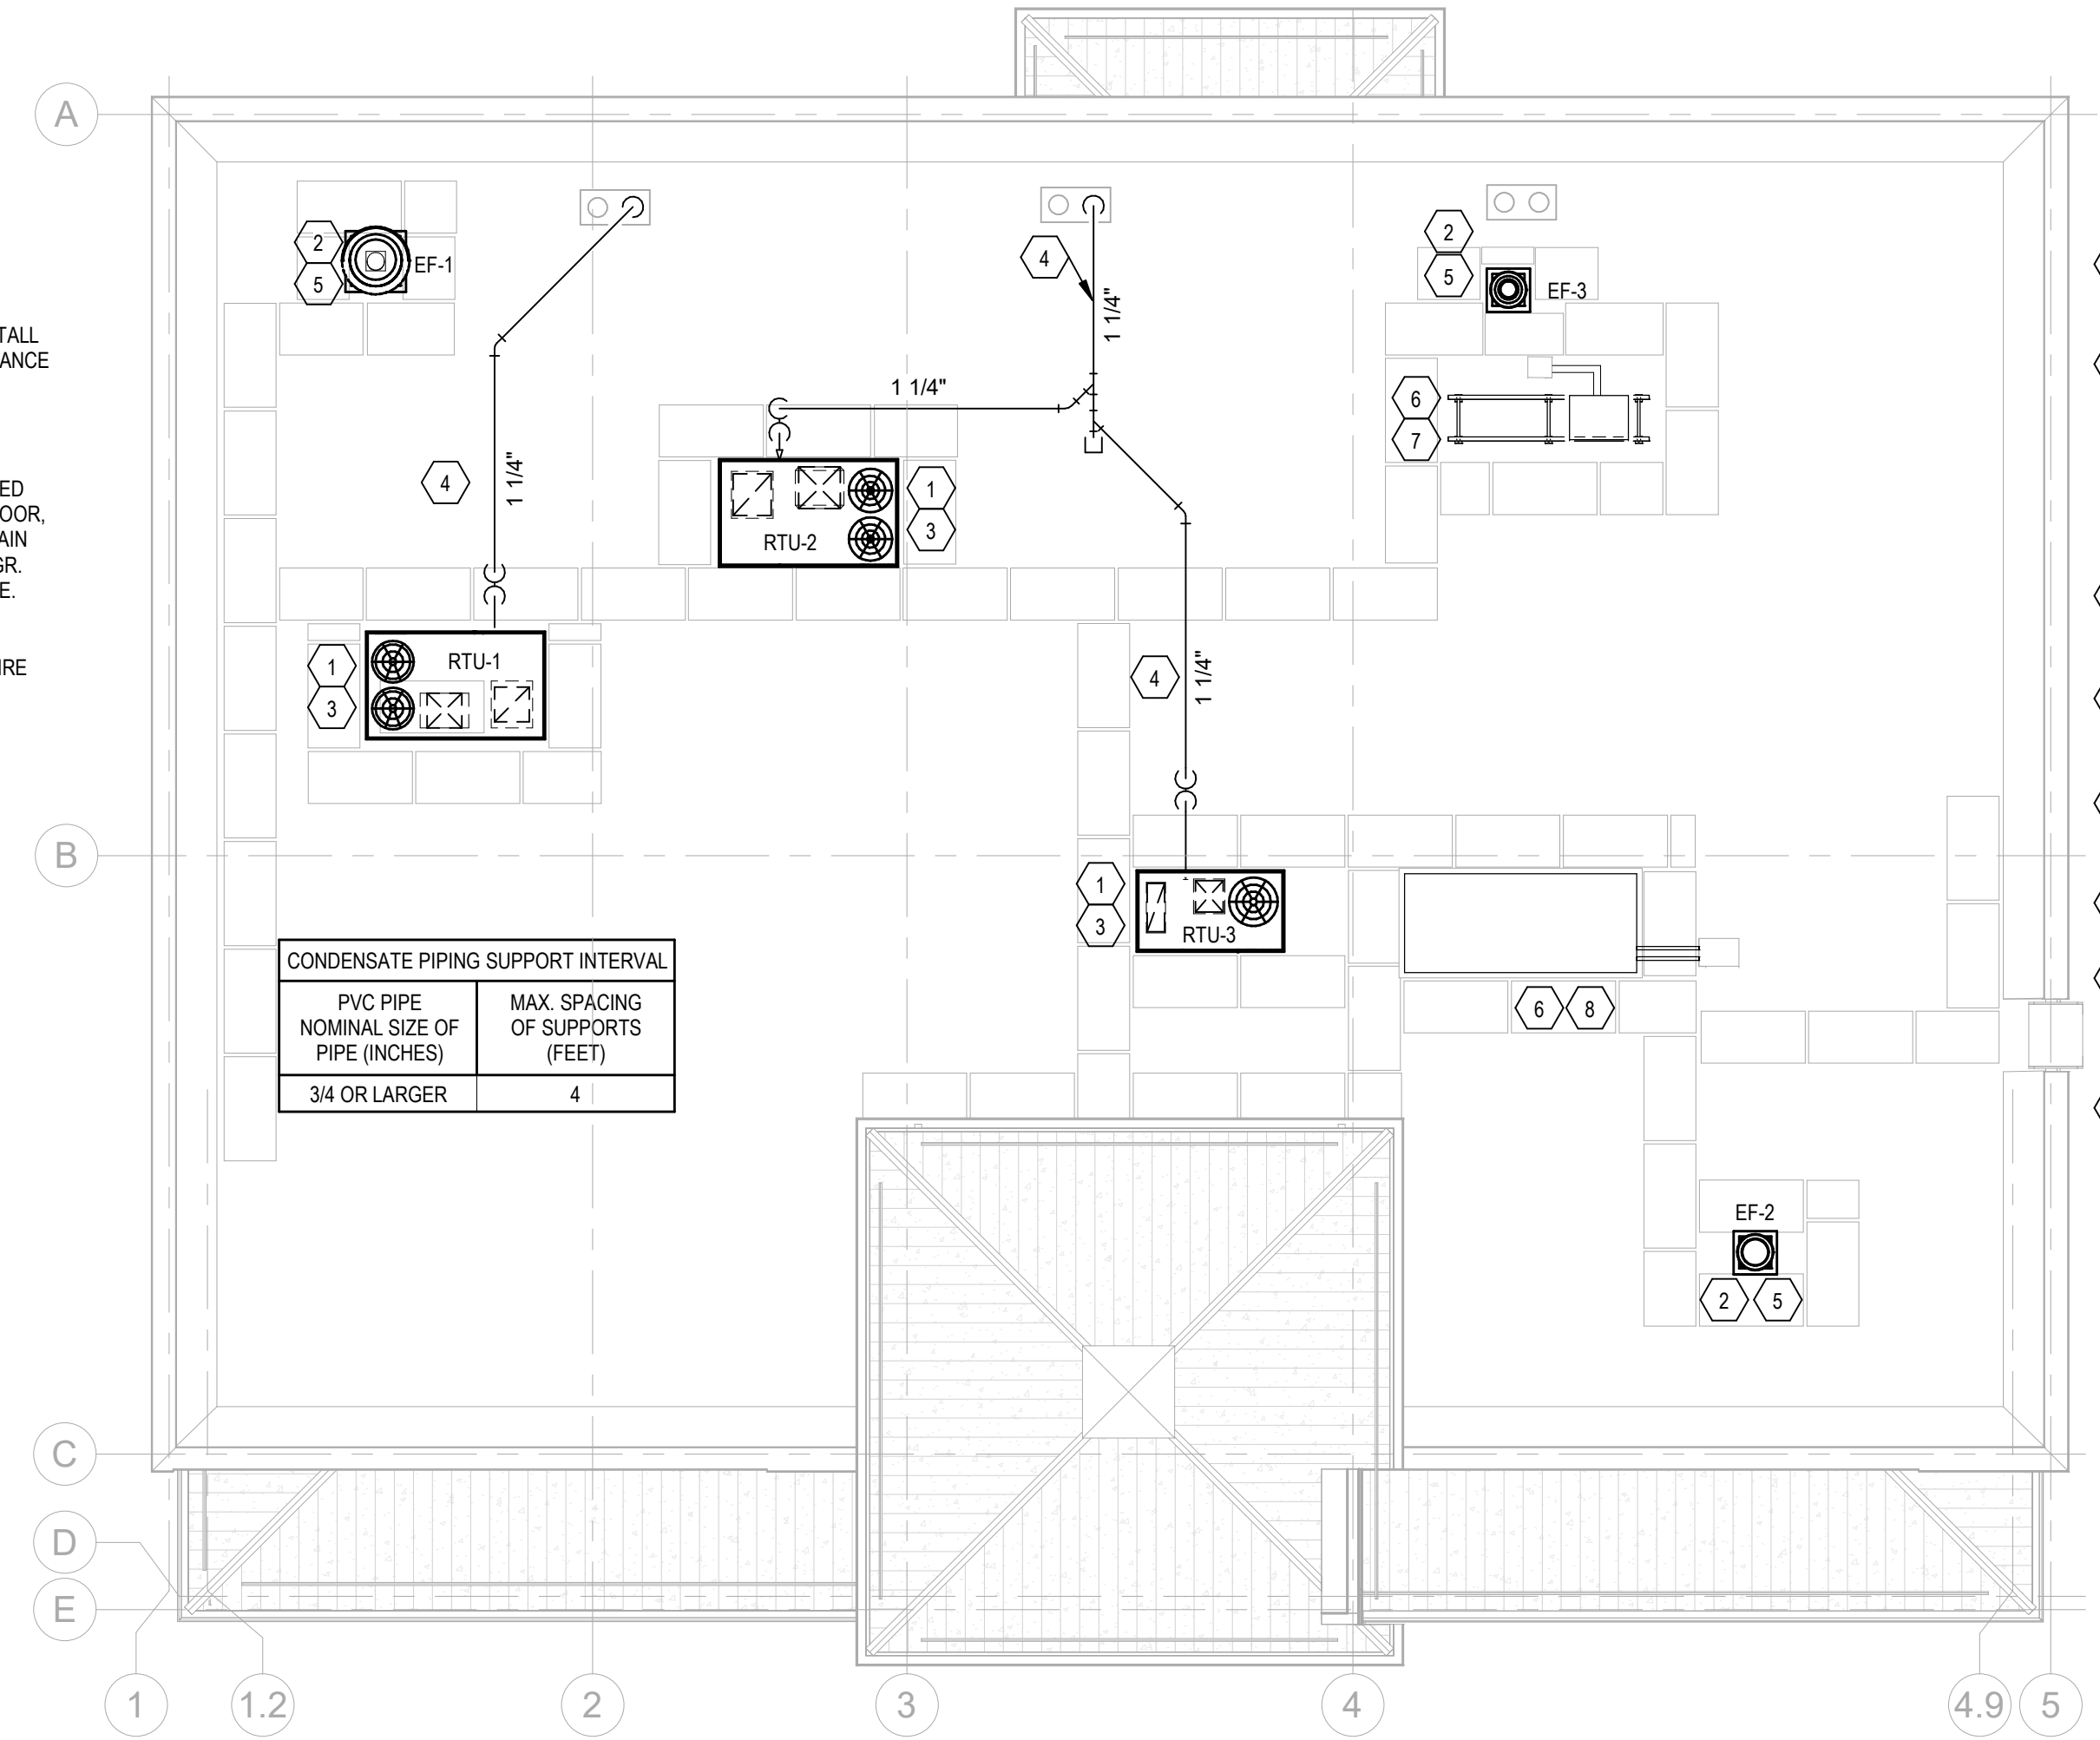

CONDENSATE PIPING SUPPORT INTERVAL	
PVC PIPE NOMINAL SIZE OF PIPE (INCHES)	MAX. SPACING OF SUPPORTS (FEET)
3/4 OR LARGER	4


1 HVAC ROOF PLAN
M2.0 1/8" = 1'-0"

SHEET NOTES

- FACTORY INSTALLED SMOKE DETECTOR IN MAIN SUPPLY AND RETURN OF EACH ROOF TOP UNIT.
- INSTALL ROOF MOUNTED EXHAUST FAN PER DETAIL ON SHEET M2.0 COORDINATE EXACT LOCATION OF FAN PENETRATION WITH ARCHITECTURAL ROOF PLAN. TRANSITION GALVANIZED DUCT WORK AS NECESSARY FROM FAN INTO CEILING/JOIST SPACE. SEE SHEET M2.0 FOR CONTINUATION.
- PROVIDE FLEXIBLE CONNECTIONS BETWEEN ALL DUCT WORK AND MECHANICAL UNITS.
- ROUTE SCH. 40 PVC CONDENSATE DRAIN PIPING ALONG ROOF. SUPPORT PIPING PER DETAIL ON SHEET M2.0
- MAINTAIN A MINIMUM 10" CLEARANCE BETWEEN OUTSIDE AIR INTAKES AND EXHAUST TERMINATIONS ON ROOF.
- FOOD SERVICE REFRIGERATION EQUIPMENT PROVIDED BY OTHERS.
- FOOD SERVICE REFRIGERATION EQUIPMENT MOUNTED ON PRE-ENGINEERED RACK. SEE DETAIL ON SHEET A3.1
- FOR SPECIFIC WIND LOADING REQUIREMENTS NOT TO EXCEED 110 MPH, SEE STRUCTURAL DRAWINGS.

2600 Midland Center Parkway
Suite #200
Midland, FL 32751
P (407) 661-9100
F (407) 661-9101
c-p.com

CUHACI PETERSON

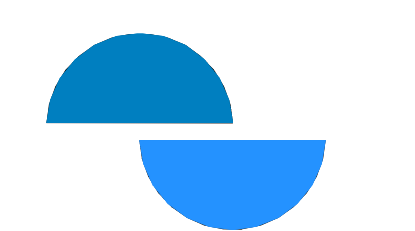

COPYRIGHT © - All reports, plans, specifications, computer files, field data, notes and other documents are instruments of service prepared by CuHaci & Peterson, C.C. & P., as instruments of service remain the property of C.C. & P. C.C. & P. shall retain all common law, statutory and other reserved rights, including the copyright therein. Any use or reproduction of this document without written permission from C.C. & P. is a violation of Federal Copyright laws.

CLIENT NAME
WAWA
260 W. BALTIMORE PIKE
WAWA, PA 19063

PROJECT NAME
W50FB PA v2022.1
STORE #8199
SEVEN BRIDGE ROAD & MUSIC CENTER DRIVE, SMITHFIELD TOWNSHIP, PA

SHEET TITLE
HVAC ROOF PLAN & DETAILS

Revision Schedule	
No.	Description
1	PERMIT SET
2	PRE-BID SET

PROJECT NO. ZZ2005Z	DATE 03-01-2023	DRAWN JFG	CHECKED ESD
------------------------	--------------------	--------------	----------------

M2.0

MECHANICAL GENERAL NOTES

- REFER TO WRITTEN BOOK SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- THE WORK TO BE DONE UNDER THESE SPECIFICATIONS AND THE DRAWINGS CONSISTS OF FURNISHING ALL EQUIPMENT, MATERIALS, LABOR AND SERVICES, AND PERFORMING ALL OPERATIONS TO COMPLETE THE MECHANICAL CONSTRUCTION WORK FOR THIS PROJECT. ANY WORK NOT SPECIFICALLY COVERED BY THESE SPECIFICATIONS OR INDICATED ON THE MECHANICAL/ELECTRICAL/PLUMBING PLANS, BUT NECESSARY TO COMPLETE OR PERFECT ANY PART OF THIS INSTALLATION IN A SUBSTANTIAL MANNER, SHALL BE PROVIDED WITHOUT EXTRA COST TO OWNER.
- THE TERM "FURNISH" SHALL MEAN TO OBTAIN AND SUPPLY TO THE JOB SITE. THE TERM "INSTALL" SHALL MEAN TO FIX IN POSITION AND CONNECT FOR USE. THE TERM "PROVIDE" SHALL MEAN TO FURNISH AND INSTALL. THE TERM "MECHANICAL WORK" OR "WORK" SHALL MEAN ALL LABOR, MATERIAL, EQUIPMENT, SCAFFOLDING, RIGGING, TOOLS, SUPERVISION, SERVICES AND OTHER INCIDENTALS NECESSARY FOR COMPLETE AND OPERABLE INSTALLATION.
- THE CONTRACTOR SHALL FURNISH AND INSTALL ALL EQUIPMENT, MATERIALS AND LABOR TO PROVIDE A COMPLETE AND OPERATIONAL SYSTEM AS INDICATED ON THE DESIGN DOCUMENTS.
- CONTRACTOR SHALL OBTAIN ALL PERMITS, INSPECTIONS AND APPROVALS PRIOR TO AND DURING CONSTRUCTION.
- ALL MATERIALS, EQUIPMENT AND INSTALLATIONS SHALL BE IN STRICT ACCORDANCE WITH THE 2018 INTERNATIONAL BUILDING CODE - MECHANICAL, SMACNA, UL, STATE CODES, LOCAL CODES, MANUFACTURER'S RECOMMENDATIONS, AND ALL AUTHORITIES HAVING JURISDICTION.
- CONTRACTOR SHALL PROVIDE ALL ROOFING OPENINGS, FLASHINGS, AUXILIARY STEEL, THREADED RODS, VIBRATION ISOLATORS, TURNBUCKLES, ETC. TO SUPPORT HIS EQUIPMENT ON OR FROM THE STRUCTURE.
- CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES AND IN FIELD PRIOR TO INSTALLATION OF ANY WORK. REPORT ALL CONFLICTS IMMEDIATELY TO ARCHITECT AND ENGINEER.
- THE DRAWINGS INDICATE DIAGRAMMATICALLY THE EXTENT, GENERAL CHARACTER AND LOCATION OF THE WORK INCLUDED. OFFSETS OR CHANGES IN DUCT SHAPE TO AVOID STRUCTURAL OR OTHER INTERFERENCES, AND WORK INDICATED BUT HAVING MINOR DETAILS OBVIOUSLY OMITTED SHALL BE PROVIDED WITHOUT EXTRA COST.
- ANY CHANGES AND/OR MODIFICATIONS MUST BE REVIEWED AND APPROVED BY THE ENGINEER OR OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- REMOVE ALL TRASH, DEBRIS AND DEMOLITION MATERIAL FROM PREMISES AT THE END OF EACH WORK DAY.
- SCHEDULE ALL WORK, CUTTING AND BUILDING SERVICE INTERRUPTIONS WITH BUILDING OWNER AND CONSTRUCTION MANAGER, PRIOR TO COMPLETING WORK.
- ALL DUCT DIMENSIONS ARE INSIDE CLEAR DIMENSIONS.
- THE MAXIMUM FLEXIBLE DUCT LENGTH PERMITTED IS 8'-0". THIS DUCTWORK SHALL BE INSTALLED WITHOUT KINKS OR 90° BENDS.
- ALL FLEXIBLE DUCTWORK SHALL BE FLEX-VENT TYPE KIM INSULATED WITH POLYMER INNER FILM AND METALIZED OUTER JACKET, OR APPROVED EQUAL. SIZE SHALL BE SAME AS DIFFUSER NECK SIZE, UNLESS INDICATED OTHERWISE.
- FIELD ADJUST THE DIRECTION OF BLOW FOR ALL SUPPLY AIR DEVICES SO THAT THE DEVICES DO NOT BLOW DIRECTLY INTO SOFFITS, CURTAIN WALLS, REFRIGERATED CASES OR EXHAUST HOODS.
- ALL NEW AND EXISTING PIPES AND DUCTS SHALL HAVE UL FIRE RATED SLEEVES AND/OR FIRE RATED DAMPERS, WHEN PASSING THROUGH FIRE RATED CONSTRUCTION.
- COORDINATE LOCATION OF NEW DUCTWORK, AIR DEVICES AND EQUIPMENT WITH LIGHT FIXTURES, SPRINKLER PIPING AND HYDRONIC PIPING.
- CONTRACTOR SHALL VERIFY FIELD CONDITIONS AT THE SITE AND NOTIFY THE OWNER/ENGINEER OF ANY DISCREPANCIES PRIOR TO COMMENCING WITH WORK.
- ALL WALL MOUNTED TEMPERATURE, HUMIDITY, AND CO2 SENSORS SHALL BE INSTALLED AT AN ELEVATION 54" ABOVE FINISHED FLOOR TO THE TOP UNLESS OTHERWISE NOTED ON DRAWINGS. COORDINATE FINAL LOCATIONS WITH EQUIPMENT, FURNITURE, TENANT AND ARCHITECT PRIOR TO INSTALLATION.
- ALL DUCTWORK SHALL BE GALVANIZED STEEL CONSTRUCTED AT 2" PRESSURE CLASS. ALL CONCEALED DUCTWORK BELOW TRUSSES SHALL BE INSULATED WITH 1-1/2" FIBERGLASS DUCT WRAP WITH WIRE SUPPORT BANDS ON 24" CENTERS. ALL CONCEALED DUCTWORK ABOVE THE TRUSSES SHALL BE INSULATED WITH 1-1/2" OF FIBERGLASS DUCT WRAP WITH WIRE SUPPORT BANDS ON 24" CENTERS. ALL INTERIOR EXPOSED DUCTWORK BELOW TRUSSES SHALL BE INSULATED WITH 1" RIGID FIBERGLASS DUCT BOARD WITH FOIL AND SCRIM FACING. ALL EXTERIOR EXPOSED DUCTWORK SHALL BE INSULATED WITH 4" RIGID FIBERGLASS BOARD WITH WEATHERPROOF MEMBRANE.
- VERIFY ALL EQUIPMENT VOLTAGES, WIRING REQUIREMENTS, AND REQUIRED BREAKER SIZES WITH THE ELECTRICAL CONTRACTOR PRIOR TO ORDERING EQUIPMENT.
- ALL ACCESS DOORS REQUIRED IN GENERAL CONSTRUCTION ARE TO BE PROVIDED AND INSTALLED BY THE GENERAL CONTRACTOR. IT IS THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR TO IDENTIFY SIZE, TYPE AND LOCATION OF SUCH DOORS FOR PROPER ACCESS TO ALL CONCEALED MECHANICAL EQUIPMENT, VALVES AND OTHER RELATED DEVICES. THE MECHANICAL CONTRACTOR SHALL IDENTIFY THESE REQUIREMENTS ON A COORDINATED SHOP DRAWING PRIOR TO SYSTEM FABRICATION AND INSTALLATION.
- AFTER THE HEATING AND AIR CONDITIONING SYSTEM INSTALLATIONS ARE COMPLETE, THE CONTRACTOR SHALL BALANCE THE SYSTEM AND PRESENT OWNER & ARCHITECT WITH A WRITTEN BALANCING REPORT BY A CERTIFIED INDEPENDENT TESTING LAB. DAMPER HANDLES SHALL BE FASTENED INTO DUCTWORK WITH SHEETMETAL SCREWS AFTER BALANCING TO ASSURE CORRECT BALANCED AIRFLOW.
- PROVIDE ELBOWS OR TEES WITH TURNING VANES FOR ALL CHANGES IN SUPPLY DUCT DIRECTION. PROVIDE BRANCH DUCT DAMPERS WITH LOCKING QUADRANTS FOR ALL BRANCHES AND TAKE-OFFS. PROVIDE RAISED QUADRANTS FOR INSULATED DUCTWORK. ALL VOLUME DAMPER HANDLES ARE TO PROTRUDE NEATLY THROUGH DUCT INSULATION AND BE TAGGED SO THAT THEY ARE CLEARLY VISIBLE.
- PROVIDE FLEXIBLE CONNECTIONS AT ALL DUCT CONNECTIONS TO VIBRATING EQUIPMENT. THESE CONNECTIONS SHALL BE INSTALLED IN CLOSE PROXIMITY TO SUCH EQUIPMENT.
- THE MECHANICAL CONTRACTOR SHALL HAVE A QUALIFIED HVAC TECHNICIAN FROM THE UNIT MANUFACTURER PROVIDE AN EQUIPMENT OPERATION CHECK AFTER UNIT START-UP AND PRIOR TO CERTIFIED AIR BALANCING. THE CERTIFICATION, SIGNED BY THE TECHNICIAN, MUST BE INCLUDED IN THE GENERAL CONTRACTOR CLOSING DOCUMENTS FOR THE STORE.
- PROVIDE CONDENSATE DRAIN PIPING SIZED PER PLAN. PROVIDE TRAP FOR EACH ROOFTOP UNIT PER DETAIL ON PLANS. PIPE DRAIN TO GUTTER OR DOWNSPOUT PER PLAN.

AIR BALANCE SCHEDULE

SYSTEM	CFM
RTU-1	+635
RTU-2	+950
RTU-3	+365
EF-1	-1300
EF-2	-250
EF-3	-100
BUILDING POSITIVE PRESSURE	+300

OUTSIDE AIR CALCULATION

AREA SERVED	AREA (SQFT)	PEOPLE / 1000 SQFT	# PEOPLE	CFM / PERSON	PEOPLE O.A. (CFM)	CFM / SQFT	SOFT O.A. (CFM)	TOTAL O.A. REQ'D (CFM)	TOTAL O.A. SUPPLIED (CFM)
OFFICE	65	5	2	5	10	0.06	4	14	
ASSOCIATE	76	5	2	5	10	0.06	5	15	
RETAIL AREA	1318	15	20	7.5	150	0.12	159	309	
								RTU-1	635
STAGING	85	2	1	10	10	0.12	11	21	
COFFEE	270	5	2	5	10	0.06	17	27	
FOOD SVC. 1	393	20	8	7.5	60	0.12	48	108	
FOOD SVC. 2	385	20	8	7.5	60	0.12	47	107	
								RTU-2	950
RETAIL AREA	1400	15	21	7.5	158	0.12	168	326	
DELIVERY RM	67	2	1	10	10	0.12	9	19	
REAR VEST.	52	10	1	5	5	0.06	4	9	
FRONT VEST.	89	10	1	5	5	0.06	6	11	
								RTU-3	365

- NOTES:**
- OCCUPANCY LOAD VENTILATION RATES ARE BASED ON NET OCCUPIABLE SPACE IN ACCORDANCE WITH THE 2018 INTERNATIONAL MECHANICAL CODE, TABLE 403.3.1.1.
 - ANTICIPATED NUMBER OF PEOPLE IS BASED ON AN OCCUPANCY LOAD FACTOR (# PEOPLE/SF) VALUE (BASED ON THE 2018 INTERNATIONAL MECHANICAL CODE, TABLE 403.3.1.1).

HVAC AIR DEVICE SCHEDULE

TYPE MARK	MANUFACTURER	MODEL	SERVICE	DESCRIPTION	MOUNTING TYPE	MATERIAL	NECK SIZE	FACE SIZE	NOTES
CD-1	PRICE	AMD	SUPPLY	LOUVERED FACE DIRECTIONAL DIFFUSER	LAY-IN	ALUMINUM	18"X18"	24"X24"	1.6
CD-2	PRICE	AMD	SUPPLY	LOUVERED FACE DIRECTIONAL DIFFUSER	SURFACE	ALUMINUM	12"X12"	NECK-5"	5.6
CD-3	PRICE	AMD	SUPPLY	LOUVERED FACE DIRECTIONAL DIFFUSER	SURFACE	ALUMINUM	6"X6"	NECK-4"	5.6
G-1	PRICE	630FF	RET/EXH/TRAN	LOUVERED FACE FILTER RETURN GRILLE	LAY-IN	ALUMINUM	20"X20"	NECK-3.334"	4
G-2	PRICE	630FF	TRANSFER	LOUVERED FACE FILTER RETURN GRILLE	SURFACE	ALUMINUM	12"X12"	NECK-3.334"	4
G-3	PRICE	630FF	EXHAUST/TRANSFER	LOUVERED FACE FILTER RETURN GRILLE	SURFACE	ALUMINUM	8"X8"	NECK-3.334"	4
LD-1	PRICE	TBD04	SUPPLY	48" INSULATED PLENUM W (4) 1" SLOTS	LAY-IN	ALUMINUM	SEE PLAN	N/A	2.3

- NOTES:**
- NO SUBSTITUTIONS PERMITTED--
 - FOR LAY-IN CEILING PROVIDE WITH 18"X18" FULL FACE APPEARANCE DIFFUSER NECK. PROVIDE WITH FACTORY SQUARE TO ROUND NECK ADAPTER MODEL "SR". ROUND NECK SIZE SHALL BE EQUAL TO FLEX SIZE SERVING DIFFUSER.
 - PROVIDE WITH PLENUM INTERNALLY LINED WITH COATED FIBERBOARD. EXTERNALLY INSULATE PLENUM UPON INSTALLATION WITH DUCT WRAP INSULATION.
 - PROVIDE WITH CENTER NOTCH OPTION (CN) AS REQUIRED WHEN USED IN 24" T-BAR CEILING.
 - "GR" STYLE (1/4 TURN FASTENERS ONLY) - OMIT HINGE. FILTER TYPE RETURN GRILLES PROVIDED SOLELY FOR MAINTENANCE PURPOSES. OMIT FILTER UPON INSTALLATION.
 - PROVIDE WITH TYPE 6 BEVELED SURFACE MOUNT FRAME AND FACTORY SQUARE TO ROUND NECK ADAPTER MODEL "SR".
 - PROVIDE WITH BACKPAN INSULATION.

HVAC AIR CURTAIN SCHEDULE

MARK	AREA SERVED	BASIS OF DESIGN				HP	VOLTAGE	PHASE	MOUNTING HEIGHT	NOTES
		MANUFACTURER	MODEL	NOZZLE CFM	UNIT POWER					
AC-1	STAGING	POWERED AIRE	BCE-1-42	2163	0.5	120 V	1	7'-2"	1-4	
AC-2	DELIVERY ROOM	POWERED AIRE	BCE-1-48	2155	0.5	120 V	1	7'-2"	1-4	

- NOTES:**
- NO SUBSTITUTIONS PERMITTED--
 - MOUNT INSIDE BUILDING ABOVE DOOR AT 7'-2" A.F.F. MOUNTING HEIGHT IS FROM BOTTOM OF AIR CURTAIN.
 - PROVIDE ALL NECESSARY MOUNTING BRACKETS AND ACCESSORIES.
 - PROVIDE WITH MODEL SM-300 COMMERCIAL MAGNETIC REED DOOR SWITCH.
 - AIR CURTAIN CONTROLLED BY MAGNETIC REED DOOR SWITCH, FAN ON WHEN DOOR IS OPEN.

HVAC EXHAUST FAN SCHEDULE

MARK	CFM	EXT. STATIC PRESSURE	FAN TYPE	DRIVE TYPE	SONES	HP	FAN RPM	VOLTAGE	PHASE	BASIS OF DESIGN			NOTES
										MANUFACTURER	MODEL	NOTES	
EF-1	1300	0.375 in-wg	DOWNBLAST	DIRECT	9.5	1/3	1300	120 V	1	PENNBARRY	DX16S	1-2	
EF-2	250	0.125 in-wg	DOWNBLAST	DIRECT	5.9	1/12	1550	120 V	1	PENNBARRY	DX10R	1-2	
EF-3	100	0.125 in-wg	DOWNBLAST	DIRECT	3.4	1/6	1725	120 V	1	PENNBARRY	DX08Q	1-2	

- NOTES:**
- NO SUBSTITUTIONS PERMITTED--
 - PROVIDE WITH FACTORY DISCONNECT, FACTORY WIRED SOLID STATE SPEED CONTROLLER, 18" HIGH ROOF CURB WITH DAMPER TRAY, BACKDRAFT DAMPER, AND BIRD SCREEN.
 - WIRE FOR CONTINUOUS OPERATION.
 - PROVIDE WITH FACTORY DISCONNECT & FACTORY WIRED SOLID STATE SPEED CONTROLLER. FAN SHALL BE WIRED TO EMERGENCY SHUTOFF SWITCH PROVIDED BY OTHERS. REFERENCE ARCHITECTURAL AND ELECTRICAL DRAWINGS.

HVAC ROOF TOP UNIT SCHEDULE

MARK	AREA SERVED	NOMINAL TONS	SUPPLY AIR FAN DATA			GAS HEAT			UNIT POWER			WEIGHT (LBS. RTU ONLY)	COOLING CAPACITY				EER (IEER) (SEER)	BASIS OF DESIGN					
			CFM	E.S.P. (IN.)	HP	INPUT MBH	OUTPUT MBH	CONTROL STAGES	VOLTAGE	PHASE	MCA		MCCP	TOTAL COOLING MBH	SENSIBLE COOLING MBH	EDG (°F)		EWB (°F)	AMBIENT (DB°/WB°F)	MANUFACTURER & PRODUCT LINE	MODEL	NOTES	
RTU-1	RETAIL	8.5	3400	635	0.5	3.75	130	104	2	208 V	3	47	50	1409	98.3	93.2	76.9	64.2	92/75	12.1 [15.7]	LENNOX ENLIGHT	LGT102HE	1-20
RTU-2	FOOD SERVICE	12.5	5000	950	0.5	3.75	N/A	N/A	N/A	208 V	3	64	80	1342	146.1	108.1	75.2	62.5	92/75	11.0 [14.6]	LENNOX ENLIGHT	LCT150HE	2-20
RTU-3	RETAIL	5	2000	365	0.5	1	65	53	2	208 V	3	31	40	903	58.1	46.8	76.5	63.8	92/75	12.8 [17.1]	LENNOX ENLIGHT	LGT060HE	2-20

- NOTES:**
- PROVIDE CO2 SENSOR FOR INTERLINK WITH BUILDING AUTOMATION SYSTEM.
 - PROVIDE LENNOX HUMIDITROL HOT GAS REHEAT OPTION.
 - PROVIDE REMOTE WALL MOUNTED COMBINATION TEMPERATURE/HUMIDITY SENSOR MODEL 21W06
 - REFER TO CONTROL SYSTEM NOTES FOR CONTROL COMPONENTS REQUIREMENTS.
 - PROVIDE 5-MINUTE ANTI-SHORT CYCLE TIMER.
 - PROVIDE THRU THE BASE ELECTRICAL AND SINGLE POINT CONNECTION.
 - PROVIDE WITH FACTORY 2" THROW AWAY PLEATED MERV 8 FILTERS.
 - PROVIDE WITH 18" ROOF CURB.
 - PROVIDE FACTORY 15 AMP GFCI SERVICE OUTLET WITH WEATHERPROOF COVER. COORDINATE WITH ELECTRICAL CONTRACTOR TO PROVIDE FIELD WIRING TO RECEPTACLE.
 - PROVIDE WITH FACTORY INSTALLED DISCONNECT.
 - PROVIDE WITH SINGLE ENTHALPY ECONOMIZER AND POWERED EXHAUST FAN.
 - PROVIDE MANUFACTURER'S MOTOR AND DRIVE PACKAGE AS REQUIRED TO MEET SCHEDULED AIR CAPACITIES AND PRESSURE DROP.
 - PROVIDE FACTORY APPLIED PHENOLIC COATING FOR CORROSION PROTECTION ON CONDENSER COILS WITHIN 5 MILES OF SALT WATER.
 - PROVIDE BUILDING AUTOMATION SYSTEM (BAS) EQUIPMENT - REFER TO BAS SYSTEM MASTER SPEC FOR SYSTEM DETAILS AND EQUIPMENT PART NUMBERS.
 - PROVIDE FACTORY INSTALLED BACNET BAS INTERFACE.
 - PROVIDE LENNOX DIRTY FILTER SWITCH.
 - PROVIDE LENNOX IMC CONTROL BOARD (STANDARD ON L-SERIES UNITS)
 - TEMPERATURE SETPOINT: 74°F COOLING, 68°F HEATING. HUMIDITY SETPOINT: 50% RELATIVE HUMIDITY.
 - PROVIDE WITH FACTORY CONDENSATE PAN WATER LEVEL MONITORING DEVICE FOR COMPLIANCE WITH 2018 IMC, SECTION 307.2.3.
 - PROVIDE WITH FACTORY INSTALLED SUPPLY AND RETURN SMOKE DETECTORS.

HVAC LEGEND

SYMBOL	DESCRIPTION
	NEW RECTANGULAR OR ROUND DUCT
	FLEXIBLE DUCT
	SUPPLY AIR DUCTWORK UP THROUGH PLAN
	RETURN AIR DUCTWORK UP THROUGH PLAN
	EXHAUST AIR DUCTWORK UP THROUGH PLAN
	90° ELBOW WITH TURNING VANES
	MANUAL AIR VOLUME CONTROL DAMPER
	4 WAY SUPPLY DIFFUSER
	3 WAY SUPPLY DIFFUSER
	2 WAY OPPOSED SUPPLY DIFFUSER
	2 WAY CORNER SUPPLY DIFFUSER
	RETURN AIR DEVICE
	EXHAUST AIR DEVICE
	VAV PLAQUE FACE DIFFUSER
	AIR CURTAIN
	LINEAR SLOT DIFFUSER WITH PLENUM
	TEMPERATURE SENSOR
	COMBINATION TEMPERATURE/HUMIDITY SENSOR
	CO2 SENSOR
	TYPE MARK CFM
	MECHANICAL EQUIPMENT TAG
	CONDENSATE PIPING
	ROOF MOUNTED EXHAUST FAN
	INLINE EXHAUST FAN
	PACKAGED ROOFTOP AIR CONDITIONER

ABBREVIATIONS

DB°F	DRY BULB DEGREES FAHRENHEIT	LD	LINEAR DIFFUSER
AC	AIR CURTAIN	L.P.	LOW PRESSURE
AC	AIR CURTAIN	MAX	MAXIMUM
A.F.F.	ABOVE FINISHED FLOOR	MBH	1000 BTU PER HOUR
BAS	BUILDING AUTOMATION SYSTEM	MCA	MINIMUM CIRCUIT AMPACITY
BTU	BRITISH THERMAL UNIT	MIN	MINIMUM
CD	CEILING DIFFUSER	MCCP	MAXIMUM OVER CURRENT PROTECTION
CFM	CUBIC FEET PER MINUTE	MPH	MILES PER HOUR
CO2	CARBON DIOXIDE	O.A.	OUTSIDE AIR
D	DIAMETER	O.C.	ON CENTER
EER	ENERGY EFFICIENCY RATIO	PVC	POLYVINYL CHLORIDE
EF	EXHAUST FAN	REQ'D	REQUIRED
FFH	FAN FORCED HEATER	RTU	PACKAGED ROOF TOP HVAC UNIT
G	GRILLE	SCH	SCHEDULE
G.C.	GENERAL CONTRACTOR	SEER	SEASONAL ENERGY EFFICIENCY RATIO
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SF	SQUARE FOOT
HP	HORSEPOWER	TYP.	TYPICAL
IEER	INTEGRATED ENERGY EFFICIENCY RATIO	V	VOLTS
IN.	INCHES WATER COLUMN	W	WITH
LBS.	POUNDS	WB°F	WET BULB DEGREES FAHRENHEIT

RTU-1, 2, & 3 TEST AND BALANCE NOTES

- TEST AND BALANCE CONTRACTOR TO OBTAIN INITIAL BALANCE OF COOLING CFM FOR RTU USING FAN SHEAVE ADJUSTMENT TO WITHIN +/- 5% SCHEDULED SUPPLY AIR CFM. PRODIGY CONTROLLER MAY BE USED FOR FINAL 5% TO OBTAIN SCHEDULED SUPPLY AIR CFM.
- SET MINIMUM OUTSIDE AIR DAMPER POSITION FOR COOLING AND VERIFY OUTSIDE AIR CFM PER RTU SCHEDULE.
- NOT USED.
- NOT USED.
- USING PRODIGY CONTROLLER, VERIFY HEATING CFM EQUALS COOLING CFM.
- ALL PRODIGY CONTROLLER SETTINGS OTHER THAN THOSE MENTIONED ABOVE SHALL REMAIN AS THEIR DEFAULT VALUE AS SET FROM THE FACTORY.
- VERIFY POSITIVE BUILDING PRESSURE.

LENNOX SETUP PARAMETERS / MID-ATLANTIC STORES (R3)

- UNIT ID CONFIGURATION (MECHANICAL CONTRACTOR TO DEFINE / AS APPLICABLE):**
- BACNET CONFIGURATION: GO TO SETTINGS-GENERAL-CONFIGURATION ID1 POSITION 5 SET TO "B"
 - NETWORK CONFIGURATION: GO TO SETUP-NETWORK INTEGRATION, SET TO BACNET
 - CONTROL MODE: SET CONTROL MODE TO ROOM SENSOR: CO2, TEMP, & HUMIDITY TO "NO".
 - ENTHALPY CONFIGURATION: CHANGE CONFIG ID1 POSITION 2 FROM D (DUAL ENTHALPY) TO S (SINGLE ENTHALPY)
 - FRESH AIR COOLING: SETUP-TEST & BALANCE-DAMPER. SCROLL TO FRESH AIR COOLING SET TO "NO"
 - FRESH AIR HEAT: SETUP-TEST & BALANCE-DAMPER. SCROLL TO FRESH AIR HEAT SET TO "NO"
- INDIVIDUAL PARAMETER CONFIGURATIONS (MECHANICAL CONTRACTOR TO DEFINE / AS APPLICABLE):**
- PARAMETER 105 DEHUMID MODE: 7 (NO CONDITIONS)
 - PARAMETER 106 DEHUMID SETPOINT: 50 (THIS IS A CENTERED SET POINT (+/-))
 - PARAMETER 107 DEHUMID DEADBAND: 3 (DEFAULT) THIS IS THE ACTUAL +/- VALUE
 - PARAMETER 117 CO2 DAMPER MAX OPEN %: 50
 - PARAMETER 118 CO2 START OPEN PPM: 1200
 - PARAMETER 119 CO2 FULL OPEN PPM: 1500
 - PARAMETER 131 FREE COOL MAX DAMPER: 100%
 - PARAMETER 137 OCC HEAT SET POINT: 68 (BACK UP)
 - PARAMETER 139 OCC COOLING SET POINT: 72 (BACK UP)
 - PARAMETER 154 OCC BLOWER MODE: ON-CONTINUOUS 1
 - PARAMETER 155 FREE COOL LOCK OUT SET POINT: 29 (DISABLED)
 - PARAMETER 159 FREE COOL SUPPLY SET POINT: 55 (DEFAULT)
 - PARAMETER 160 ECON FREE COOL SET POINT: 55 (DEFAULT)
 - PARAMETER 161 ECON FREE COOL OFFSET: 10 (DEFAULT)
 - PARAMETER 162 FREE COOL ENTHALPY SET POINT (SINGLE ENTHALPY): 19 MA (50% HUM + 60F)
 - PARAMETER 163 ECON FREE COOL ENTHALPY OFFSET: 1 (DEFAULT)
 - PARAMETER 164 ECONOMIZER PROFILE: 2 (DEFAULT)
- CFM VALUES / MSAV FAN SPEEDS (AIR BALANCER TO DEFINE / IF APPLICABLE):**
- HEAT CFM VALUE: PER THE HVAC SCHEDULE
 - HIGH COOL CFM VALUE: PER THE HVAC SCHEDULE
 - LOW COOL CFM VALUE: MATCH THE HIGH COOL CFM VALUE
 - VENTILATION CFM VALUE: MATCH THE HIGH COOL CFM VALUE

2600 Midland Center Parkway
Suite #200
Maitland, FL 32751

CUHACI PETERSON

P (407) 661-9100
F (407) 661-9101
c-p.com

CLIENT NAME
WAWA
260 W. BALTIMORE PIKE
WAWA, PA 19063

PROJECT NAME
W50FB PA v2022.1
STORE #8199
SEVEN BRIDGE ROAD & MUSIC CENTER
DRIVE, SMITHFIELD TOWNSHIP, PA

REVISION SCHEDULE

No.	Description	Date
1	PERMIT SET	03/01/2023
2	PRE-BID SET	03/01/2023

PROJECT NO.
220052

DATE
03-01-2023

DRAWN
JFG

CHECKED
ESD

M3.0