

KEY NOTES

- 1 REMOTE TEST STATION FOR SMOKE DETECTORS FOR RTU-1, 2 & 3. TEST STATION TO BE MOUNTED ON THE WALL. SECURITY CONTRACTOR SHALL WIRE RTU FACTORY MOUNTED SMOKE DETECTORS TO SECURITY/FIRE ALARM PANEL. MECHANICAL CONTRACTOR SHALL PROVIDE TEST STATION AND WIRING BETWEEN COMPONENTS AS WELL AS WIRING TO SHUT DOWN THE RTU FAN UPON ACTIVATION OF THE SMOKE DETECTOR. G.C. TO TEST THE SMOKE DETECTOR FUNCTIONS WITH THE WAWA PROJECT MANAGER.
- 2 TRANSFER AIR DUCT ASSEMBLY.
- 3 PROVIDE SEALED 20" X 20" PLENUM BOX ASSEMBLY ABOVE TRANSFER GRILLE TO ALLOW FLEX TRANSFER DUCT CONNECTIONS. PAINT INTERIOR OF PLENUM BOX FLAT BLACK.
- 4 WALL MOUNTED SENSOR(S) FOR EACH MECHANICAL UNIT PER ROOFTOP UNIT SCHEDULE ON SHEET M4.0. G.C. SHALL INSTALL AND WIRE TO UNIT. BAS CONTRACTOR SHALL CONNECT TO MECHANICAL UNIT ONLY.
- 5 WALL MOUNTED CO2 SENSOR TO RTU-1. SENSOR TO MONITOR CO2 LEVELS THROUGH REMOTE BAS INTERFACE.
- 6 ROUTE DUCT THROUGH ANGLED WEB MEMBER AND SUPPORT AT PANEL POINT.
- 7 DUCTWORK TO RUN WITHIN JOIST SPACING. MECHANICAL CONTRACTOR TO COORDINATE MECHANICAL WORK WITH ALL TRADES PRIOR TO INSTALLATION.
- 8 ROUTE DUCT THRU OPEN WEBBING OF JOIST GIRDER.
- 9 CONNECT TO BOTTOM OF MAIN DUCT WITH VOLUME DAMPER.
- 10 HEATER SHALL BE A MINIMUM OF 12" AWAY FROM ANY WALL. INSTALL HEATER IN STRICT ACCORDANCE WITH MANUFACTURER'S WRITTEN INSTRUCTIONS.
- 11 NOT USED.
- 12 NOT USED.
- 13 EMERGENCY SHUTOFF SWITCH AND WALL PLACARD INDICATING VENTILATION SYSTEM EMERGENCY SHUTOFF PROVIDED BY OTHERS. REFERENCE ELECTRICAL AND ARCHITECTURAL DRAWINGS.
- 14 INSTALL EXHAUST FAN PER DETAIL SHEET M3.0. FAN SHALL BE WIRED TO EMERGENCY SHUTOFF SWITCH PROVIDED BY OTHERS. REFERENCE ARCHITECTURAL AND ELECTRICAL DRAWINGS.
- 15 EXHAUST DUCT UP TO ROOF MOUNTED EXHAUST FAN. SEE ROOF PLAN FOR CONTINUATION.
- 16 RETURN DUCT TO TRANSITION SIZE SHOWING ON PLANS.
- 17 SUPPLY DUCT TO TRANSITION SIZE SHOWING ON PLANS.
- 18 ROUTE DUCT BELOW JOIST GIRDER.

PERMITTING NOTE:

ALL REFRIGERATION EQUIPMENT INCLUDING WALK-IN COOLERS AND REFRIGERATORS WILL BE SUBMITTED UNDER A SEPARATE PERMIT.

GENERAL NOTE:

- A. MECHANICAL CONTRACTOR SHALL ADJUST ALL LINEAR SLOT DIFFUSERS TO A GENERALLY VERTICAL FLOW. ADJUSTMENT SHALL BE MADE SO AS TO AVOID AIRFLOWS ON SENSORS, REFRIGERATION CASES, OR OPEN FOOD REFRIGERATION EQUIPMENT.
- B. IN ADDITION TO SPECIFICATIONS REQUIREMENTS FOR TESTING AND BALANCING, SUBMIT TESTING AND BALANCING REPORT WITH FLOOR PLAN INDICATING LOCATION OF INLETS AND OUTLETS WITH TAGS THAT MATCH THE TESTING AND BALANCING REPORT.
- C. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL VOLUME DAMPERS IN LOCATIONS ACCESSIBLE TO ALLOW FOR BALANCING.

1 HVAC FLOOR PLAN
M1.0 1/4" = 1'-0"

AECOM
AECOM Services of PA, Inc.
1255 BROAD STREET, SUITE 201
CLIFTON, NJ 07030-3988
973.883.8500 FAX 973.883.8601
http://www.aecom.com

CLIENT NAME
WAWA INC.
260 W. BALTIMORE PIKE
WAWA, PA 19063

PROJECT NAME
WAWA STORE #8202
8601 WESTBRANCH HIGHWAY
TOWERSHIP OF KELLY, PA 17837


SHEET TITLE
HVAC FLOOR PLAN

RELEASE	DATE
ISSUE FOR BID SET	12/14/2023
ISSUE FOR PERMIT	10/20/2023
REV B - ISSUED FOR CONSTRUCTION SET	03/01/2024
MECHANICAL UPDATES	04/23/2024

PROTOTYPE	DATE	DRAWN	CHECKED
W56584 PA		DA	FA
PROJECT NO.			
6669812			

8202
KELLY, PA

Wawa
M1.0

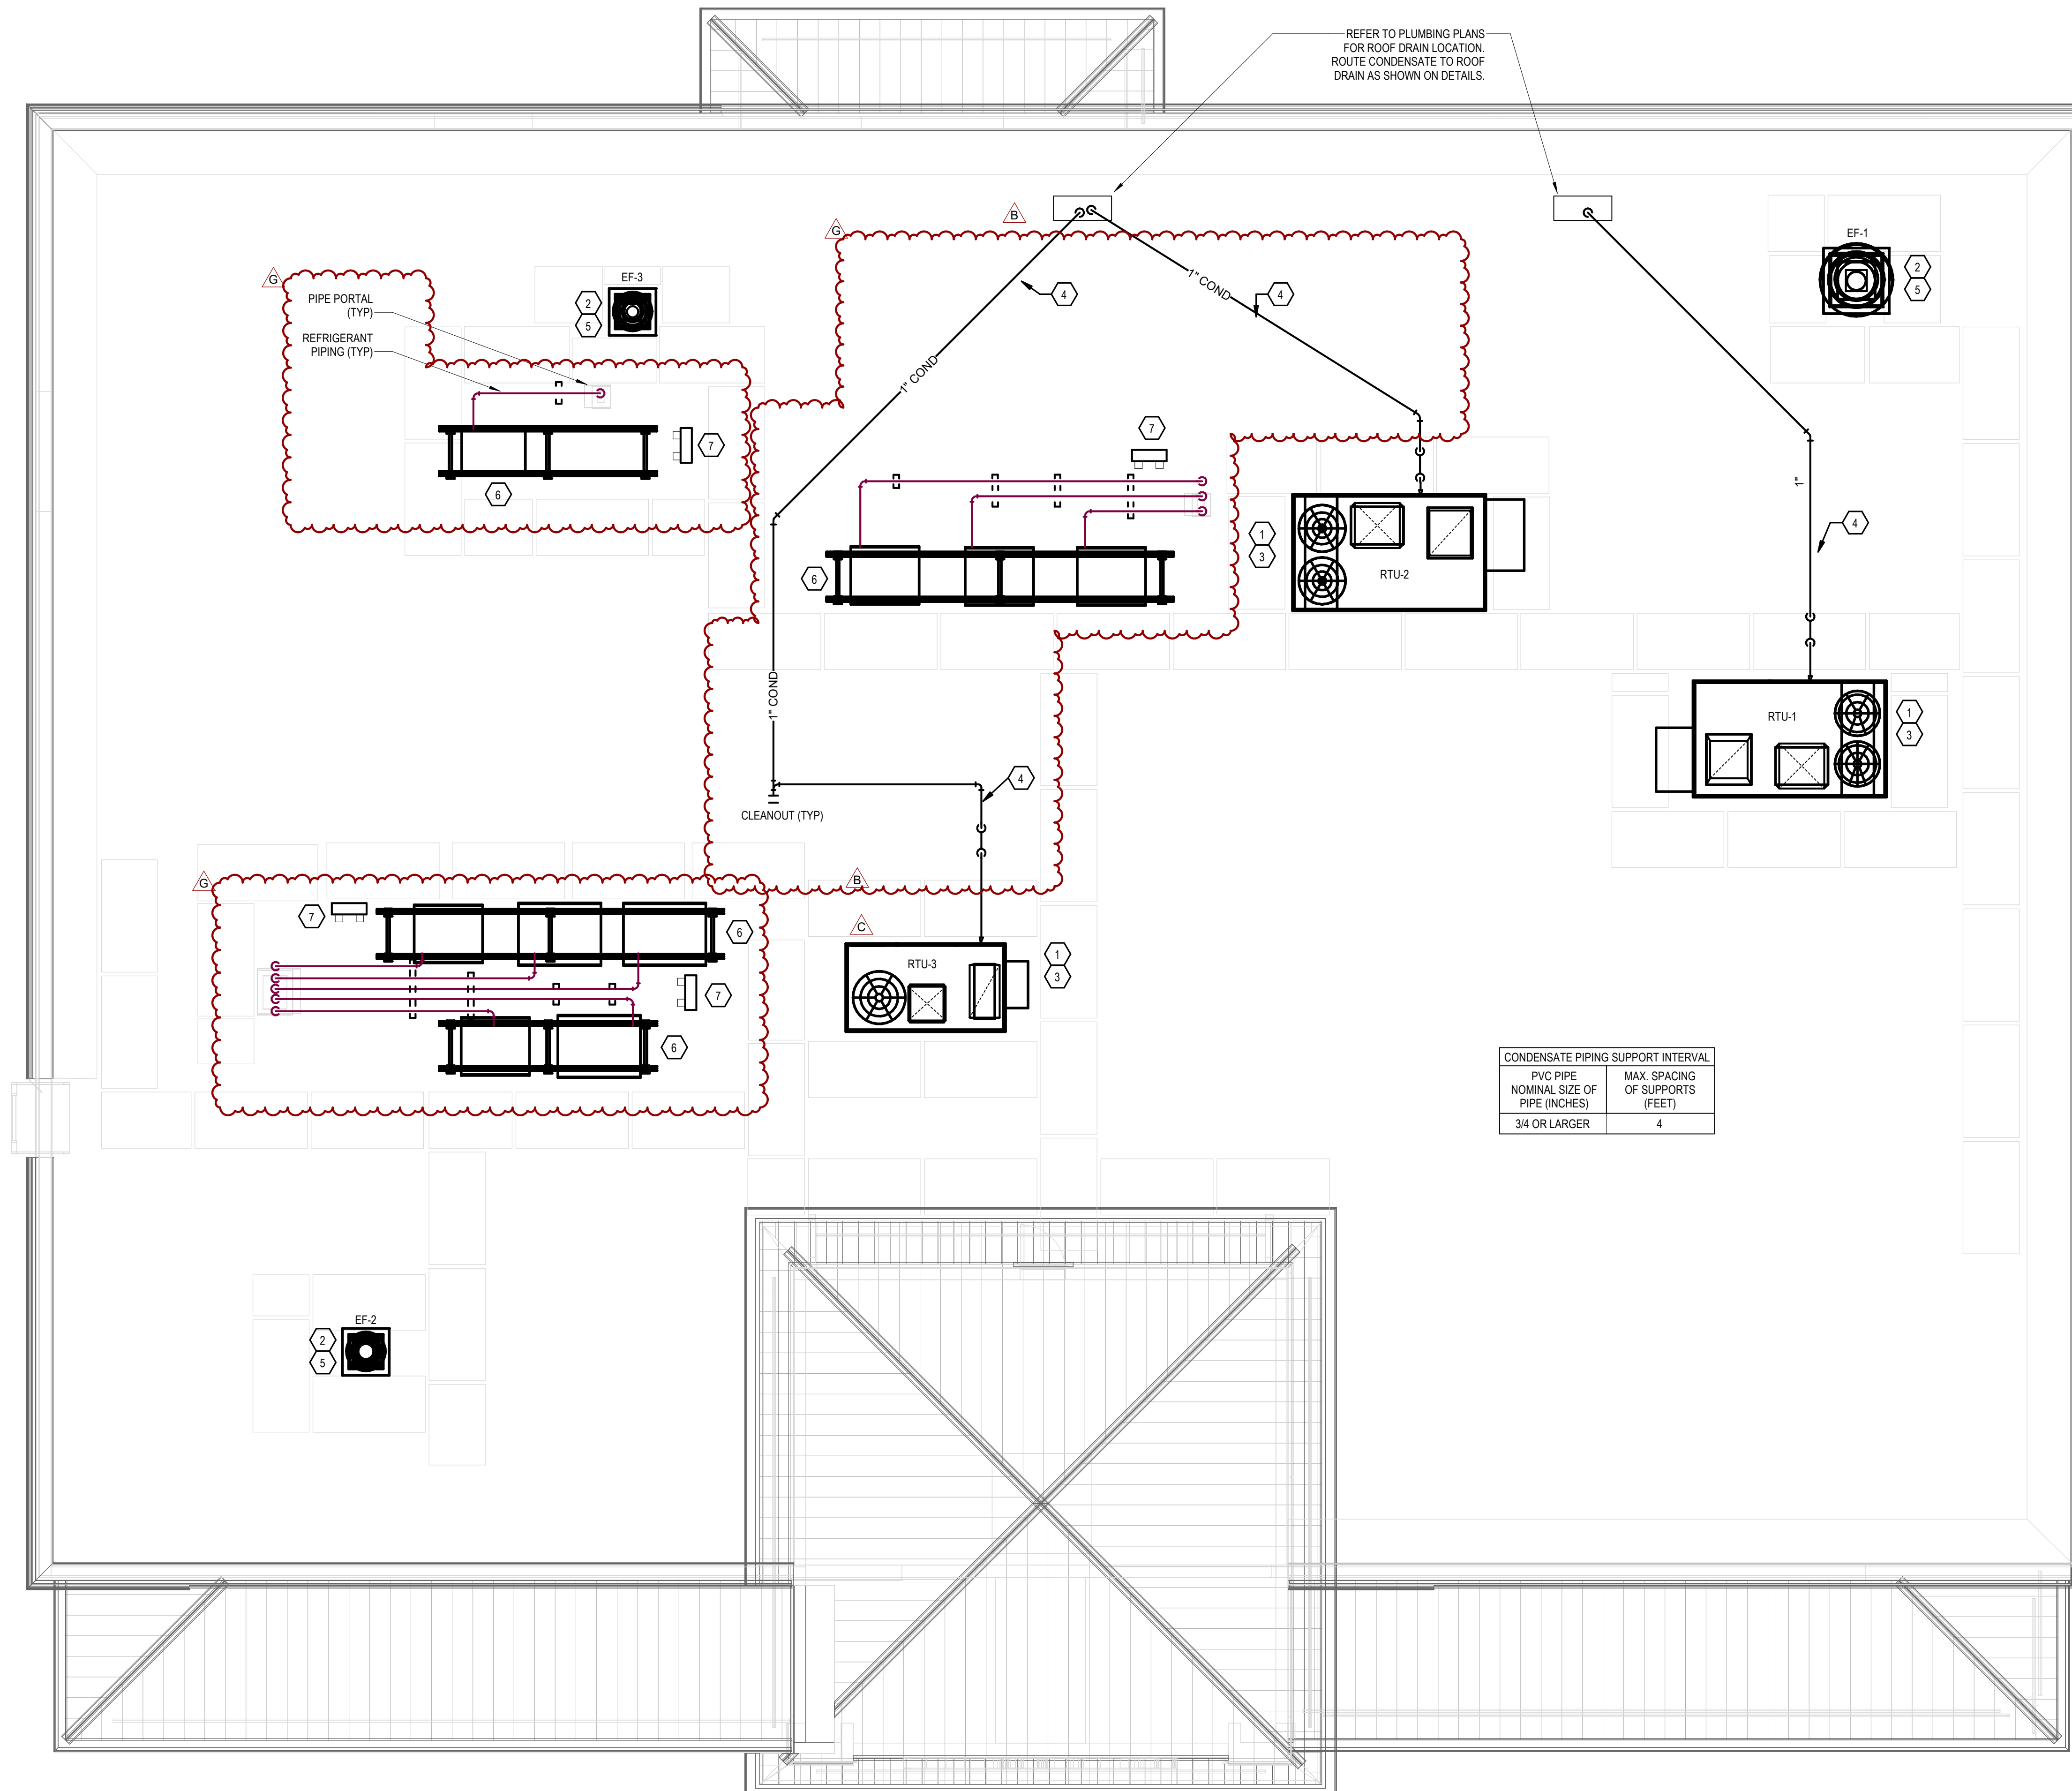

SHEET NOTES

- 1 FACTORY INSTALLED SMOKE DETECTOR IN MAIN SUPPLY AND RETURN OF EACH ROOF TOP UNIT.
- 2 INSTALL ROOF MOUNTED EXHAUST FAN PER DETAIL ON SHEET M3.0 COORDINATE EXACT LOCATION OF FAN PENETRATION WITH ARCHITECTURAL ROOF PLAN. TRANSITION GALVANIZED DUCT WORK AS NECESSARY FROM FAN INTO CEILING/JOIST SPACE. SEE SHEET M1.0 FOR CONTINUATION.
- 3 PROVIDE FLEXIBLE CONNECTIONS BETWEEN ALL DUCT WORK AND MECHANICAL UNITS.
- 4 ROUTE SCH. 40 PVC CONDENSATE DRAIN PIPING ALONG ROOF. SUPPORT PIPING PER DETAIL ON SHEET M3.0
- 5 MAINTAIN A MINIMUM 10' CLEARANCE BETWEEN OUTSIDE AIR INTAKES AND EXHAUST TERMINATIONS ON ROOF.
- 6 FOOD SERVICE REFRIGERATION EQUIPMENT PROVIDED BY OTHERS. SET AND SECURE CONDENSERS ON EQUIPMENT RAILS AS DETAILED ON STRUCTURAL AND ARCHITECTURAL DRAWINGS.
- 7 PROVIDE CONDENSER PANEL IN LOCATION SHOWN. LOCATION SHOULD BE FIELD COORDINATED WITH OTHER TRADES. WHENEVER IT ENGRADES ANY EQUIPMENT'S MAINTENANCE AND OPERATIONS CLEARANCES. REFER TO STRUCTURAL DRAWINGS FOR MOUNTING PANEL ON UNISTRUT SYSTEM.

GENERAL NOTES

- A. FOR SPECIFIC SEISMIC AND WIND LOADING REQUIREMENTS SEE STRUCTURAL PLANS AND SPECIFICATIONS.

CONDENSATE PIPING SUPPORT INTERVAL		
PVC PIPE NOMINAL SIZE OF PIPE (INCHES)		MAX. SPACING OF SUPPORTS (FEET)
3/4 OR LARGER		4

AECOM
 AECOM Services of PA, Inc.
 1255 BROAD STREET, SUITE 201
 CLIFTON, NJ 07013-3988
 973.883.8500 FAX 973.883.8601
<http://www.aecom.com>

CLIENT NAME
WAWA INC.
 280 W. BALTIMORE PIKE
 WAWA, PA 19063

PROJECT NAME
WAWA STORE #8202
 8601 WESTBRANCH HIGHWAY
 TOWERSHIP OF KELLY, PA 17837

SHEET TITLE
HVAC ROOF PLAN

RELEASE	DATE
ISSUE FOR PERMIT	10/20/2023
REV. A - ISSUED FOR BLDG DEPT. CMTS.	01/18/2024
ISSUE FOR CONSTRUCTION SET	03/01/2024
REV. C - MECHANICAL UPDATES	04/23/2024
REV. G - REF. CONDENSER UPDATES	06/28/2024


PROTOTYPE	W578M PA
PROJECT NO.	6668812
DRAWN	DA
CHECKED	FA

8202
 KELLY, PA


M2.0

BUILDING LOCATION
KELLY, PA


WIND SPEED ZONE
(IBC FIGURE 1609A)
SEE STRUCTURAL PLANS

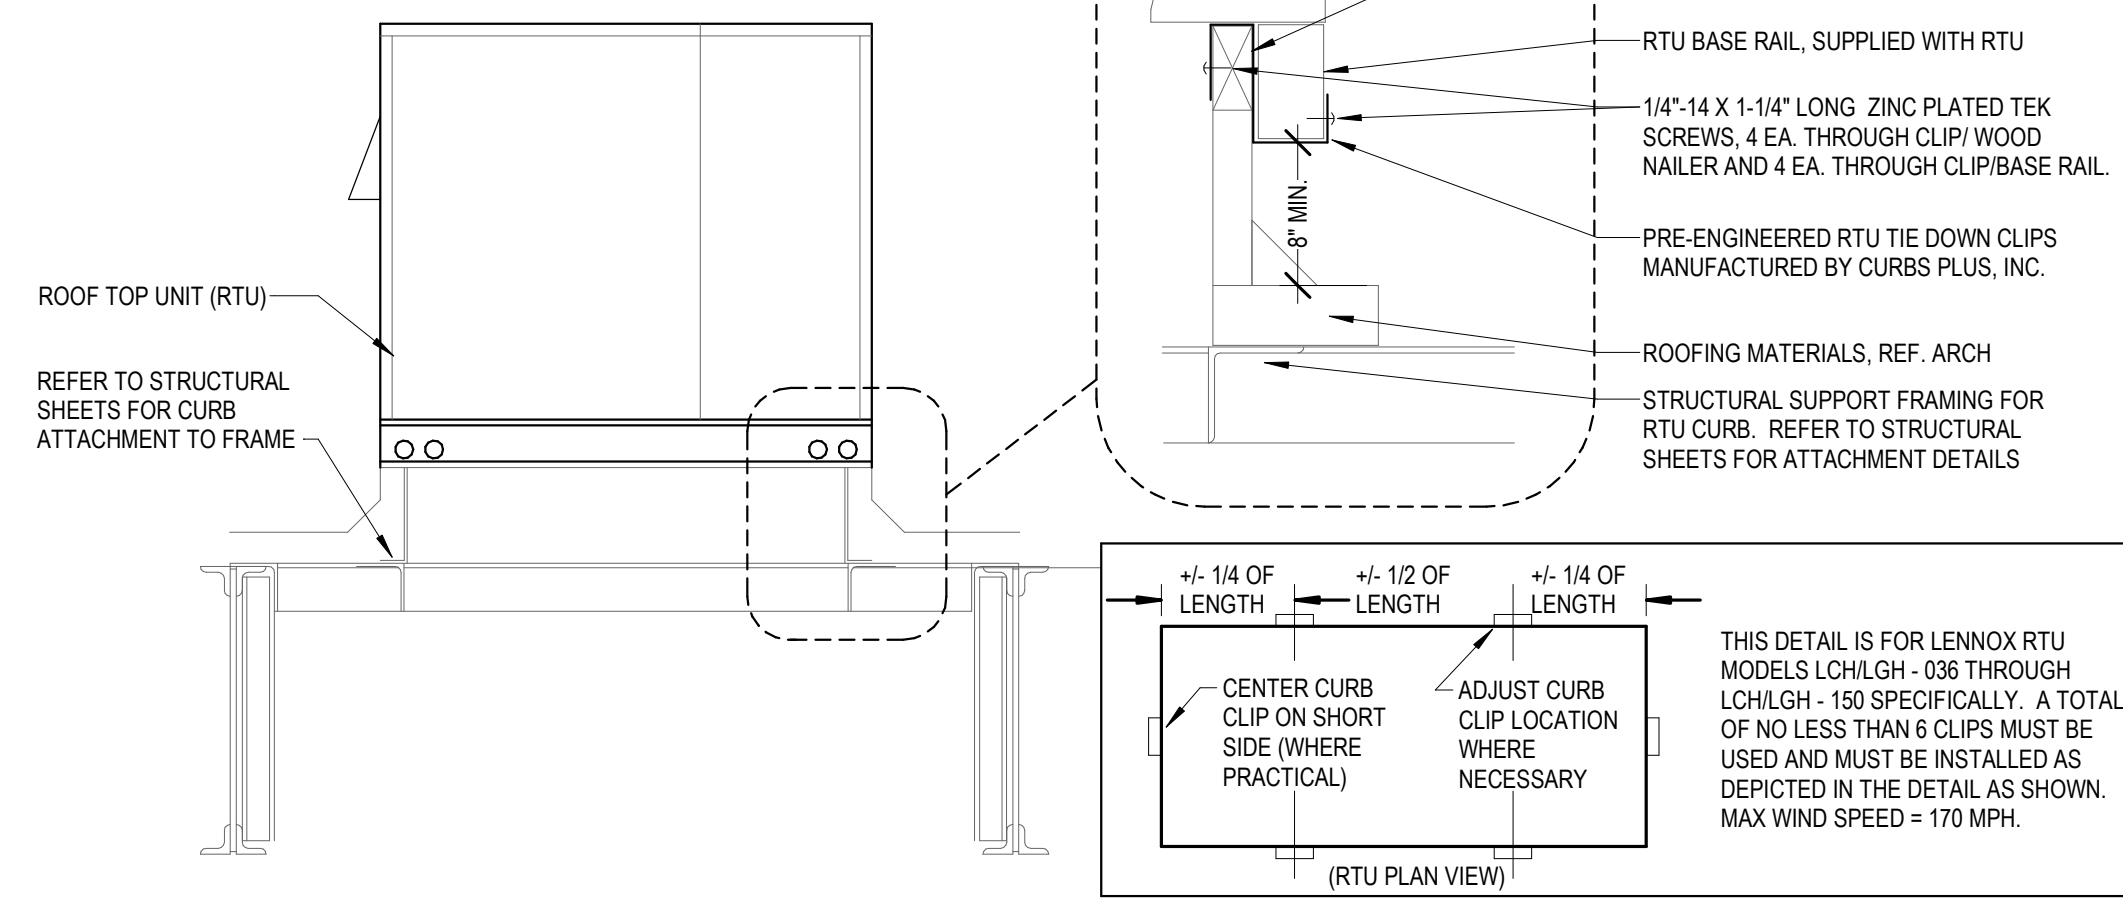


1 HVAC RTU TIE-DOWN DETAIL
M3.0 NOT TO SCALE

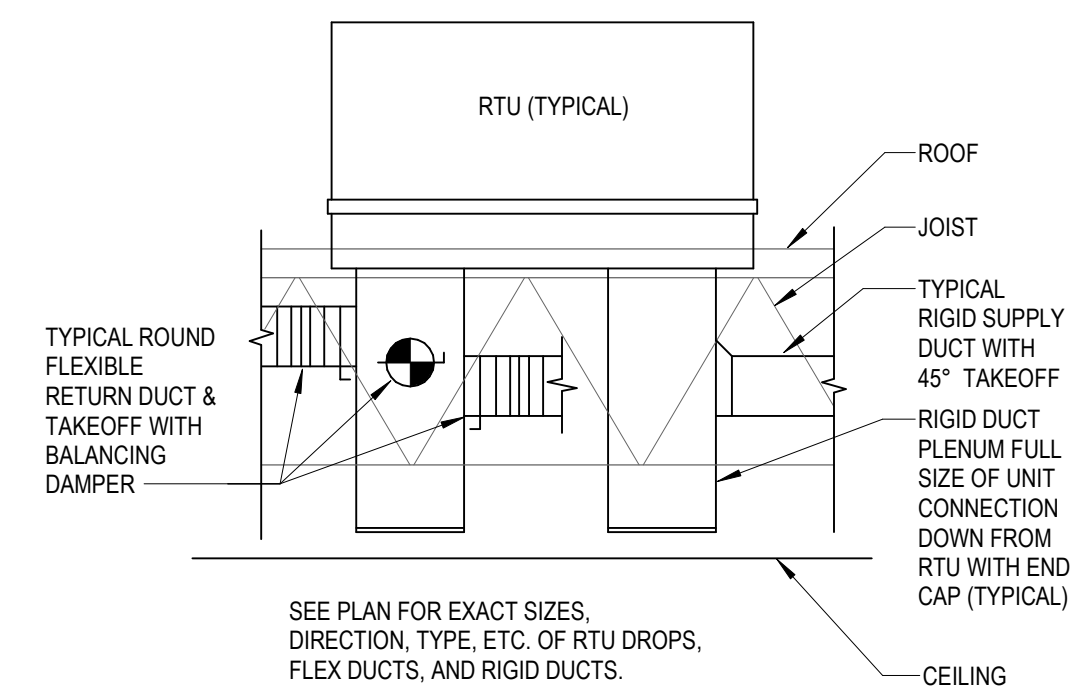


2 TYPICAL DUCT PLENUM DETAIL
M3.0 NOT TO SCALE

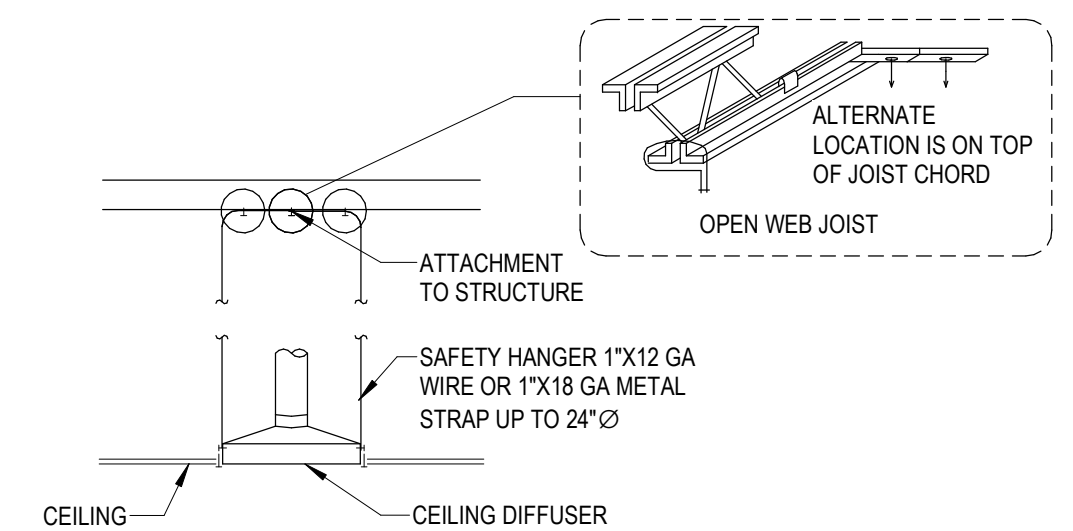


3 HVAC CEILING MOUNTED AIR DIFFUSER SUPPORT DETAIL
M3.0 NOT TO SCALE

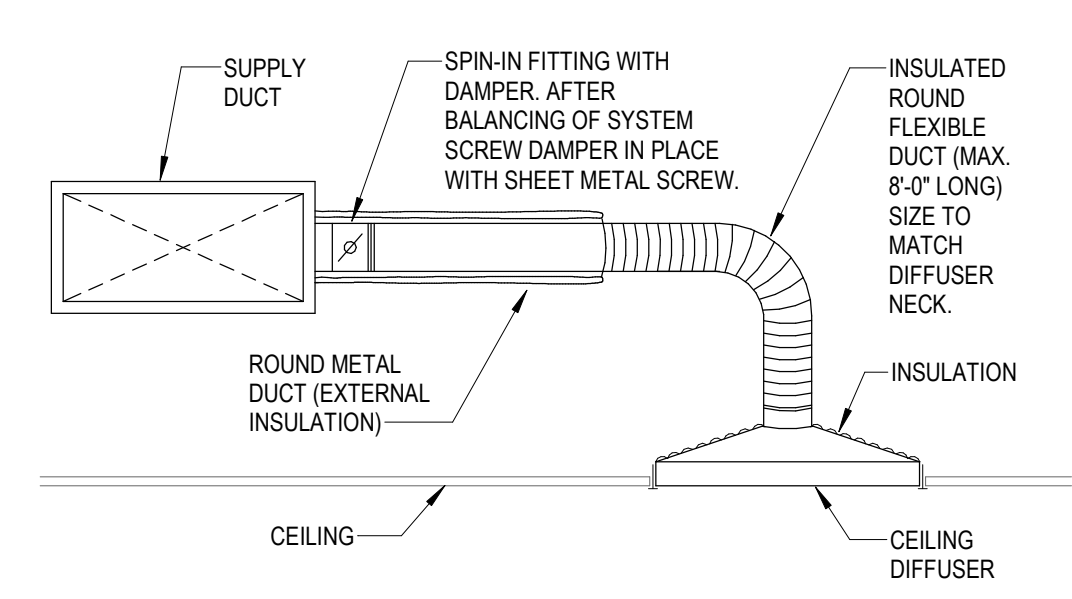


4 HVAC CEILING DIFFUSER RUNOUT DETAIL
M3.0 NOT TO SCALE

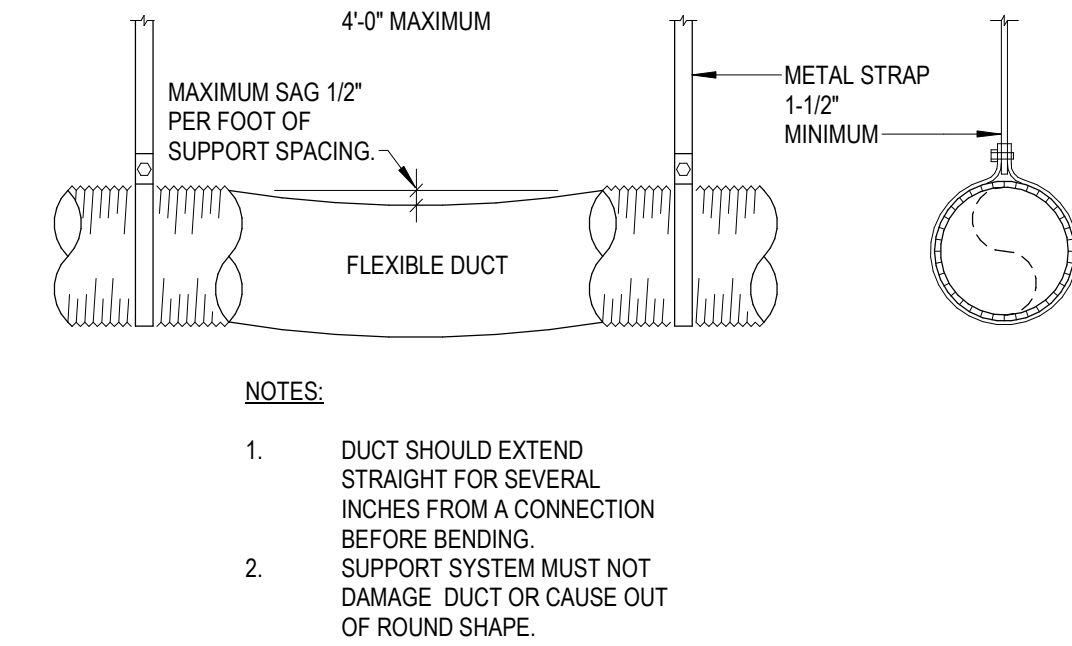


5 HVAC FLEX DUCT SUPPORT DETAIL
M3.0 NOT TO SCALE

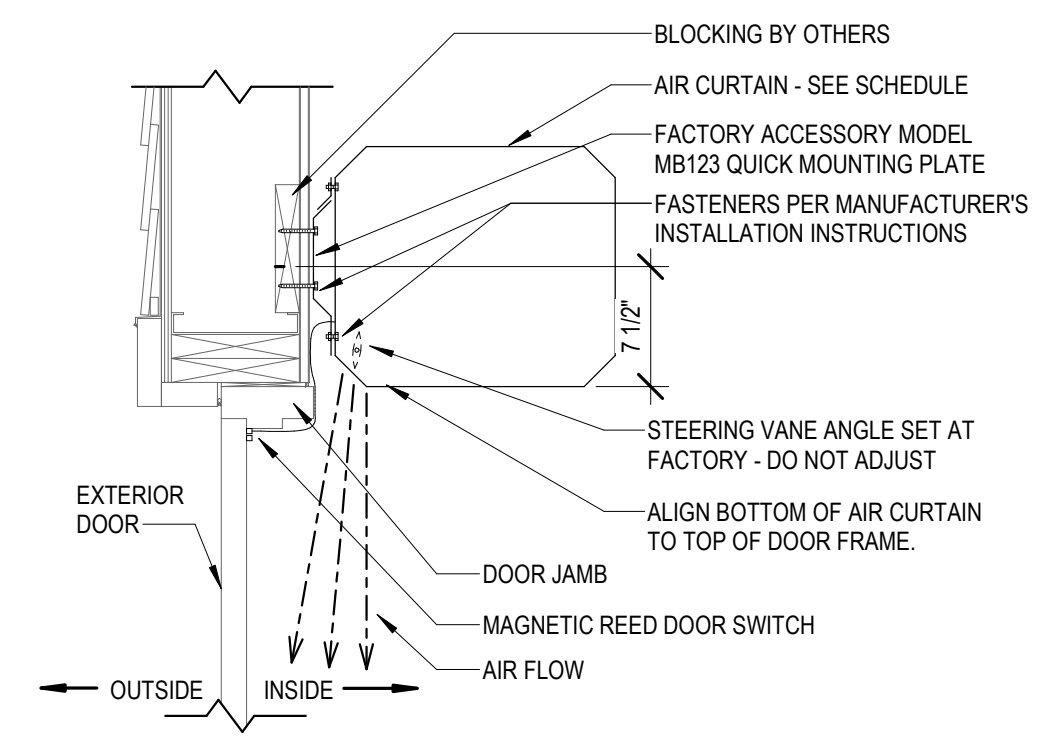


6 AIR CURTAIN INSTALLATION DETAIL
M3.0 NOT TO SCALE

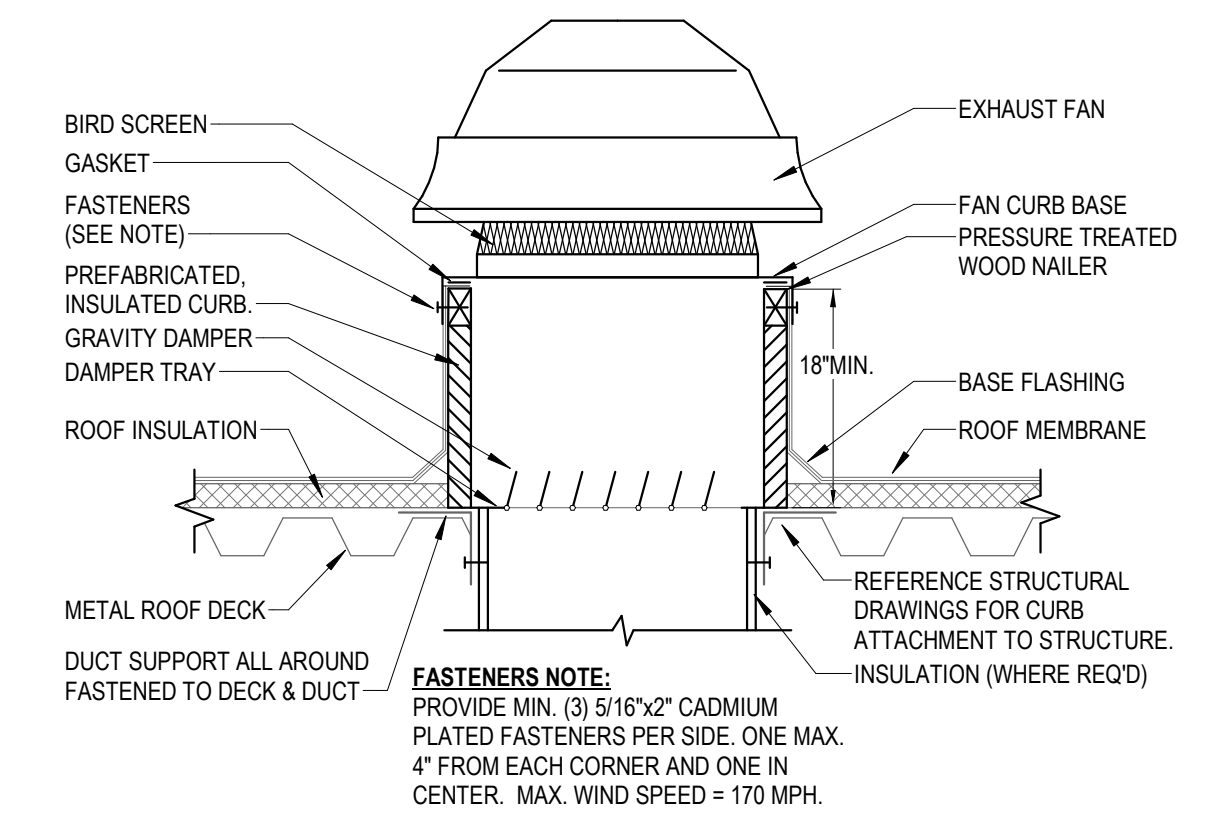

7 ROOF FAN MOUNTING DETAIL
M3.0 NOT TO SCALE

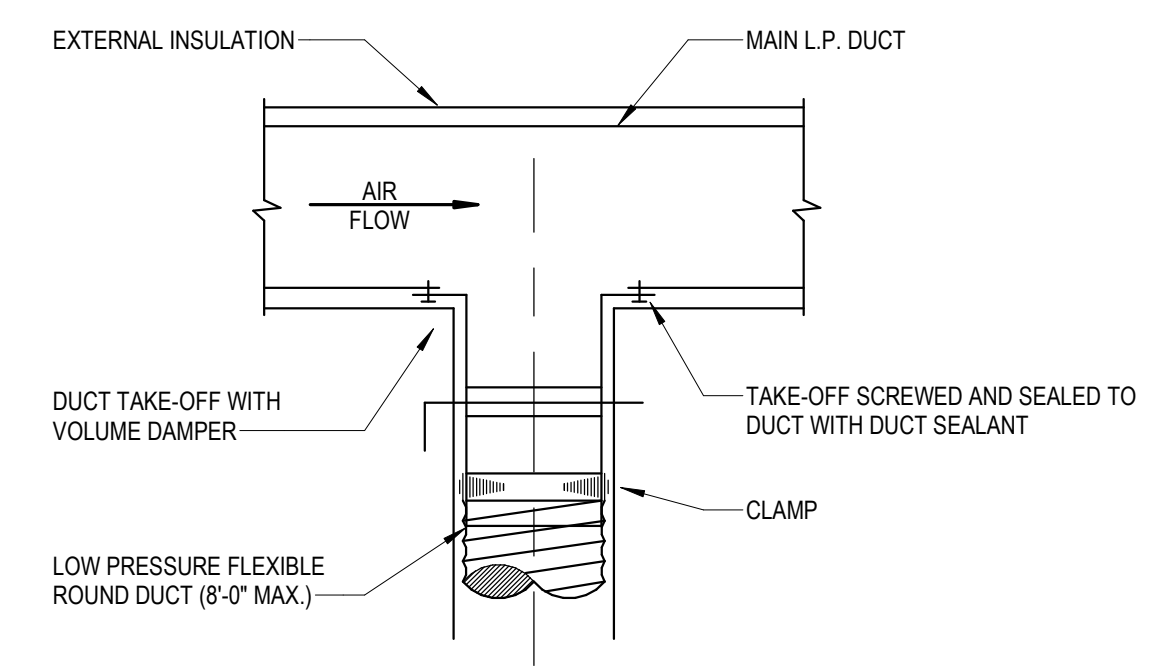

8 HVAC SUPPLY DIFFUSER TAKE OFF DETAIL
M3.0 NOT TO SCALE

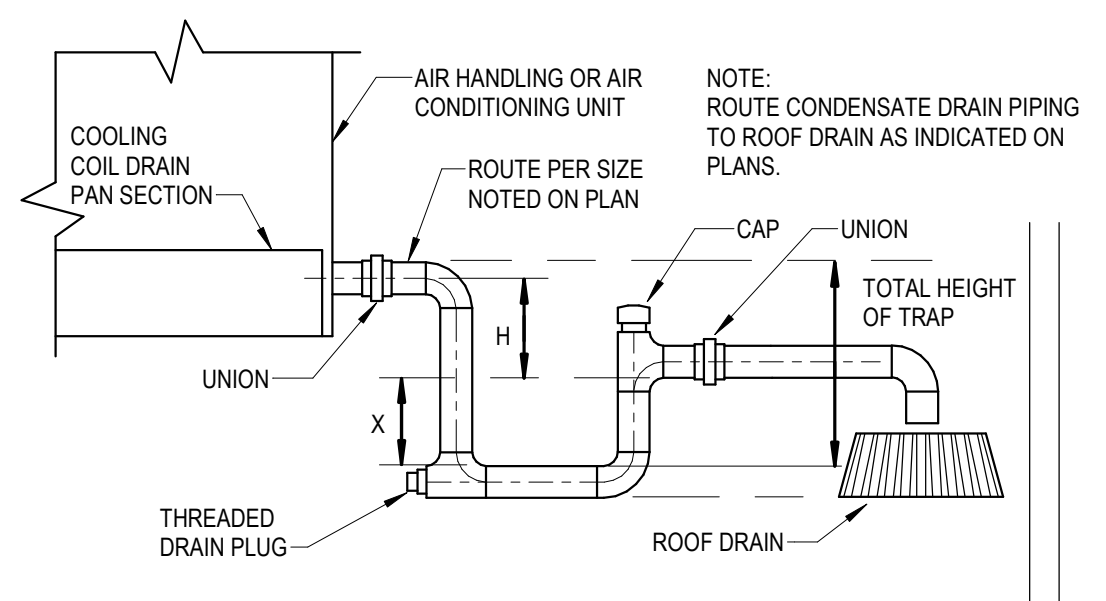


DRAIN TRAPPING HEIGHT		
FAN ARRANGEMENT	H	X
BLOW-THRU (POSITIVE STATIC PRESSURE)	A	B
DRAW-THRU (NEGATIVE STATIC PRESSURE)	D	C


A = MINIMUM 1"
 B = AT LEAST 1' PLUS CASING STATIC PRESSURE
 C = 1/2" D"
 D = AT LEAST 1' PLUS CASING STATIC PRESSURE

TOTAL HEIGHT OF TRAP = X + H + (1.5 x PIPE DIAMETER) (WITHOUT INSULATION)

9 HVAC CONDENSATE DRAIN DETAIL
M3.0 NOT TO SCALE

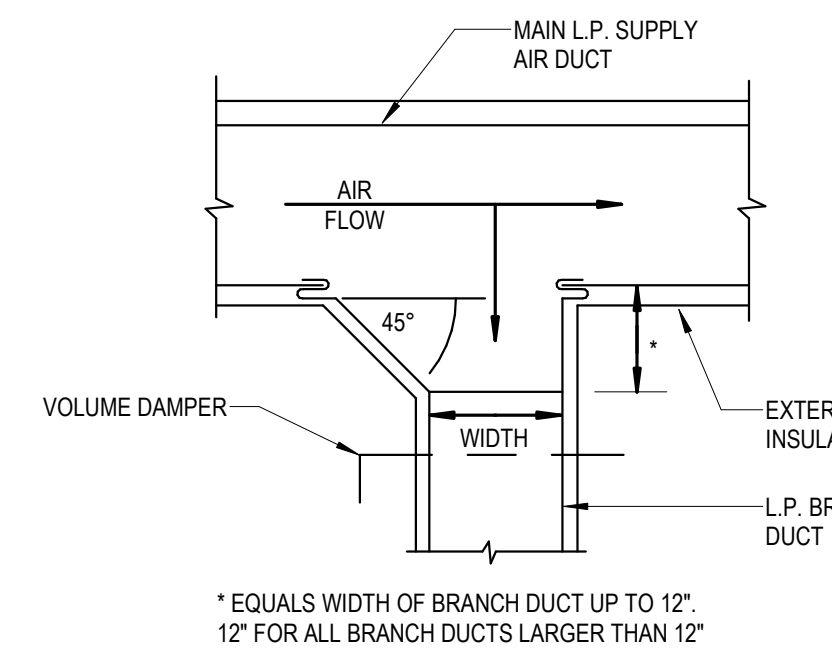

10 HVAC LOW PRESSURE SUPPLY BRANCH DUCT DETAIL
M3.0 NOT TO SCALE

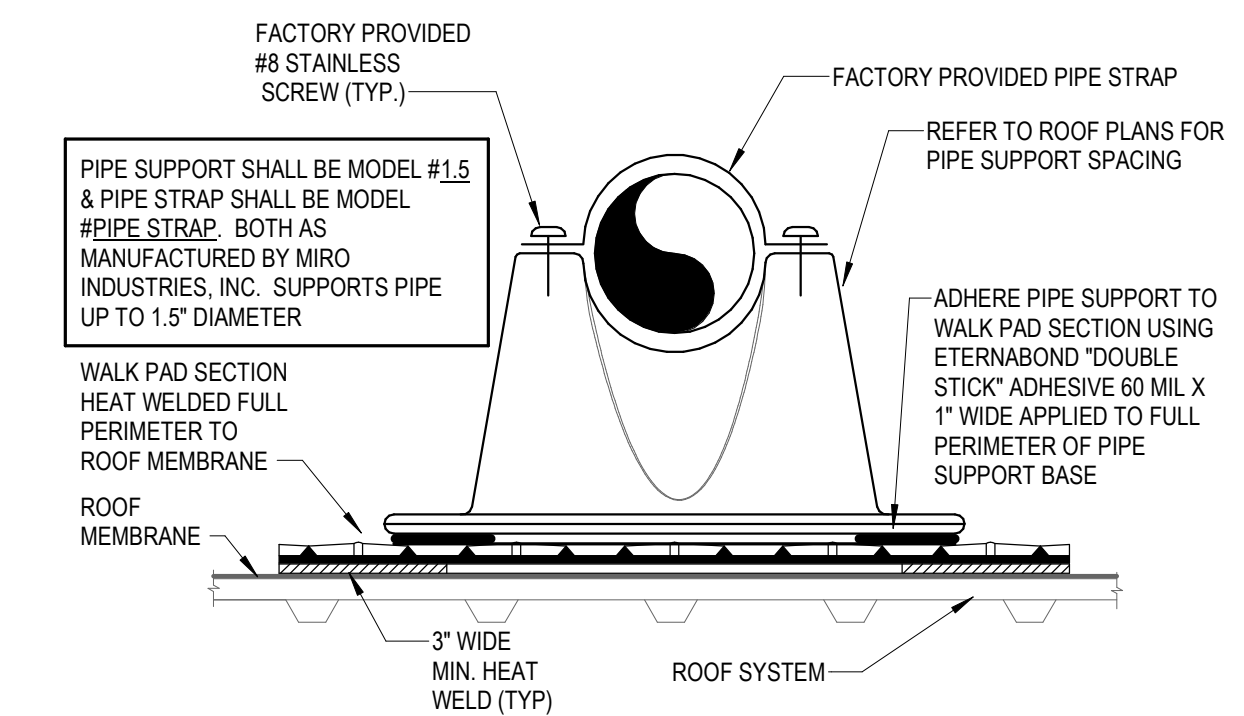

11 PIPE ROOF SUPPORT DETAIL
M3.0 NOT TO SCALE

AECOM
 AECOM Services of PA, Inc.
 1255 BROAD STREET, SUITE 201
 CLIFTON, NJ 07030-3988
 973.883.8500 FAX 973.883.8601
 http://www.aecom.com

CLIENT NAME
WAWA INC.
 280 W. BALTIMORE PIKE
 WAWA, PA 19083

PROJECT NAME
WAWA STORE #8202
 8601 WESTBRANCH HIGHWAY
 TOWNSHIP OF KELLY, PA 17837

SHEET TITLE
HVAC DETAILS

DATE	RELEASE
12/14/2023	ISSUE FOR BID SET
10/20/2023	ISSUE FOR PERMIT
01/18/2024	REV A - ISSUED FOR BLDG DEPT. CMIS

PROTOTYPE	PROJECT NO.	DRAWN	DA	CHECKED	FA
W658M PA	6668812	DA			

8202
 KELLY, PA
Wawa
M3.0

MECHANICAL GENERAL NOTES

- REFER TO WRITTEN BOOK SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- THE WORK TO BE DONE UNDER THESE SPECIFICATIONS AND THE DRAWINGS CONSISTS OF FURNISHING ALL EQUIPMENT, MATERIALS, LABOR AND SERVICES, AND PERFORMING ALL OPERATIONS TO COMPLETE THE MECHANICAL CONSTRUCTION WORK FOR THIS PROJECT. ANY WORK NOT SPECIFICALLY COVERED BY THESE SPECIFICATIONS OR INDICATED ON THE MECHANICAL/ELECTRICAL/PLUMBING PLANS, BUT NECESSARY TO COMPLETE OR PERFECT ANY PART OF THIS INSTALLATION IN A SUBSTANTIAL MANNER, SHALL BE PROVIDED WITHOUT EXTRA COST TO OWNER.
- THE TERM "FURNISH" SHALL MEAN TO OBTAIN AND SUPPLY TO THE JOB SITE. THE TERM "INSTALL" SHALL MEAN TO FIX IN POSITION AND CONNECT FOR USE. THE TERM "FIT" SHALL MEAN TO FURNISH AND INSTALL. THE TERM "MECHANICAL WORK" OR "WORK" SHALL MEAN ALL LABOR, MATERIAL, EQUIPMENT, SCAFFOLDING, RIGGING, TOOLS, SUPERVISION, SERVICES AND OTHER INCIDENTALS NECESSARY FOR COMPLETE AND OPERABLE INSTALLATION.
- THE CONTRACTOR SHALL FURNISH AND INSTALL ALL EQUIPMENT, MATERIALS AND LABOR TO PROVIDE A COMPLETE AND OPERATIONAL SYSTEM AS INDICATED ON THE DESIGN DOCUMENTS.
- CONTRACTOR SHALL OBTAIN ALL PERMITS, INSPECTIONS AND APPROVALS PRIOR TO AND DURING CONSTRUCTION.
- ALL MATERIALS, EQUIPMENT AND INSTALLATIONS SHALL BE IN STRICT ACCORDANCE WITH JURISDICTIONS LATEST ACCEPTED VERSION OF THE INTERNATIONAL BUILDING CODE - MECHANICAL, SMACNA, UL, STATE CODES, LOCAL CODES, MANUFACTURER'S RECOMMENDATIONS, AND ALL AUTHORITIES HAVING JURISDICTION.
- CONTRACTOR SHALL PROVIDE ALL ROOFING OPENINGS, FLASHINGS, AUXILIARY STEEL, THREADED RODS, VIBRATION ISOLATORS, TURNBUCKLES, ETC. TO SUPPORT HIS EQUIPMENT ON OR FROM THE STRUCTURE.
- CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES AND IN FIELD PRIOR TO INSTALLATION OF ANY WORK. REPORT ALL CONFLICTS IMMEDIATELY TO ARCHITECT AND ENGINEER.
- THE DRAWINGS INDICATE DIAGRAMMATICALLY THE EXTENT, GENERAL CHARACTER AND LOCATION OF THE WORK INCLUDED. OFFSETS OR CHANGES IN DUCT SHAPE TO AVOID STRUCTURAL OR OTHER INTERFERENCES, AND WORK INDICATED BUT HAVING MINOR DETAILS OBVIOUSLY OMITTED SHALL BE PROVIDED WITHOUT EXTRA COST.
- ANY CHANGES AND/OR MODIFICATIONS MUST BE REVIEWED AND APPROVED BY THE ENGINEER OR OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- REMOVE ALL TRASH, DEBRIS AND DEMOLITION MATERIAL FROM PREMISES AT THE END OF EACH WORK DAY.
- SCHEDULE ALL WORK, CUTTING AND BUILDING SERVICE INTERRUPTIONS WITH BUILDING OWNER AND CONSTRUCTION MANAGER, PRIOR TO COMPLETING WORK.
- ALL DUCT DIMENSIONS ARE INSIDE CLEAR DIMENSIONS.
- THE MAXIMUM FLEXIBLE DUCT LENGTH PERMITTED IS 8'-0". THIS DUCTWORK SHALL BE INSTALLED WITHOUT KINKS OR 90° BENDS.
- ALL FLEXIBLE DUCTWORK SHALL BE FLEX-VENT TYPE KM INSULATED WITH POLYMER INNER FILM AND METALIZED OUTER JACKET, OR APPROVED EQUAL. SIZE SHALL BE SAME AS DIFFUSER NECK SIZE, UNLESS INDICATED OTHERWISE.
- FIELD ADJUST THE DIRECTION OF BLOW FOR ALL SUPPLY AIR DEVICES SO THAT THE DEVICES DO NOT BLOW DIRECTLY INTO SOFFITS, CURTAIN WALLS, REFRIGERATED CASES OR EXHAUST HOODS.
- ALL NEW AND EXISTING PIPES AND DUCTS SHALL HAVE UL FIRE RATED SLEEVES AND/OR FIRE RATED DAMPERS, WHEN PASSING THROUGH FIRE RATED CONSTRUCTION.
- COORDINATE LOCATION OF NEW DUCTWORK, AIR DEVICES AND EQUIPMENT WITH LIGHT FIXTURES, SPRINKLER PIPING AND HYDRONIC PIPING.
- CONTRACTOR SHALL VERIFY FIELD CONDITIONS AT THE SITE AND NOTIFY THE OWNER/ENGINEER OF ANY DISCREPANCIES PRIOR TO COMMENCING WITH WORK.
- ALL WALL MOUNTED TEMPERATURE, HUMIDITY, AND CO2 SENSORS SHALL BE INSTALLED AT AN ELEVATION 54" ABOVE FINISHED FLOOR TO THE TOP UNLESS OTHERWISE NOTED ON DRAWINGS. COORDINATE FINAL LOCATIONS WITH EQUIPMENT, FURNITURE, TENANT AND ARCHITECT PRIOR TO INSTALLATION.
- ALL DUCTWORK SHALL BE GALVANIZED STEEL CONSTRUCTED AT 2" PRESSURE CLASS. ALL CONCEALED DUCTWORK BELOW TRUSSES SHALL BE INSULATED WITH 1-1/2" FIBERGLASS DUCT WRAP WITH WIRE SUPPORT BANDS ON 24" CENTERS. ALL CONCEALED DUCTWORK ABOVE THE TRUSSES SHALL BE INSULATED WITH 1-1/2" OF FIBERGLASS DUCT WRAP WITH WIRE SUPPORT BANDS ON 24" CENTERS. ALL INTERIOR EXPOSED DUCTWORK BELOW TRUSSES SHALL BE INSULATED WITH 1" RIGID FIBERGLASS DUCT BOARD WITH FOL AND SCRM FACING. ALL EXTERIOR EXPOSED DUCTWORK SHALL BE INSULATED WITH 4" RIGID FIBERGLASS BOARD WITH WEATHERPROOF MEMBRANE.
- VERIFY ALL EQUIPMENT VOLTAGES, WIRING REQUIREMENTS, AND REQUIRED BREAKER SIZES WITH THE ELECTRICAL CONTRACTOR PRIOR TO ORDERING EQUIPMENT.
- ALL ACCESS DOORS REQUIRED IN GENERAL CONSTRUCTION ARE TO BE PROVIDED AND INSTALLED BY THE GENERAL CONTRACTOR. IT IS THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR TO IDENTIFY SIZE, TYPE AND LOCATION OF SUCH DOORS FOR PROPER ACCESS TO ALL CONCEALED MECHANICAL EQUIPMENT, VALVES AND OTHER RELATED DEVICES. THE MECHANICAL CONTRACTOR SHALL IDENTIFY THESE REQUIREMENTS ON A COORDINATED SHOP DRAWING PRIOR TO SYSTEM FABRICATION AND INSTALLATION.
- AFTER THE HEATING AND AIR CONDITIONING SYSTEM INSTALLATIONS ARE COMPLETE, THE CONTRACTOR SHALL BALANCE THE SYSTEM AND PRESENT OWNER & ARCHITECT WITH A WRITTEN BALANCING REPORT BY A CERTIFIED INDEPENDENT TESTING LAB. DAMPER HANDLES SHALL BE FASTENED INTO DUCTWORK WITH SHEETMETAL SCREWS AFTER BALANCING TO ASSURE CORRECT BALANCED AIRFLOW.
- PROVIDE ELBOWS OR TEES WITH TURNING VANES FOR ALL CHANGES IN SUPPLY DUCT DIRECTION. PROVIDE BRANCH DUCT DAMPERS WITH LOCKING QUADRANTS FOR ALL BRANCHES AND TAKE-OFFS. PROVIDE RAISED QUADRANTS FOR INSULATED DUCTWORK. ALL VOLUME DAMPER HANDLES ARE TO PROTRUDE NEATLY THROUGH DUCT INSULATION AND BE TAGGED SO THAT THEY ARE CLEARLY VISIBLE.
- PROVIDE FLEXIBLE CONNECTIONS AT ALL DUCT CONNECTIONS TO VIBRATING EQUIPMENT. THESE CONNECTIONS SHALL BE INSTALLED IN CLOSE PROXIMITY TO SUCH EQUIPMENT.
- THE MECHANICAL CONTRACTOR SHALL HAVE A QUALIFIED HVAC TECHNICIAN FROM THE UNIT MANUFACTURER PROVIDE AN EQUIPMENT OPERATION CHECK AFTER UNIT START-UP AND PRIOR TO CERTIFIED AIR BALANCING. THE CERTIFICATION, SIGNED BY THE TECHNICIAN, MUST BE INCLUDED IN THE GENERAL CONTRACTOR CLOSING DOCUMENTS FOR THE STORE.
- PROVIDE CONDENSATE DRAIN PIPING SIZED PER PLAN. PROVIDE TRAP FOR EACH ROOFTOP UNIT PER DETAIL ON PLANS. PIPE DRAIN TO GUTTER OR DOWNSPOUT PER PLAN.

AREA SERVED	AREA (SQFT)	PEOPLE / 1000 SQFT	# PEOPLE	CFM PERSON	PEOPLE O.A. (CFM)	CFM / SQFT	SOFT O.A. (CFM)	TOTAL O.A. REQ'D (CFM)	TOTAL O.A. SUPPLIED (CFM)
OFFICE	65	5	2	5	10	0.06	4	14	
ASSOCIATE	76	5	2	5	10	0.06	5	15	
RETAIL AREA	1318	15	20	7.5	150	0.12	169	309	
								RTU-1	610
								RTU-2	990
STAGING	85	2	1	10	10	0.12	11	21	
COFFEE	270	5	2	5	10	0.06	17	27	
FOOD SVC. 1	393	20	8	7.5	60	0.12	48	108	
FOOD SVC. 2	385	20	8	7.5	60	0.12	47	107	
								RTU-2	990
RETAIL AREA	1400	15	21	7.5	158	0.12	168	326	
DELIVERY RM	67	2	1	10	10	0.12	9	19	
REAR WEST.	52	10	1	5	5	0.06	4	9	
FRONT VEST.	89	10	1	5	5	0.06	6	11	
								RTU-3	425

SYSTEM	CFM
RTU-1	+610
RTU-2	+990
RTU-3	+425
EF-1	-150
EF-2	-350
EF-3	-100
BUILDING POSITIVE PRESSURE	+275

TYPE MARK	MANUFACTURER	MODEL	SERVICE	DESCRIPTION	MOUNTING TYPE	MATERIAL	NECK SIZE	FACE SIZE	NOTES
CD-1	PRICE	AMD	<varies>	LOUVERED FACE DIRECTIONAL DIFFUSER	LAY-IN	ALUMINUM	18"X18"	24"X24"	<varies>
CD-2	PRICE	AMD	SUPPLY	LOUVERED FACE DIRECTIONAL DIFFUSER	SURFACE	ALUMINUM	12"X12"	NECK-5"	5.6
CD-3	PRICE	AMD	SUPPLY	LOUVERED FACE DIRECTIONAL DIFFUSER	SURFACE	ALUMINUM	6"X6"	NECK-5"	5.6
G-1	PRICE	630FF	RET/EXH/TRAN	LOUVERED FACE FILTER RETURN GRILLE	LAY-IN	ALUMINUM	20"X20"	NECK-3-3/4"	4
G-2	PRICE	630FF	TRANSFER	LOUVERED FACE FILTER RETURN GRILLE	SURFACE	ALUMINUM	12"X12"	NECK-3-3/4"	4
G-3	PRICE	630FF	EXHAUST/TRANSFER	LOUVERED FACE FILTER RETURN GRILLE	SURFACE	ALUMINUM	8"X8"	NECK-3-3/4"	4
LD-1	PRICE	TBD14	SEE PLANS	48" INSULATED PLENUM W/ (4) 1" SLOTS	LAY-IN	ALUMINUM	SEE PLAN	N/A	2.3

MARK	AREA SERVED	BASIS OF DESIGN			UNIT POWER		MOUNTING HEIGHT	NOTES	
		MANUFACTURER	MODEL	NOZZLE CFM	HP	VOLTAGE			PHASE
ARC-1	STAGING	POWERED AIRE	BCE-1-42	2163	0.5	120 V	1	7-2"	1-4
ARC-2	DELIVERY ROOM	POWERED AIRE	BCE-1-48	2155	0.5	120 V	1	7-2"	1-4

MARK	CFM	EXT. STATIC PRESSURE	FAN TYPE	DRIVE TYPE	SONES	HP	FAN RPM	VOLTAGE	PHASE	BASIS OF DESIGN			NOTES
										MANUFACTURER	MODEL	NOTES	
EF-1	1300	0.375 in-wg	DOWNBLAST	DIRECT	9.5	1/3	1300	120 V	1	PENNBARRY	DX16S	1-2	
EF-2	350	0.125 in-wg	DOWNBLAST	DIRECT	5.9	1/12	1550	120 V	1	PENNBARRY	DX10R	1-2	
EF-3	100	0.125 in-wg	DOWNBLAST	DIRECT	3.4	1/6	1725	120 V	1	PENNBARRY	DX08Q	1-2	

MARK	CFM	FAN TYPE	VOLTAGE	PHASE	HEATING CAPACITY	BASIS OF DESIGN			NOTES
						MANUFACTURER	MODEL	NOTES	
FFH-1	150	FAN FORCED CLG HEATER	120 V	1	1500 W	QMARK	EFF-1500	1-3	
FFH-2	150	FAN FORCED CLG HEATER	120 V	1	1500 W	QMARK	EFF-1500	1-3	

MARK	AREA SERVED	NOMINAL TONS	SUPPLY AIR FAN DATA			GAS HEAT			UNIT POWER			WEIGHT (LBS)	COOLING CAPACITY			BASIS OF DESIGN							
			OUTSIDE AIR (CFM)	E.S.P. (IN.)	HP	INPUT MBH	OUTPUT MBH	CONTROL STAGES	VOLTAGE	PHASE	MCA		MOCP	TOTAL COOLING MBH	SENSIBLE COOLING MBH	EDB (°F)	EWB (°F)	AMBIENT (°F)	EER (EER)	MANUFACTURER & PRODUCT LINE	MODEL	NOTES	
RTU-1	RETAIL	10	3910	610	0.75	3.75	130	104	2	208 V	3	54	70	1296	121.9	89	78	64.2	92/75	12.3 (15.8)	LENNOX ENLIGHT	LGT120H4E	1-20
RTU-2	FOOD SERVICE	12.5	4500	990	0.75	3.75	130	67	2	208 V	3	64	80	1431	146.1	108.1	75.2	62.5	92/75	10.8(14.6)	LENNOX ENLIGHT	LCT150H4E	2-20
RTU-3	CHECKOUT	5	2025	425	0.75	3.75	130	104	2	208 V	3	31	40	903	58.1	46.8	76.5	63.8	92/75	12.8 (17.1)	LENNOX ENLIGHT	LGT060H4E	2-20

RTU-1, 2, & 3 SEQUENCE OF OPERATION

GENERAL: TEMPERATURE SETPOINT: 74°F COOLING, 68°F HEATING HUMIDITY SETPOINT: 50% RELATIVE HUMIDITY.

SUPPLY AIR BLOWER SPEED
UNIT HAS FOLLOWING SUPPLY AIR BLOWER SPEED SETTINGS THAT PERTAIN TO THIS INSTALLATION:

- COOLING AIR BLOWER SPEED
- HEATING AIR BLOWER SPEED

COOLING MODE


- Y1 DEMAND: COMPRESSOR 1 OPERATES AND SUPPLY AIR BLOWER OPERATES AT COOLING SPEED.
- Y2 DEMAND: ALL COMPRESSORS OPERATE AND SUPPLY AIR BLOWER OPERATES AT COOLING SPEED.

DEHUMIDIFICATION MODE

- IF THE UNIT RECEIVES A CALL FOR DEHUMIDIFICATION, ECONOMIZER FREE COOLING IS LOCKED OUT (ON UNITS EQUIPPED WITH ECONOMIZER).
- CALL FOR DEHUMIDIFICATION, NO Y1, Y2 DEMAND: 1ST STAGE COMPRESSOR OPERATES, SUPPLY AIR BLOWER OPERATES AT COOLING SPEED, AND THE REHEAT VALVE IS ENERGIZED.
- Y1 DEMAND WITH A CALL FOR DEHUMIDIFICATION: ALL COMPRESSORS OPERATE, SUPPLY AIR BLOWER OPERATES AT COOLING SPEED AND THE REHEAT VALVE IS ENERGIZED.
- Y2 DEMAND WITH A CALL FOR DEHUMIDIFICATION: ALL COMPRESSORS OPERATE, SUPPLY AIR BLOWER OPERATES AT COOLING SPEED, AND THE REHEAT VALVE IS DE-ENERGIZED.

HEATING MODE (GAS HEAT)

- W1 DEMAND: 1ST STAGE GAS HEAT IS ENERGIZED AND THE SUPPLY AIR BLOWER OPERATES AT HEATING SPEED.
- W2 DEMAND: 2ND STAGE GAS HEAT IS ENERGIZED AND THE SUPPLY AIR BLOWER OPERATES AT HEATING SPEED.

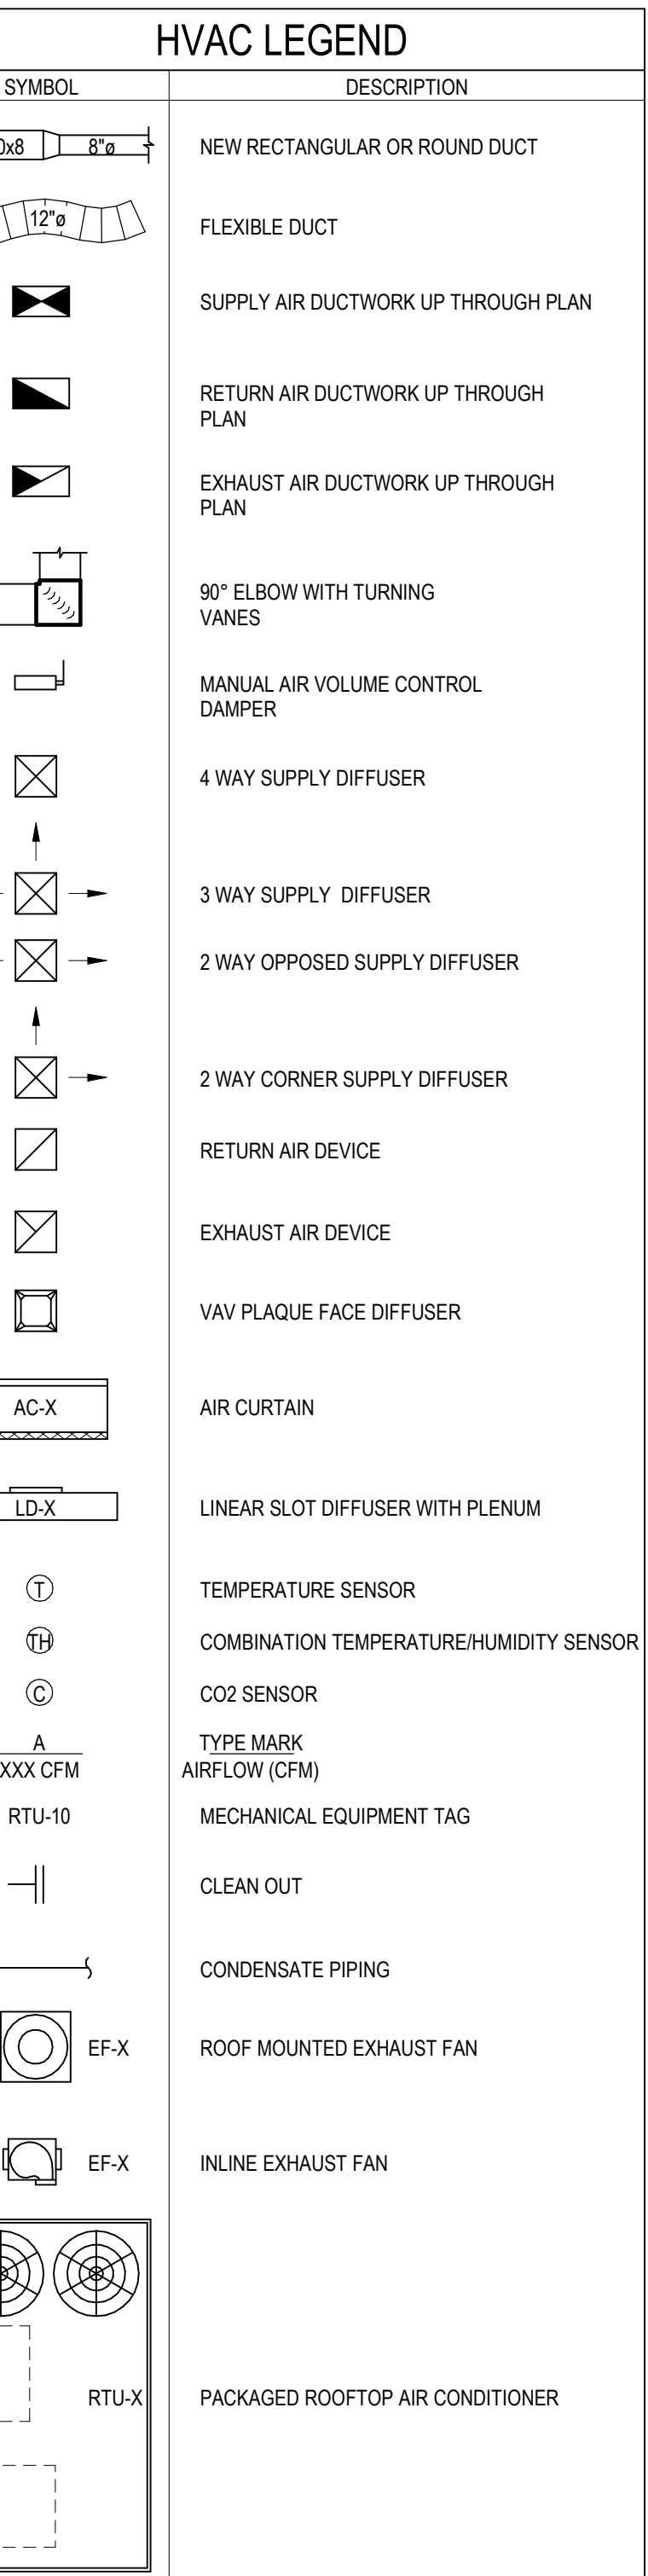

DB°F	DRY BULB DEGREES FAHRENHEIT	LD	LINEAR DIFFUSER
AC	AIR CONDITIONING	LP	LOW PRESSURE
AC	AIR CURTAIN	MAX	MAXIMUM
A.F.F.	ABOVE FINISHED FLOOR	MBH	1000 BTU PER HOUR
BAS	BUILDING AUTOMATION SYSTEM	MCA	MINIMUM CIRCUIT AMPACITY
BTU	BRITISH THERMAL UNIT	MIN	MINIMUM
CD	CEILING DIFFUSER	MOPC	MAXIMUM OVER CURRENT PROTECTION
CFM	CUBIC FEET PER MINUTE	MPH	MILES PER HOUR
CO2	CARBON DIOXIDE	O.A.	OUTSIDE AIR
D	DIAMETER	O.C.	ON CENTER
EER	ENERGY EFFICIENCY RATIO	PVC	POLYVINYL CHLORIDE
EF	EXHAUST FAN	REQ'D	REQUIRED
FFH	FAN FORCED HEATER	RTU	PACKAGED ROOF TOP HVAC UNIT
G	GRILLE	SCH	SCHEDULE
G.C.	GENERAL CONTRACTOR	SEER	SEASONAL ENERGY EFFICIENCY RATIO
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SF	SQUARE FOOT
HP	HORSEPOWER	TYP.	TYPICAL
IEER	INTEGRATED ENERGY EFFICIENCY RATIO	V	VOLTS
IN	INCHES WATER COLUMN	CO	CLEAN OUT
LBS.	POUNDS	WB°F	WET BULB DEGREES FAHRENHEIT

RTU-1, 2, & 3 TEST AND BALANCE NOTES

- TEST AND BALANCE CONTRACTOR TO OBTAIN INITIAL BALANCE OF COOLING CFM FOR RTU USING FAN SHEAVE ADJUSTMENT TO WITHIN +/- 5% SCHEDULED SUPPLY AIR CFM. PRODIGY CONTROLLER MAY BE USED FOR FINAL 5% TO OBTAIN SCHEDULED SUPPLY AIR CFM.
- SET MINIMUM OUTSIDE AIR DAMPER POSITION FOR COOLING AND VERIFY OUTSIDE AIR CFM PER RTU SCHEDULE.
- NOT USED
- NOT USED
- USING PRODIGY CONTROLLER, VERIFY HEATING CFM EQUALS COOLING CFM.
- ALL PRODIGY CONTROLLER SETTINGS OTHER THAN THOSE MENTIONED ABOVE SHALL REMAIN AS THEIR DEFAULT VALUE AS SET FROM THE FACTORY.
- VERIFY POSITIVE BUILDING PRESSURE.

LENNOX SETUP PARAMETERS / MID-ATLANTIC STORES (RS)

UNIT ID CONFIGURATION (MECHANICAL CONTRACTOR TO DEFINE / AS APPLICABLE):

- BACNET CONFIGURATION:** GO TO SETTINGS>GENERAL>CONFIGURATION ID1 POSITION 5 SET TO "B"
- NETWORK CONFIGURATION:** GO TO SETUP>NETWORK INTEGRATION, SET TO BACNET
- CONTROL MODE:** SET CONTROL MODE TO ROOM SENSOR, CO2 TEMP. & HUMIDITY TO "NO"
- ENTHALPY CONFIGURATION:** CHANGE CONFIG ID1 POSITION 2 FROM D (DUAL ENTHALPY) TO S (SINGLE ENTHALPY)
- FRESH AIR COOLING:** SETUP>TEST & BALANCE>DAMPER. SCROLL TO FRESH AIR COOLING SET TO "NO"
- FRESH AIR HEAT:** SETUP>TEST & BALANCE>DAMPER. SCROLL TO FRESH AIR HEAT SET TO "NO"

INDIVIDUAL PARAMETER CONFIGURATIONS (MECHANICAL CONTRACTOR TO DEFINE / AS APPLICABLE):

- PARAMETER 105 DEHUMID MODE: 7 NO CONDITIONS
- PARAMETER 106 DEHUMID SETPOINT: 50, THIS IS A CENTERED SET POINT (+/-)
- PARAMETER 107 DEHUMID DEADBAND: 3 (DEFAULT) THIS IS THE ACTUAL +/- VALUE
- PARAMETER 110 CO2 DAMPER MAX OPEN %: 50
- PARAMETER 118 CO2 START OPEN PPM: 1200
- PARAMETER 119 CO2 FULL OPEN PPM: 1500
- PARAMETER 131 FREE COOL MAX DAMPER: 100%
- PARAMETER 137 OCC HEAT SET POINT: 68 (BACK UP)
- PARAMETER 139 OCC COOLING SET POINT: 72 (BACK UP)
- PARAMETER 154 OCC BLOWER MODE: ON CONTINUOUS 1
- PARAMETER 155 FREE COOL LOCK OUT SET POINT: 29 (DISABLED)
- PARAMETER 159 FREE COOL SUPPLY SET POINT: 55 (DEFAULT)
- PARAMETER 160 ECON FREE COOL SET POINT: 55 (DEFAULT)
- PARAMETER 161 ECON FREE COOL OFFSET: 10 (DEFAULT)
- PARAMETER 162 FREE COOL ENTHALPY SET POINT (SINGLE ENTHALPY): 19 MA (50% HUM + 60F)
- PARAMETER 163 ECON FREE COOL ENTHALPY OFFSET: 1 (DEFAULT)
- PARAMETER 164 ECONOMIZER PROFILE: 2 (DEFAULT)

CFM VALUES / MSVA FAN SPEEDS (AIR BALANCER TO DEFINE / IF APPLICABLE):

- HEAT CFM VALUE: PER THE HVAC SCHEDULE
- HIGH COOL CFM VALUE: PER THE HVAC SCHEDULE
- LOW COOL CFM VALUE: MATCH THE HIGH COOL CFM VALUE
- VENTILATION CFM VALUE: MATCH THE HIGH COOL CFM VALUE

AECOM Services of PA, Inc.
1255 BROAD STREET, SUITE 201
CLIFTON, NJ 07013-3988
973.883.8500 FAX 973.883.8601
http://www.aecom.com

PROJECT NAME
WAWA STORE #8202
8601 WESTBRANCH HIGHWAY
TOWNSHIP OF KELLY, PA 17837

CLIENT NAME
WAWA INC.
260 W. BALTIMORE PIKE
WAWA, PA 19003

SHEET TITLE
HVAC SCHEDULES & NOTES

DATE	RELEASE
12/14/2023	ISSUE FOR BID SET
10/20/2023	ISSUE FOR PERMIT
03/01/2024	REV B - ISSUED FOR CONSTRUCTION SET
04/23/2024	MECHANICAL UPDATES
05/17/2024	REV D - MECHANICAL UPDATES

PROTOTYPE	DATE	CHECKED
WSPB PA	06/08/24	DA
PROJECT NO.	6668812	FA

8202
KELLY, PA

M4.0