GENERAL NOTES:

1. DEVIATIONS FROM THE HVAC PLANS ARE THE RESPONSIBILITY OF THE HVAC CONTRACTOR & WILL NOT RESULT IN ADDITIONAL COSTS TO THE OWNER UNLESS WRITTEN CHANGE ORDERS ARE APPROVED BY THE OWNER.
2. ALL WORK TO BE PERFORMED TO STATE AND LOCAL CODES & SMACNA GUIDELINES.
3. INSTALL UNITS ACCORDING TO MANUFACTURERS GUIDELINES.
4. PROVIDE OWNER w/OPERATION & MAINTENANCE MANUALS & SYSTEM SCHEMATICS.
5. CONTRACTOR TO CONFIRM VOLTAGES & PHASES OF EQUIPMENT PRIOR TO INSTALLATION.
6. EXHAUST FANS AND FURNACE FANS TO RUN CONTINUOUSLY DURING OCCUPIED MODE.
7. VERIFY w/ OWNER EXACT HEATER LOCATION TO AVOID BUILDING FUNCTION INTERFERENCE.
8. NIGHT SET BACK THERMOSTATS TO BE INSTALLED ON ALL HVAC EQUIPMENT.
9. INSULATE DUCT WORK TO SMACNA GUIDELINES AND STATE CODES.
10. INSTALL VOLUME CONTROL DAMPERS AS INDICATED ON PLANS.
11. MAINTAIN AT LEAST 10 FEET CLEARANCE FROM INTAKES OR WINDOWS ON ALL EXHAUST VENTS.
12. RETURN AIR DUCT WORK TO BE LINED FOR SOUND ATTENUATION.
13. FLEXIBLE ROUND DUCT WORK NOT TO EXCEED 8 FEET IN LENGTH. AVOID UNNECESSARY. TURNS & SLACK.
14. DUCT WORK TO BE STANDARD GAUGE SHEET METAL (FIBROUS DUCT NOT ALLOWED).
15. COORDINATE WORK WITH GENERAL CONTRACTOR & OWNER TO MAXIMIZE CEILING HEIGHT & AVOID CONFLICTS.
16. TEST, ADJUST & CALIBRATE CONTROL SYSTEMS AS REQUIRED. PROVIDE SCHEMATICS & DESCRIPTION TO THE OWNER PRIOR TO INSTALLATION.
17. INSULATE EXHAUST DUCT FOR EXHAUST FAN TO EXTERIOR TERMINATION.
18. CONTRACTOR TO VERIFY GAS METER CAPACITY WITH LOCAL GAS SUPPLIER.
19. VERIFY ALL EXISTING CONDITIONS PRIOR TO INSTALLATION (DRAWINGS ARE DIAGRAMMATIC IN NATURE AND DO NOT REFLECT EXACT LOCATIONS OF EQUIPMENT OR OTHER APPARATUSES.)
20. PROVIDE SHOP DRAWINGS TO THE ARCHITECT/DESIGNER FOR EQUIPMENT, FANS, REGISTERS ETC. PRIOR TO PROCUREMENT
21. PROVIDE OWNER WITH COLOR CHOICES FOR SWITCHES AND OTHER APPARATUSES WHERE APPLICABLE.
22. VENT OWNER'S WATER HEATERS AS REQUIRED.
23. VENT DRYER TO EXTERIOR AS REQUIRED. MAINTAIN CLEARANCES FROM INTAKES AS NOTED ABOVE.
24. HANGER AND SUPPORT MATERIALS SHALL BE INSTALLED TO THE LATEST EDITION OF THE ASHRAE HANDBOOK OF FUNDAMENTALS.
25. HVAC CONTRACTOR RESPONSIBLE FOR A COMPLETE AND FULLY WORKING SYSTEM.
26. REPLACE ALL AIR FILTERS PRIOR TO TURNING SYSTEM OPERATIONS OVER TO OWNER.
27. INSTALLER IS RESPONSIBLE FOR FINAL TEST & BALANCING DURING TRAINING WEEK & PROVIDE A WRITTEN REPORT TO OWNER.
28. HVAC CONTRACTOR TO INSTALL #2 GAS w/ 14" WATER COLUMN MAX. PER STATE CODE & AGA GUIDELINES (LABEL AS REQUIRED).
29. DUCT DIMENSIONS LISTED ARE NET FREE - CLEAR INSIDE DIMENSIONS.
30. VERIFY DUCT LOCATIONS PRIOR TO FABRICATION. VERIFY LIMITED AREA FOR DUCTWORK & OTHER APPARATUSES.
31. S/S WALL PANELS FOR THE KITCHEN AREA ARE TO BE FURNISHED AND INSTALLED BY THE HVAC CONTRACTOR. PANELS ARE TO BE 18 GA. TYPE 304 S/S. SEE DETAILS AND LOCATIONS ON THE ARCHITECTURAL DRAWINGS.
32. ALL ROOFTOP MECHANICAL EQUIPMENT WILL BE SHIELDED FROM VIEW OF THE PUBLIC RIGHT-OF-WAY AND ADJACENT STREETS BY MATERIAL COMPATIBLE WITH THE BUILDING ARCHITECTURE, BY PARAPET WALL, OR BY A DESIGNATED ROOFTOP ENCLOSURE.

H.V.A.C. SPECIFICATIONS:

15010 MECHANICAL REQUIREMENTS:

DO ALL WORK IN COMPLIANCE WITH ALL APPLICABLE CODES, LAWS AND ORDINANCES, THE STANDARD BUILDING CODE AND THE REGULATIONS OF THE LOCAL UTILITY COMPANIES. OBTAIN AND PAY FOR ANY AND ALL REQUIRED PERMITS, INSPECTIONS, CERTIFICATES OF INSPECTIONS.

COOPERATE WITH OTHER TRADES AND CONTRACTORS AT JOB. PERFORM WORK IN SUCH MANNER AND AT SUCH TIMES AS NOT TO DELAY WORK OF OTHER TRADES.

OBTAIN MANUFACTURER'S DATA ON ALL EQUIPMENT, THE DIMENSIONS OF WHICH MAY AFFECT INSTALLATION. USE THIS DATA TO COORDINATE PROPER SERVICE CHARACTERISTICS, ENTRY LOCATIONS, ETC., AND TO INSURE MINIMUM CLEARANCES ARE MAINTAINED.

WORKMAN SHALL BE EXPERIENCED IN THEIR RESPECTIVE TRADE. WORKMANSHIP OF INSTALLED WORK SHALL BE FIRST CLASS AND WILL BE SO JUDGED. SUBSTANDARD WORK SHALL BE REMOVED AND REPLACED AT CONTRACTOR'S EXPENSE.

CONTRACTOR SHALL AND DOES HEREBY WARRANT ALL MATERIALS AND EQUIPMENT FURNISHED UNDER THIS SECTION TO BE FREE FROM DEFECTS AND TO FUNCTION OR OPERATE SATISFACTORILY FOR ONE YEAR AFTER FINAL ACCEPTANCE OF THE WORK, AND THAT ANY ITEMS NOT MEETING THIS REQUIREMENT WILL BE MADE GOOD BY HIM WITHOUT ANY COST TO THE OWNER.

PROVIDE ONLY NEW, STANDARD FIRST-GRADE MATERIALS THROUGHOUT, CONFORMING TO STANDARDS ESTABLISHED BY UNDERWRITER LABORATORIES INC., AND SO MARKED AND LABELED, TOGETHER WITH MANUFACTURER'S BRAND OR TRADEMARK. ALL LIKE ITEMS SHALL BE OF ONE MANUFACTURER.

ALL WORK SHALL BE EXECUTED IN A MANNER THAT SHALL PRESENT A NEAT APPEARANCE UPON COMPLETION. CARE SHALL BE EXERCISED THAT ALL ITEMS ARE PLUMB, STRAIGHT AND LEVEL.

UPON COMPLETION OF WORK, ALL SYSTEMS SHALL BE TESTED, AND SHALL BE SHOWN TO BE IN PERFECT WORKING CONDITION IN ACCORDANCE WITH THE INTENT OF THE DRAWINGS.

ANY WALLS, CEILINGS, EQUIPMENT, ETC., DAMAGED BY THE CONTRACTOR IN CONSTRUCTION OF THIS PROJECT SHALL BE REPAIRED, RESTORED AND/OR REPLACED BY THE CONTRACTOR TO ITS ORIGINAL CONDITION, OR TO PERFORM ITS INTENDED FUNCTION, AT NO ADDITIONAL COST TO OWNER.

15055 PIPING:

PIPING SHALL BE NEW AND IN GOOD CONDITION. ALL PIPING SHALL CONFORM TO ALL APPLICABLE STATE, COUNTY AND LOCAL CODES.

PIPING SHALL BE INSTALLED PARALLEL TO BUILDING LINES.

PIPING SHALL BE COORDINATED WITH OTHER TRADES PRIOR TO INSTALLATION. OFFSETS AS REQUIRED TO COORDINATE WITH STRUCTURE AND OTHER TRADES SHALL BE MADE AT NO ADDITIONAL COST.

PIPING SHALL BE TESTED IN ACCORDANCE WITH INDUSTRY ACCEPTED METHODS. LEAKS SHALL BE REPAIRED AND ANY LOST REFRIGERANT SHALL BE REPLACED AT NO ADDITIONAL COST.

DIELECTRIC UNIONS SHALL BE INSTALLED IN ALL COPPER AND FERROUS PIPING CONNECTIONS.

15891 DUCTWORK:

ALL DUCTWORK MATERIALS AND INSTALLATION SHALL CONFORM TO APPLICABLE STATE, COUNTY AND LOCAL CODES. DUCTWORK SHALL BE ALL NEW AND IN GOOD CONDITION.

DUCT DIMENSIONS NOTED ARE INSIDE DIMENSIONS AND DO NOT INCLUDE INSULATION OR LINER.

DUCTWORK SHALL BE INSTALLED TO AVOID CONFLICT WITH OTHER TRADES. ANY OFFSETS REQUIRED SHALL BE INSTALLED AT NO ADDITIONAL COST.

FABRICATE DUCTWORK FROM SHEET METAL. DUCT SHALL BE INSULATED WITH 3" DUCT WRAP INSULATION. DUCTWORK SHALL BE INSTALLED IN ACCORDANCE WITH SMACNA LOW PRESSURE DUCTWORK STANDARDS.

EXPOSED DUCTWORK IN THE DINING AREAS SHALL BE INSULATED, SPIRAL DUCT.

15990 TEST AND BALANCE:

TEST AND BALANCE ALL AIR SYSTEMS IN ACCORDANCE WITH AABC AND/OR NEBB REQUIREMENTS. ALL EQUIPMENT USED FOR TESTING SHALL BE IN PROPER WORKING ORDER.

THE CONTRACTOR SHALL REGULATE AND ADJUST ALL SPLITTERS, DEFLECTORS AND DAMPERS SO THAT THE INLET OR OUTLET SHALL DELIVER OR REMOVE THE REQUIRED NUMBER OF CUBIC FEET OF AIR PER MINUTE (CFM) AT THE RESPECTIVE OPENINGS.

15991 VIBRATION AND NOISE:

PROVIDE VIBRATION ISOLATORS AND ACOUSTIC INSULATION AS REQUIRED TO ELIMINATE ANY OBJECTIONABLE NOISE OR VIBRATION.

CONTROL NOTES

1. WIRE RTU-1, RTU-2 TO SHUT-DOWN & EXHAUST HOOD FANS TO CONTINUE TO RUN UPON ACTIVATION OF THE ANSUL SYSTEM.
2. WIRE RTU-1 & RTU-2 TO SHUT-DOWN UPON ACTIVATION OF ANY IN-DUCT SMOKE DETECTOR.
3. OCCUPIED MODE: FANS IN RTU-1 & RTU-2, EXHAUST FANS KEF-1, 2 & 3 AND EF-1, 2 & 3 TO RUN CONTINUOUSLY.
4. UNOCCUPIED MODE: FANS IN RTU-1 & RTU-2 TO RUN ONLY WHEN COOLING OR HEATING IS CALLED FOR.

LENNOX SETTINGS FOR CULVERS

Kitchen Unit

Parameter 3.01 HEAT DELAY NEEDS TO BE SET TO "DISABLED". CONTROL PARAMETER 3.01=0 Pg. 92
ECONOMIZER DIP SWITCHES A56 (EM1) NEED TO BE SET TO "GLOBAL" MODE. 1=ON 2=OFF (PG. 5 FIG 8)
ECONOMIZER MIN POSITION POTENTIOMETER NEEDS TO BE DETERMINED AND SET BY AIR BALANCER. (Pg. 52 FIG 33)
BOTH THE THERMOSTAT AND THE HOOD FANS MUST BE TIED INTO TB1 TERMINAL 8&9 FOR OCC/UNOCC CONTROL.
FRESH AIR TEMPERING (HEATING) CONTROL PARAMETER 6.20=160 "-55F" (KITCHEN IS USUALLY IN COOLING MODE)
(PARAMETER 6.20 Pg 99; x CHARTS Pg 109)

Dining Room Unit

PARAMETER 3.01 HEAT DELAY NEEDS TO BE SET TO "DISABLED". CONTROL PARAMETER 3.01=0 Pg 92
ECONOMIZER DIP SWITCHES A56 (EM1) NEED TO BE SET TO ECONOMIZER TYPE PURCHASED/INSTALLED. 1=? 2=?
(Pg 5 FIGURE 8)
ECONOMIZER MIN POSITION POTENTIOMETER NEEDS TO BE DETERMINED AND SET BY AIR BALANCER. (Pg 52 FIGURE 33)
THE THERMOSTAT MUST BE TIED INTO TB1 TERMINAL 8&9 FOR OCC/UNOCC CONTROL
FRESH AIR TEMPERING (HEATING) CONTROL PARAMETER 6.20=142 "68F" (ROOM NEUTRAL)
(PARAMETER 6.20 PAGE 99; x CHARTS PAGE 109)

OTHER PARAMETERS THAT WE DIDN'T SET, BUT ARE PART OF START-UP:
ROOM SET POINT
REMOTE SENSOR OPERATION
TEMP DEADBANDS

CHECK FOR CORRECT OPERATION AND WIRING OF ALL SENSORS.

TEST AND BALANCE NOTE:

ACCUREX WILL PROVIDE BALANCED AIRFLOW AND FUNCTIONAL CHARACTERISTICS OF THE HVAC AS THEY RELATE TO AIRFLOW AND RESISTANCE ONLY. SERVICES TO BE PERFORMED BY A CERTIFIED NEBB FIRM AND ITS MANAGING GROUP - NATIONAL TAB

NOTE : KITCHEN HOODS AND FANS SUPPLIED AND INSTALLED BY HVAC CONTRACTOR--MINUMUM FOUR WEEK LEAD TIME

NATIONAL ACCOUNT PROGRAM

1. LENNOX INDUSTRIES, INC. - ROOFTOP HVAC EQUIPMENT
   National Accounts Sales: (800) 367-6285 Option #1 lennoxind.com
   National Account Technical Support: (800) 367-6285 Option #2 lennoxind.com
2. ACCRUREX/ GREENHECK FAN CORPORATION - KITCHEN HOODS,
   EXHAUST FANS, ROOF CURBS, ANSUL SYSTEMS, AND ACCESSORIES
   CONTACT Phillip Kraft @ 1-262-227-7865 or phillip.kraft@accurex.com
   Secondary contact Brad Borchardt @ 1-715-551-0809 or brad.borchardt@accurex.com
   or Andy Jacobs or andy.jacobs@accurex.com
   ACCUREX WILL PROVIDE BALANCED AIRFLOW AND FUNCTIONAL CHARACTERISTICS OF THE HVAC AS THEY RELATE TO AIRFLOW AND RESISTANCE ONLY. SERVICES TO BE PERFORMED BY A CERTIFIED NEBB FIRM AND ITS MANAGING GROUP - NATIONAL TAB
3. CARNES COMPANY - DIFFUSERS AND GRILLES
   National Accounts Rep: Brian Baker @ (608) 845-6411
   bbaker@carnes.com
   National Accounts Sales: Chris Stratton @ (608) 845-6411
   cstratton@carnes.com

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:

GEORGIA REGISTERED No. PE003480 PROFESSIONAL ENGINEER RAMON G. VELAZQUEZ

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV

CHK'D BY: RGV

PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:

H.V.A.C. LEGENDS AND SPECIFICATIONS

PROJECT NO: 23061

M001

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC IS STRICTLY PROHIBITED

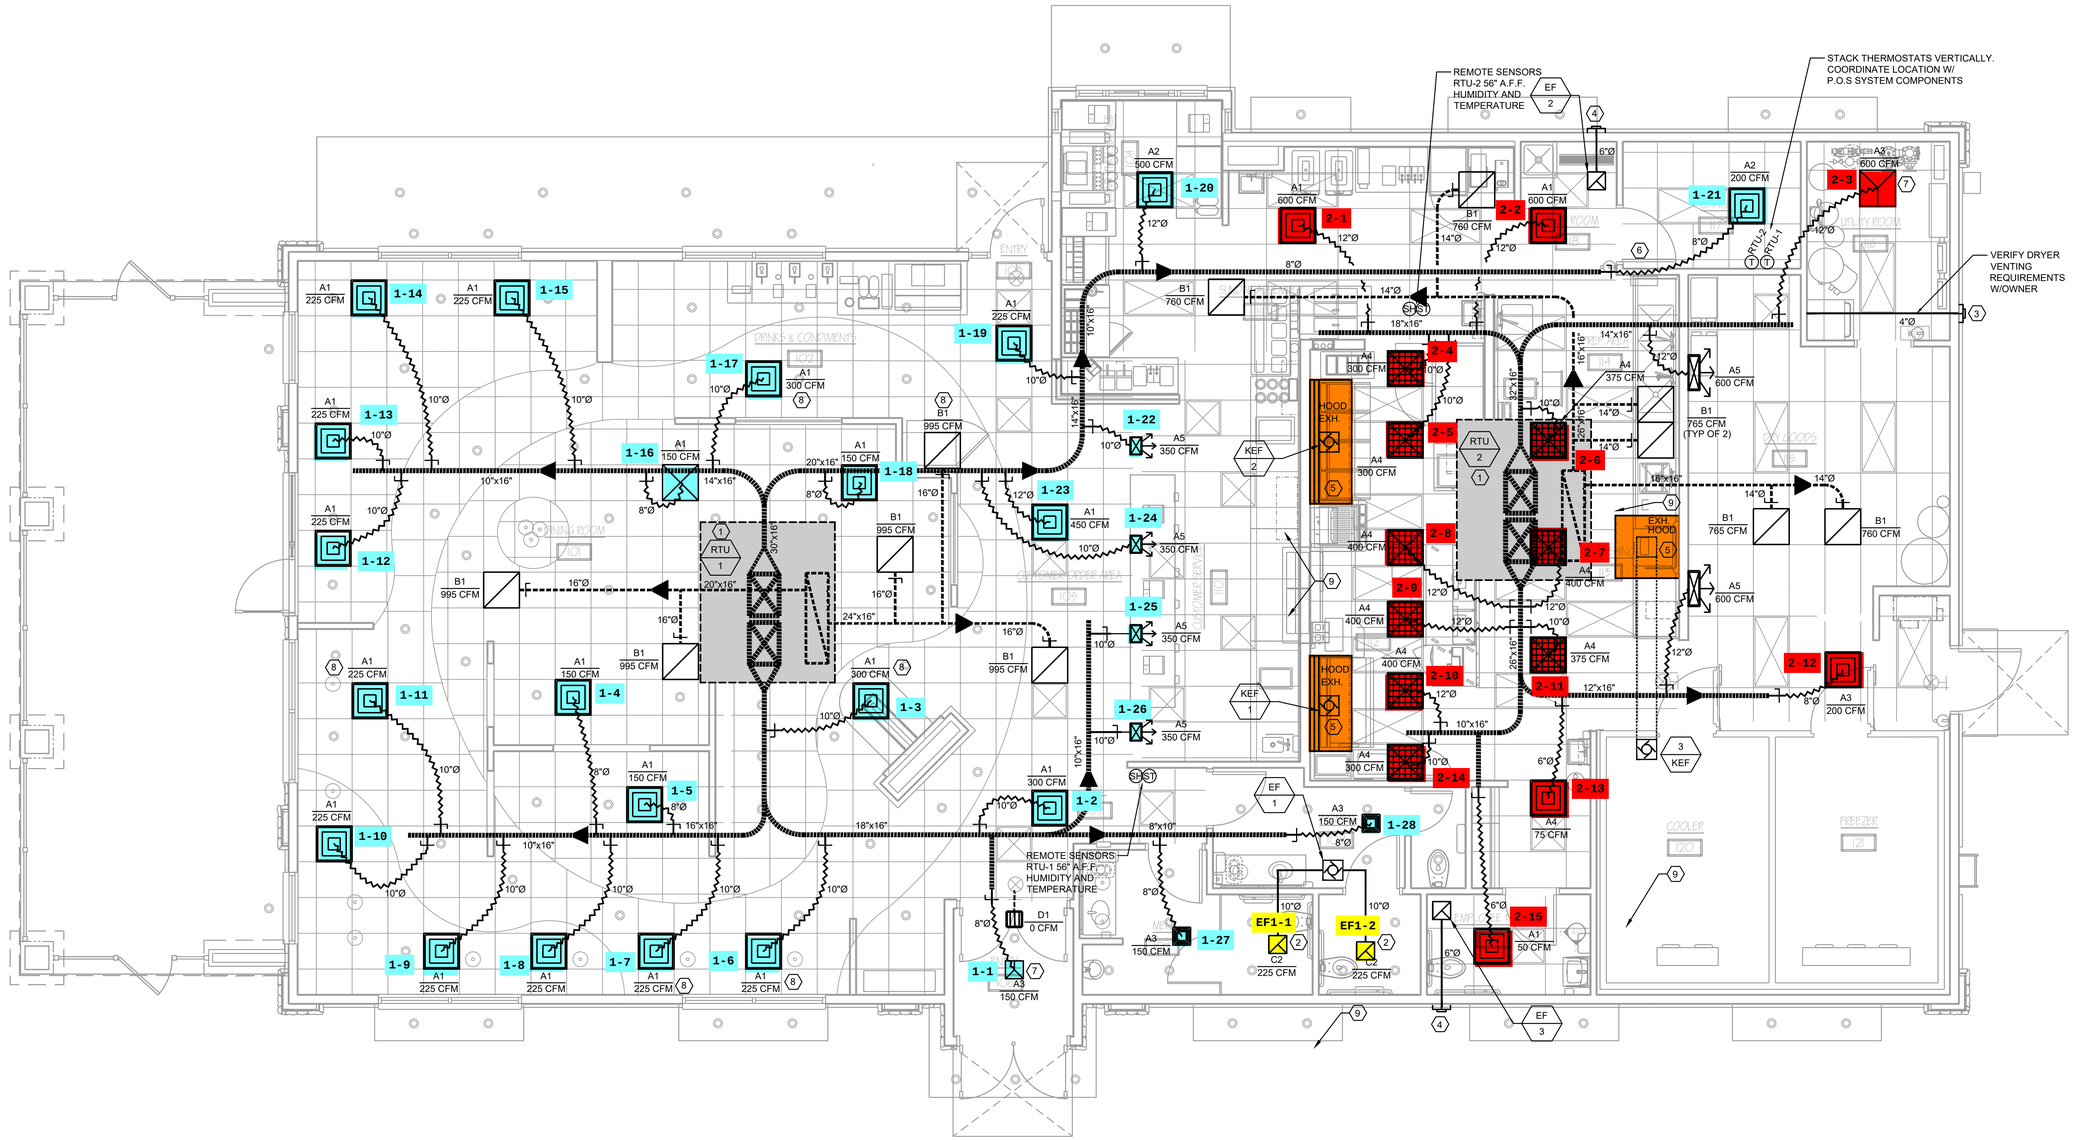

1 M101 FLOOR PLAN - H.V.A.C.
1/4" = 1'-0"

H.V.A.C. LEGEND:

- SUPPLY DIFFUSER
- RETURN AIR GRILLE
- EXHAUST AIR GRILLE
- TRANSFER GRILLE
- X" x X" RIGID DUCTWORK (WIDTH x DEPTH)
- DUCT SIZE TRANSITION
- X" FLEX DUCTWORK (DIAMETER)
- ELBOW WITH TURNING VANES
- MANUAL VOLUME DAMPER
- (T) THERMOSTAT MOUNTED 48" AFF
- (ST) (SH) TEMPERATURE AND HUMIDITY REMOTE SENSORS MOUNTED 56" AFF

H.V.A.C. KEYNOTES:

1. ROUTE FULL SIZE PVC CONDENSATE DRAIN LINE FROM RTU WITH P-TRAP TO NEAREST ROOF DRAIN OR GUTTER.
2. ROUTE GALV. STEEL EXHAUST DUCT FROM EXHAUST GRILLE TO FAN AT ROOF.
3. ROUTE 4" GALV. STEEL EXHAUST DUCT FROM DRYER TO CAP AT EXTERIOR WALL.
4. ROUTE GALV. STEEL EXHAUST DUCT FROM CEILING MOUNT EXHAUST FAN TO CAP AT EXTERIOR WALL.
5. REPRODUCTION OF THE KITCHEN CONSULTANT DRAWINGS IS PROVIDED ON SHEETS M40X. FINAL COORDINATION SHOULD BE WITH KITCHEN CONSULTANT DOCUMENTATION.
6. PROVIDE WITH 10" X 8" SIGHT TIGHT DOOR TRANSFER GRILLE MOUNTED AT BOTTOM OF DOOR EQUAL TO CARNES MODEL RFJAD (SIZED TO ALLOW 200 CFM AIR FLOW).
7. 3-WAY DIFFUSER.
8. PROVIDE DIFFUSER WITH FLAT BLACK FINISH.

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:
GEORGIA REGISTERED No:PE035480 PROFESSIONAL ENGINEER RAMON G. VELAZQUEZ

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV
CHK'D BY: RGV
PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:
FLOOR PLAN - H.V.A.C.

PROJECT NO: 23061

M101

GAS-ELECTRIC PACKAGED ROOFTOP UNIT AIR CONDITIONING SCHEDULE

UNIT LABEL	AREA SERVED	MFG	MODEL	UNIT ORIENTATION	NOM. TON.	COOLING		COOLING				INDOOR FAN						CONDENSER FAN(S)			COMPRESSOR(S)			HEATING PERFORMANCE						MCA	MOCP	WEIGHT (LBS)	IEER [SEER]	NOTE(S)
						TC (MBH)	SC (MBH)	EA D.B. (°F)	EA W.B. (°F)	OA D.B. (°F)	OA W.B. (°F)	TOTAL CFM	OA CFM	E.S.P. (IN WC)	HP	V/Ø	FLA	QTY	V/Ø	FLA (EA)	QTY	V/Ø	RLA (EA)	LRA (EA)	TYPE	EA D.B. (°F)	OA D.B. (°F)	STG	INPUT (MBH)	OUTPUT (MBH)	EFF (%)					
RTU-1	DINING	LENNOX	LGH210H4B	DOWNFLOW	17.5	208.9	160.9	79.6	65.8	91.1	74.0	7,000	2000	0.8	5	208/3	16.7	6	208/1	2.4	3	208/3	19.6	136	NG	55.6	19.5	2	360	288	80%	87	100	2650	13.0	1 - 12
RTU-2	FOOD PREP	LENNOX	LGH210H4B	DOWNFLOW	17.5	208.9	160.9	79.7	65.9	91.1	74.0	6,800	2000	0.8	5	208/3	16.7	6	208/1	2.4	3	208/3	19.6	136	NG	55.1	19.5	2	360	288	80%	87	100	2650	13.0	1 - 12

NOTES:
1. PROVIDE SMOKE DETECTOR(S) IN SUPPLY AND RETURN DUCTWORK TO SHUT THE UNIT DOWN UNDER ALARM CONDITION AS REQUIRED BY LOCAL STATE CODES.
2. SMOKE DETECTORS SHALL BE FURNISHED AND FACTORY INSTALLED BY THE MANUFACTURER AND CONNECTED TO THE FIRE ALARM SYSTEM BY THE ELECTRICAL CONTRACTOR.
3. PROVIDE WITH ROOF CURB, DISCONNECT SWITCH AND 120 VOLT GFI OUTLET TO BE WIRED IN FIELD BY CONTRACTOR.
4. PROVIDE WITH R-410A REFRIGERANT AND TIME GUARD CONTROL CIRCUIT TO PREVENT SHORT-CYCLING OF THE COMPRESSOR.
5. PROVIDE WITH HONEYWELL OR EQUAL 77350 NIGHT SETBACK THERMOSTAT.
6. PROVIDE TWO STAGE CONTROL, DUCT DISCHARGE CONTROL, MIN. MERV 4 FILTERS AND LOOSE SHIPPED CONDENSATE TRAP.
7. PROVIDE WITH HUMIDITROL DEHUMIDIFICATION OPTION.
8. SEE CONTROL NOTES ON SHEET M001.
9. UNIT SHALL BE PROVIDED WITH STAINLESS STEEL HEAT EXCHANGER AND BELT TENSIONER WITH SPARE BELT.
10. PROVIDE WITH ENTHALPY ECONOMIZER WITH FD&D CONTROLS.
11. LOAD CALCS ARE BASED ON R-20 ROOF INSULATION, R-19 WALL INSULATION, 0.65 WINDOW U-VALUE AND 0.7 WINDOW SHGC. DEVIATIONS FROM THESE NUMBERS COULD REQUIRE EQUIPMENT RESIZING. NOTIFY THE ARCHITECT AND/OR ENGINEER OF ANY DISCREPANCIES.
12. NO SUBSTITUTIONS ALLOWED. SEE NATIONAL ACCOUNT INFORMATION ON SHEET M001.

BUILDING AIR BALANCE

EQUIPMENT	OUTSIDE	EXHAUST
RTU-1	2,000	
RTU-2	2,000	
KEF-1		1,500
KEF-2		1,500
KEF-3		350
EF-1		450
EF-2		75
EF-3		75
TOTALS	4,000	3,950
TOTAL BUILDING PRESSURE		**50**

VENTILATION REQUIREMENT SCHEDULE

SERVED BY	ROOM	SPACE TYPE	NUMBER OF PEOPLE	OUTDOOR AIRFLOW RATE REQ'D PER PERSON (R_p)	AREA (sf)	OUTDOOR AIRFLOW RATE REQ'D PER SF (R_a)	$R_p \times P_z$	$R_a \times A_z$	BREATHING ZONE OUTDOOR AIRFLOW (V_{bz})	AIR DISTRIBUTION CONFIGURATION	ZONE AIR DIST. EFFECT. (E_z)	ZONE OUTDOOR AIRFLOW ($V_{oz}=V_{bz}/E_z$)	TOTAL OUTDOOR AIR INTAKE REQ'D (V_{ot})	TOTAL OUTDOOR AIR INTAKE PROVIDED
RTU-1	101 - DINING	CAFETERIA / FAST FOOD DINING	105	7.5	2030	0.18	788	366	1154	CEILING SUPPLY OF WARM AIR 15°F OR MORE ABOVE SPACE TEMPERATURE AND CEILING RETURN	0.8	1542	**1542**	**2000**
	104 - DRIVE THRU	CAFETERIA / FAST FOOD DINING	5	7.5	132	0.18	38	24	62					
	106 - ENTRY	CORRIDORS	0	0	49	0.06	0	3	3					
	107 - MEN'S RESTROOM	NONE	0	0	91	0	0	0	0					
	108 - WOMEN'S RESTROOM	NONE	0	0	121	0	0	0	0					
	117 - OFFICE	OFFICE SPACE	2	5	72	0.06	10	5	15					
								UNIT TOTAL	**1233**					
RTU-2	111 - SUNDAE PREP	CAFETERIA / FAST FOOD DINING	2	7.5	106	0.18	15	20	35	CEILING SUPPLY OF WARM AIR 15°F OR MORE ABOVE SPACE TEMPERATURE AND CEILING RETURN	0.8	322	**322**	**2000**
	112 - KITCHEN	KITCHEN (COOKING)	15	7.5	577	0.12	113	70	183					
	115 - DRY GOODS	STORAGE ROOMS	0	0	332	0.12	0	40	40					
	116 - UTILITY ROOM	NONE	0	0	90	0	0	0	0					
	118 - MOP ROOM	NONE	0	0	103	0	0	0	0					
	119 - EMPLOYEE TOILET	NONE	0	0	52	0	0	0	0					
								UNIT TOTAL	**258**					

NOTE:
REQUIRED OUTSIDE AIR CFM VALUES BASED ON ANSI/ASHRAE STANDARD 62.1-2016.

EXHAUST FAN SCHEDULE

UNIT LABEL	AREA SERVED	MFG	MODEL	LOCATION	DRIVE	TYPE	CFM	S.P. (IN WG)	MOTOR				NOTE(S)
									W	HP	RPM	V/Ø	
EF-1	RESTROOMS	ACCUREX	XRED-090-D	ROOF	DIRECT	DOWNBLAST	450	0.5	-	1/15	1550	120/1	1 - 2
EF-2	MOP ROOM	ACCUREX	XCR-B80	CEILING	DIRECT	CEILING	75	0.125	54	-	900	120/1	1 - 2
EF-3	EMPLOYEE TOILET	ACCUREX	XCR-B80	CEILING	DIRECT	CEILING	75	0.125	54	-	900	120/1	1 - 2
KEF-1	KITCHEN GRIDDLE	ACCUREX	XRUB-161XP-15	ROOF	BELT	UPBLAST	1500	1	-	1.5	1725	208/3	1 - 2
KEF-2	KITCHEN FRYER	ACCUREX	XRUB-141-7	ROOF	BELT	UPBLAST	1500	1	-	3/4	1725	208/3	1 - 2
KEF-3	KITCHEN	ACCUREX	XRED-090-D	ROOF	DIRECT	DOWNBLAST	350	0.5	-	1/15	1550	120/1	1 - 2

NOTES:
1. PROVIDE WITH FAN SPEED CONTROLLER, BACKDRAFT DAMPER AND DISCONNECT SWITCH.
2. SEE CONTROL NOTES ON SHEET M001.

GRILLE/DIFFUSER SCHEDULE

MARK	CFM	NECK SIZE	TYPE	MFG	MODEL	NOTES
A1	0-100 101-200 201-400 401-600 601-800	6" 8" 10" 12" 14"	FIXED STAMPED SQUARE LOUVERED DIFFUSERS	CARNES	SFTB24	2, 4, 5
A2	0-100 101-200 201-400 401-600 601-800	6" 8" 10" 12" 14"	ADJUSTABLE STAMPED SQUARE LOUVERED DIFFUSERS	CARNES	SJTB24	2, 4 - 6
A3	0-100 101-200 201-400	6" 8" 10"	BEVELED FRAME FIXED DISCHARGE LOUVERED FACE DIFFUSER	CARNES	SKSA	1, 4, 5, 7
A4	0-100 101-200 201-400 401-600 601-800	6" 8" 10" 12" 14"	PERFORATED SQUARE CEILING MOUNTED SUPPLY DIFFUSER	CARNES	SPRB224	1, 2, 4, 5
A5	0-350 351-600	12X6 24X6	DOUBLE DEFLECTION SUPPLY GRILLE	CARNES	RTDBH	3, 4, 5
B1	0-125 126-250 251-400 401-600 601-900 901-1350	6X6 8X8 10X10 12X12 15X15 18X18	EGGCRATE RETURN AIR GRILLE	CARNES	RAPAH	2, 3, 4, 5
C1	0-125 126-250 251-400	6X6 8X8 10X10	EGGCRATE EXHAUST AIR GRILLE	CARNES	RAPAH	1 - 5
C2	0-125 126-250 251-400	6X6 8X8 10X10	LOUVERED EXHAUST AIR GRILLE	CARNES	RTLAH	1, 3, 4, 5, 7
D1	150	12X4	45° FIXED DEFLECTION TRANSFER AIR GRILLE	CARNES	RSABH	4, 5, 8

NOTES:
1. PROVIDE WITH ADJUSTABLE OPPOSED BLADE DAMPER.
2. PROVIDE 24X24 NOMINAL FACE, T-BAR FRAME STYLE WHERE LOCATED IN LAYIN CEILING.
3. PROVIDE SQUARE TO ROUND NECK TRANSITION WHERE APPLICABLE.
4. COORDINATE BORDER TYPES WITH ARCHITECTURAL FLOOR PLAN AND REFLECTED CEILING PLAN.
5. COORDINATE FINISH WITH ARCHITECTURAL FLOOR PLAN AND REFLECTED CEILING PLAN.
6. PROVIDE KXDA EXTENSION ROD W/KNOB.
7. 12X12 NOMINAL PANEL SIZE.
8. MOUNT SO THE OCCUPANT CANNOT SEE INTO THE DUCT.

NOTE TO GENERAL CONTRACTOR (GC) AND SUB-CONTRACTORS:
MECHANICAL AND PLUMBING SUBMITTALS SHALL HAVE AN APPROVAL SIGNATURE FROM THE ELECTRICAL SUBCONTRACTOR INDICATING THAT THE ELECTRICAL CONTRACTOR HAS REVIEWED THE SUBMITTALS AND HAS COMPARED THE ELECTRICAL REQUIREMENTS OF THE SUBMITTED EQUIPMENT WITH THE PLANS AND HAS MADE ANY REQUIRED ADJUSTMENTS TO THE ELECTRICAL GEAR. ANY MECHANICAL OR PLUMBING SUBMITTAL THAT HAS A POWER REQUIREMENT THAT IS SUBMITTED WITHOUT THE SIGNATURE APPROVAL OF THE ELECTRICAL CONTRACTOR WILL BE RETURNED WITHOUT COMMENT.

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV
CHK'D BY: RGV
PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:

H.V.A.C. SCHEDULES

PROJECT NO: 23061

M201

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED

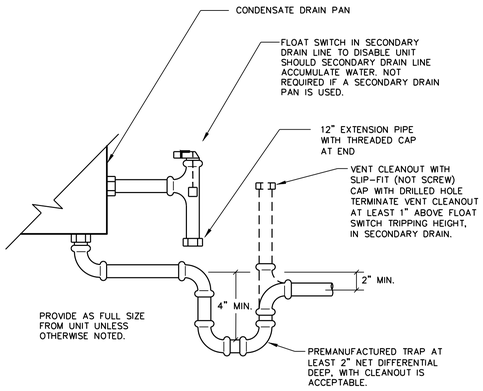

1 M301 CONDENSATE TRAP DETAIL
N.T.S.

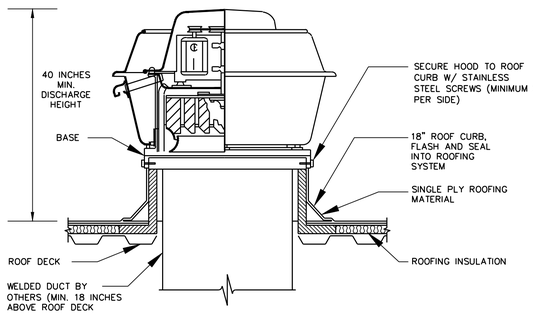

2 M301 ROOF MTD. KITCHEN EXHAUST FAN DETAIL
N.T.S.

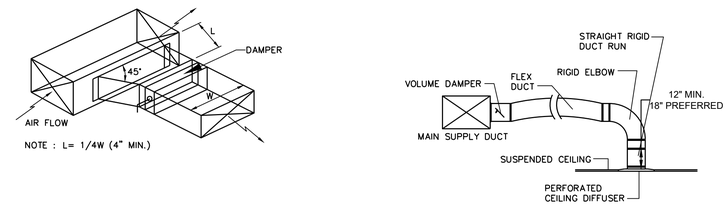

3 M301 BRANCH DUCT TAKEOFF DETAILS
N.T.S.

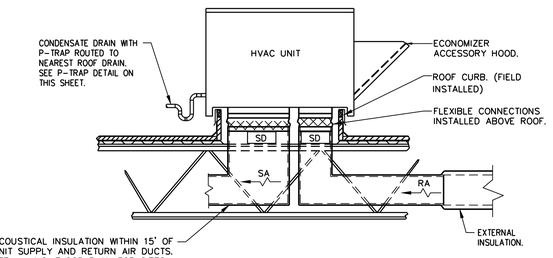

4 M301 ROOFTOP UNIT DETAIL
N.T.S.

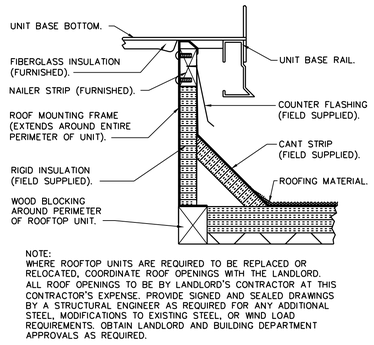

NOTE:
WHERE ROOFTOP UNITS ARE REQUIRED TO BE REPLACED OR RELOCATED, COORDINATE ROOF OPENINGS WITH THE LANDLORD. ALL ROOF OPENINGS TO BE BY LANDLORD'S CONTRACTOR AT THIS CONTRACTOR'S EXPENSE. PROVIDE SIGNED AND SEALED DRAWINGS BY A STRUCTURAL ENGINEER AS REQUIRED FOR ANY ADDITIONAL STEEL MODIFICATIONS TO EXISTING STEEL, OR WIND LOAD REQUIREMENTS. OBTAIN LANDLORD AND BUILDING DEPARTMENT APPROVALS AS REQUIRED.

5 M301 ROOF CURB DETAIL
N.T.S.

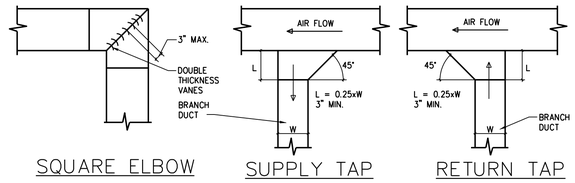

SQUARE ELBOW SUPPLY TAP RETURN TAP

6 M301 DUCTWORK DETAILS
N.T.S.

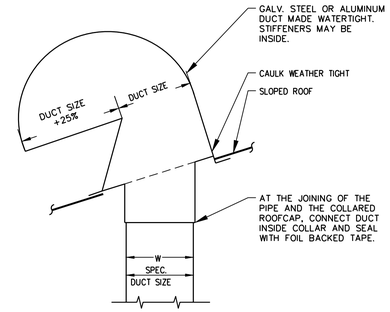

NOTES:

1. PRIME COAT AND PAINT TO MATCH ROOF COLOR.
2. PROVIDE FLASHING AND COUNTER FLASHING.
3. PROVIDE BIRD SCREEN.
4. OUTSIDE AIR INTAKE SHALL BE A MINIMUM OF 10 FT. AWAY FROM ANY EXHAUST OR PLUMBING VENT.

7 M301 ROOF CAP DETAIL
N.T.S.

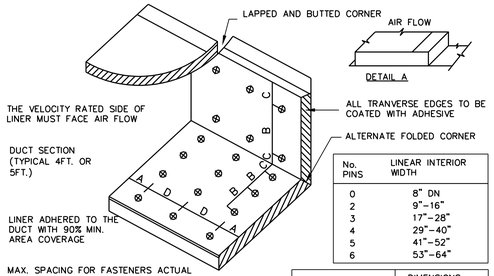

No. PINS	LINEAR INTERIOR WIDTH
0	8" DN
2	9"–16"
3	17"–28"
4	29"–40"
5	41"–52"
6	53"–64"

VELOCITY	DIMENSIONS			
	A	B	C	D
0–2500 FPM	3"	12"	4"	18"
2500–6000 FPM	3"	6"	4"	18"

8 M301 DUCT LINER INSTALLATION DETAIL
N.T.S.

NOTE: USE ONLY ON VERTICAL DROP FROM RTU TO WITHIN 9'–10" A.F.F., DUCT LINER WILL NOT BE PERMITTED ON ANY HORIZ. RUNS.

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:
GEORGIA REGISTERED No. PEF004480 PROFESSIONAL ENGINEER RAMON G. VELAZQUEZ

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV
CHK'D BY: RGV
PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980
METRO MIRROR L 2022

SHEET TITLE:
H.V.A.C. DETAILS

PROJECT NO: 23061

M301

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

THE INFORMATION INDICATED HERE IS PROVIDED AS A COURTESY TO THE CONTRACTOR. KITCHEN HOODS AND ALL EQUIPMENT ASSOCIATED WITH THE HOODS, INCLUDING THE EXHAUST FANS SHALL BE PROVIDED BY OTHERS. EXHAUST FANS SHALL BE INSTALLED BY THE MECHANICAL CONTRACTOR. COORDINATE REQUIREMENTS WITH ALL OTHER TRADES.

HOOD INFORMATION

HOOD NO.	MARK	MODEL	HOOD DIMENSIONS (IN.) LENGTH	WIDTH	HEIGHT	HOOD CONSTR.	COOKING LOAD / DUTY RATING	EXHAUST TOTAL CFM	COLLAR(S) WIDTH	LENGTH	DIA.	CFM	S.P.	SUPPLY MUA CFM	SUPPLY AC CFM	TOTAL WEIGHT LBS.	SECTION LOCATION
1	GRIDDLE HOOD	XGEP-64-S	64	TOP 23 BOT 8	FRT 12 BACK 36	430 SS WHERE EXPOSED	MEDIUM	1500	12	12		1500	1.918			137	SINGLE

FIRE SYSTEM INFORMATION

MARK	MODEL	LOCATION	FLOW POINTS HOODS	FLOW POINTS PCU	SUPPLY LINE	DETECTION
FIRE SUPPRESSION-GRIDDLE HOOD	ANSUL R-102 WET CHEMICAL	REMOTE MOUNTED	6 UTILIZED 11 AVAILABLE		CONTINUOUS	FUSIBLE LINK

HOOD INFORMATION

HOOD NO.	MARK	LIGHTING DETAILS FIXTURE TYPE BULB / LAMP INFO	QTY	FOOT CANDLES	GREASE FILTRATION DETAILS TYPE / MODEL MATERIAL	QTY	SIZE (IN.) L	H	UTILITY CABINET(S) LOCATION	FIRE SYSTEM TYPE	FIRE SYSTEM SIZE	CONTROLS MODEL	CONTROLS INTERFACE
1	GRIDDLE HOOD				GREASE GRABBER STAINLESS STEEL	4	16	16					
						0	20						

FIRE SYSTEM OPTIONS AND ACCESSORIES

- FULL INSTALLATION (INCLUDES PRE-PIPED HOOD(S) WITH DETECTION AND FACTORY COORDINATED INSTALL)
- CHROME SLEEVES FOR FACTORY PROVIDED APPLIANCES DROPS - INCLUDED
- METAL BLOW-OFF CAPS - INCLUDED
- HOOD SUPPRESSION AGENT - INCLUDED - 3 GAL. - [(1) 3.0 TANK(S)]
- REMOTE PULL STATION - STANDARD - INSTALLATION AT SINGLE POINT OF EGRESS

HOOD OPTIONS

- UL 710 LISTED W/ OUT EXHAUST FIRE DAMPER - UL #R25625
- BACK NON-INTEGRAL AIR SPACE - 3 IN WIDE
- 26 IN HIGH CEILING ENCLOSURES - FRONT LEFT RIGHT - FIELD INSTALLED
- FACTORY MOUNTED EXHAUST COLLAR(S)
- PERFORMANCE ENHANCING LIP (PEL) TECHNOLOGY
- STANDING SEAM CONSTRUCTION FOR SUPERIOR STRENGTH

SPECIAL DESIGN REQUESTS

- SDR #K1100145 - FLUE BYPASS HOOD
- SDR #K1800144 - CULVERS 4VAT 2FIRE PROCESS - GRIDDLE HOOD

Direct Drive Uplast Centrifugal Roof Exhaust Fan

MARK INFORMATION QTY	MARK	FAN INFORMATION MODEL	VOLUME (CFM)	TOTAL EXTERNAL SP (IN WG)	FAN RPM	OPERATING POWER (HP)	WEIGHT (LB.)	MOTOR INFORMATION SIZE (HP)	V/C/P	ENCLOSURE	MOTOR RPM	WINDINGS	NEC FLA*
1	PRV-2 Griddle Fan	XCUE-140-VG	1,500	1.801	1,725	0.83	92	1	115/60/1	OP	1725	1	16

*NEC FLA - Based on table 430.250 or 430.248 of National Electrical Code 2020. Actual motor FLA may vary for sizing thermal overload, consult factory"

PRV-2 Griddle Fan : SELECTED OPTIONS AND ACCESSORIES

- One piece fully welded windband
- Tapered bushing wheel hub
- Breather tube outlet area min. 4.4 sq. in. (sizes 99-480), 2.0 sq. in. (sizes 60-95)
- Min. windband material thickness: 0.051" aluminum (060-240), 0.064" aluminum (240HP, 240XP), 0.080" aluminum (sizes 300-480)
- Larger Curb Cap Size - 26 Square
- UL/cUL 705 Listed - Supplement SC - "Power Ventilators for Restaurant Exh. Appliances" (Formerly UL 762)
- Switch, NEMA-3R, Toggle,
- Hinge, Factory Installed
- High Temp Curb Seal Rated for Continuous Duty at 1500 F (Factory Attached)
- Grease Trap (PN 475538)
- Clean-out Port - Factory Installed
- Conduit Chase Qty 1

PRV-2 Griddle Fan

DUCT TYPE	SIZE
STANDARD	18 SQ
FIRE-WRAPPED	12 SQ

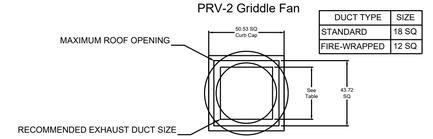

TOP VIEW

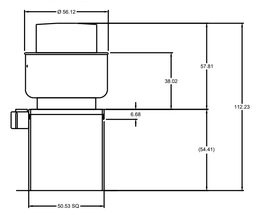

FRONT VIEW

NOTE: Overall height may be greater depending on motor

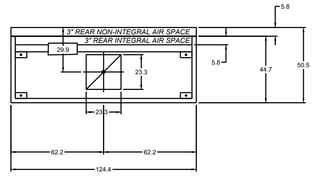

MARK: Griddle Hood - SECTION 1
PLAN VIEW

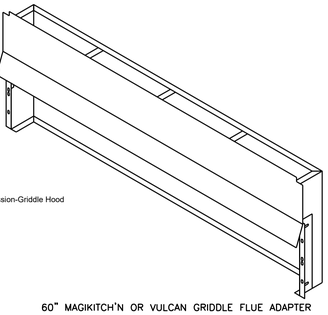

MUST USE WITH MAGIKITCH'N
MODEL MKG-C-60
OR
VULCAN MODEL VIG60-R3

60" MAGIKITCH'N OR VULCAN GRIDDLE FLUE ADAPTER

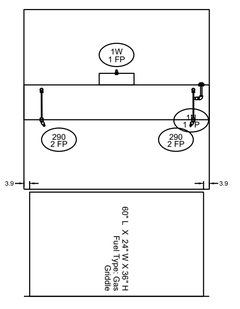

SECTION 1
ELEVATION VIEW

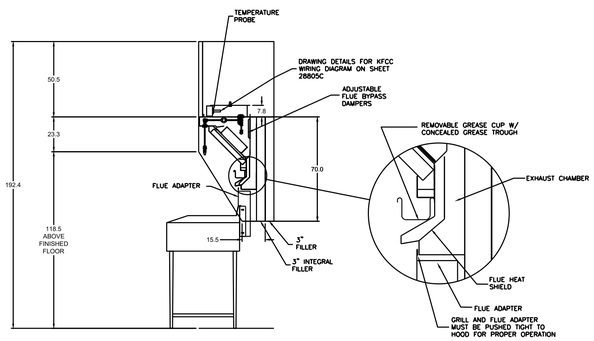

MARK: Griddle Hood
SECTION VIEW

MAGIKITCH'N OR VULCAN GRIDDLE FLUE ADAPTER MOUNTING INSTRUCTIONS

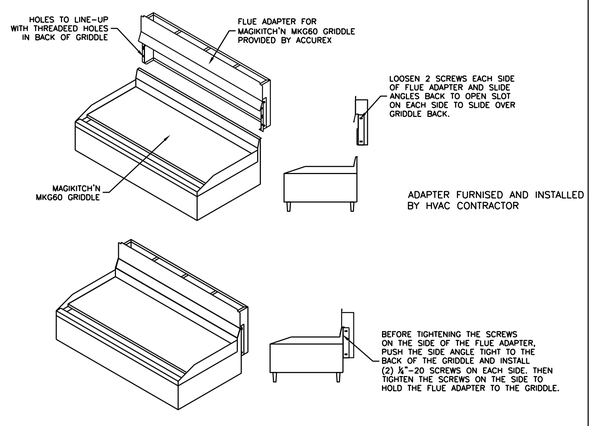

ANSUL R102 (WET CHEMICAL) FIRE PROTECTION SYSTEM - MODEL FSSC

CONTROL PANEL

1. STAINLESS STEEL ENCLOSURE
2. AGENT STORAGE TANK
3. EXPELLENT GAS CARTRIDGE
4. ANSUL AUTOMAN RELEASE
5. REGULATOR
6. KNOCKOUT FOR WIRING MICROSWITCH



NOT TO SCALE

NOTES:

WET CHEMICAL FIRE PROTECTION SYSTEM TO BE ANSUL R-102, DESIGNED IN COMPLIANCE WITH UL 300 REQUIREMENTS.
-VERIFICATION OF ALL COOKING EQUIPMENT MAKE, MODEL AND LOCATION REQUIRED FOR ALL FIRE PROTECTION SYSTEMS.
-ALL FIRE SYSTEM PIPING IS STANDARDLY TO THE RIGHT END OF THE HOOD UNLESS A WALL IS LOCATED ON THE RIGHT END.
-ANSUL AUTOMAN RELEASE TO BE LOCATED WITHIN 60" OF HOOD.

THE BASIC FIRE SYSTEM WILL INCLUDE THE FOLLOWING:
-GAS SHUT-OFF VALVE, IF REQUIRED, TO BE SUPPLIED BY MANUFACTURER (UP TO 2" DIAMETER AS STANDARD), AND INSTALLED BY A LICENSED PLUMBER.
-MICRO SWITCH TO BE SUPPLIED BY MANUFACTURER FOR CONNECTION TO, BUT NOT LIMITED TO, BUILDING ALARM SYSTEM(S), EXHAUST AND SUPPLY FANS AND ELECTRICAL POWER SHUT DOWN. FIELD WIRING AND CONNECTIONS TO BE PERFORMED BY A LICENSED ELECTRICIAN.

THE BASIC FIRE SYSTEM DOES NOT INCLUDE THE FOLLOWING:
-FULL DUMP TEST OTHER THAN WHT IS SPECIFIED PER THE INSTALLATION MANUAL, OR TO SATISFY A STATE OR LOCAL CODE. PERMIT AND TESTING FEES ARE NOT INCLUDED UNLESS NOTED UNDER THE EQUIPMENT SCHEDULE FOR THE FIRE SYSTEM.
-MORE THEN TWO TRIPS TO THE JOBSITE OR SPECIAL TRANSPORTATION, OR OVERNIGHT LODGING REQUIREMENTS IN REMOTE AREAS. NORMAL TRAVEL DISTANCE IS FIRST 50 MI. (80.5 KM) FROM OFFICE.
- SPECIAL CLASSES OR ADDITIONAL LABOR FOR ACCESS TO SECURITY SENSITIVE AREAS.
-INSTALLATION OF GAS SHUT-OFF VALVE.
-SPECIAL DRAWINGS REQUIRED TO SATISFY STATE OR LOCAL CODE. PLAN EXAMINATION FEES, PE OR FS APPROVAL STAMP.
-UNION LABOR, GOVERNMENT LABOR, OR PREVAILING WAGES REQUIRED FOR FINAL FIELD HOOK-UP.
-ANY AND ALL ELECTRICAL COMPONENTS/CONNECTIONS REQUIRED TO SHUT DOWN FANS, SHUT OFF DEVICE FOR ELECTRIC COOKING EQUIPMENT (SHUNT TRIP BREAKER), OR ACTIVATE AN ALARM SYSTEM, ETC.
-ANY DISMANTLING OR REASSEMBLY REQUIRED TO GAIN ACCESS TO THE FIRE SUPPRESSION PIPING LOCATED ON THE TOP OF THE HOOD.
-ROUGH-IN HIDDEN CONDUIT FOR REMOTE PULL STATION OR GAS VALVE (FLUSH MOUNTED PULL STATION).
-INSTALLATION OF MORE THAN (1) REMOTE PULL STATIONS OR DISTANCES GREATER THAN 20 FT (6.1M.)
-PARTS OR LABOR REQUIRED TO CORRECT PIPING DUE TO COOKING EQUIPMENT CHANGES OR DEVIATION FROM PLANS. OR ANY CHARGES FOR MISSING OR ADDITIONAL PARTS OTHER THEN THOSE INDICATED ON THE FIRE SUPPRESSION DETAIL.

WIRING DIAGRAMS W/DPDT MICRO SWITCH

DPDT SWITCHES PROVIDED BY MANUFACTURER MAY BE WIRED PER TYPICAL EXAMPLES SHOWN. VERIFY WITH LOCAL CODES AND EQUIPMENT SUPPLIED AS THE CONNECTION NEEDED FOR YOUR INSTALLATION.

CONNECTION TO BUILDINGS ALARM

CONNECTION TO COOKING EQUIPMENT SHUT DOWN



CONNECTION TO FAN SHUT DOWN



NOTES:
1. _____ DENOTES FIELD INSTALLATION.
2. - - - - - DENOTES FACTORY INSTALLATION.
3. DO NOT USE BLACK WIRE ON SNAP-ACTION SWITCH IN NORMAL INSTALLATION. BLACK WIRE TO BE USED ONLY FOR EXTRANEOUS ALARM, LIGHT CIRCUITS, ETC.

ENCLOSURE PANEL INSTALLATION DETAIL

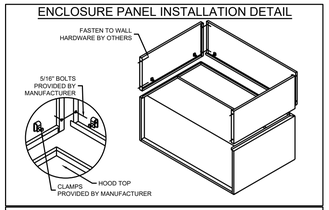

HOOD HANGING HEIGHT FOR FIRE SYSTEMS

VERIFICATION OF HOOD HANGING HEIGHT ABOVE FINISHED FLOOR (A.F.F.) IS REQUIRED FOR CORRECT PLACEMENT OF FIRE SYSTEM NOZZLES.

- ☐ RECOMMENDED HANGING HEIGHT = 61" FROM FINISHED FLOOR TO LOWER FRONT EDGE OF HOOD.
- ☐ OTHER HANGING HEIGHT = _____" FROM FINISHED FLOOR TO LOWER EDGE OF HOOD.

HOOD HANGER BRACKET DETAIL

FOR BACKSHELF HOODS

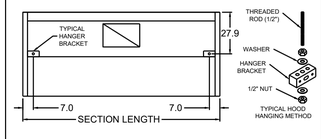

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR. ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV

CHK'D BY: RGV

PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:

H.V.A.C. HOOD, FAN & FIRE SUPPRESSION

PROJECT NO: 23061

M401

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC IS STRICTLY PROHIBITED

THE INFORMATION INDICATED HERE IS PROVIDED AS A COURTESY TO THE CONTRACTOR. KITCHEN HOODS AND ALL EQUIPMENT ASSOCIATED WITH THE HOODS, INCLUDING THE EXHAUST FANS SHALL BE PROVIDED BY OTHERS. EXHAUST FANS SHALL BE INSTALLED BY THE MECHANICAL CONTRACTOR. COORDINATE REQUIREMENTS WITH ALL OTHER TRADES.

HOOD INFORMATION

HOOD NO.	MARK	MODEL	HOOD DIMENSIONS (IN.) LENGTH	WIDTH	HEIGHT	HOOD CONSTR.	COOKING LOAD / DUTY RATING	EXHAUST TOTAL CFM	COLLAR(S) WIDTH	LENGTH	DIA.	CFM	S.P.	SUPPLY MUA CFM	AC CFM	TOTAL WEIGHT LBS.	SECTION LOCATION
1	FRYER HOOD	XXEP-83-S	83	TOP 23 BOT 3	FRT 12 BACK 36	430 SS WHERE EXPOSED	MEDIUM	1500	12	12		1500	0.518			169	SINGLE

HOOD INFORMATION

HOOD NO.	MARK	LIGHTING DETAILS FIXTURE TYPE BULB / LAMP INFO	QTY	FOOT CANDLES	GREASE FILTRATION DETAILS TYPE / MODEL MATERIAL	QTY	SIZE (IN.) L	H	UTILITY CABINET(S) LOCATION	FIRE SYSTEM TYPE	SIZE	CONTROLS MODEL	INTERFACE
1	FRYER HOOD				X-TRACTOR (SPARK ARRESTOR INCL.) STAINLESS STEEL	5 0	16 20	16					

HOOD OPTIONS

- UL 710 LISTED W/ OUT EXHAUST FIRE DAMPER - UL #R25625
- BACK NON-INTEGRAL AIR SPACE - 3 IN WIDE
- 26 IN HIGH CEILING ENCLOSURES - FRONT LEFT RIGHT - FIELD INSTALLED
- FACTORY MOUNTED EXHAUST COLLAR(S)
- PERFORMANCE ENHANCING LIP (PEL) TECHNOLOGY
- STANDING SEAM CONSTRUCTION FOR SUPERIOR STRENGTH

SPECIAL DESIGN REQUESTS

- SDR #K1100559 - NEW PITCO 4L FRYER FLUE BYPASS SYSTEM
- SDR #K1700974 - CULVERS 4VAT 2FIRE PROCESS - FRYER HOOD
- SDR #K2000140 - IF FRYMASTER FRYER FLUE BYPASS

Direct Drive Upblast Centrifugal Roof Exhaust Fan

MARK INFORMATION QTY	MARK	FAN INFORMATION MODEL	VOLUME (CFM)	TOTAL EXTERNAL SP (IN WG)	FAN RPM	OPERATING POWER (HP)	WEIGHT (LB.)	MOTOR INFORMATION SIZE (HP)	V/C/P	ENCLOSURE	MOTOR RPM	WINDINGS	NEC FLA*
1	PRV-3 Fryer Fan	XCUE-140-VG	1,500	1	1,365	0.46	92	1	115/60/1	OP	1725	1	16

*NEC FLA - Based on table 430.250 or 430.248 of National Electrical Code 2020. Actual motor FLA may vary for sizing thermal overload, consult factory"

PRV-3 Fryer Fan : SELECTED OPTIONS AND ACCESSORIES

- One piece fully welded windband
- Tapered bushing wheel hub
- Breather tube outlet area min. 4.4 sq. in. (sizes 99-480), 2.0 sq. in. (sizes 60-95)
- Min. windband material thickness: 0.051" aluminum (060-240), 0.064" aluminum (240HP, 240XP), 0.080" aluminum (sizes 300-480)
- Larger Curb Cap Size - 26 Square
- UL/cUL 705 Listed - Supplement SC - "Power Ventilators for Restaurant Exh. Appliances" (Formerly UL 762)
- Switch, NEMA-3R, Toggle,
- Hinge, Factory Installed
- High Temp Curb Seal Rated for Continuous Duty at 1500 F (Factory Attached)
- Grease Trap (PN 475538)
- Clean-out Port - Factory Installed
- Conduit Chase Qty 1

FIRE SYSTEM INFORMATION

MARK	MODEL	LOCATION	FLOW POINTS HOODS	PCU	SUPPLY LINE	DETECTION	MARK(S) PROTECTED BY FIRE SYSTEM
FIRE SUPPRESSION-FRYER HOOD	ANSUL R-102 WET CHEMICAL	REMOTE MOUNTED	18 UTILIZED 22 AVAILABLE		CONTINUOUS	FUSIBLE LINK	FRYER HOOD SECTION 1

FIRE SYSTEM OPTIONS AND ACCESSORIES

- FULL INSTALLATION (INCLUDES PRE-PIPED HOOD(S) WITH DETECTION AND FACTORY COORDINATED INSTALL)
- CHROME SLEEVES FOR FACTORY PROVIDED APPLIANCES DROPS - INCLUDED
- METAL BLOW-OFF CAPS - INCLUDED
- PRE-TEST - INCLUDED
- HOOD SUPPRESSION AGENT - INCLUDED - 6 GAL. - [(2) 3.0 TANK(S)]
- REMOTE PULL STATION - STANDARD - INSTALLATION AT SINGLE POINT OF EGRESS

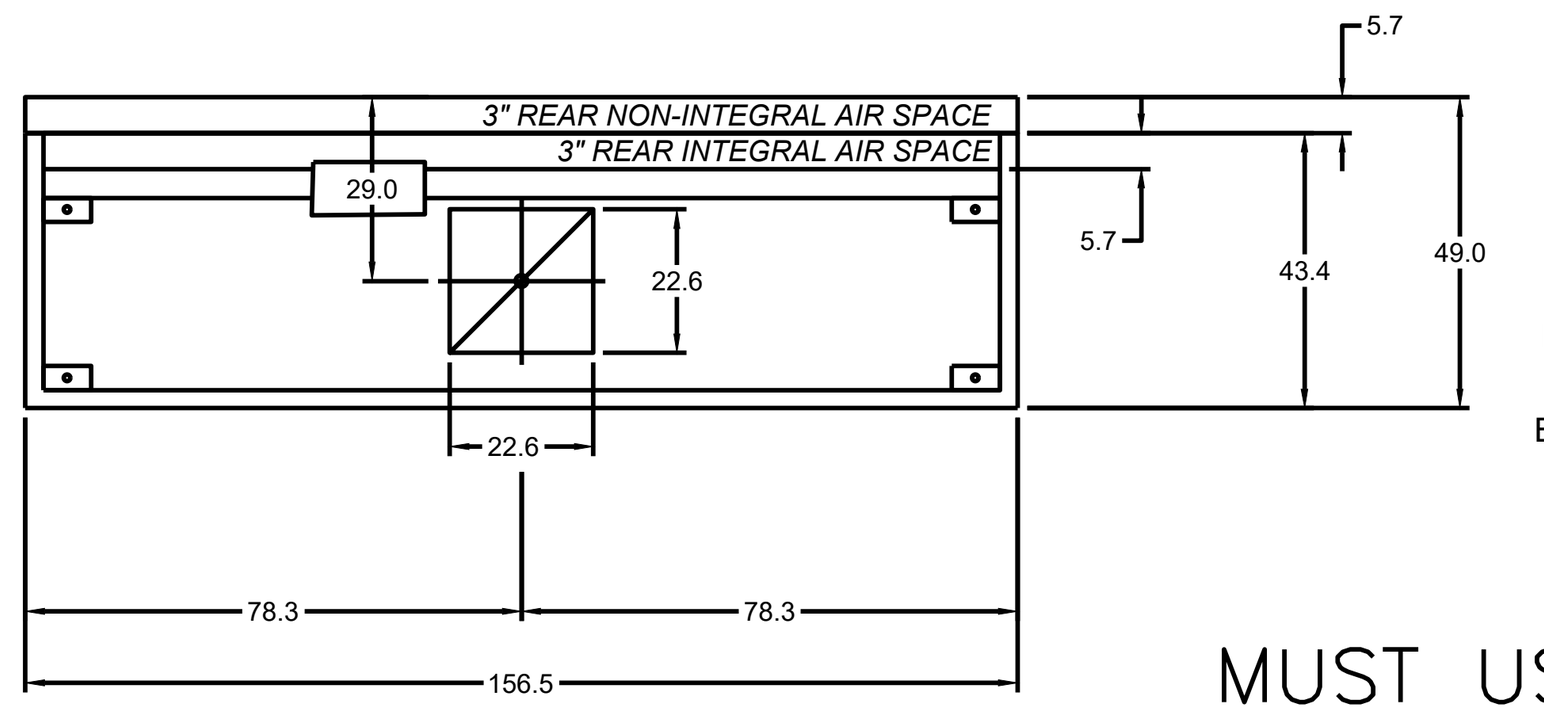

MARK: Fryer Hood
PLAN VIEW

ANSUL R102

FIRE SYSTEM MARK: Fire Suppression-Fryer Hood

PIPE & CONDUIT
BY ANSUL DISTRIBUTOR

** INSTALL ALL TANKS **
IN AN ENCLOSURE

FOOD SERVICE
EQUIPMENT #59

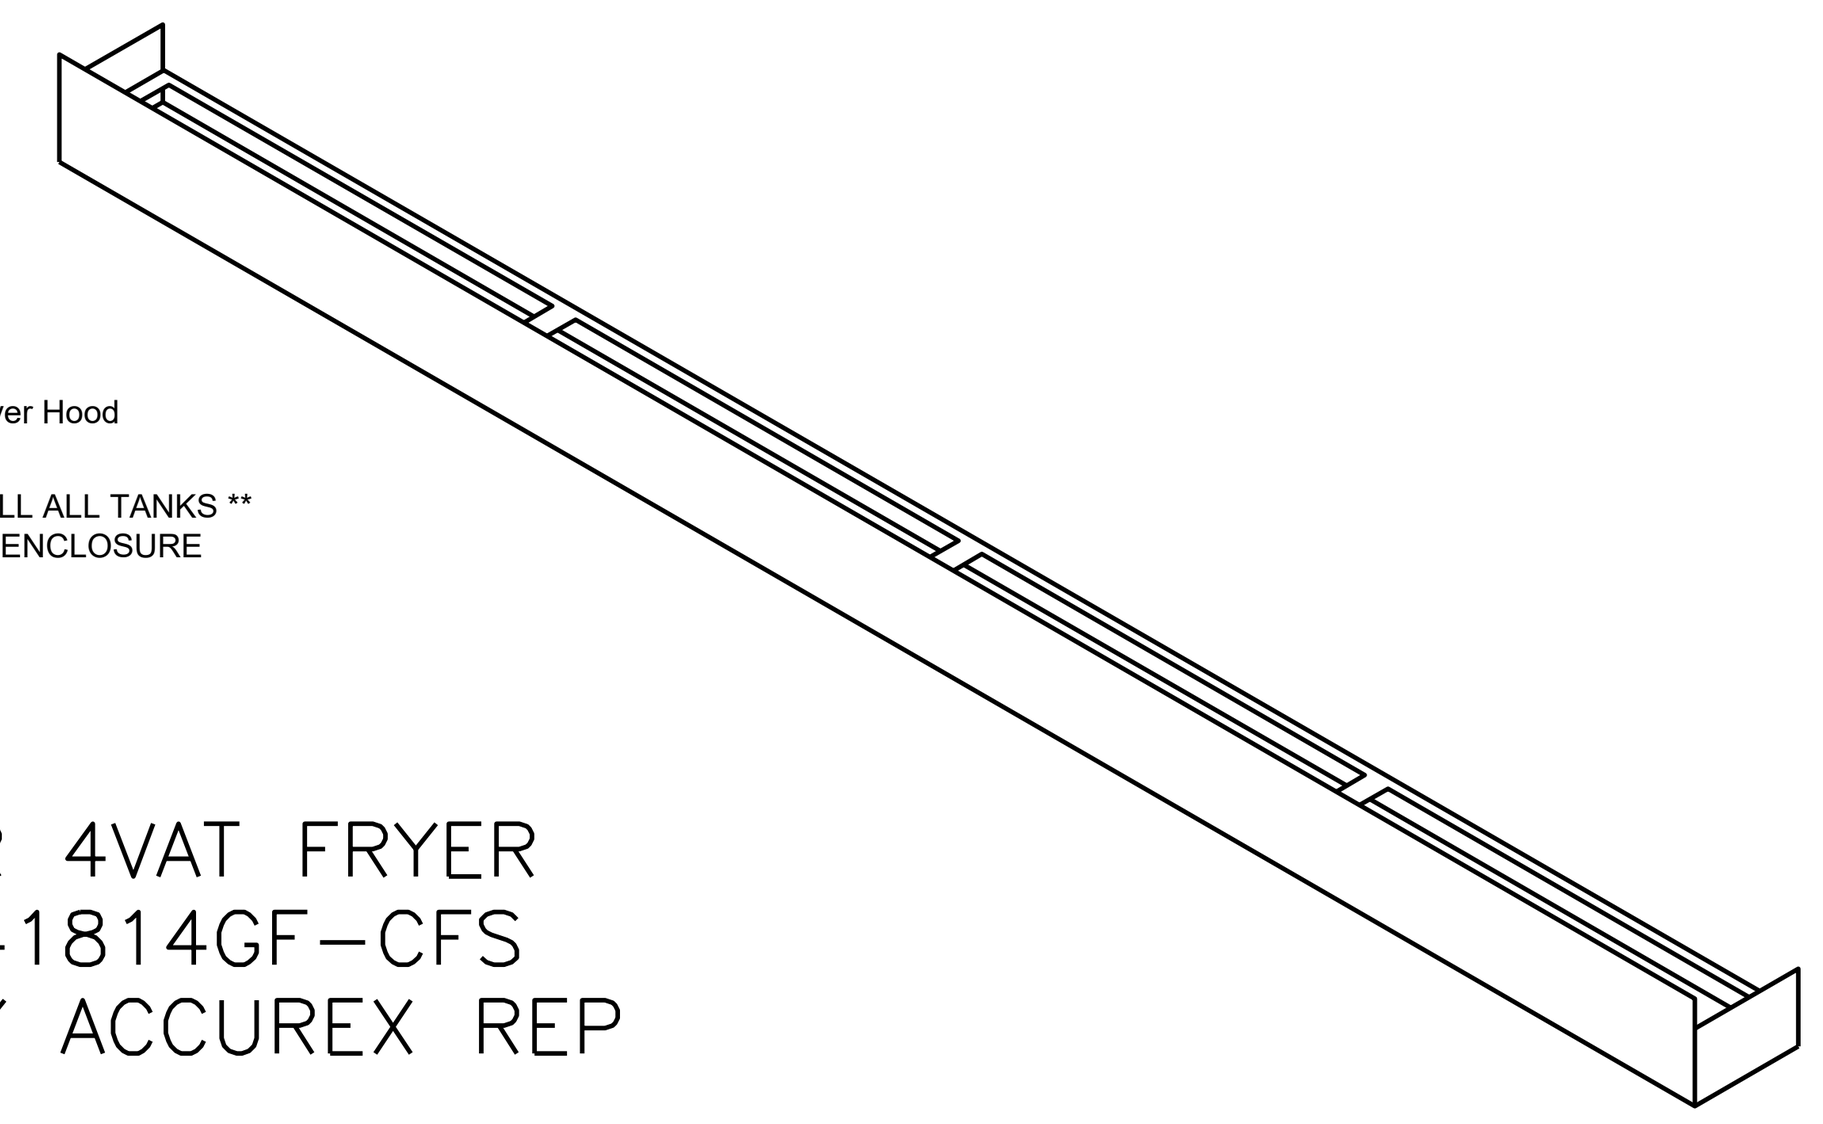

MUST USE WITH PITCO
MODEL CU-SSH60W/WR 4VAT FRYER
IF FRYMASTER MODEL 41814GF-CFS
IS BEING USED, NOTIFIY ACCUREX REP

PITCO MODEL CU-SSH60W/WR 4-VAT FRYER FLUE ADAPTER
OR FRYMASTER MODEL 41814GF-CFS

PRV-3 Fryer Fan

DUCT TYPE	SIZE
STANDARD	18 SQ
FIRE-WRAPPED	12 SQ

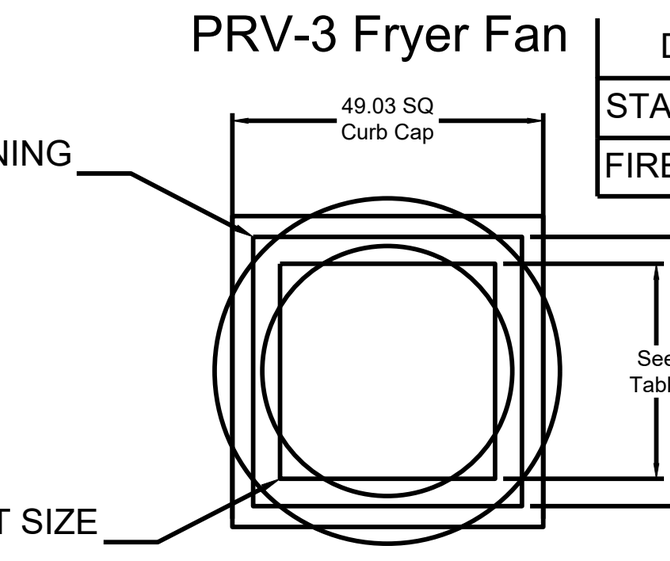

TOP VIEW

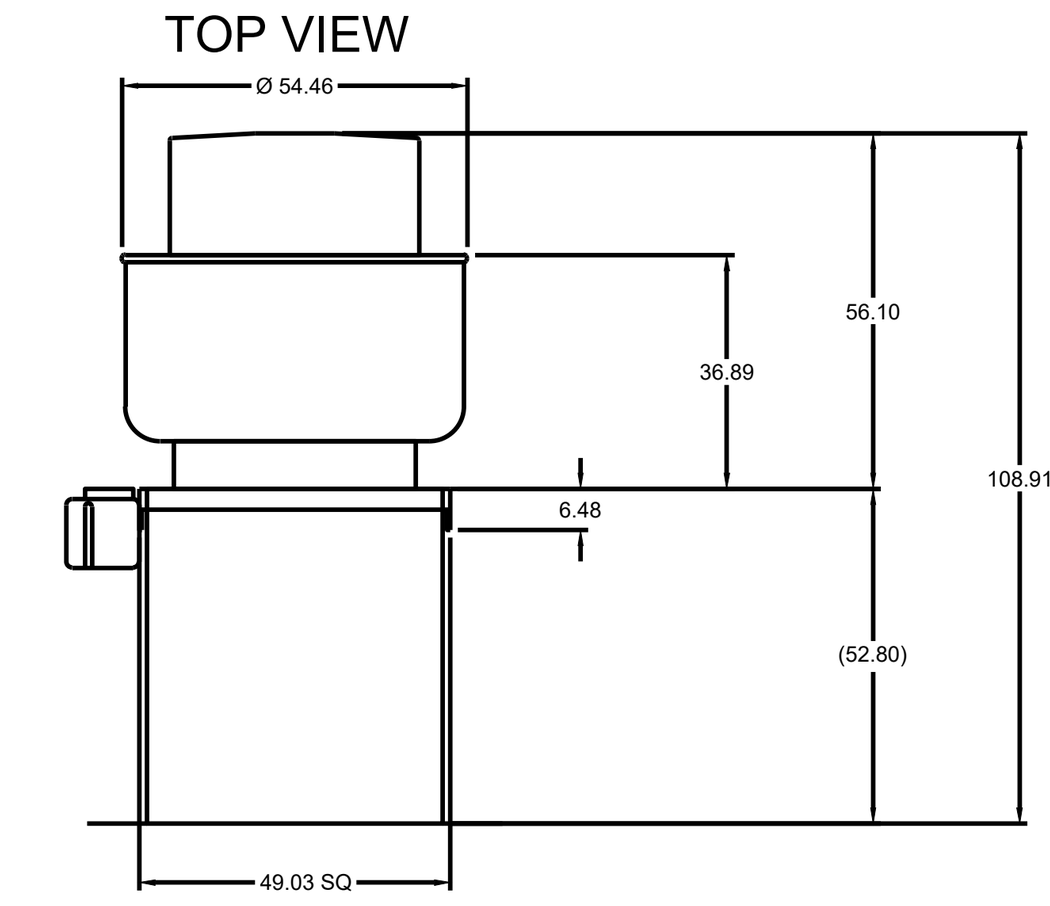

FRONT VIEW

NOTE: Overall height may be greater depending on motor

ANSUL R102 (WET CHEMICAL) FIRE PROTECTION SYSTEM - MODEL FSSC

CONTROL PANEL

1. STAINLESS STEEL ENCLOSURE
2. AGENT STORAGE TANK
3. EXPELLENT GAS CARTRIDGE
4. ANSUL AUTOMAN RELEASE
5. REGULATOR
6. KNOCKOUT FOR WIRING MICROSWITCH

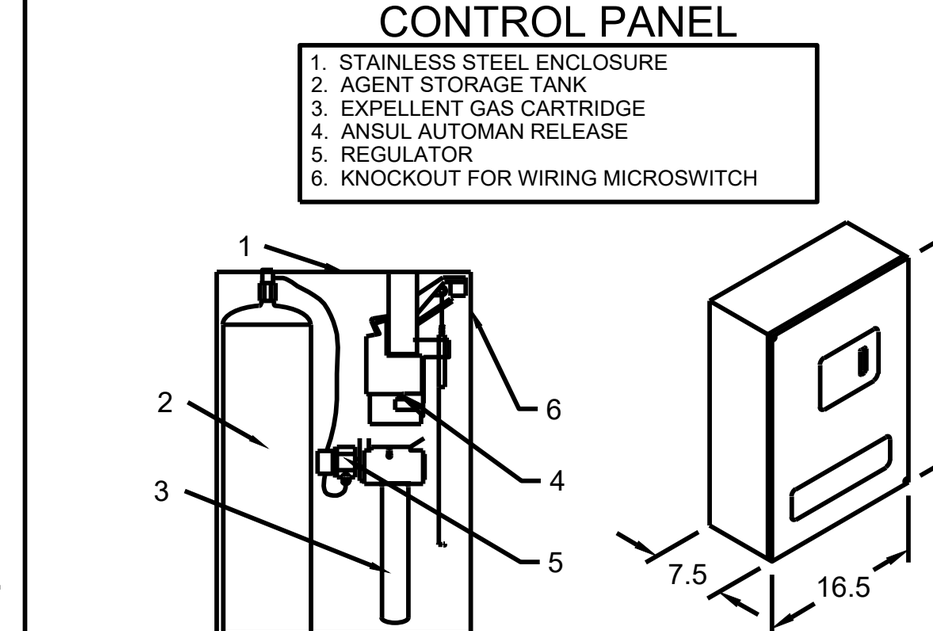

NOT TO SCALE

NOTES:

WET CHEMICAL FIRE PROTECTION SYSTEM TO BE ANSUL R-102, DESIGNED IN COMPLIANCE WITH UL 300 REQUIREMENTS.
-VERIFICATION OF ALL COOKING EQUIPMENT MAKE, MODEL AND LOCATION REQUIRED FOR ALL FIRE PROTECTION SYSTEMS.
-ALL FIRE SYSTEM PIPING IS STANDARDLY TO THE RIGHT END OF THE HOOD UNLESS A WALL IS LOCATED ON THE RIGHT END.
-ANSUL AUTOMAN RELEASE TO BE LOCATED WITHIN 60" OF HOOD.

THE BASIC FIRE SYSTEM WILL INCLUDE THE FOLLOWING:
-GAS SHUT-OFF VALVE, IF REQUIRED, TO BE SUPPLIED BY MANUFACTURER (UP TO 2" DIAMETER AS STANDARD), AND INSTALLED BY A LICENSED PLUMBER.
-MICRO SWITCH TO BE SUPPLIED BY MANUFACTURER FOR CONNECTION TO, BUT NOT LIMITED TO, BUILDING ALARM SYSTEM(S), EXHAUST AND SUPPLY FANS AND ELECTRICAL POWER SHUT DOWN. FIELD WIRING AND CONNECTIONS TO BE PERFORMED BY A LICENSED ELECTRICIAN.

THE BASIC FIRE SYSTEM DOES NOT INCLUDE THE FOLLOWING:
-FULL DUMP TEST OTHER THAN WHT IS SPECIFIED PER THE INSTALLATION MANUAL, OR TO SATISFY A STATE OR LOCAL CODE. PERMIT AND TESTING FEES ARE NOT INCLUDED UNLESS NOTED UNDER THE EQUIPMENT SCHEDULE FOR THE FIRE SYSTEM.
-MORE THEN TWO TRIPS TO THE JOBSITE OR SPECIAL TRANSPORTATION, OR OVERNIGHT LODGING REQUIREMENTS IN REMOTE AREAS. NORMAL TRAVEL DISTANCE IS FIRST 50 MI. (80.5 KM) FROM OFFICE.
- SPECIAL CLASSES OR ADDITIONAL LABOR FOR ACCESS TO SECURITY SENSITIVE AREAS.
-INSTALLATION OF GAS SHUT-OFF VALVE.
-SPECIAL DRAWINGS REQUIRED TO SATISFY STATE OR LOCAL CODE. PLAN EXAMINATION FEES, PE OR FS APPROVAL STAMP.
-UNION LABOR, GOVERNMENT LABOR, OR PREVAILING WAGES REQUIRED FOR FINAL FIELD HOOK-UP.
-ANY AND ALL ELECTRICAL COMPONENTS/CONNECTIONS REQUIRED TO SHUT DOWN FANS, SHUT OFF DEVICE FOR ELECTRIC COOKING EQUIPMENT (SHUNT TRIP BREAKER), OR ACTIVATE AN ALARM SYSTEM, ETC.
-ANY DISMANTLING OR REASSEMBLY REQUIRED TO GAIN ACCESS TO THE FIRE SUPPRESSION PIPING LOCATED ON THE TOP OF THE HOOD.
-ROUGH-IN HIDDEN CONDUIT FOR REMOTE PULL STATION OR GAS VALVE (FLUSH MOUNTED PULL STATION).
-INSTALLATION OF MORE THAN (1) REMOTE PULL STATIONS OR DISTANCES GREATER THAN 20 FT (6.1M.)
-PARTS OR LABOR REQUIRED TO CORRECT PIPING DUE TO COOKING EQUIPMENT CHANGES OR DEVIATION FROM PLANS. OR ANY CHARGES FOR MISSING OR ADDITIONAL PARTS OTHER THEN THOSE INDICATED ON THE FIRE SUPPRESSION DETAIL.

WIRING DIAGRAMS
W/DPDT MICRO SWITCH

DPDT SWITCHES PROVIDED BY MANUFACTURER MAY BE WIRED PER TYPICAL EXAMPLES SHOWN. VERIFY WITH LOCAL CODES AND EQUIPMENT SUPPLIED AS THE CONNECTION NEEDED FOR YOUR INSTALLATION.

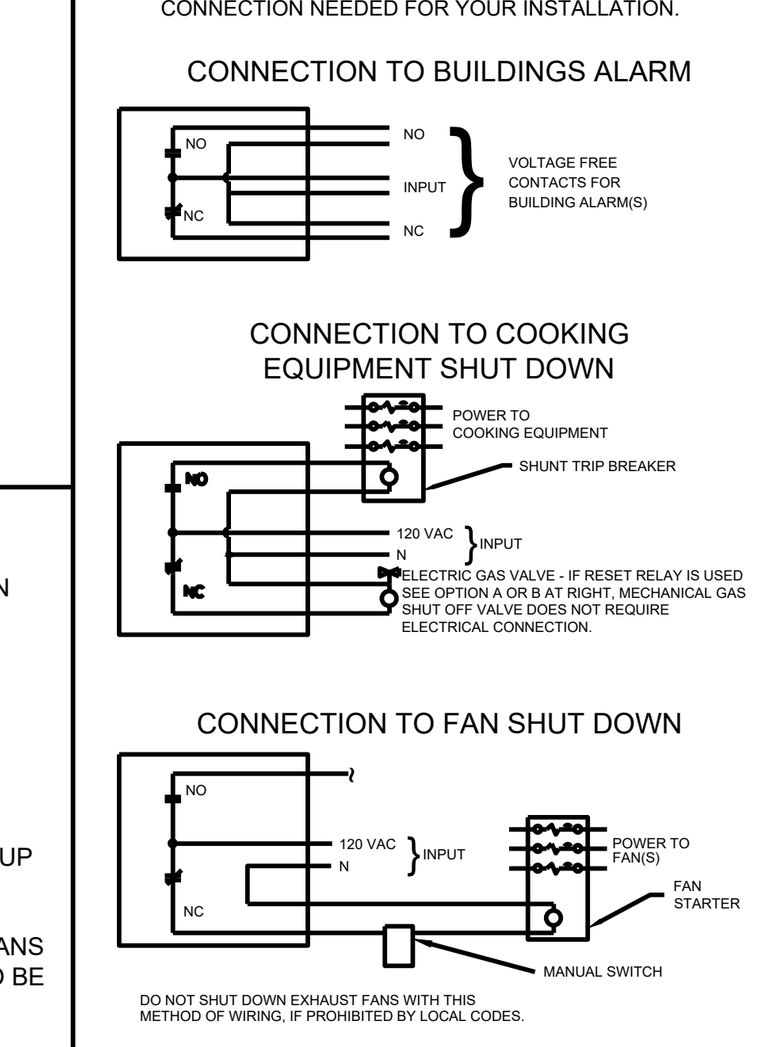

DO NOT SHUT DOWN EXHAUST FANS WITH THIS METHOD OF WIRING, IF PROHIBITED BY LOCAL CODES.

NOTES:
1. ——— DENOTES FIELD INSTALLATION.
2. ——— DENOTES FACTORY INSTALLATION.
3. DO NOT USE BLACK WIRE ON SNAP-ACTION SWITCH IN NORMAL INSTALLATION. BLACK WIRE TO BE USED ONLY FOR EXTRANEOUS ALARM, LIGHT CIRCUITS, ETC.

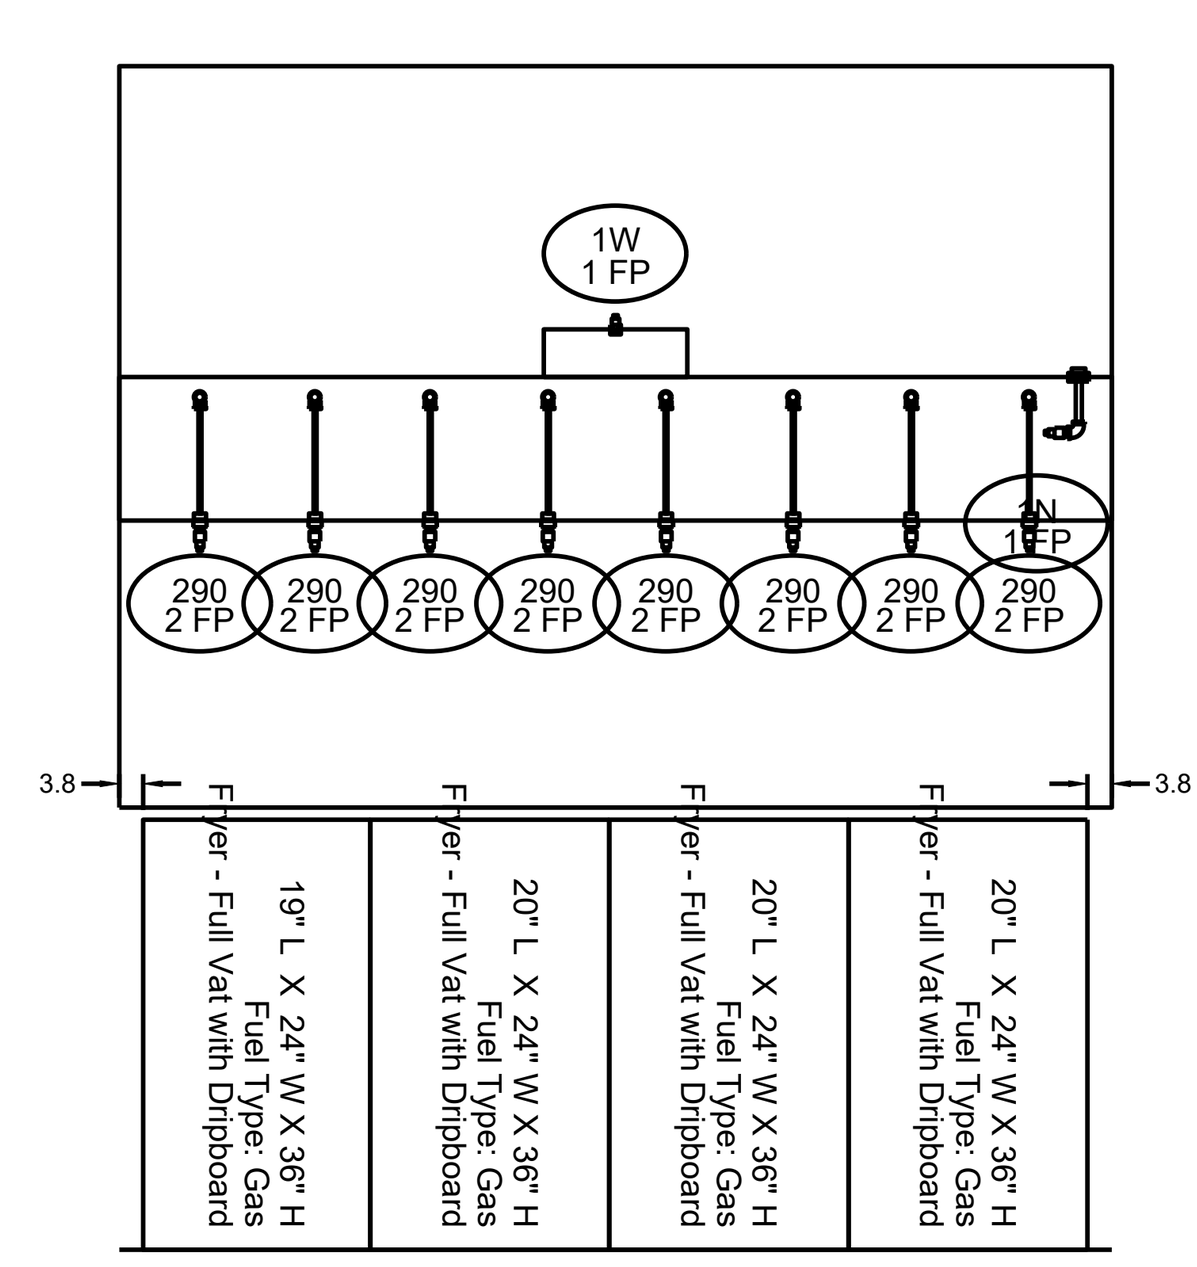

SECTION 1
ELEVATION VIEW

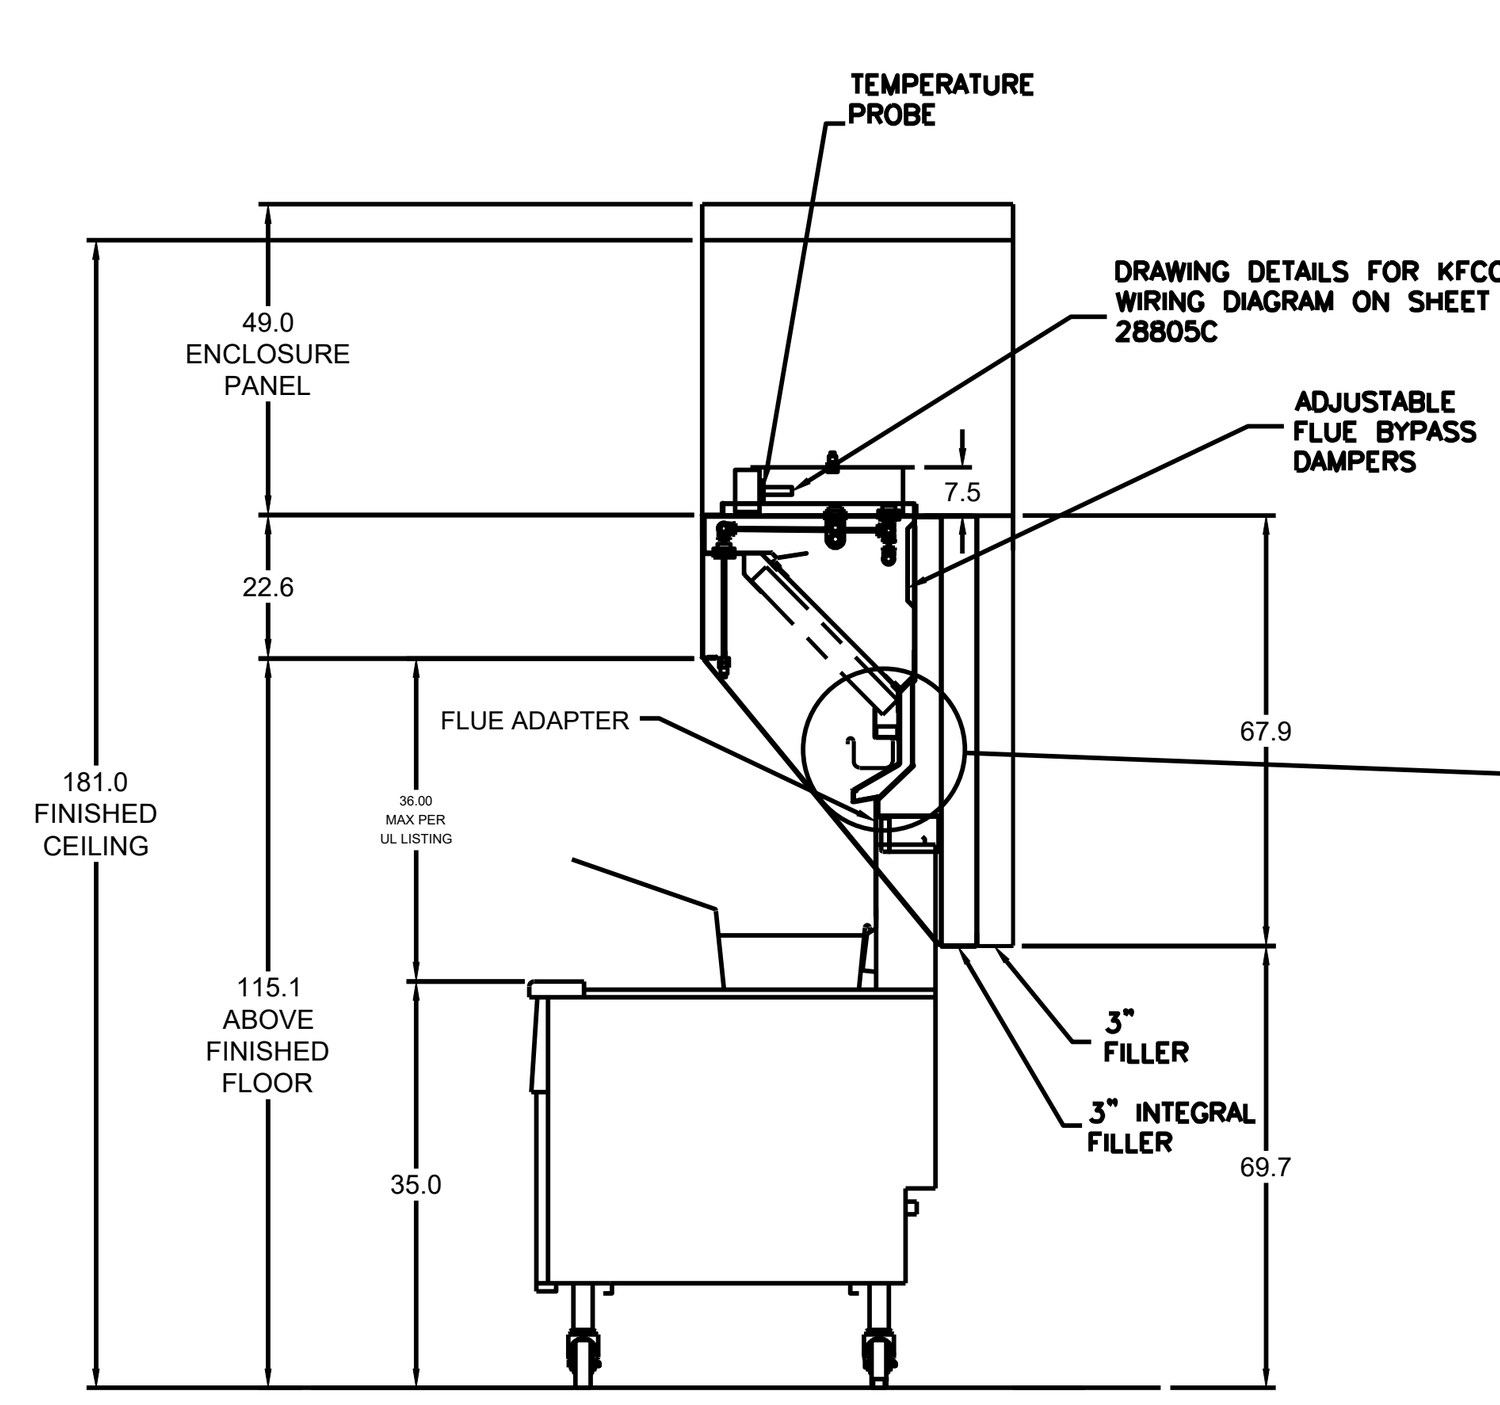

MARK: ITEM #59
SECTION VIEW

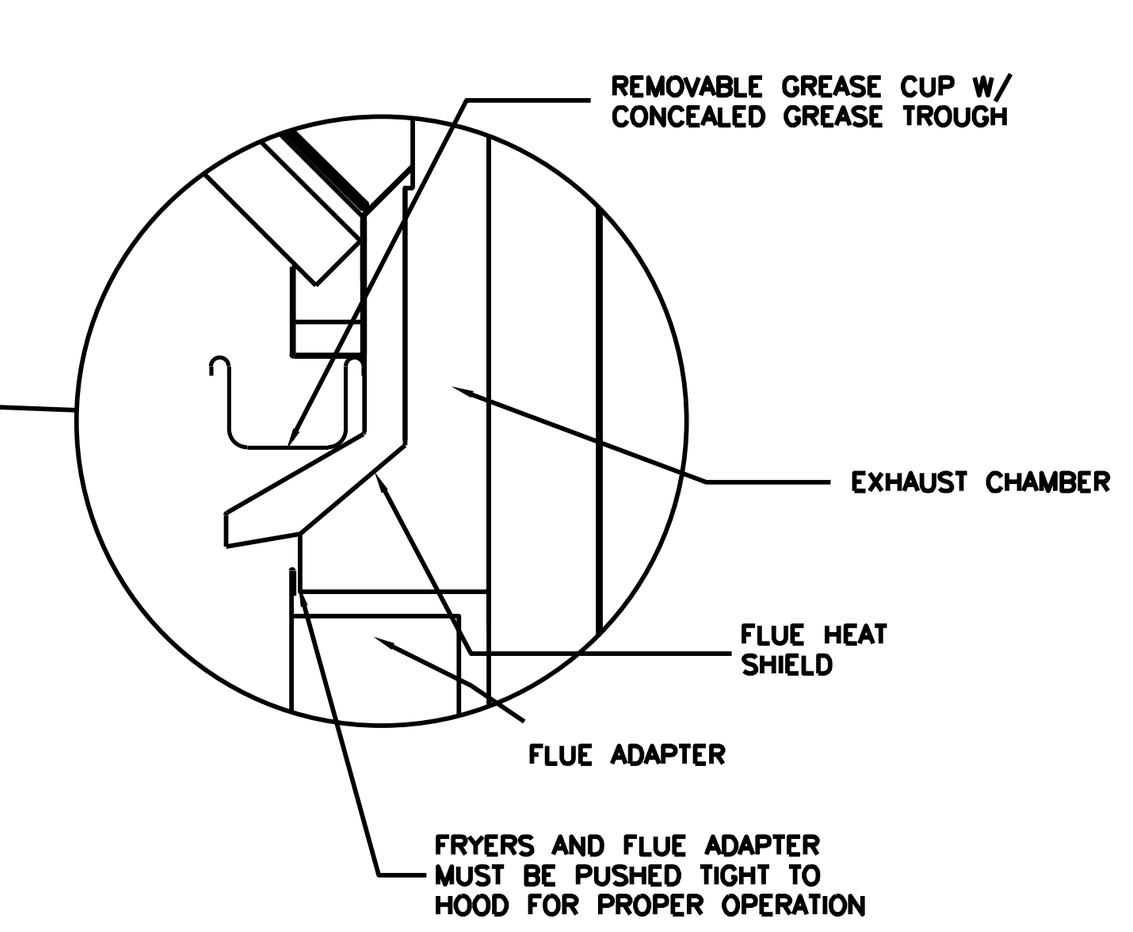

PITCO OR FRYMASTER FLUE ADAPTER MOUNTING INSTRUCTIONS

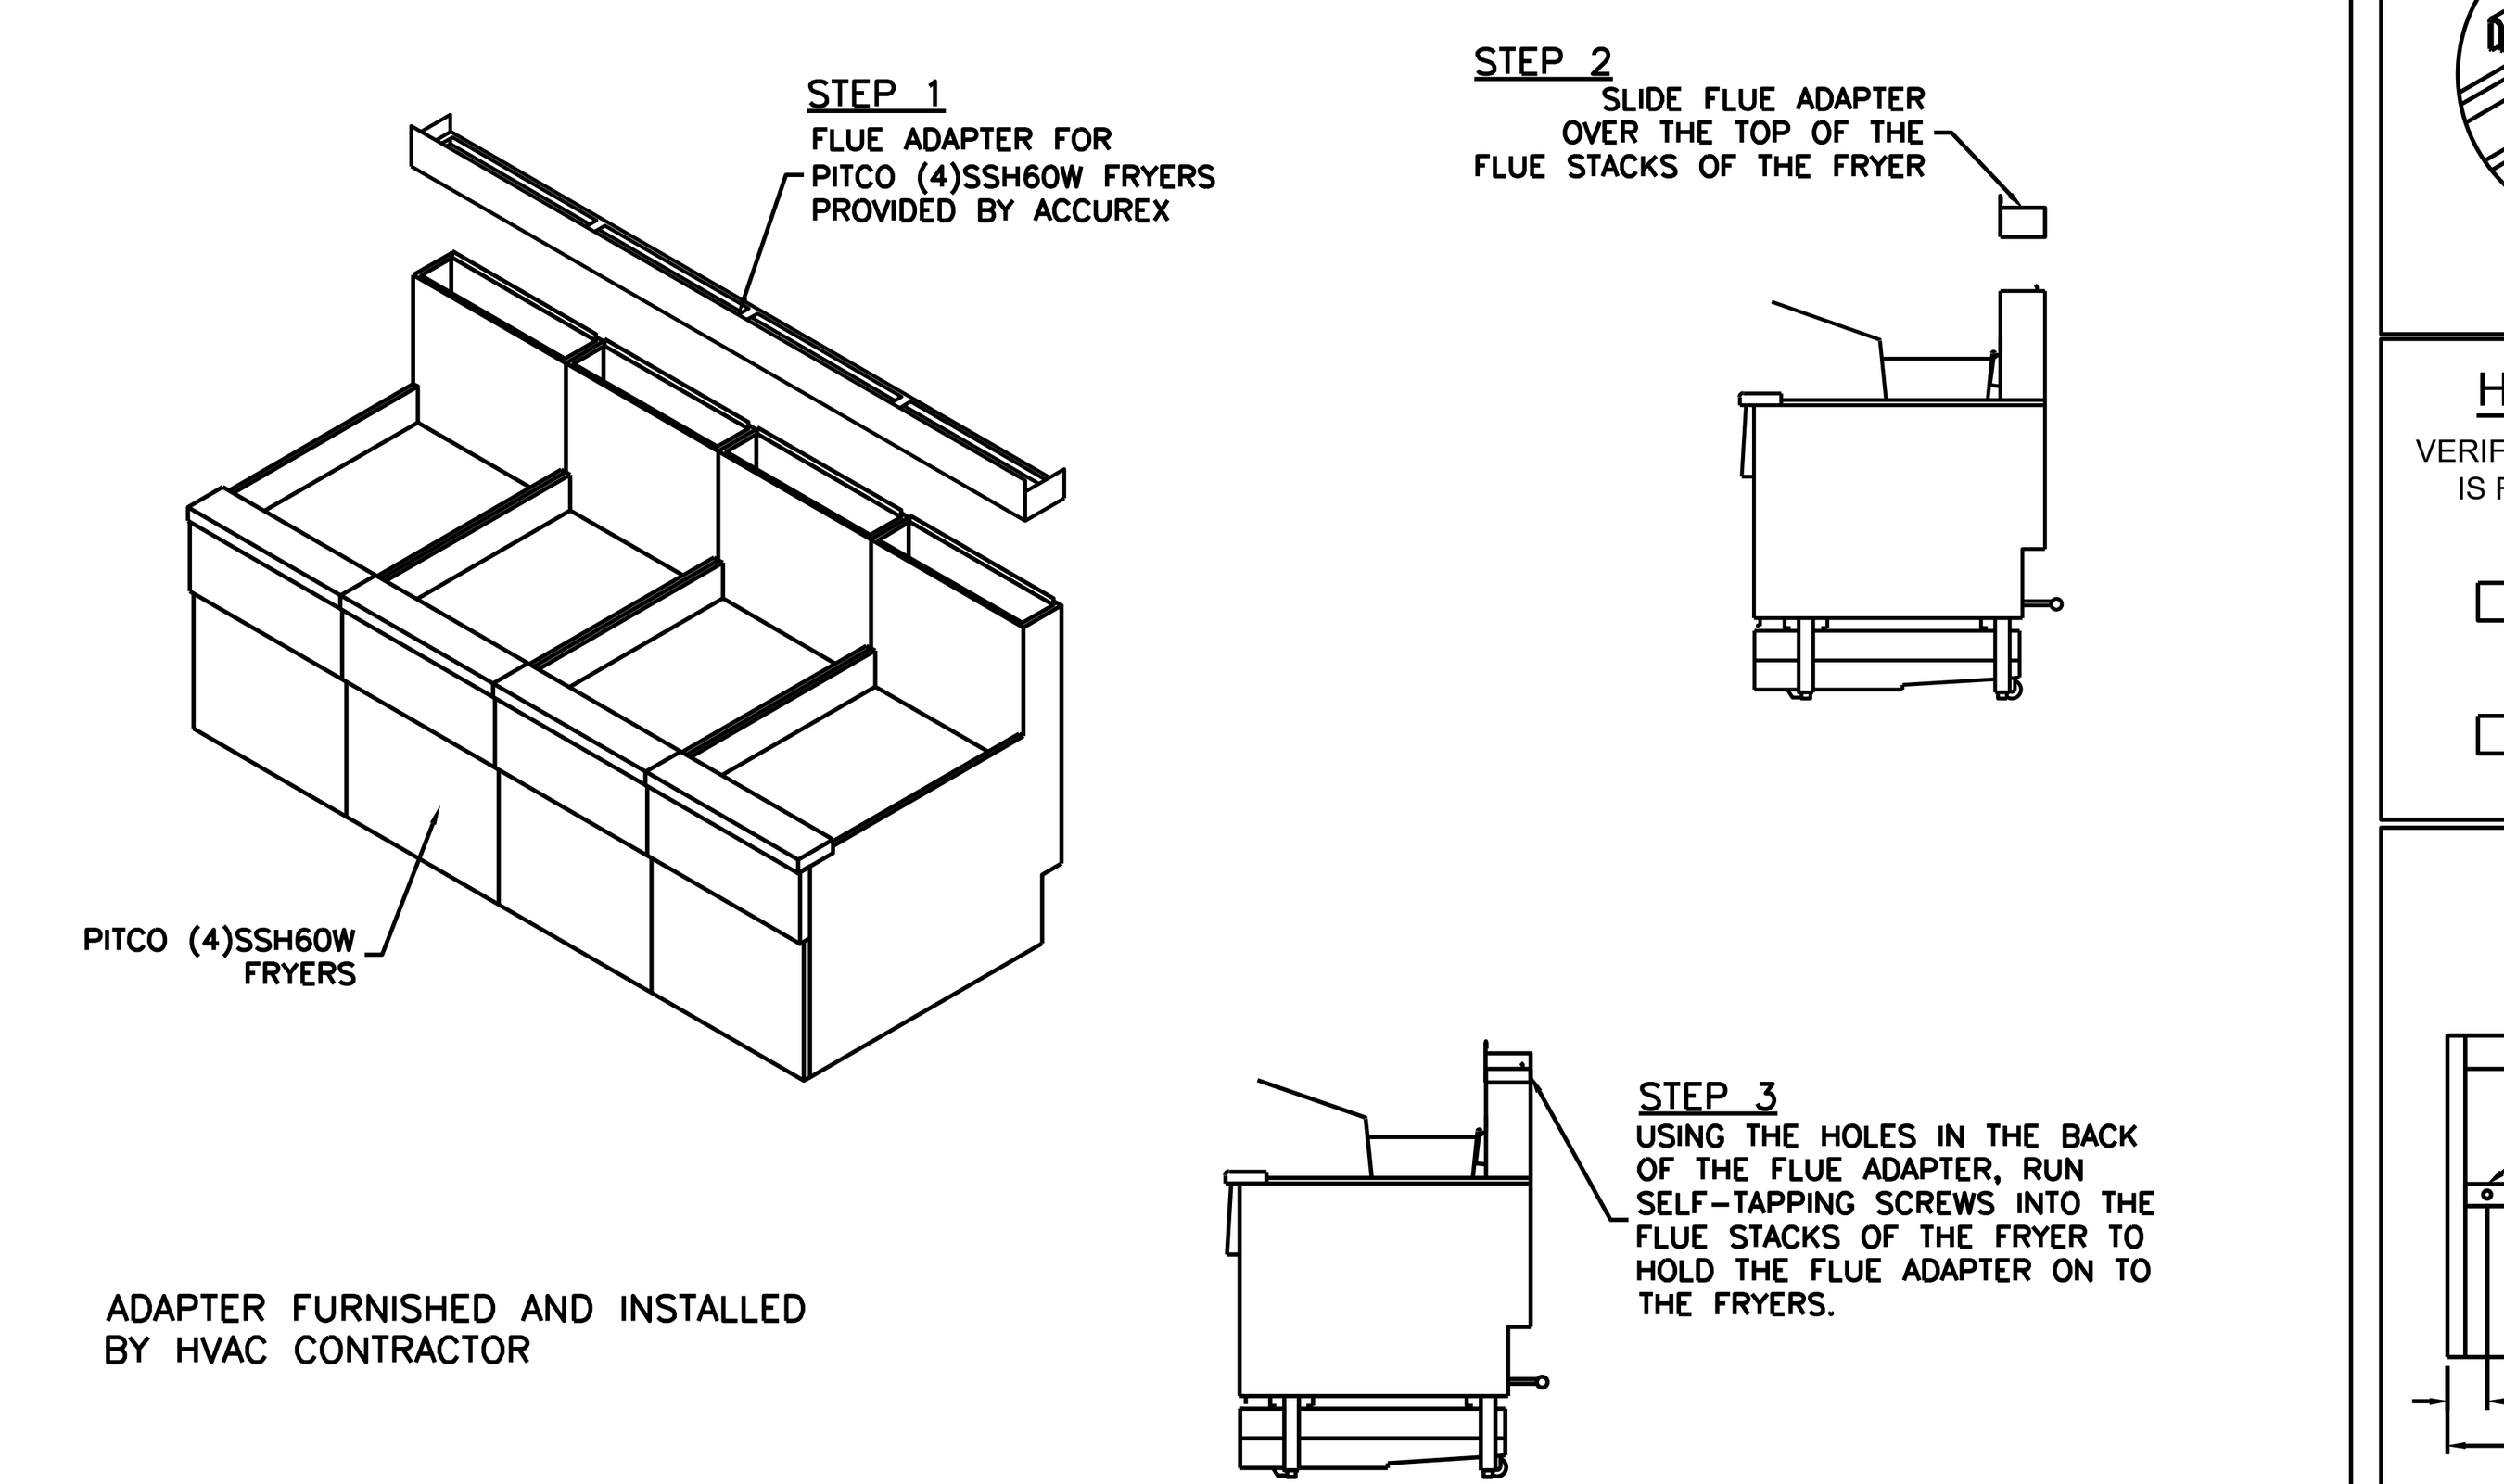

ADAPTER FURNISHED AND INSTALLED BY HVAC CONTRACTOR

ENCLOSURE PANEL INSTALLATION DETAIL

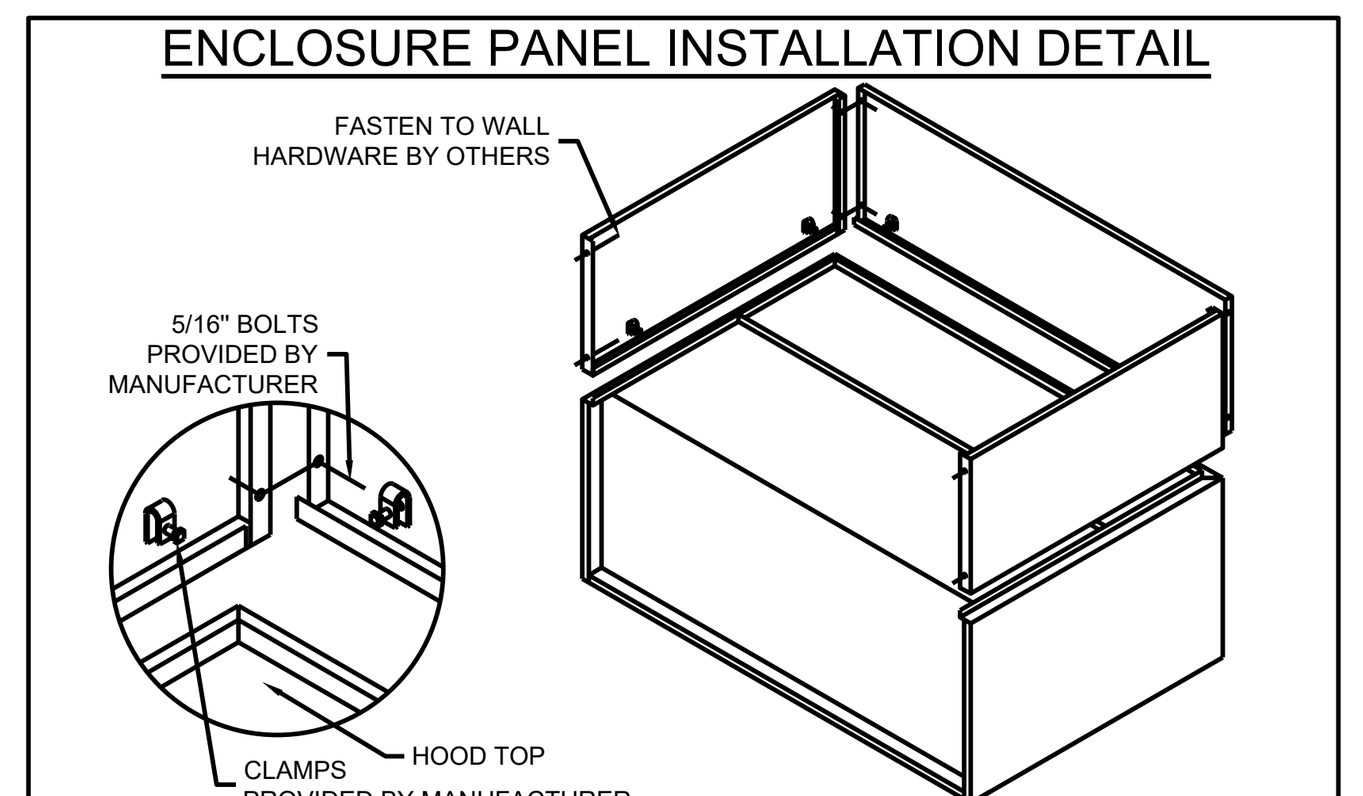

HOOD HANGING HEIGHT FOR FIRE SYSTEMS

VERIFICATION OF HOOD HANGING HEIGHT ABOVE FINISHED FLOOR (A.F.F.) IS REQUIRED FOR CORRECT PLACEMENT OF FIRE SYSTEM NOZZLES.

- ☐ RECOMMENDED HANGING HEIGHT = 61" FROM FINISHED FLOOR TO LOWER FRONT EDGE OF HOOD.
- ☐ OTHER HANGING HEIGHT = __________" FROM FINISHED FLOOR TO LOWER EDGE OF HOOD.

HOOD HANGER BRACKET DETAIL

FOR BACKSHELF HOODS

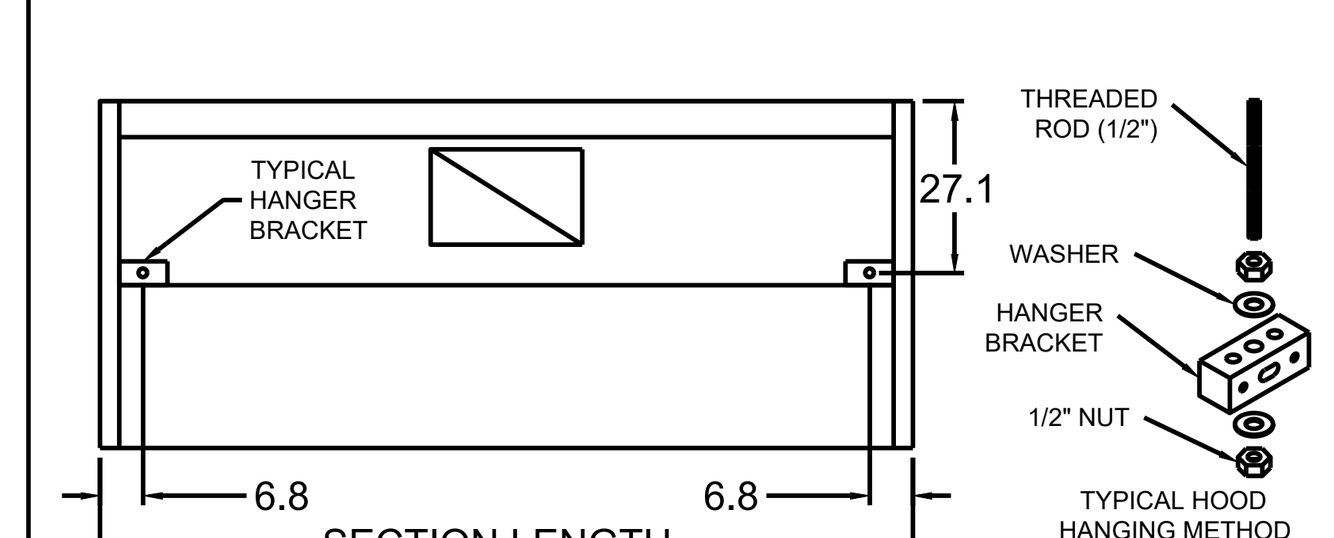

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV

CHK'D BY: RGV

PROJECT TITLE:

Location: ROCKMART, GA

Culver's ButterBurgers & Frozen Custard

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:

H.V.A.C. HOOD, FAN & FIRE SUPPRESSION

PROJECT NO: 23061

M402

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED

MARK: EF-1

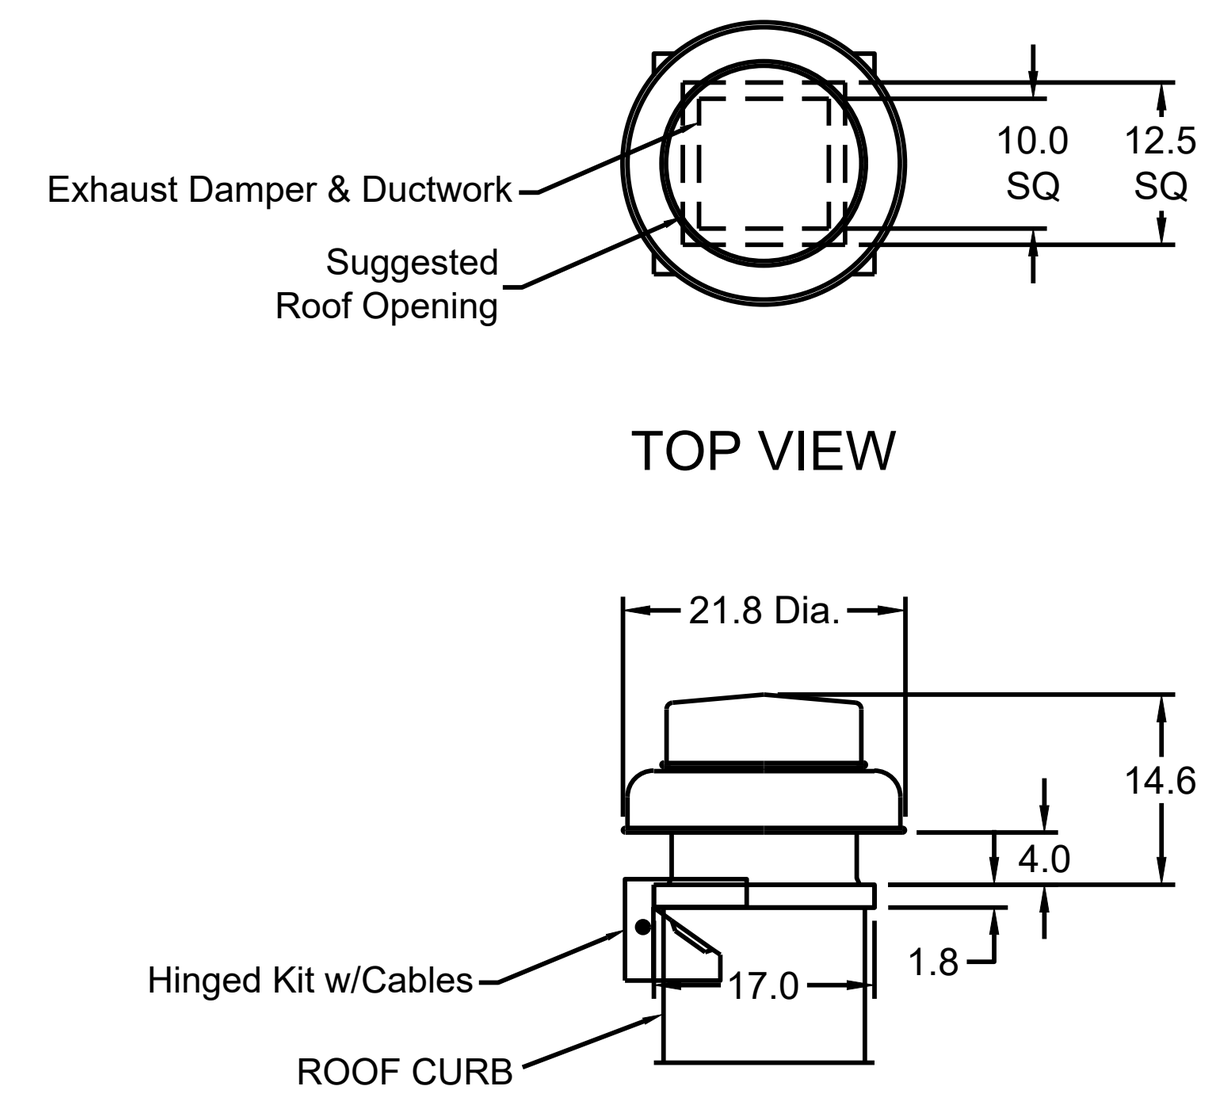

FRONT VIEW

MARK: KEF-3

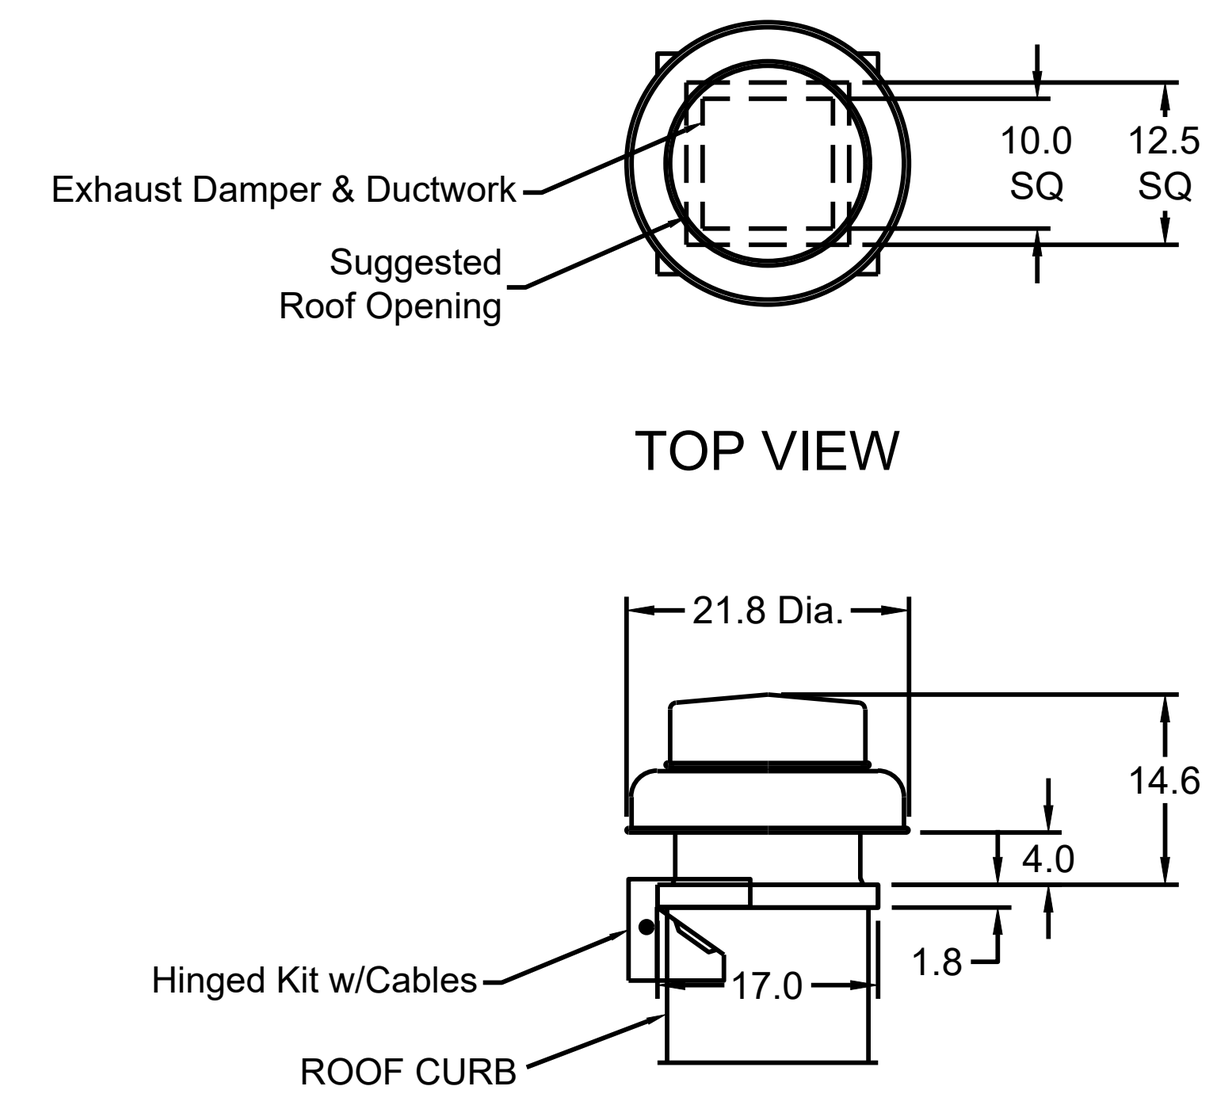

FRONT VIEW

MARK: EF-2

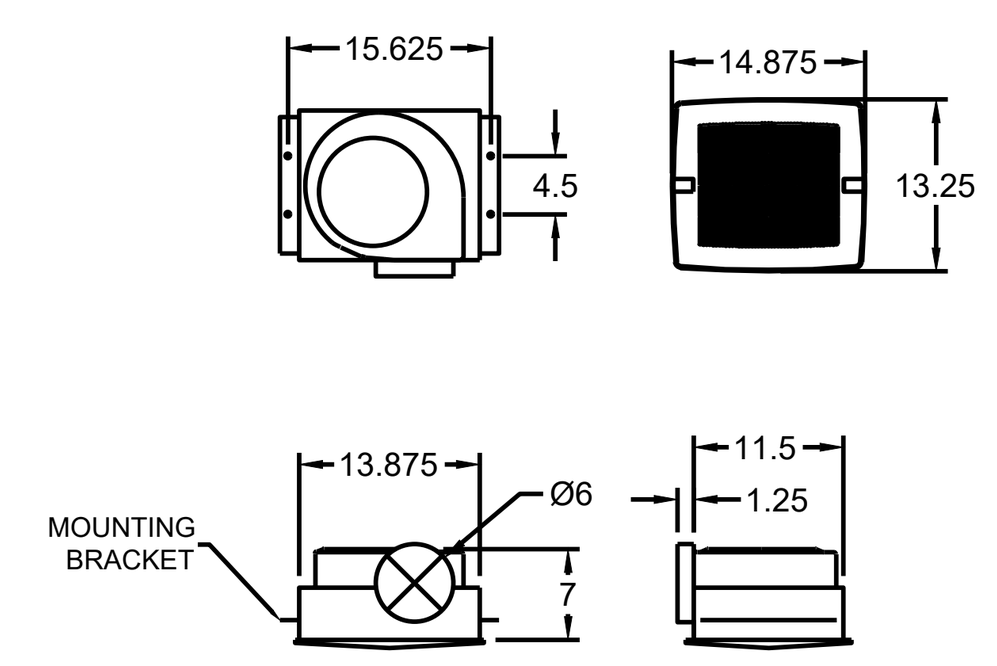

THE INFORMATION INDICATED HERE IS PROVIDED AS A COURTESY TO THE CONTRACTOR. KITCHEN HOODS AND ALL EQUIPMENT ASSOCIATED WITH THE HOODS, INCLUDING THE EXHAUST FANS SHALL BE PROVIDED BY OTHERS. EXHAUST FANS SHALL BE INSTALLED BY THE MECHANICAL CONTRACTOR. COORDINATE REQUIREMENTS WITH ALL OTHER TRADES.

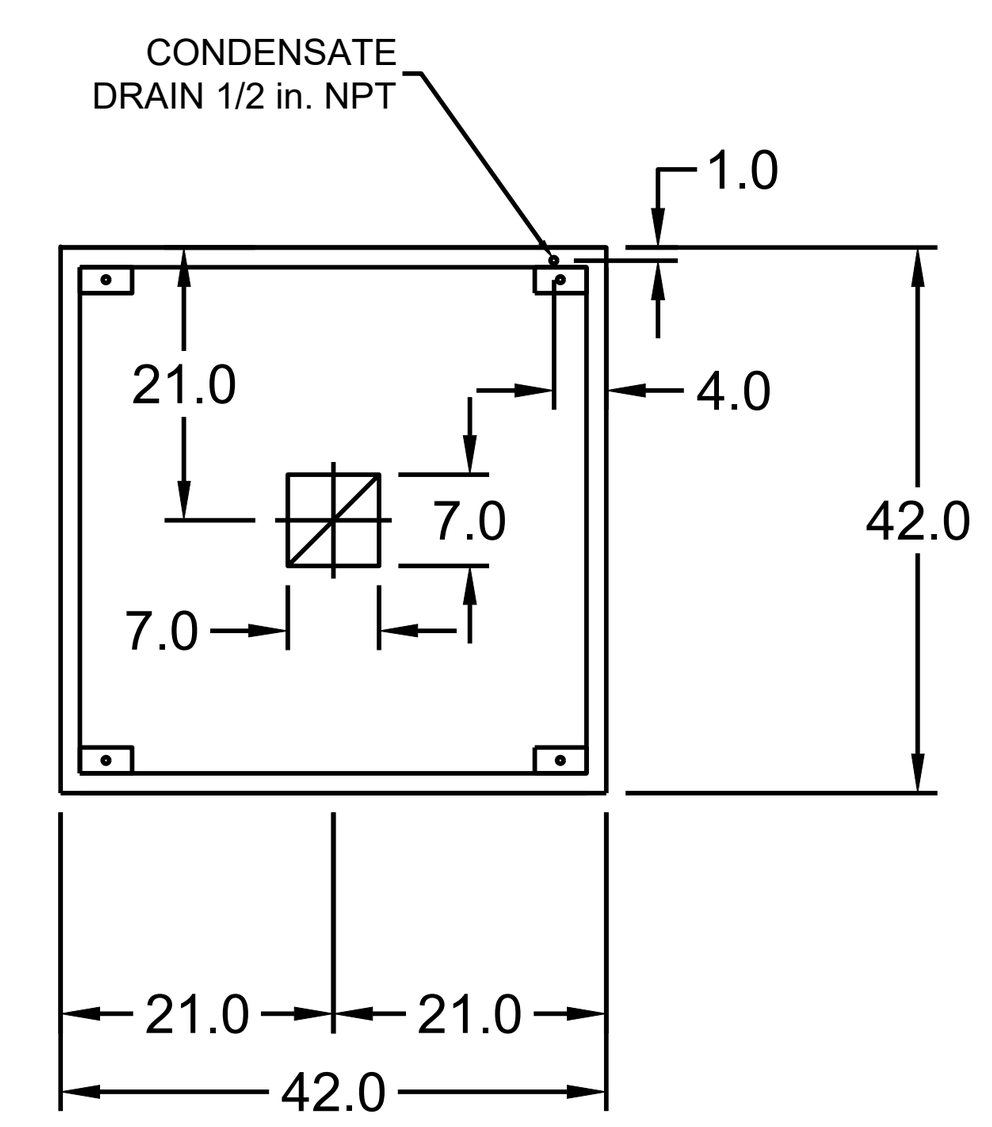

MARK:ITEM #25A
PLAN VIEW

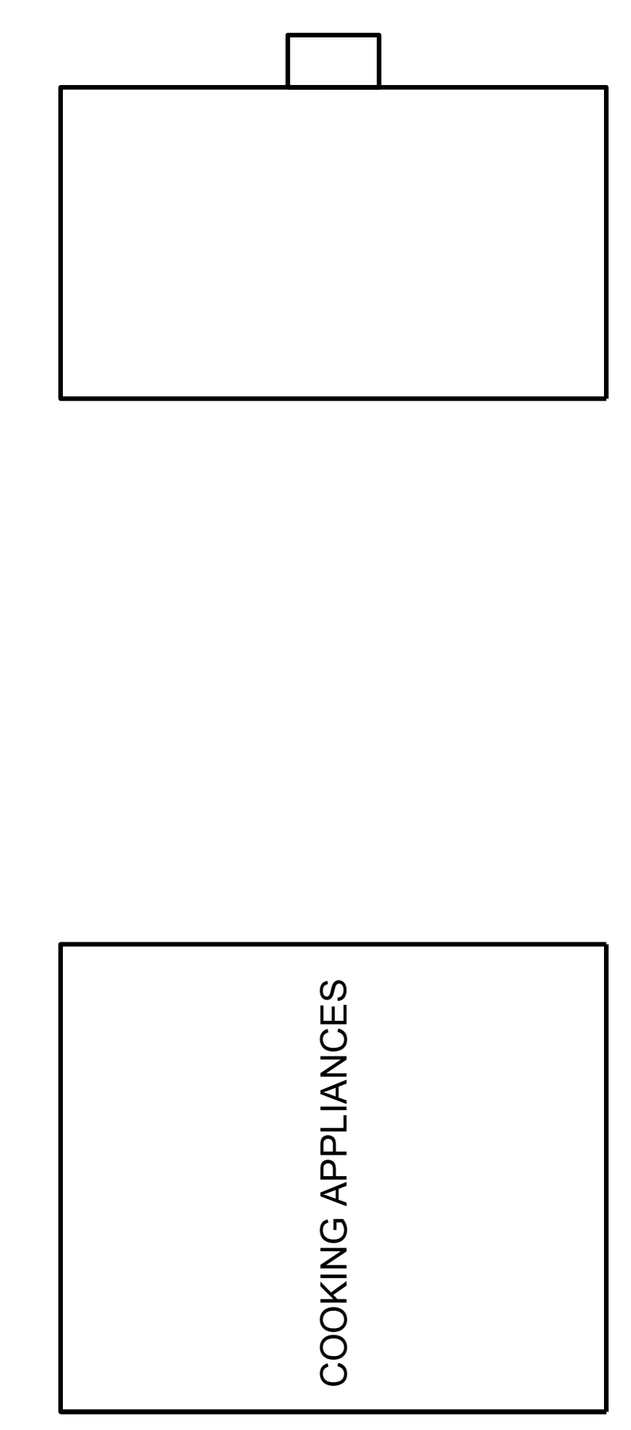

MARK: ITEM #25A
ELEVATION VIEW

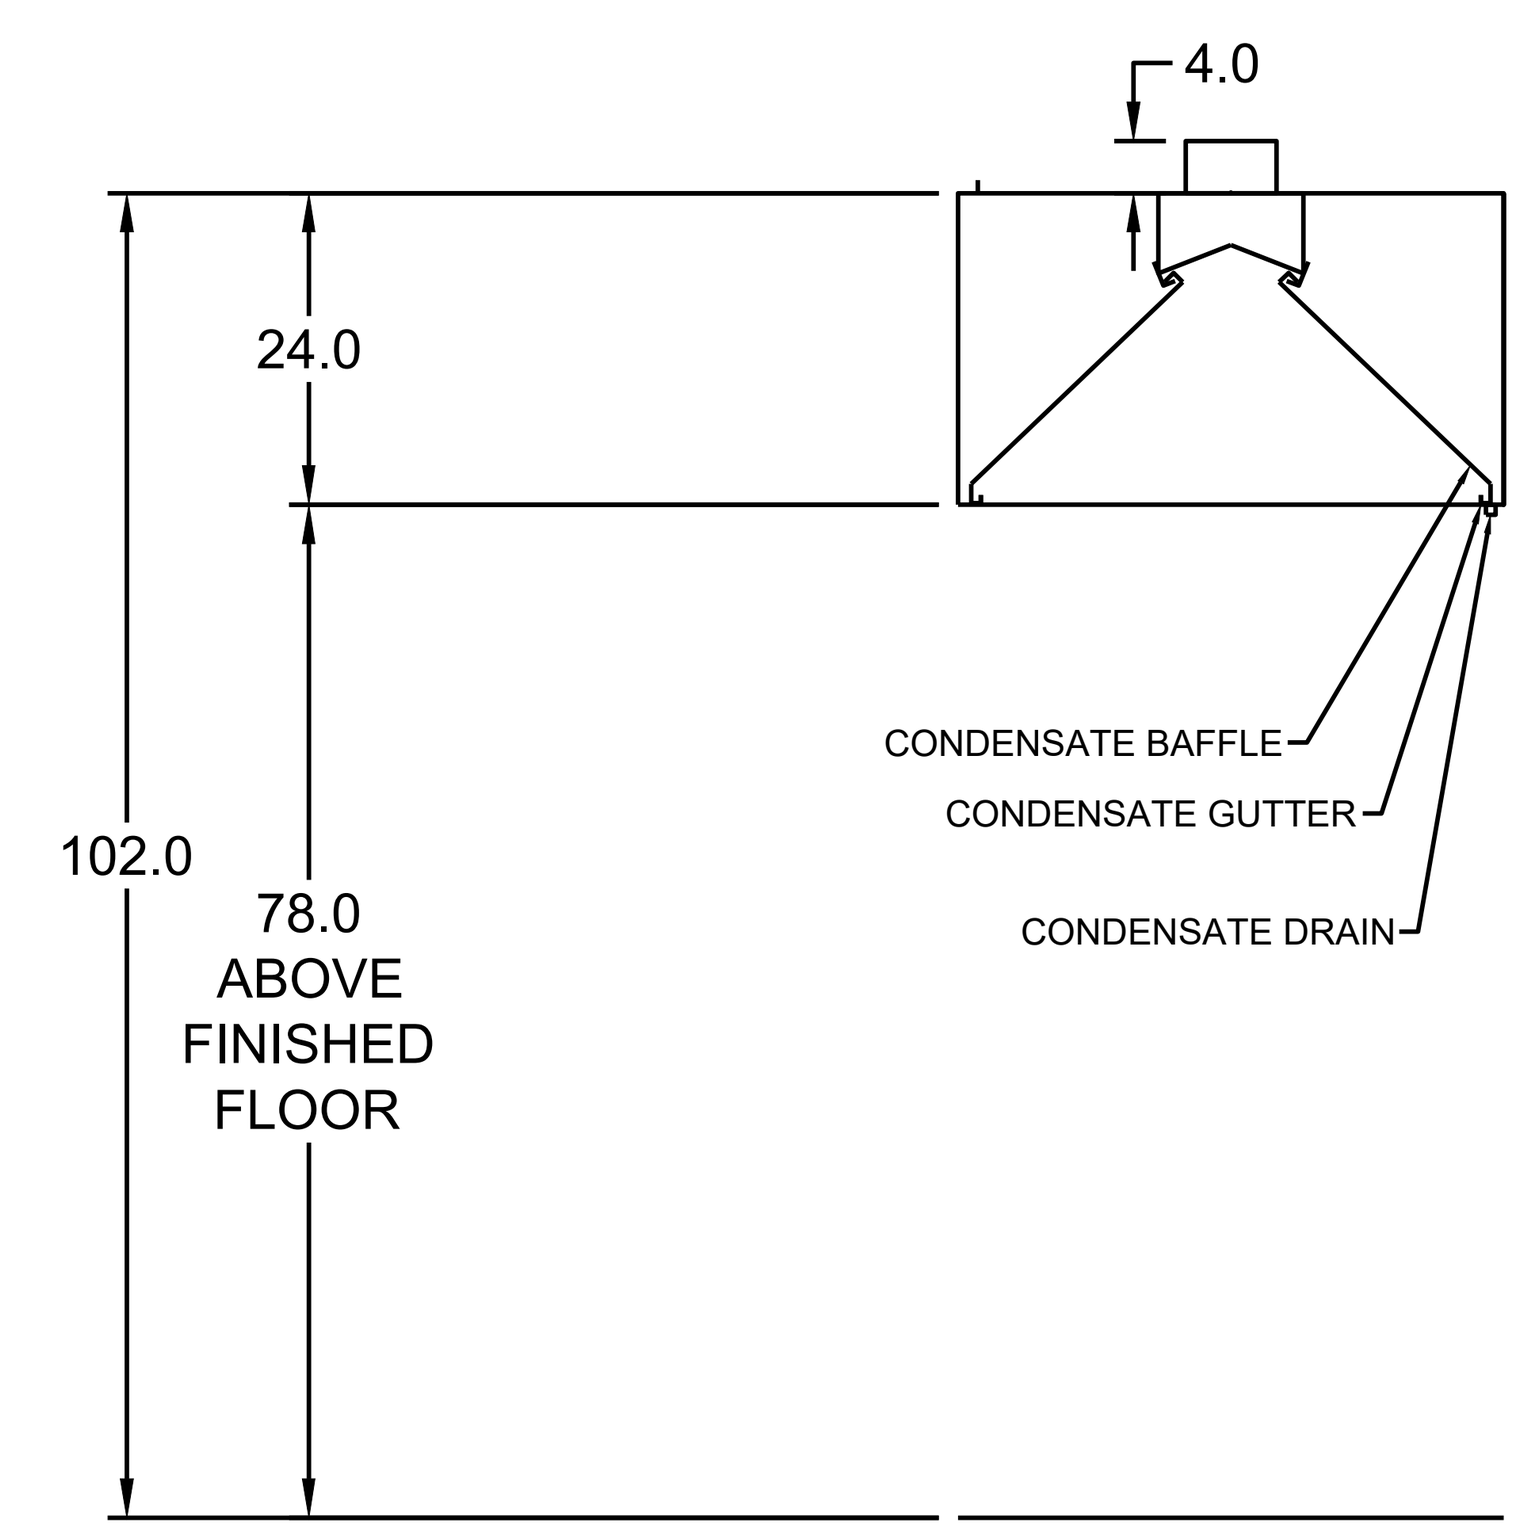

MARK: ITEM #25
SECTION VIEW

CONDENSATE HOOD BAFFLE INSTALLATION DETAIL

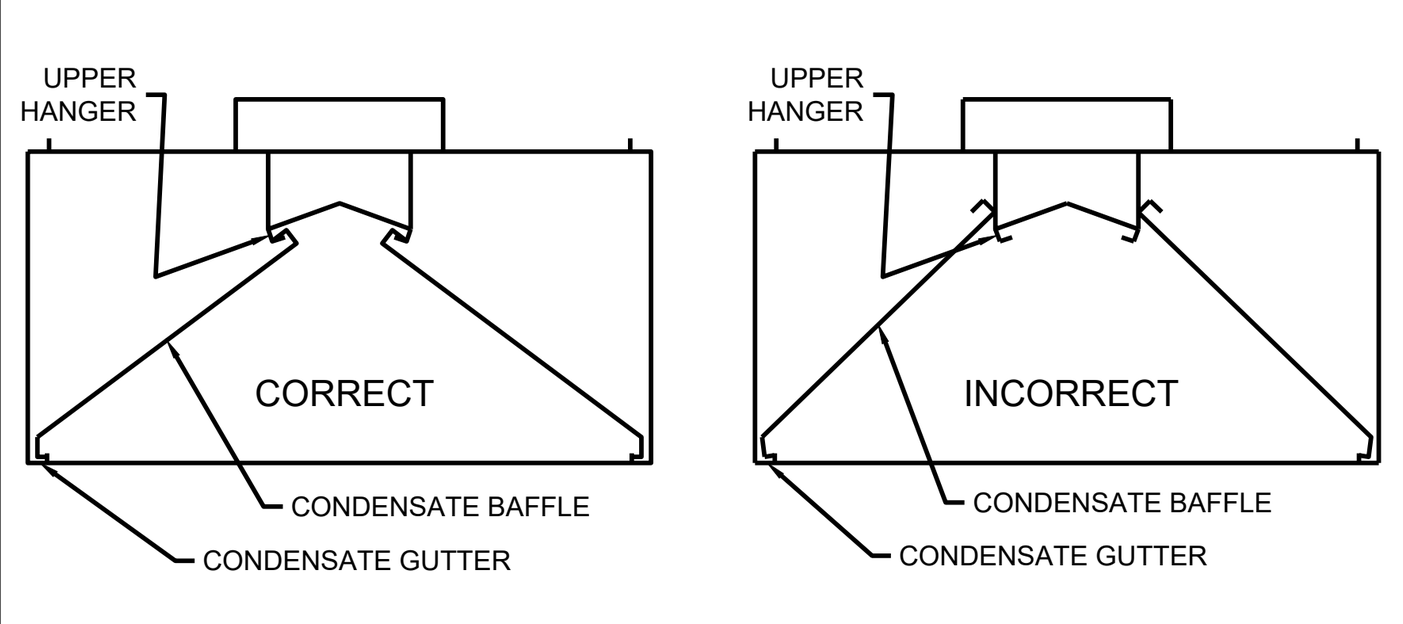

NOTES:
1. THE CONDENSATE BAFFLES MUST HOOK ONTO THE UPPER HANGER AND REST IN THE CONDENSATE GUTTER FOR PROPER OPERATION.

HOOD HANGER BRACKET DETAIL

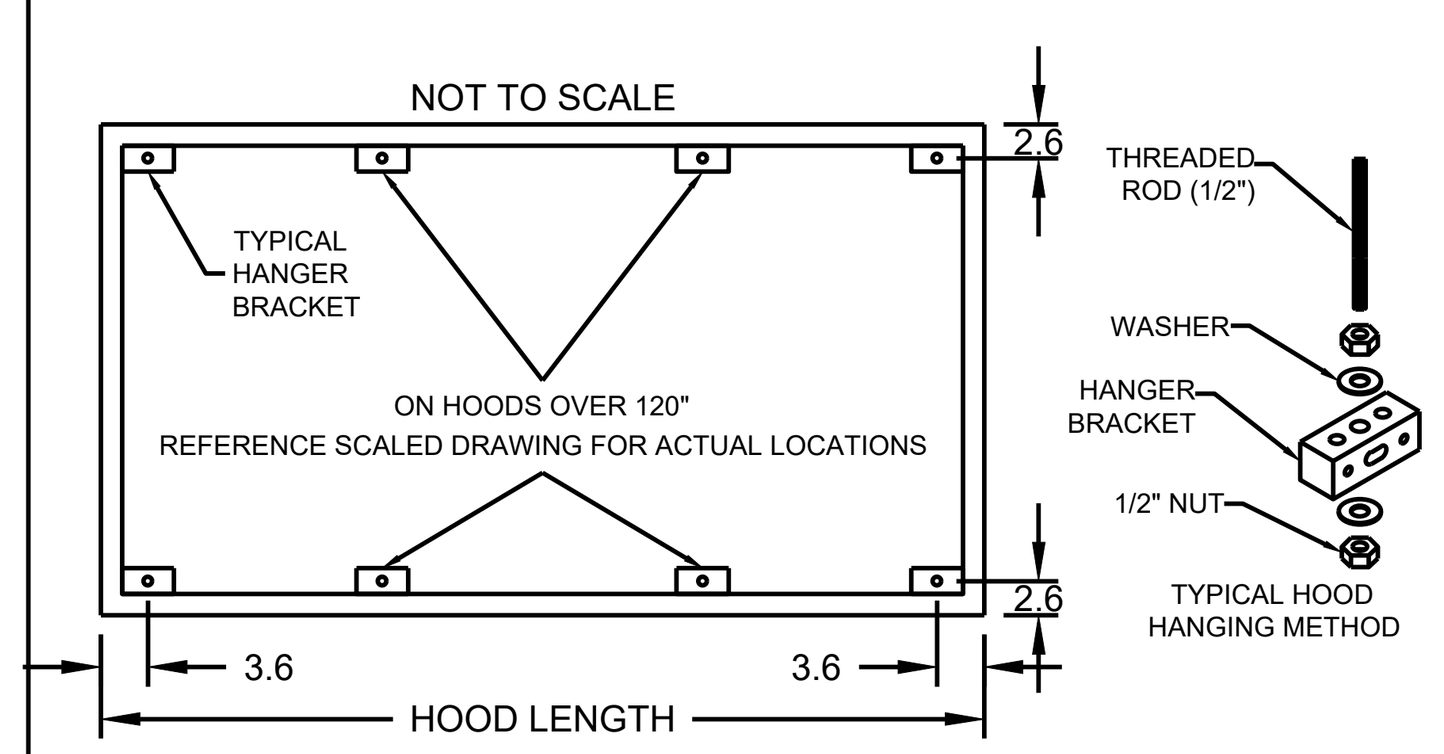

GENERAL DRAWING NOTES

Verify building entry conditions or limitations for equipment access to space.

Verify type and height of finished ceiling and if hood(s) may extend above finished ceiling (if required).

Seismic installation and bracing of equipment is by others.

Greenheck will not accept liability for problems that result from sub-standard installation. Including field electrical wiring that deviate from supplied diagrams, jobsite conditions (ductwork, fuel types and structural conditions) that GFC has not been notified of at the time of ordering. Or use of this equipment other than that for which it is designed.

It is the responsibility of the purchaser to hire qualified personnel for installation and start-up of all equipment. Installation and start-up information is shipped with all equipment via the Installation, Operation and Maintenance Manual (IOM), also included is a troubleshooting guide. Have all start-up info available prior to any warranty claims and/or factory technical support.

VENTILATION SYSTEM NOTES

Greenheck ventilators are designed in compliance with all national codes: NFPA # 96, national electric code. BOCA, uniform mechanical code, international mechanical code, and southern building conference. See national evaluation report #436 for allowable values, and/or conditions of use concerning material presented in this document. Local codes may vary. It is the responsibility of the purchaser to submit drawings to local authorities.

Exhaust and supply air volumes are to be maintained within -5% to +10% tolerance of values indicated. Static pressure(s) indicated are for the ventilator at the duct connection(s) only.

The grease filter face velocities are based on the filter manufacturers recommendations for maximum greaseextraction. Inlet opening air velocities for waterwash, dry cartridge and high velocity cartridge filters manufactured by Greenheck are designed to deliver maximum grease extraction.

Hoods installation (by others unless otherwise noted) shall be in accordance with NFPA # 96 and applicable building codes.

PROPRIETARY INFORMATION NOTICE

This document is and contains confidential trade secret information of the company and remains property of the company and is to be returned upon request. Neither it nor information is contains may be reproduced or disclosed to persons not having a need-to-know consistent with the purpose of the loan document without written permission.

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED

XFCC WIRE DIAGRAM
CULVER'S

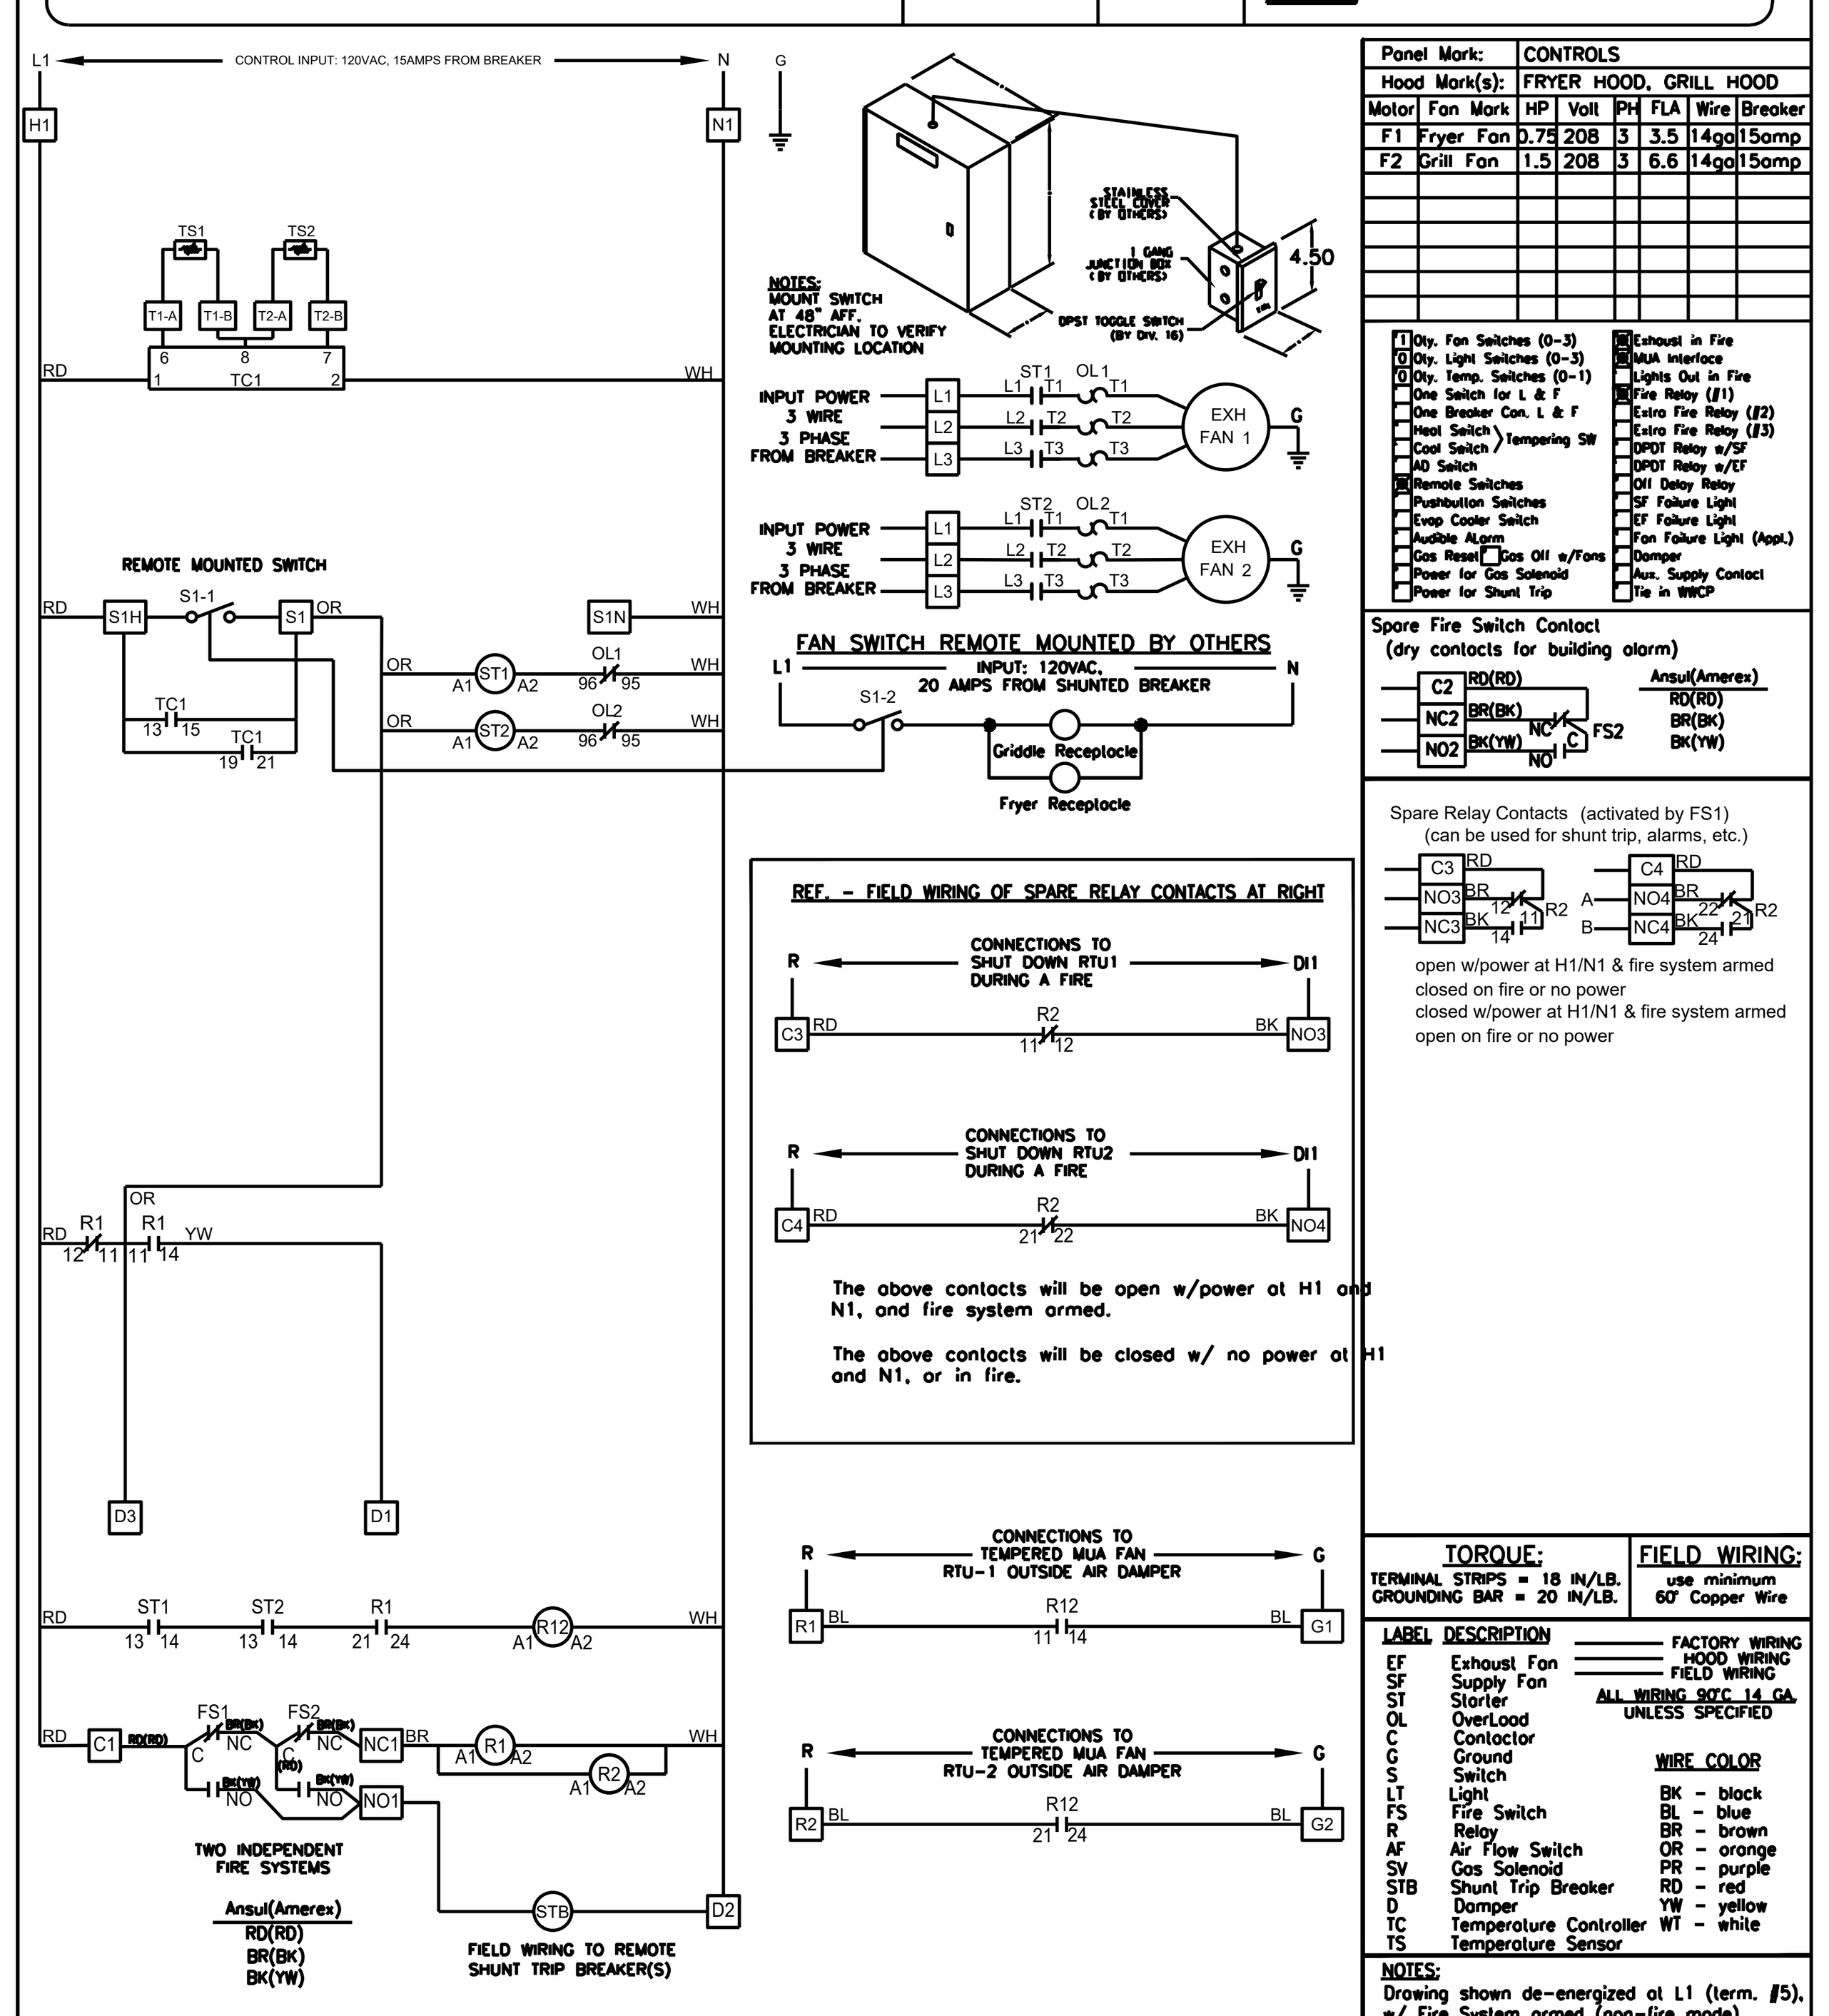

TEMPERATURE INTERLOCK CALIBRATION

1. PRESS THE SET BUTTON TO SEE THE FIRST SET POINT. (PRESS THE SET BUTTON TWICE, SLOWLY TO SEE THE SECOND SET POINT)
2. PRESS THE UP/DOWN ARROW BUTTON TO CHANGE THE SET POINT.
3. PRESS THE SET BUTTON TO VIEW THE CURRENT TEMPERATURE.
4. CHECK SYSTEM OPERATION BEFORE MAKING ADDITIONAL ADJUSTMENTS

FOR TECHINCAL SUPPORT ON THE KFCC
(KITCHEN FAN CONTROL CENTER)
CALL EITHER:
AARON VAN KREY 715.841.8521
TYLER SCHILLING 715.841.8749

EQUIPMENT SCHEDULE

ELECTRICAL CONTROL BOX — MARK: KFCC

DESCRIPTION / ACCUREX MODEL MOUNTING LOCATION (CONTROL PANEL / SWITCHES)	EXHAUST FAN QTY	SUPPLY FAN QTY	POWER FREQUENCY
KITCHEN FAN CONTROL CENTER / XFCC SHIP LOOSE / SHIP LOOSE FOR REMOTE MOUNTING	2	0	60 CYCLE

CONTROL PANEL ENCLOSURE - 16 GA 304 STAINLESS STEEL ENCLOSURE (NEMA-1) - DIMENSIONS 12 X 18 X 6
WIRING DIAGRAM #: T100- 2 - 20
STARTERS PROVIDED IN CONTROL PANEL - QTY 2
2 POSITION FAN SWITCH - QTY 1
INTEGRATED EXHAUST TEMPERATURE INTERLOCK SYSTEM
-FACTORY MOUNTED EXHAUST TEMPERATURE SENSORS - QTY 2
-COMPLIES WITH INTERNATIONAL MECHANICAL CODE 2006 SECTION 507.2.1.1
TURN ON EXHAUST IN FIRE
THERMAL OVERLOADS IN CABINET
1 SPEED FAN(S)

SPECIAL DESIGN REQUESTS

SDR #K0800240 - USE KIT #852883, WIRING DIAG. #ZZ905336

TYPE 2 KITCHEN HOOD — MARK: ITEM #25

HOOD NO.	ACCUREX MODEL STYLE / CONFIGURATION	HOOD DIMENSIONS: SECTION LENGTH	WIDTH	HEIGHT	GREASE CUP OR DRAIN	HOOD TEMP. RATING	TOTAL WEIGHT	SECTION LOCATION
1	XD3-42-S CONDENSATE HOOD - DOUBLE BAFFLE	42.0 IN.	42 IN.	24 IN.	RIGHT	NA	224.0 LBS.	NA

HOOD SECTION # COLLAR #	EXHAUST PLENUM COLLARS: DISTANCE TO END (IN.)	WIDTH (IN.)	LENGTH (IN.)	DIAMETER (IN.)	VOLUME (CFM)	S.P. (IN. WC)	VELOCITY (FT/MIN)
1 / 1	21	7	7	NA	350	0.127	1029
TOTAL EXHAUST CFM - SECTION 1					350.0	≈	100.0 CFM / FT

OPTIONS AND ACCESSORIES

304 STAINLESS STEEL 100% CONSTRUCTION
FACTORY MOUNTED EXHAUST COLLAR(S)

EQUIPMENT SCHEDULE

Direct Drive Centrifugal Roof Exhaust Fan — MARK: EF-1

Qty	Accurex Model	Volume (CFM)	SP (in wg)	FRPM	Operating Power (hp)	Weight (Lb.)	Motor Information: Size (hp)	V/C/P	Encl:	Motor RPM	Windings	FLA
1	XRED-090-D	375	0.5	1479	0.060	43	0.0667	115/60/1	OP	1550	1	NA

OPTIONS AND ACCESSORIES

UL/cUL 705 Listed - "Power Ventilators"
Switch, NEMA-1, Toggle, Shipped with unit
Hinged Curb Cap Kit w/Cables (PN 851018) (Shipped Loose)
Curb Seal (Attached)
Damper, WD-100-PB-10X10, Gravity Operated (Loose)
Solid State Speed Control, Shipped Loose (PN 5WSSC)
Roof Curb-Galv., GPI-17-10-G12, Undersized 1.5" total

EQUIPMENT SCHEDULE

Direct Drive Centrifugal Roof Exhaust Fan — MARK: KEF-3

Qty	Accurex Model	Volume (CFM)	SP (in wg)	FRPM	Operating Power (hp)	Weight (Lb.)	Motor Information: Size (hp)	V/C/P	Encl:	Motor RPM	Windings	FLA
1	XRED-090-D	350	0.5	1455	0.07	43	0.0667	115/60/1	OP	1550	1	NA

OPTIONS AND ACCESSORIES

UL/cUL 705 Listed - "Power Ventilators"
Switch, NEMA-1, Toggle, Shipped with unit
Hinged Curb Cap Kit w/Cables (PN 851018) (Shipped Loose)
Curb Seal (Attached)
Damper, WD-100-PB-10X10, Gravity Operated (Loose)
Solid State Speed Control, Shipped Loose (PN 5WSSC)
Roof Curb-Galv., GPI-17-10G12, Undersized 1.5" total

EQUIPMENT SCHEDULE

Ceiling Exhaust Fan — MARK: EF-2

Qty	Accurex Model	Volume (CFM)	SP (in wg)	FRPM	Operating Power (hp)	Weight (Lb.)	Motor Information: Size (hp)	V/C/P	Encl:	Motor RPM	Windings	FLA
1	XCR-B80	75	0.125	885	0.01	10	0.0	115/60/1	OP	900	1	NA

OPTIONS AND ACCESSORIES

UL/cUL 705 Listed - Electric fan
Solid State Speed Control. 6.0 amp, shipped loose
Round Hooded Wall cap, (PN: WC-6) Shiiped loose)
Designer Grille
Round duct connection
Polypropylene Wheel Material
Energy Star Rated

CONSTRUCTION COMPLIES WITH NFPA 96

Thank you for your interest in Accurex

SUBMITTAL

Please return one approved print to your Greenheck Representative including signature, date, and answers to all submittal "verify" notes and questions. Fabrication will not begin until after approved drawings are received.

☐ APPROVED AS SUBMITTED
☐ APPROVED AS NOTED
☐ REJECTED – REVISE AND RESUBMIT

SIGNATURE | DATE

REV	DESCRIPTION	DATE

ACCUREX
DRAWN BY: GNH
DATE: 01/31/17
SUPERSEDES:
SCALE: 1/24
ECO:
ENG. REF.:
TITLE: CULVER'S MASTER TEMPLATE
CAD DRAWING NO.: C28805C
D

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR. ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV
CHK'D BY: RGV
PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:
H.V.A.C. HOOD, FAN & FIRE SUPPRESSION

PROJECT NO: 23061

M403

THE INFORMATION INDICATED HERE IS PROVIDED AS A COURTESY TO THE CONTRACTOR. KITCHEN HOODS AND ALL EQUIPMENT ASSOCIATED WITH THE HOODS, INCLUDING THE EXHAUST FANS SHALL BE PROVIDED BY OTHERS. EXHAUST FANS SHALL BE INSTALLED BY THE MECHANICAL CONTRACTOR. COORDINATE REQUIREMENTS WITH ALL OTHER TRADES.

CONSTRUCTION COMPLIES WITH NFPA 96

SUBMITTAL

Please return one approved print to Greenheck including signature, date, and answers to all submittal "verify" notes and questions. Fabrication will not begin until after approved drawings are received.

- ☐ APPROVED AS SUBMITTED
- ☐ APPROVED AS NOTED
- ☐ REJECTED – REVISE AND RESUBMIT

SIGNATURE DATE

GREENHECK
P.O. BOX 410, SCHOFIELD WI 54476-0410

CULVER'S ELECTRICAL FIELD CONNECTION INSTALLATION INSTRUCTIONS

Remote Mount DPST Switch
Fryer & Griddle Receptacles, Kitchen Exhaust Fans

Exhaust Fan Connections in Greenheck Control Panel
Model KFCC

Key
——Designates Field Connection

Greenheck Control Panel Connections
Model KFCC

			Torque to 18 in-lbs	
Power from Main Breaker Panel (Black), *Non-shunted*	H1	**120/1 - 15 Amp**		H1
Neutral from Main Breaker Panel (White)	N1	NEUTRAL		N1
	H2	NOT USED		H2
	N2	NOT USED		N2
	W2	NOT USED		W2
	B2	NOT USED		B2
To Pole 2 of Remote Mount DPST Switch	S1	Fan Switch Connection		S1
To Pole 2 of Remote Mount DPST Switch	S1H	Fan Switch Connection		S1H
	S1N	NOT USED		S1N
To Fire Sytem Microswitch (Red)	C1	Fire System Common		C1
To Fire System Microswitch (Black)	NO1	Fire System N/O		NO1
To Fire System Mircoswitch (Brown)	NC1	Fire System N/C		NC1
	C2	Spare Fire Sys. Common		C2
	NO2	Spare Fire Sys. N/O		NO2
	NC2	Spare Fire Sys. N/C		NC2
To RTU 1 Shutdown in Fire (*Contact will open in fire*)	C3	RTU 1 Fire Shutdown		C3
	NO3	OPEN		NO3
To RTU 1 Shutdown in Fire (*Contact will open in fire*)	NC3	RTU 1 Fire Shutdown		NC3
To RTU 2 Shutdown in Fire (*Contact will open in fire*)	C4	RTU 2 Fire Shutdown		C4
	NO4	OPEN		NO4
To RTU 2 Shutdown in Fire (*Contact will open in fire*)	NC4	RTU 2 Fire Shutdown		NC4
	D1	120/1 "Off in Fire"		D1
To Griddle & Fryer Shunt Trip Breaker at Main Panel	D2	120/1- Shunt Trip Breaker		D2
	D3	120/1		D3
To RTU 1 Outside Air Damper (*Contact will close when exhaust fans are running*)	R1	RTU-1 Outside Air Damper		R1
To RTU 1 Outside Air Damper (*Contact will close when exhaust fans are running*)	G1	RTU-1 Outside Air Damper		G1
To RTU 2 Outside Air Damper (*Contact will close when exhaust fans are running*)	R2	RTU-2 Outside Air Damper		R2
To RTU 2 Outside Air Damper (*Contact will close when exhaust fans are running*)	G2	RTU-2 Outside Air Damper		G2

To Griddle & Fryer Shunt Trip Breaker at Main Panel

Culver's Installation and Operation Guide
Greenheck Control Panel and Exhaust Fan & Receptacle Switch

Mechanical Scope of work

1) Mechanical contractor to mount Greenheck Control Panel (*Model KFCC, 12"W x 18"H x 6"W*) in specified location above drop ceiling.
2) Mechanical Contractor to start up fans and electrical outlet by turning fan switch to the "ON" position. Verify power to fryer & griddle receptacles and exhaust fans.

Electrical Scope of Work

1) Electrical contractor shall provide one 120 Volt - 20 Amp circuit with shunt trip breaker (120V trip) for fryer and griddle receptacles. This circuit will have two receptacles, one for the fryer and one for the griddle. Circuit will be controlled using a DPST (Double Pole Single Throw) switch for exhaust fan and electrical outlet control. Switch to be mounted on wall where specified on drawings.
2) Electrical Contractor to provide and install DPST switch on wall. Wire one pole of switch to the receptacle outlet circuit. Wire other pole of DPST switch to terminals S1H and S1 in Greenheck Control Panel (Model KFCC) to complete fan control circuit.
3) Electrical Contractor to run a separate 120 Volt - 15A circuit to KFCC terminals H1 and N1 to power KFCC controls.
4) Two 208/60/3 - 15A circuits must be run from the main breaker panel to each motor starter in the KFCC (L1, L2, & L3). Run power from Terminals T1, T2, & T3 on the bottom of motor starter in KFCC to kitchen exhaust fans.
5) Electrical Contractor to make connections from terminals NO1 and D2 (120 Volt normally open contact) to shunt-trip breaker for fryer and griddle receptacles.
6) Electrical Contractor to wire fire system mircoswitch in fire system cabinet to KFCC terminals C1, NC1, and NO1 as indicated on Greenheck drawing.
7) Electrical Contractor to wire RTU 1 & 2 damper control to KFCC terminals R1 and G1 and R2 and G2 as indicated on Greenheck drawing.
8) Electrical Contractor to wire RTU 1 & 2 control (10 amp max) circuits to KFCC dry contacts C3 and NC3 for RTU 1 and C4 and NC4 for RTU 2 to shutdown units in a fire.

Sequence of Operation

1) Turn fan switch on. Fans and fryer and griddle receptacles will be energized.
2) Turn on RTU 1 & RTU 2.
3) Before fire system agent tanks are installed, manually trigger fire system while fan switch is on. This should accomplish the following:
   - Shunt trip breaker will trip causing a loss of power to fryer and griddle receptacles.
   - Gas valve will close shutting gas off to the fryer and griddle.
   - Exhaust fans will remain on.
   - RTU 1 & 2 will shut down.
1) Put fire system in the "cocked" position and reset shunt trip breaker. Power will be restored to equipment and RTU's.
2) Turn fan switch to "OFF" position. This will shut down power to receptacles and exhaust fans. RTU outside air dampers will close. RTU's will remain operational providing 100% return air only.

SAVANT Engineering, LLC
5064 Roswell Road, Suite D-301
Sandy Springs GA 30342 770.319.7400
Project 23090.002 ©2024
COA#: PEF004211
EXPIRES: 6/30/2024

ARCHITECT OF RECORD:
THOMAS E. MORGAN, JR.
ARCHITECT
423 FISCHER TRAIL
ELLIJAY, GEORGIA 30540

SEAL:
GEORGIA REGISTERED No. PE025480 PROFESSIONAL ENGINEER RAMON G. VELAZQUEZ

MRP DESIGN GROUP
3450 Acworth Due West Road
Building 100, Suite 120
Kennesaw, Georgia 30144
P. 770-917-9172
F. 770-917-9470
www.mrpdesign.com

RELEASED FOR CONSTRUCTION

ISSUES / REVISIONS:

DATE	DESCRIPTION

DRAWN BY: RGV
CHK'D BY: RGV
PROJECT TITLE:

Location: ROCKMART, GA

Culver Franchising System, Inc.
1240 Water Street
Prairie du Sac, WI 53578
608-643-7980

METRO MIRROR L 2022

SHEET TITLE:

H.V.A.C. HOOD, FAN & FIRE SUPPRESSION

PROJECT NO: 23061

M404

THESE PLANS ARE THE PROPERTY OF MRP DESIGN GROUP, INC. AND ARE SUBJECT TO FEDERAL COPYRIGHT LAWS. ANY USE OF SAME WITHOUT THE EXPRESS WRITTEN PERMISSION OF MRP DESIGN GROUP, INC. IS STRICTLY PROHIBITED