

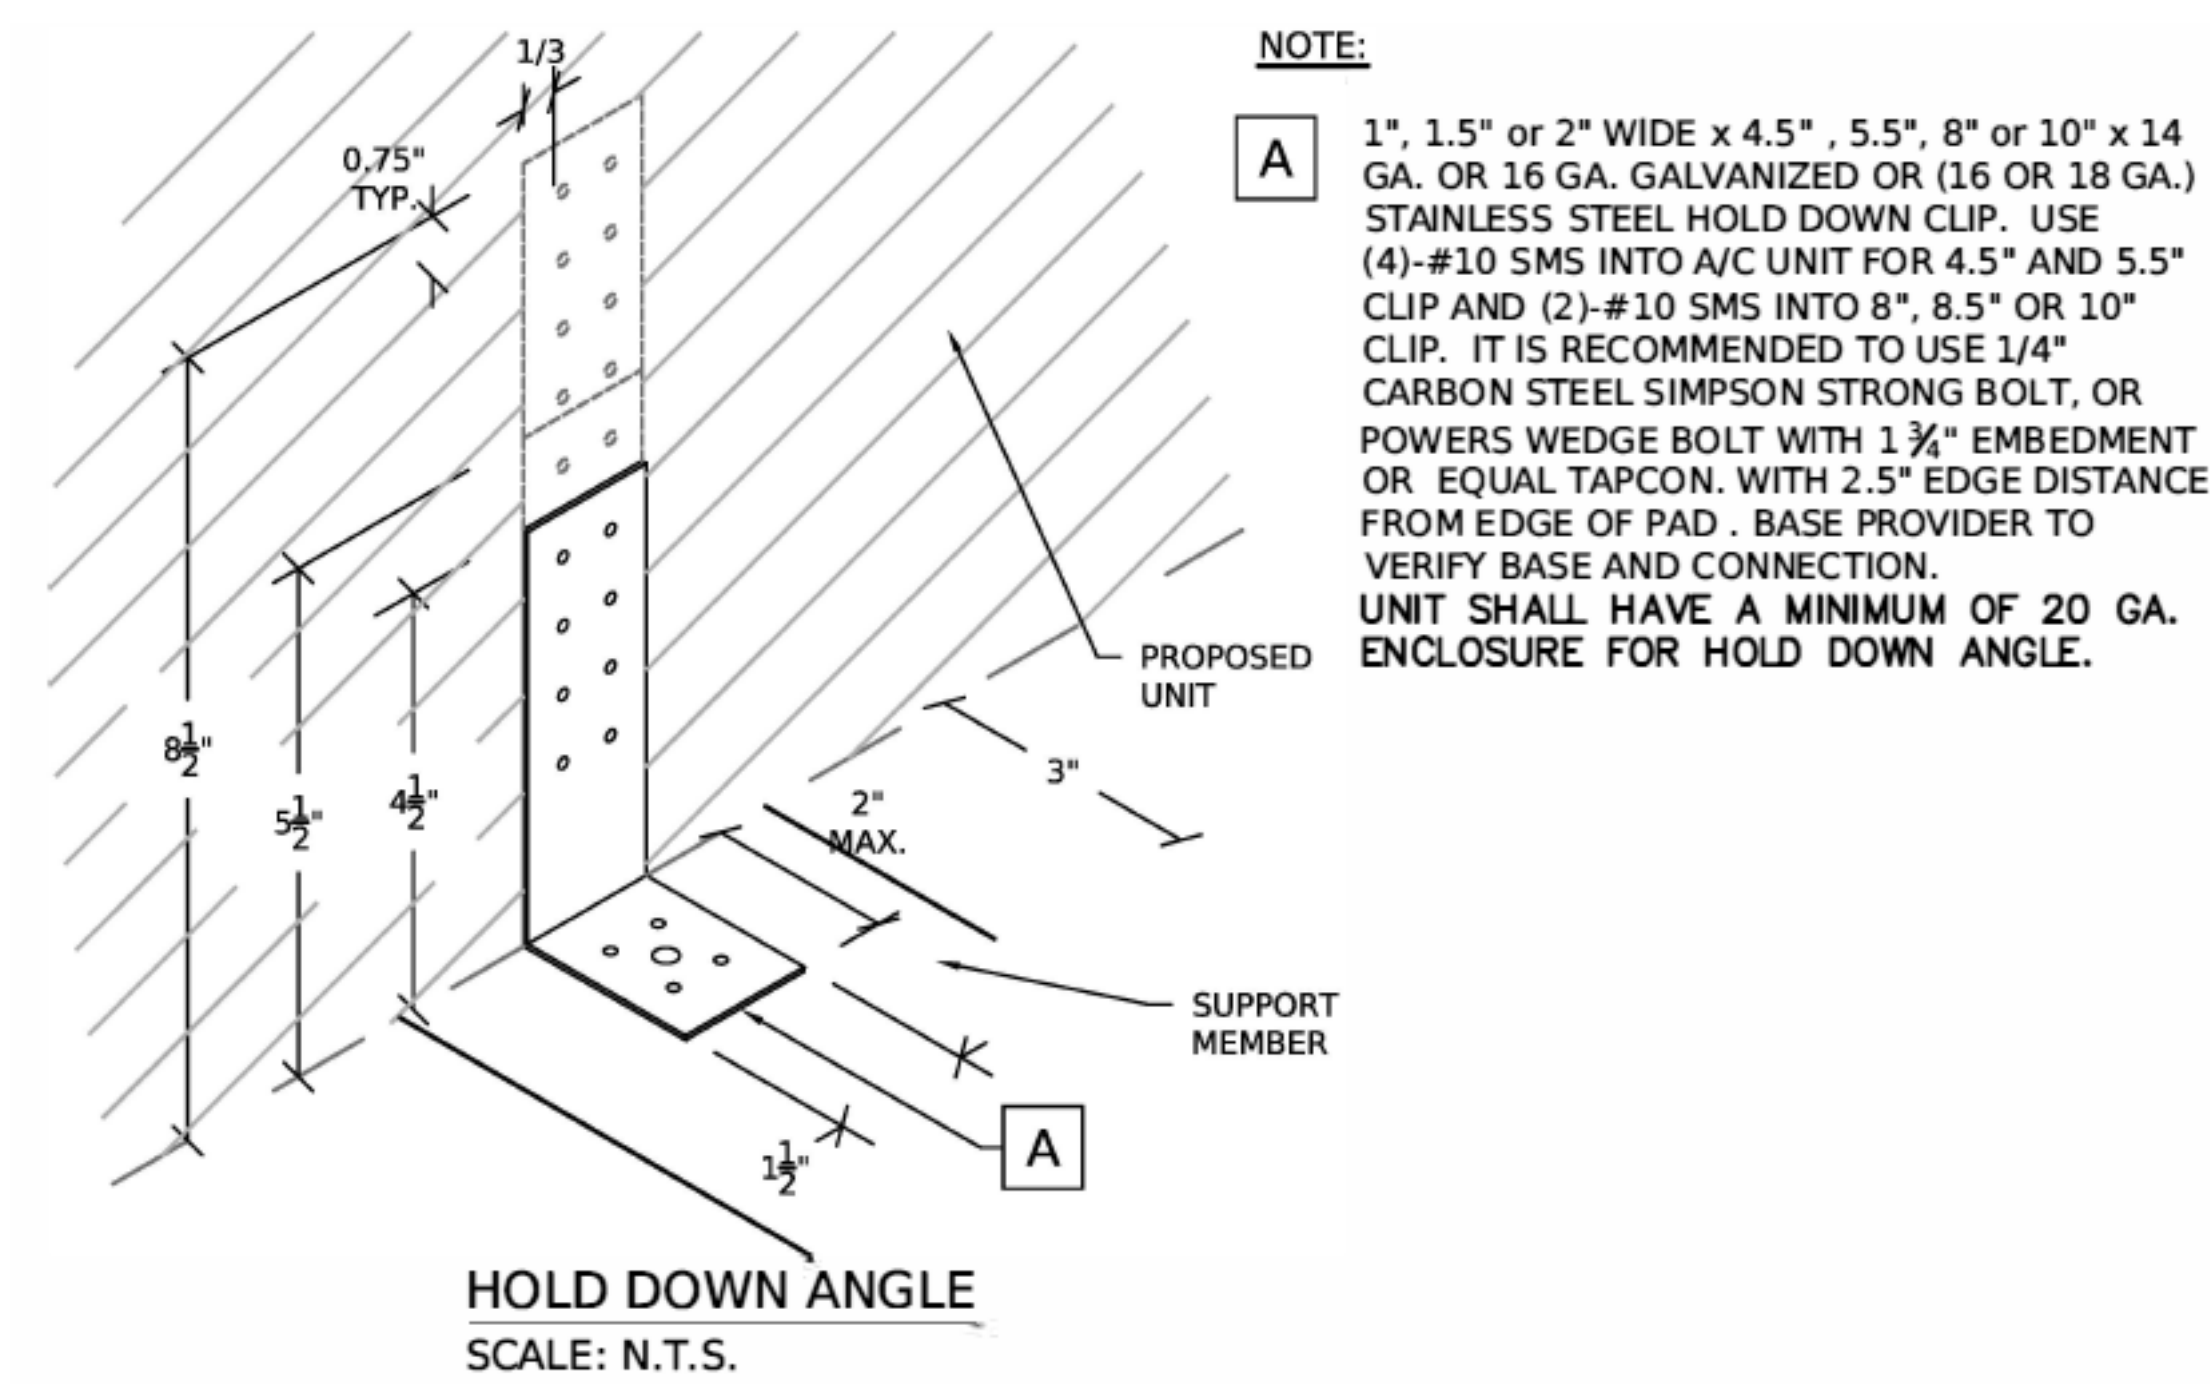
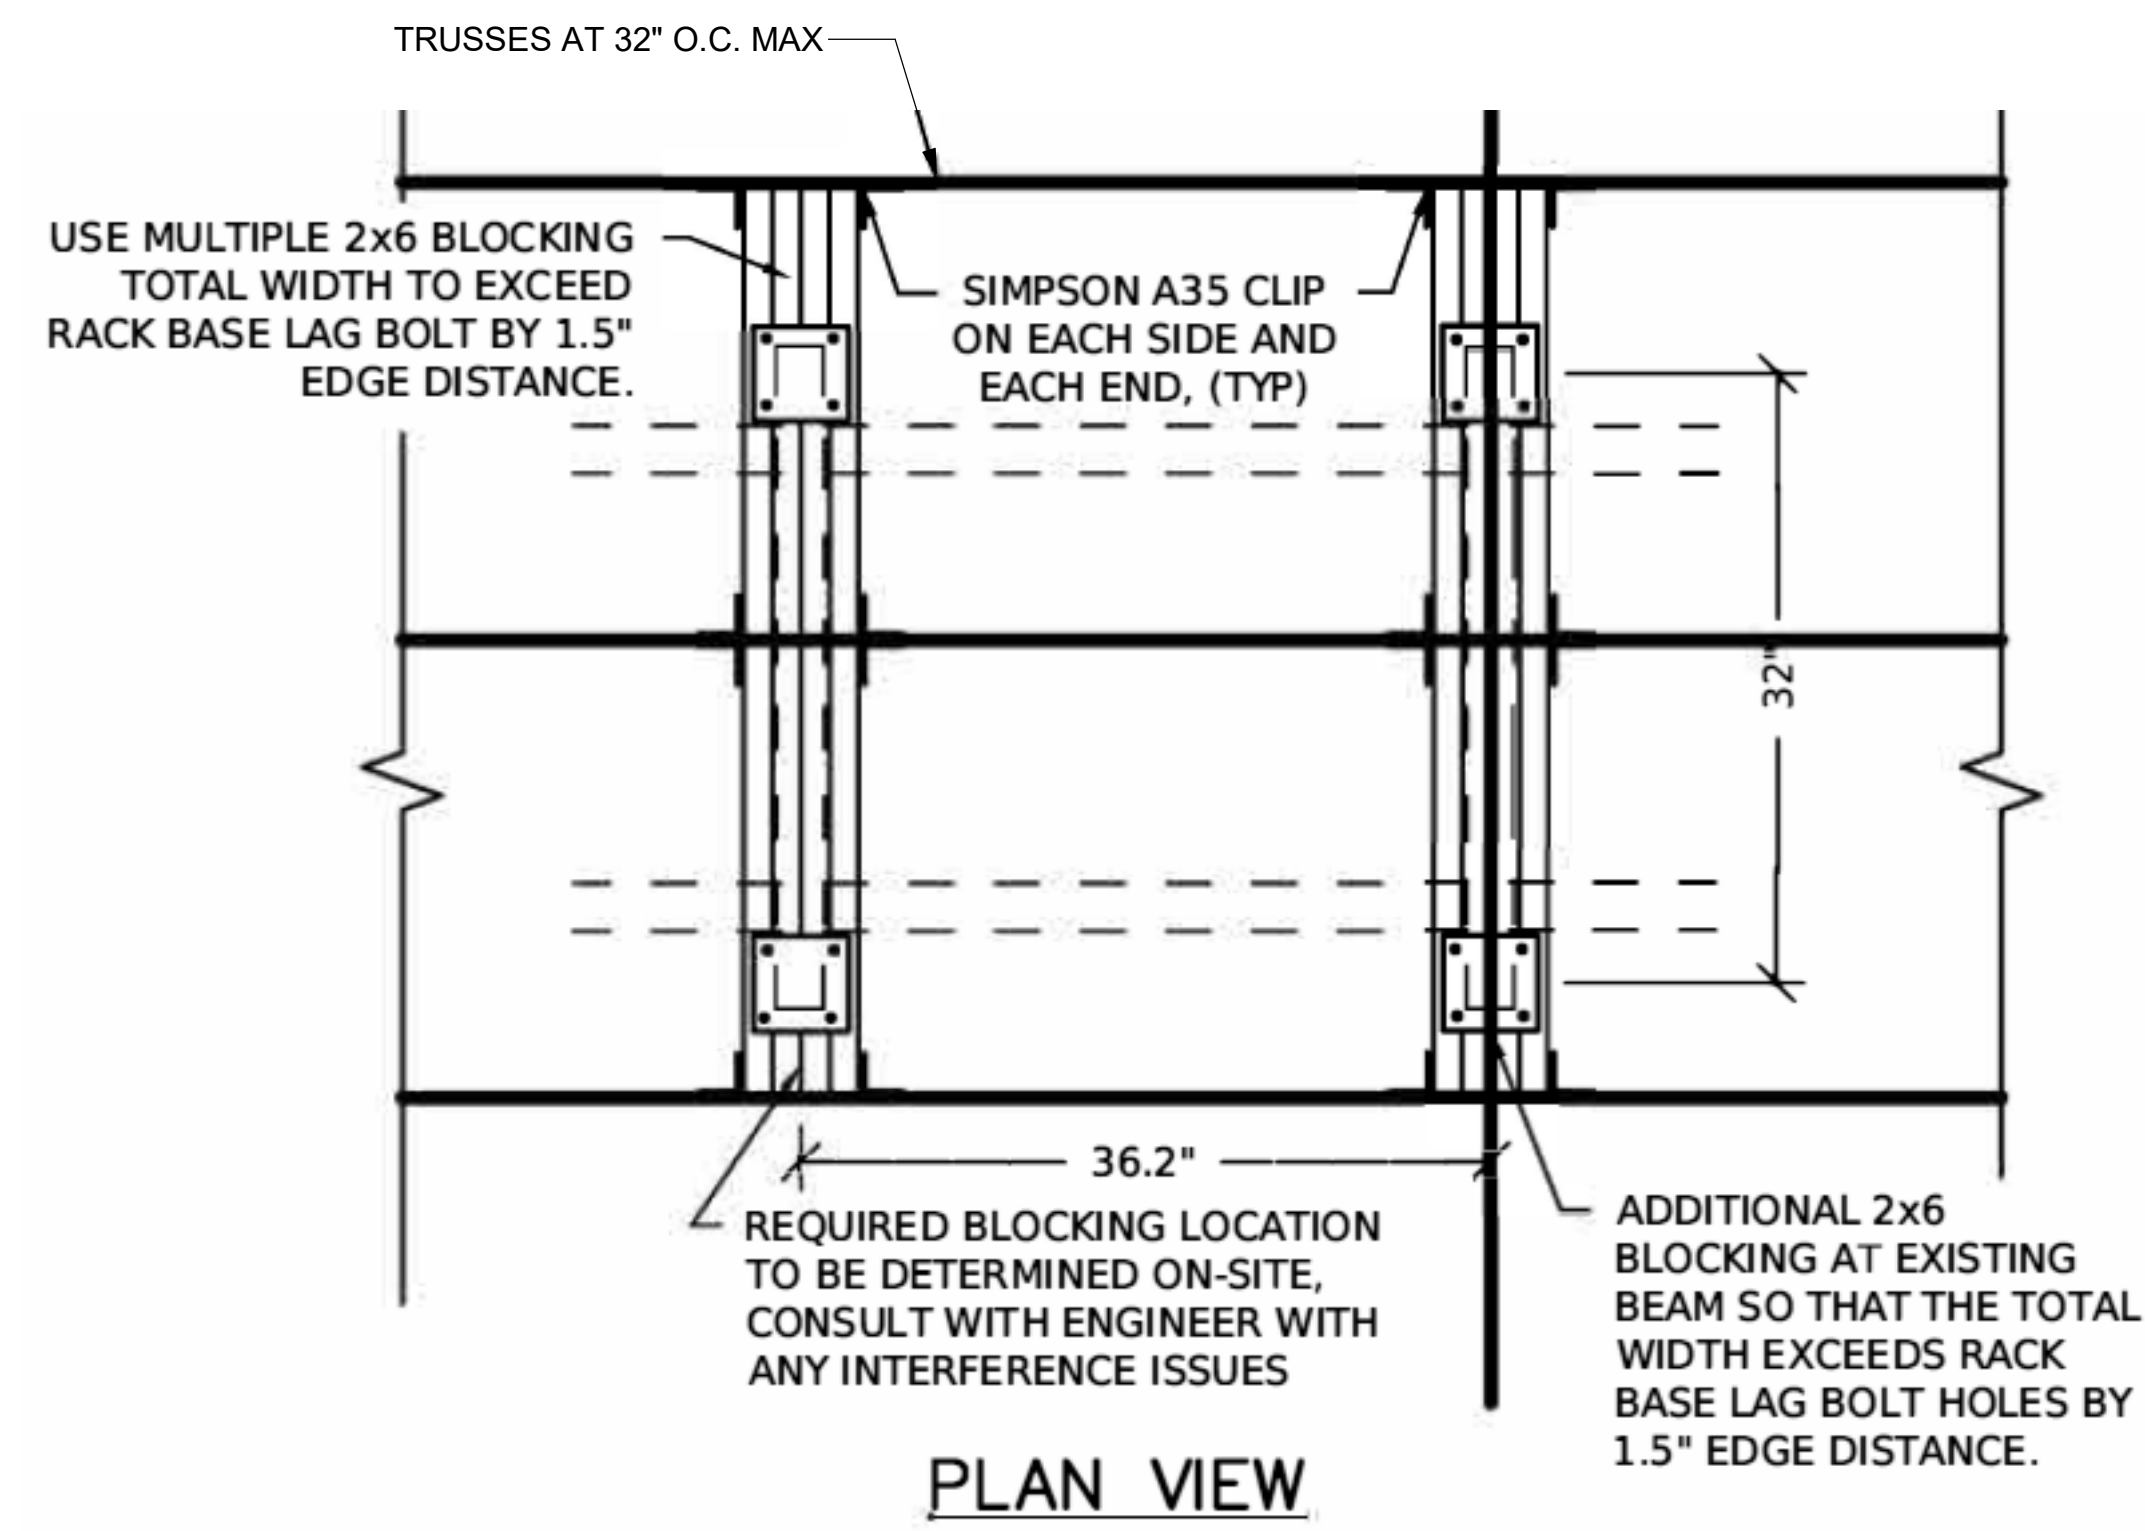



3 RTU CURB BRACKET
NTS

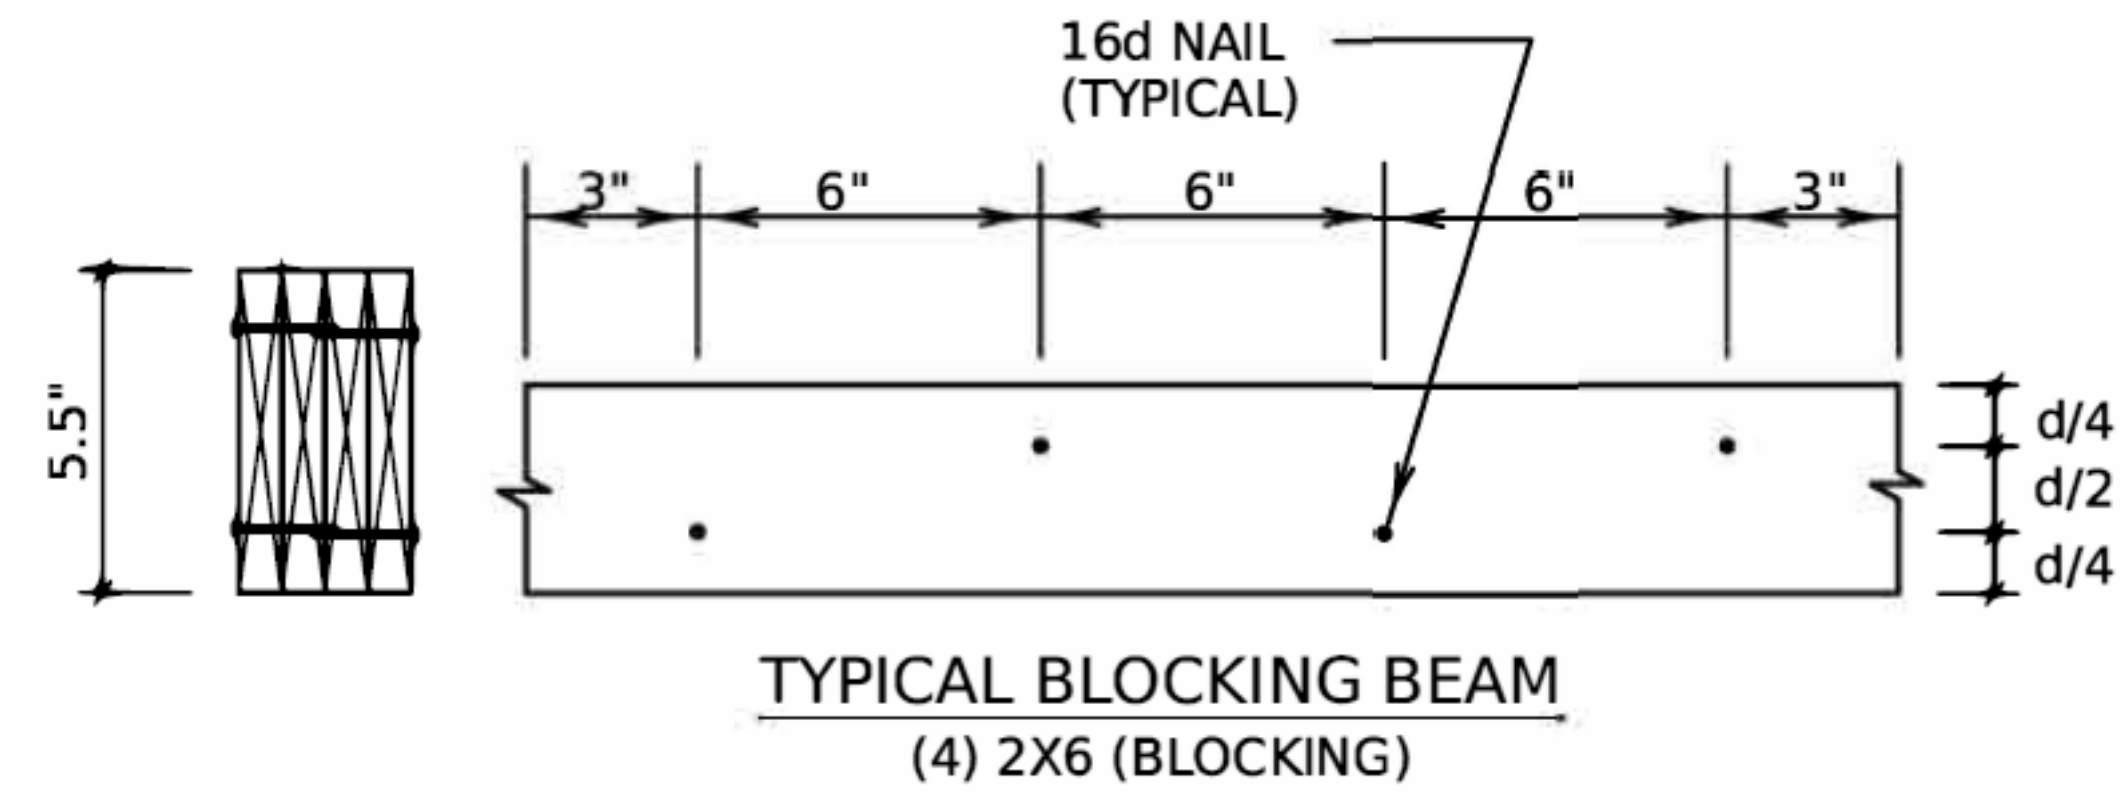


5 CONDENSER STAND DETAILS
NOT TO SCALE

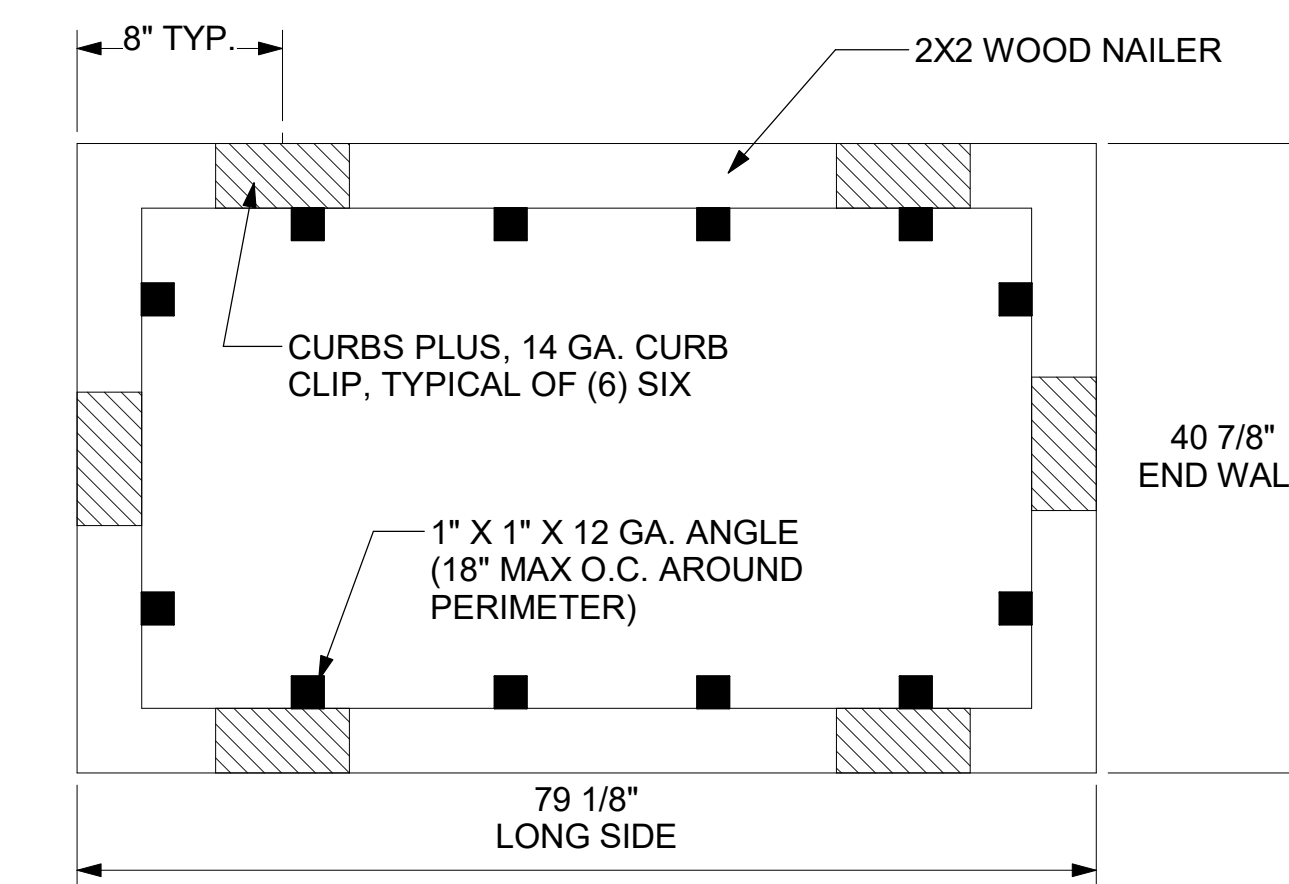

LENNOX LGT MODELS 024 THRU 072

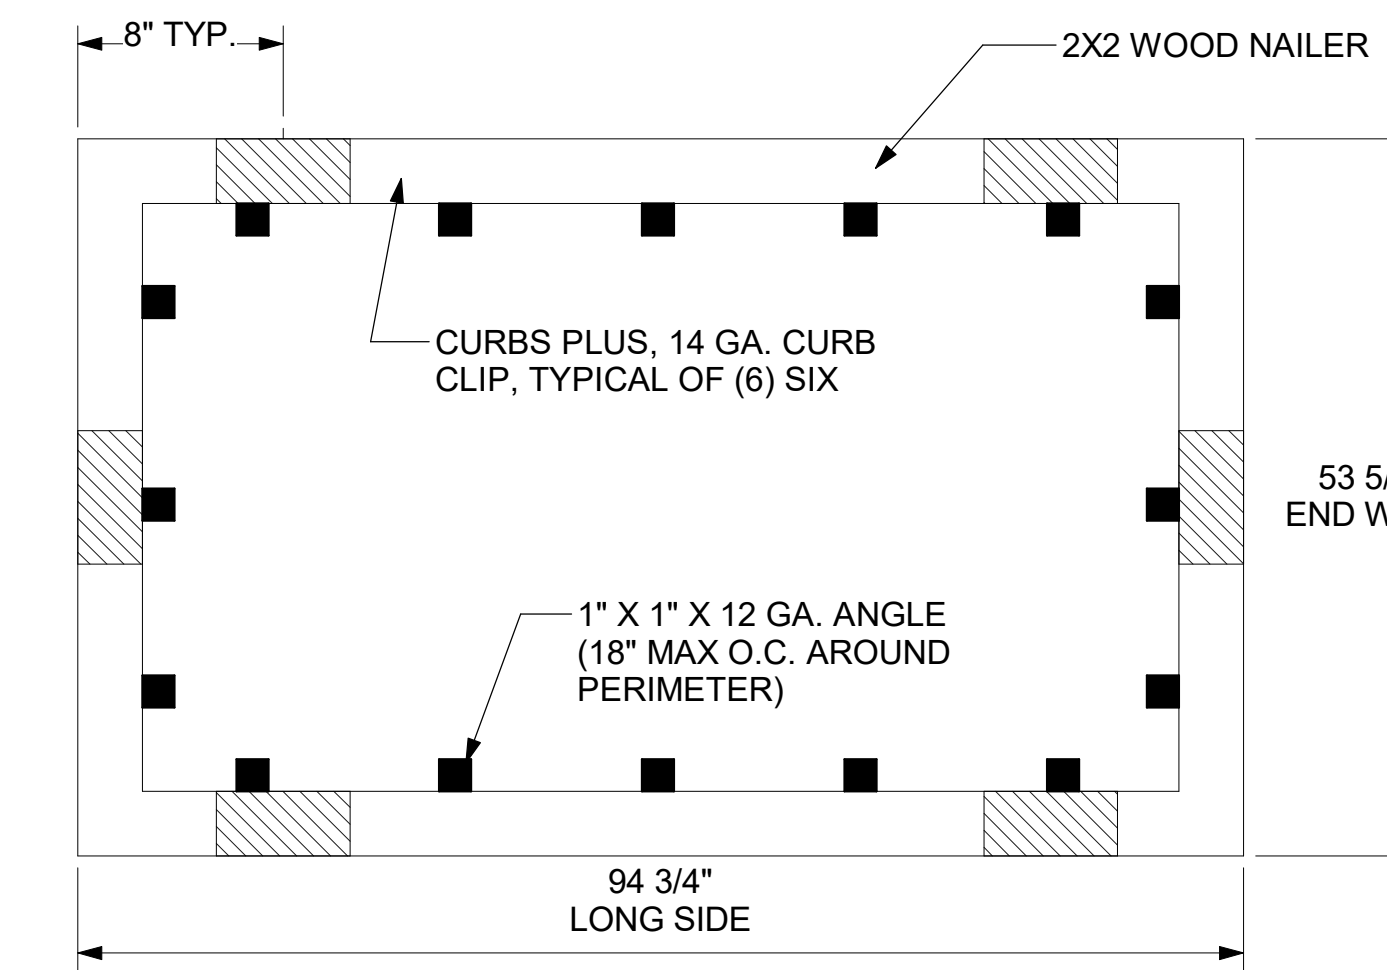


LENNOX LGT MODELS 092 THRU 150

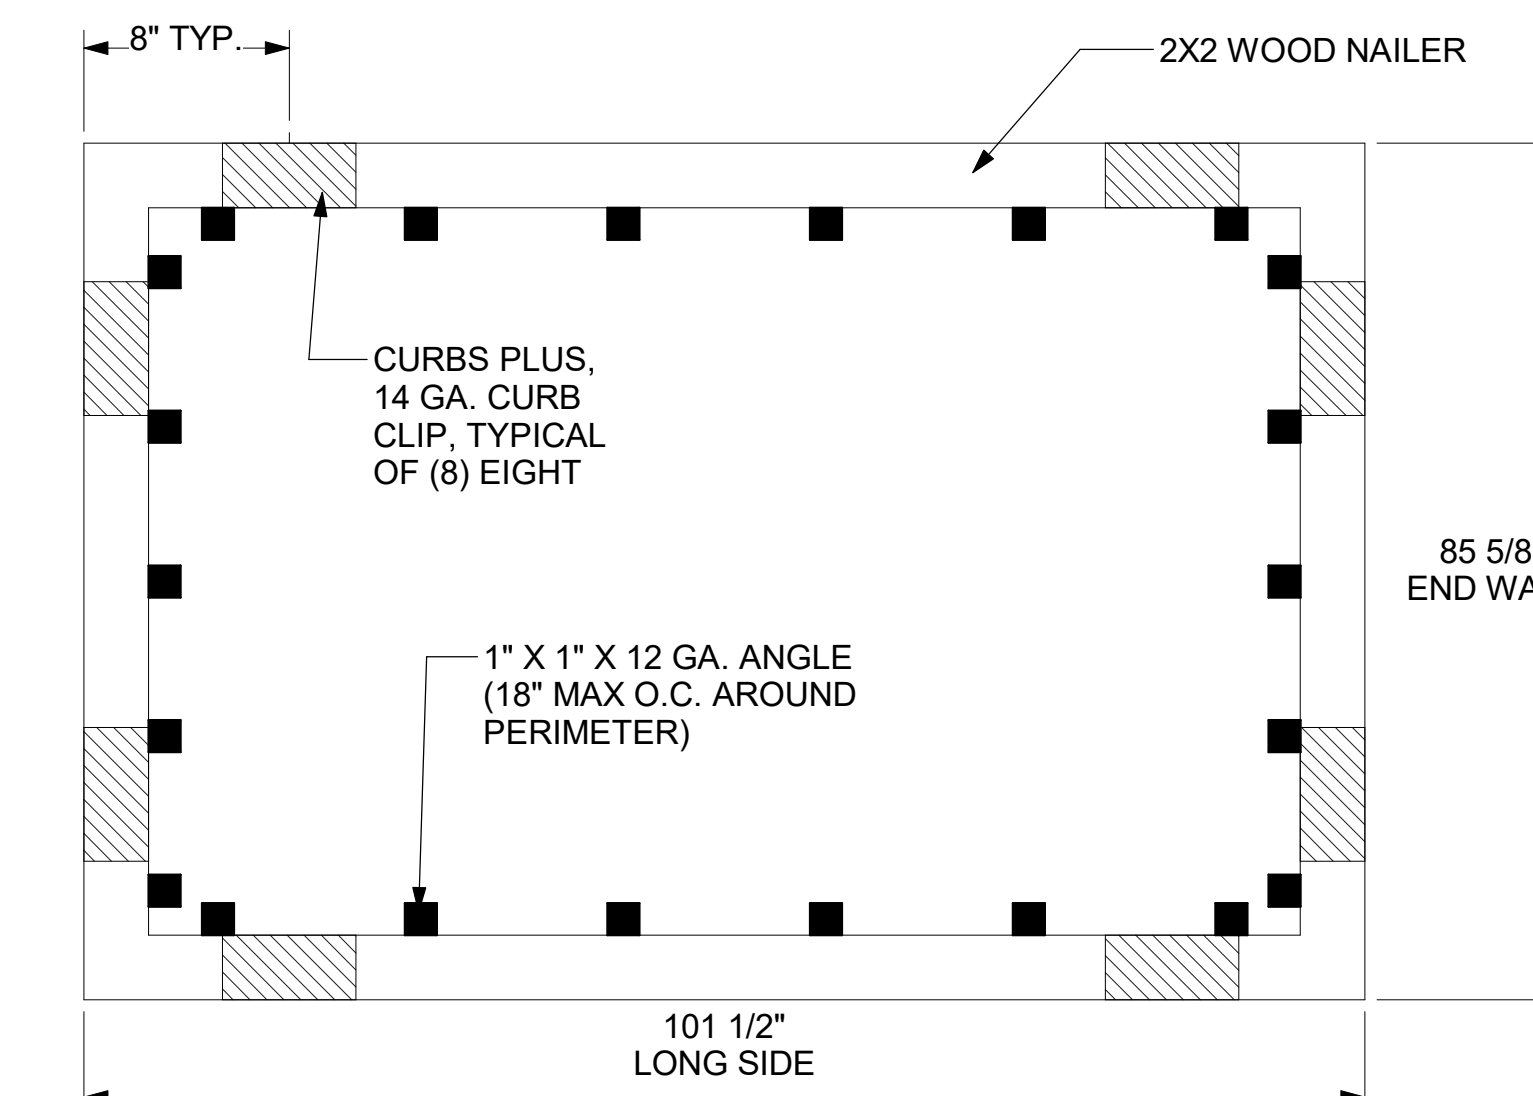

LENNOX LGT MODELS 156 THRU 300


4 RTU CURB CLIP INSTALLATION
NOT TO SCALE

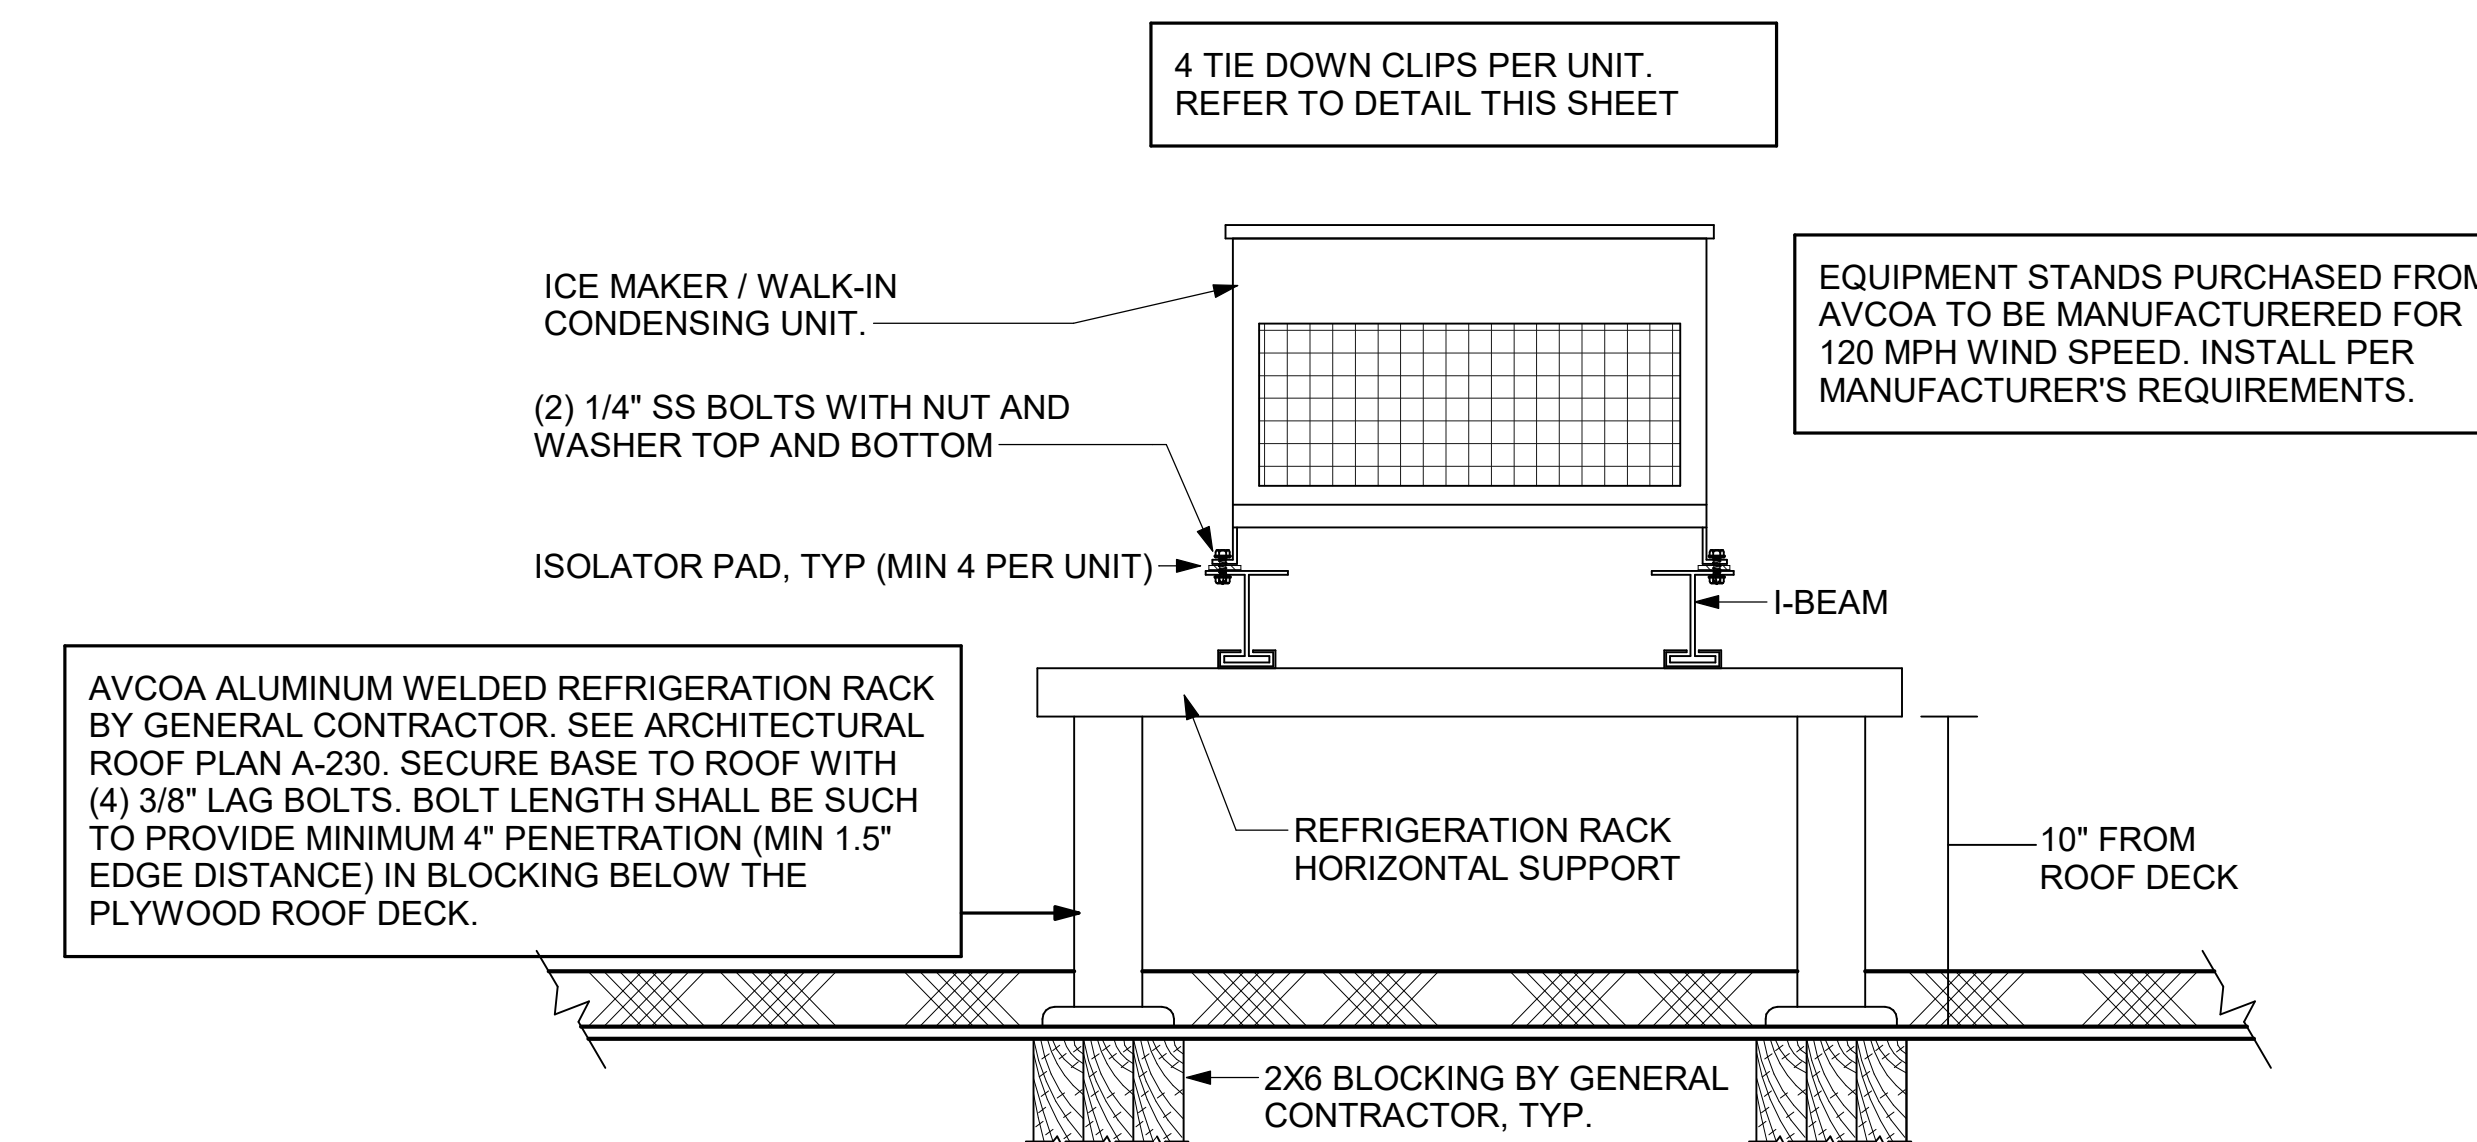

1 CONDENSING UNIT TIE DOWN DETAIL
NTS



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.


SHEET WIND DETAILS
SHEET NUMBER

M-503



Chick-fil-A

Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske
& Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



5/15/25

CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661


BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION
6 05/15/25 IFC Set

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.


SHEET
EQUIPMENT AND
DUCTWORK PLAN -
LENNOX
SHEET NUMBER

M-101L

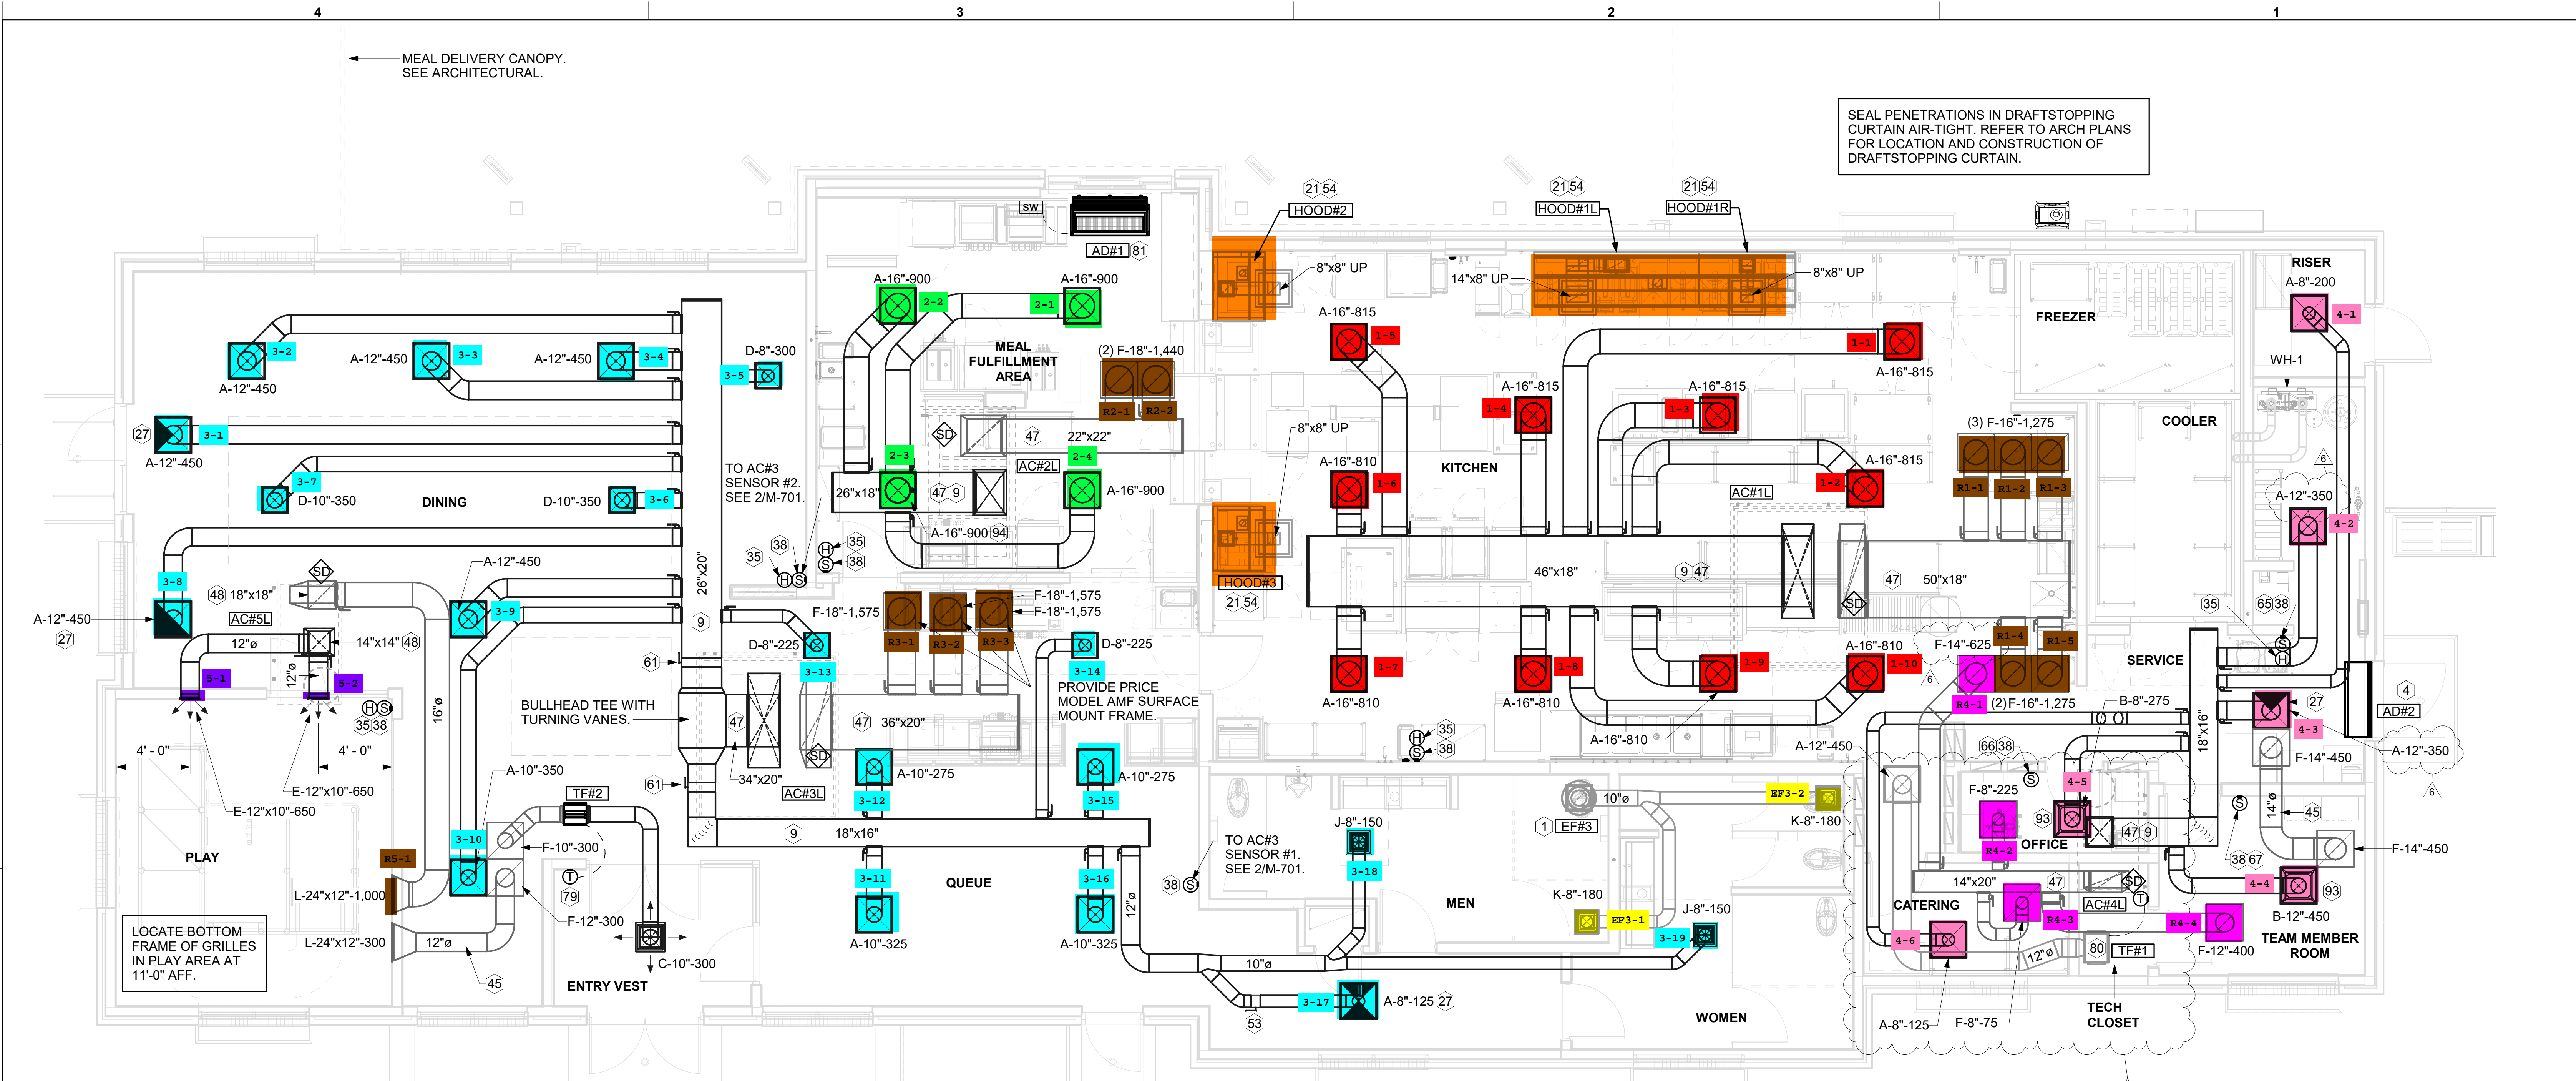

1 EQUIPMENT AND DUCTWORK PLAN

1/4" = 1'-0"

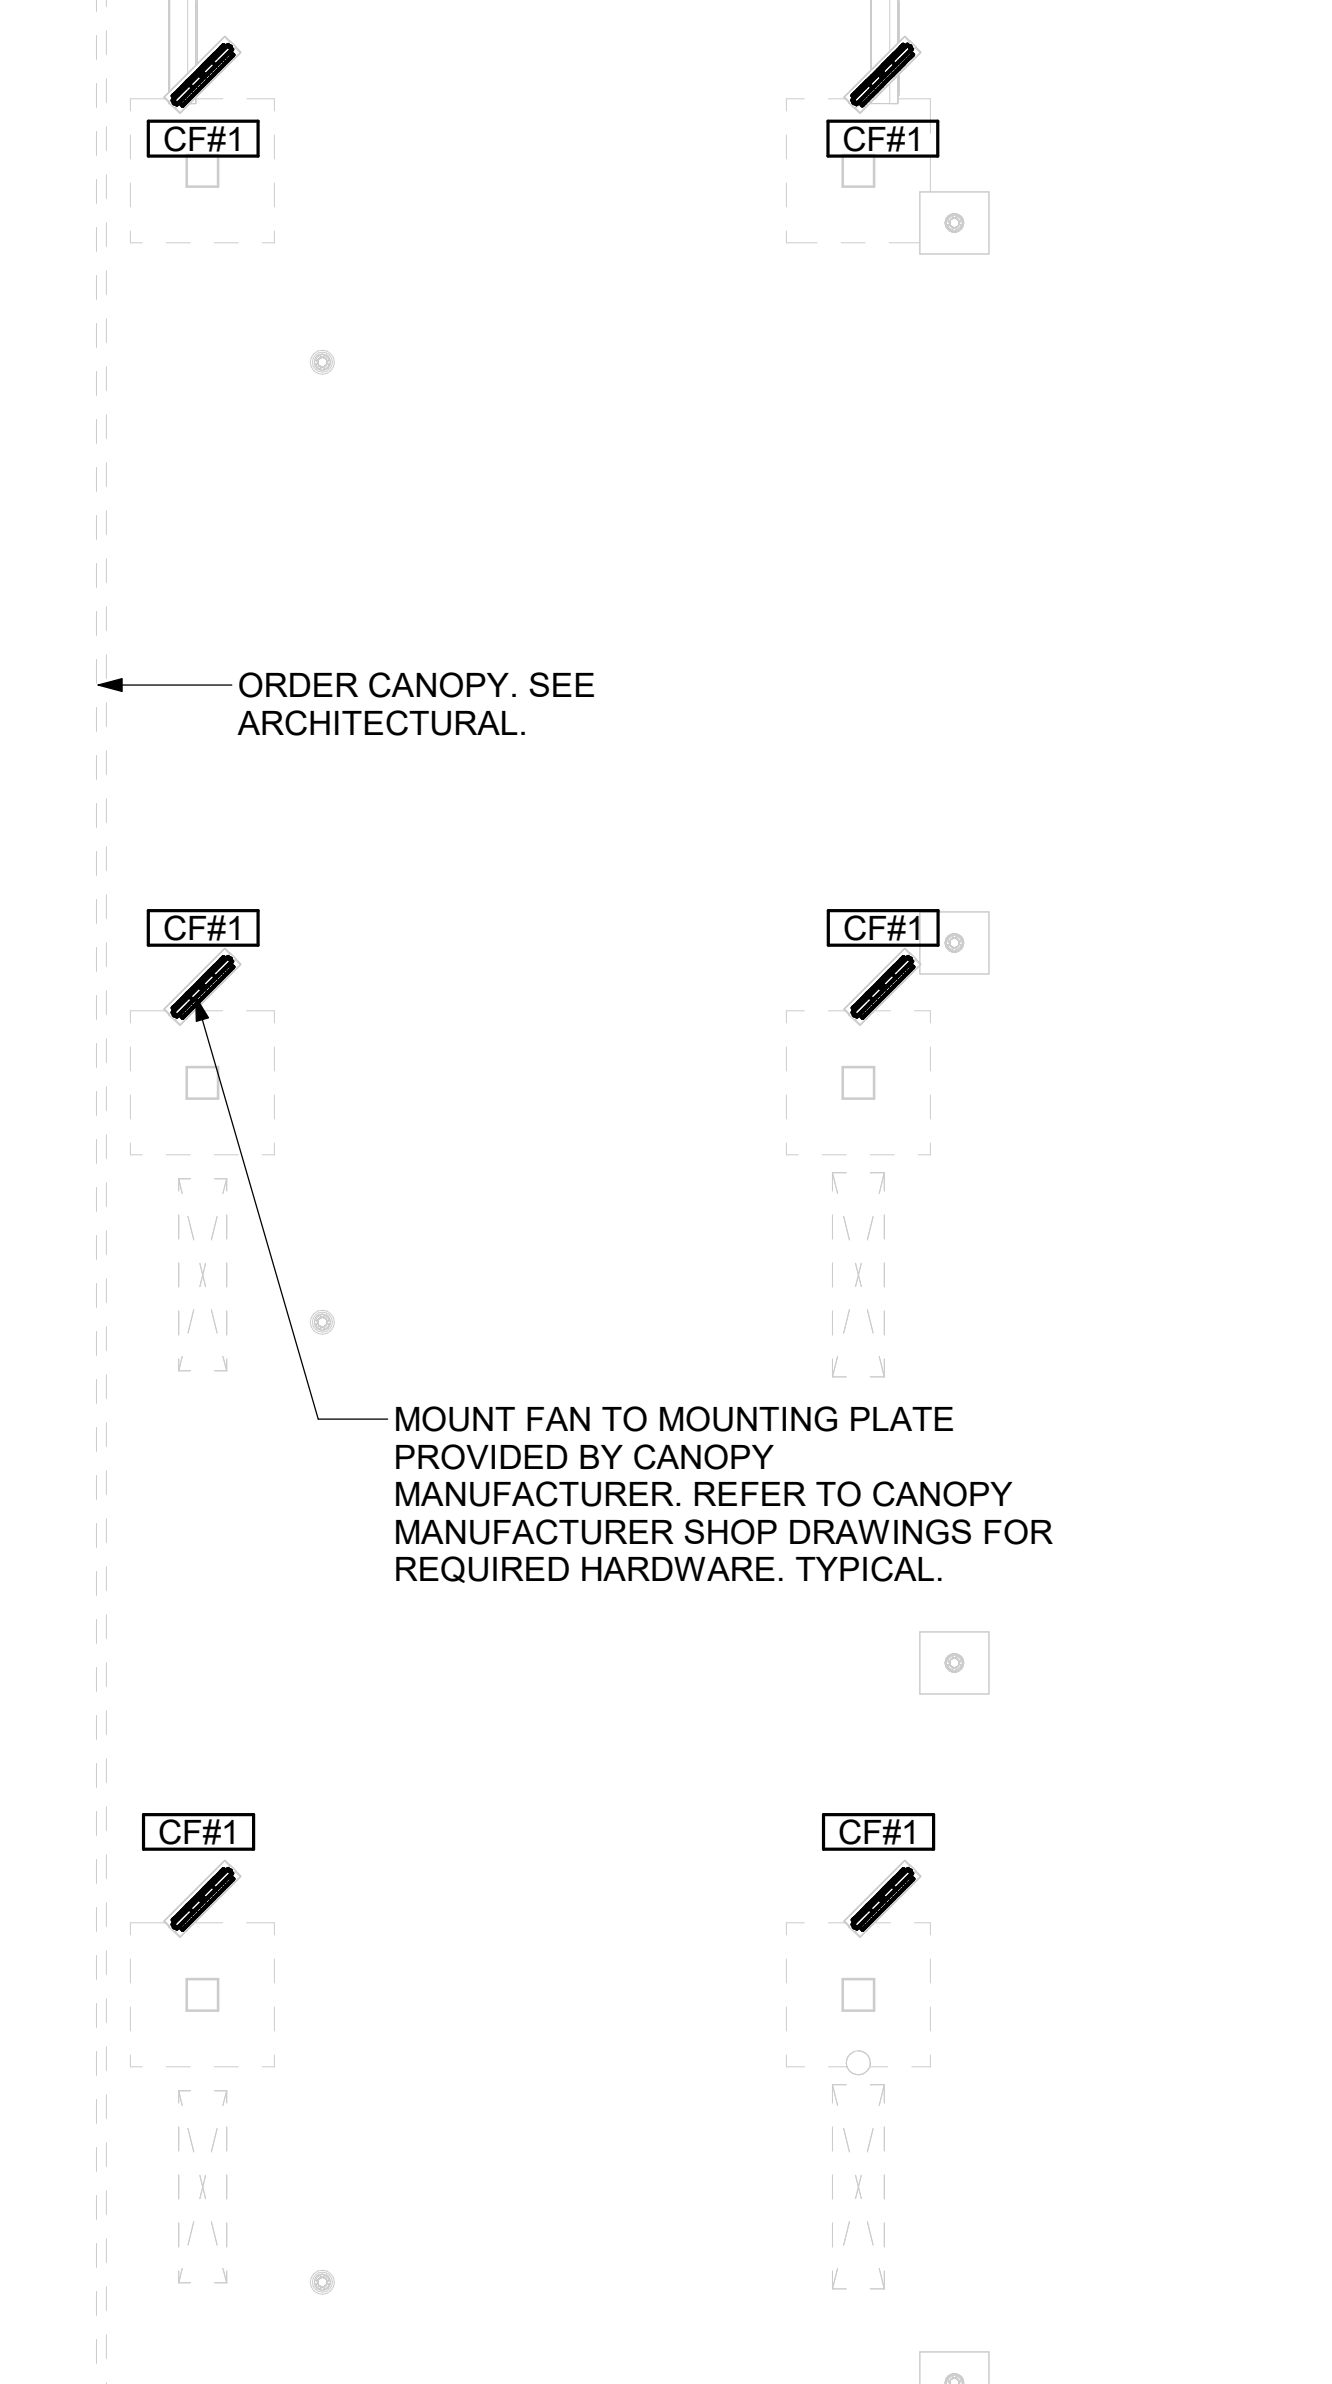

2 MECHANICAL FLOOR PLAN - ORDER CANOPY

1/4" = 1'-0"

AIR BALANCE SCHEDULE








MARK	SUPPLY AIR	RETURN AIR	OUTSIDE AIR	EXHAUST AIR	BUILDING POSITIVE PRESSURE
AC#1L	8,125	6,375	1,750	0	
AC#2L	3,600	2,880	720	0	
AC#3L	6,125	4,725	1,400	0	
AC#4L	1,750	1,325	425	0	
AC#5L	1,300	1,000	300	0	
EF#1	0	0	0	1,913	
EF#2	0	0	0	1,402	
EF#3	0	0	0	360	
	20,900	16,305	4,595	3,675	920

H.E.S. SYSTEM

MECHANICAL CONTRACTOR TO PROVIDE AND INSTALL SUNCOAST H.E.S. SYSTEM FOR ALL HOODS. SEE HOOD FAN/EQUIPMENT INTERLOCK WIRING DIAGRAM ON M-702 FOR MORE INFORMATION.

KEY NOTES

- 10" UP THRU ROOF.
- AIR CURTAIN MOUNTED OVER DOOR HEADER AT 7'-2" AFF TO BOTTOM OF UNIT. PROVIDE BLOCKING IN WALL BEHIND AIR CURTAIN. USE FACTORY PRE-PUNCHED MOUNTING HOLES ON BACK SIDE OF AIR CURTAIN ONLY. ATTACH AIR CURTAIN TO WALL USING 3/8" LAG BOLTS. LENGTH AS REQUIRED TO FULLY PENETRATE BLOCKING. LOCATE MAGNETIC CONTACT TYPE MICROSWITCH IN DOOR FRAME ON STRIKE SIDE.
- BRANCH TAKE-OFFS ARE NOT TO BE LOCATED CLOSER THAN 3'-0" FROM ANY OFFSET OR ELBOW INCLUDING THE SUPPLY AIR DROP FROM CURB.
- HALTON KBD DAMPER AT HOOD COLLAR BY MECHANICAL CONTRACTOR. SEE HOOD ELEVATIONS ON M-201 FOR LOCATION.
- MECHANICAL CONTRACTOR TO CLOSE THE AIR PATTERN DEFLECTORS ON SHADED SIDE.
- MOUNT HUMIDITY SENSOR ON WALL ABOVE SPACE TEMP SENSOR AND ROUTE WIRING TO UNIT ON ROOF.
- MOUNT REMOTE SENSOR ON WALL AT 5'-0" AFF U.N.O. AND ROUTE WIRING BACK TO SUNCOAST TEMP CONTROL PANEL. FOR SENSOR SERVING AC#1, COORDINATE EXACT LOCATION WITH KITCHEN EQUIPMENT.
- TRANSFER AIR DUCT, NO BALANCING DAMPERS AT GRILLES.
- TRANSITION IN VERTICAL DROP FROM FULL SIZE OF CURB OPENING TO SIZE SHOWN. TRANSITION WITHIN CURB WHERE REQUIRED TO AVOID STRUCTURE. WHERE SUPPLY DUCT, PROVIDE ELBOWS WITH TURNING VANES. WHERE RETURN DUCT, NO TURNING VANES IN ELBOWS. HORIZONTAL DUCT MINIMUM 10" ABOVE CEILING TO BOTTOM OF DUCT.
- TRANSITION IN VERTICAL DROP FROM FULL SIZE OF CURB OPENING TO SIZE SHOWN. TRANSITION WITHIN CURB WHERE REQUIRED TO AVOID STRUCTURE. STOP VERTICAL DROP A MINIMUM OF 10" ABOVE CEILING.
- RUSKIN MDRS25 MVD W/LOCKING QUADRANT HANDLE.
- SEE ELEVATIONS ON M-201 FOR CJ FAN DUCTING REQUIREMENT.
- PROVIDE RUSKIN CD35 MANUAL BALANCING DAMPER WITH 6" MAXIMUM BLADE WIDTH, OPPOSED BLADE ACTION, LOCKING QUADRANT HANDLE WITH 2" STANDOFF AND 16 GA GALVANIZED BLADE AND FRAME CONSTRUCTION.
- TO AC#4, SENSOR #1. SEE 2/M-701.
- TO AC#4, SENSOR #2. SEE 2/M-701.
- TO AC#4, SENSOR #3. SEE 2/M-701.
- PROVIDE 7 DAY PROGRAMMABLE THERMOSTAT, OCCUPIED/UNOCCUPIED TERMINALS. MOUNT THERMOSTAT ON WALL AT 4'-0" AFF. OCCUPIED SETPOINTS: 75 DEG. F COOLING, 69 DEG. F HEATING; UNOCCUPIED SETPOINTS: 85 DEG. F COOLING, 55 DEG. F HEATING.
- CEILING MOUNTED RECIRCULATING FAN. DUCT AND DISCHARGE TO TYPE 'A' DIFFUSER AS SHOWN. MOUNT THERMOSTAT FOR RECIRCULATING FAN ON WALL AT 4'-0" AFF.
- MOUNT AIR DOOR IN CEILING. CENTERED ON DRIVE-THRU/MFA DOOR OPENING. REFER TO WIRING DIAGRAM ON SHEET M-702 FOR MORE INFORMATION.
- MAXIMUM HEATING AND COOLING AIRFLOWS INDICATED. SET MINIMUM AIRFLOW TO 50 CFM.
- TAKE OFF WITH DAMPER AT THE BOTTOM OF DUCTWORK, TYP.

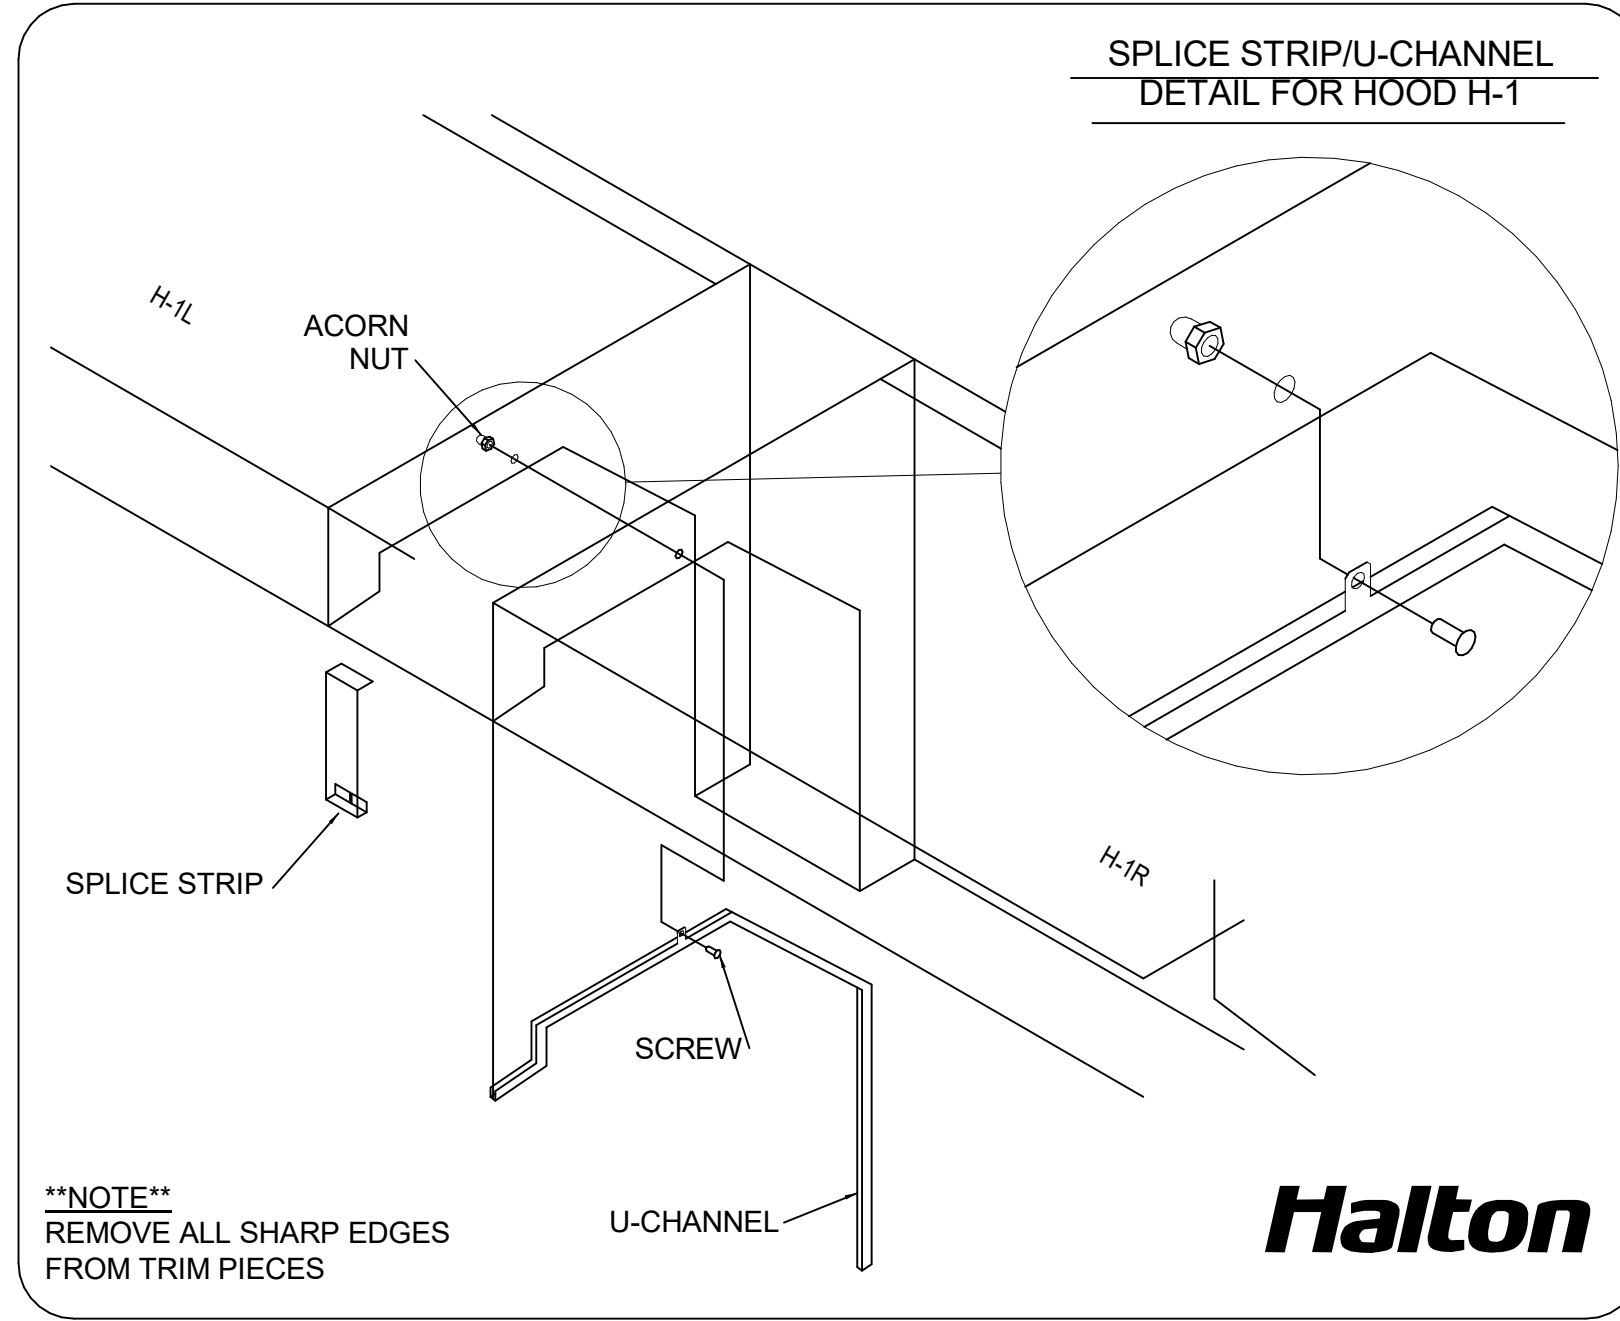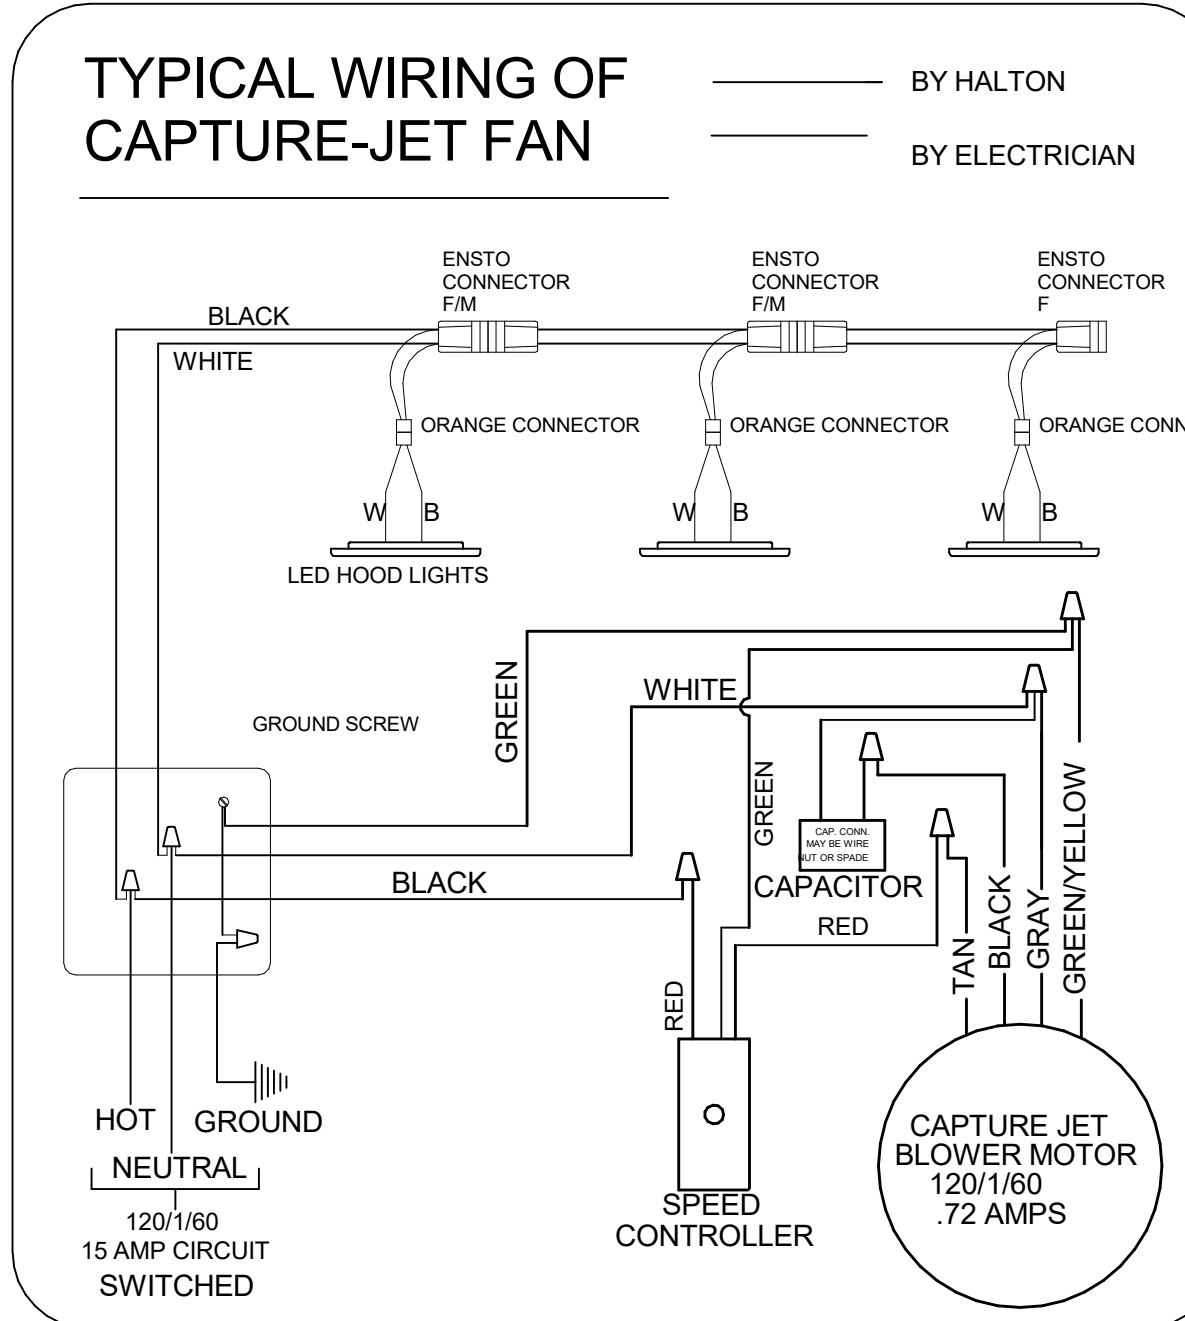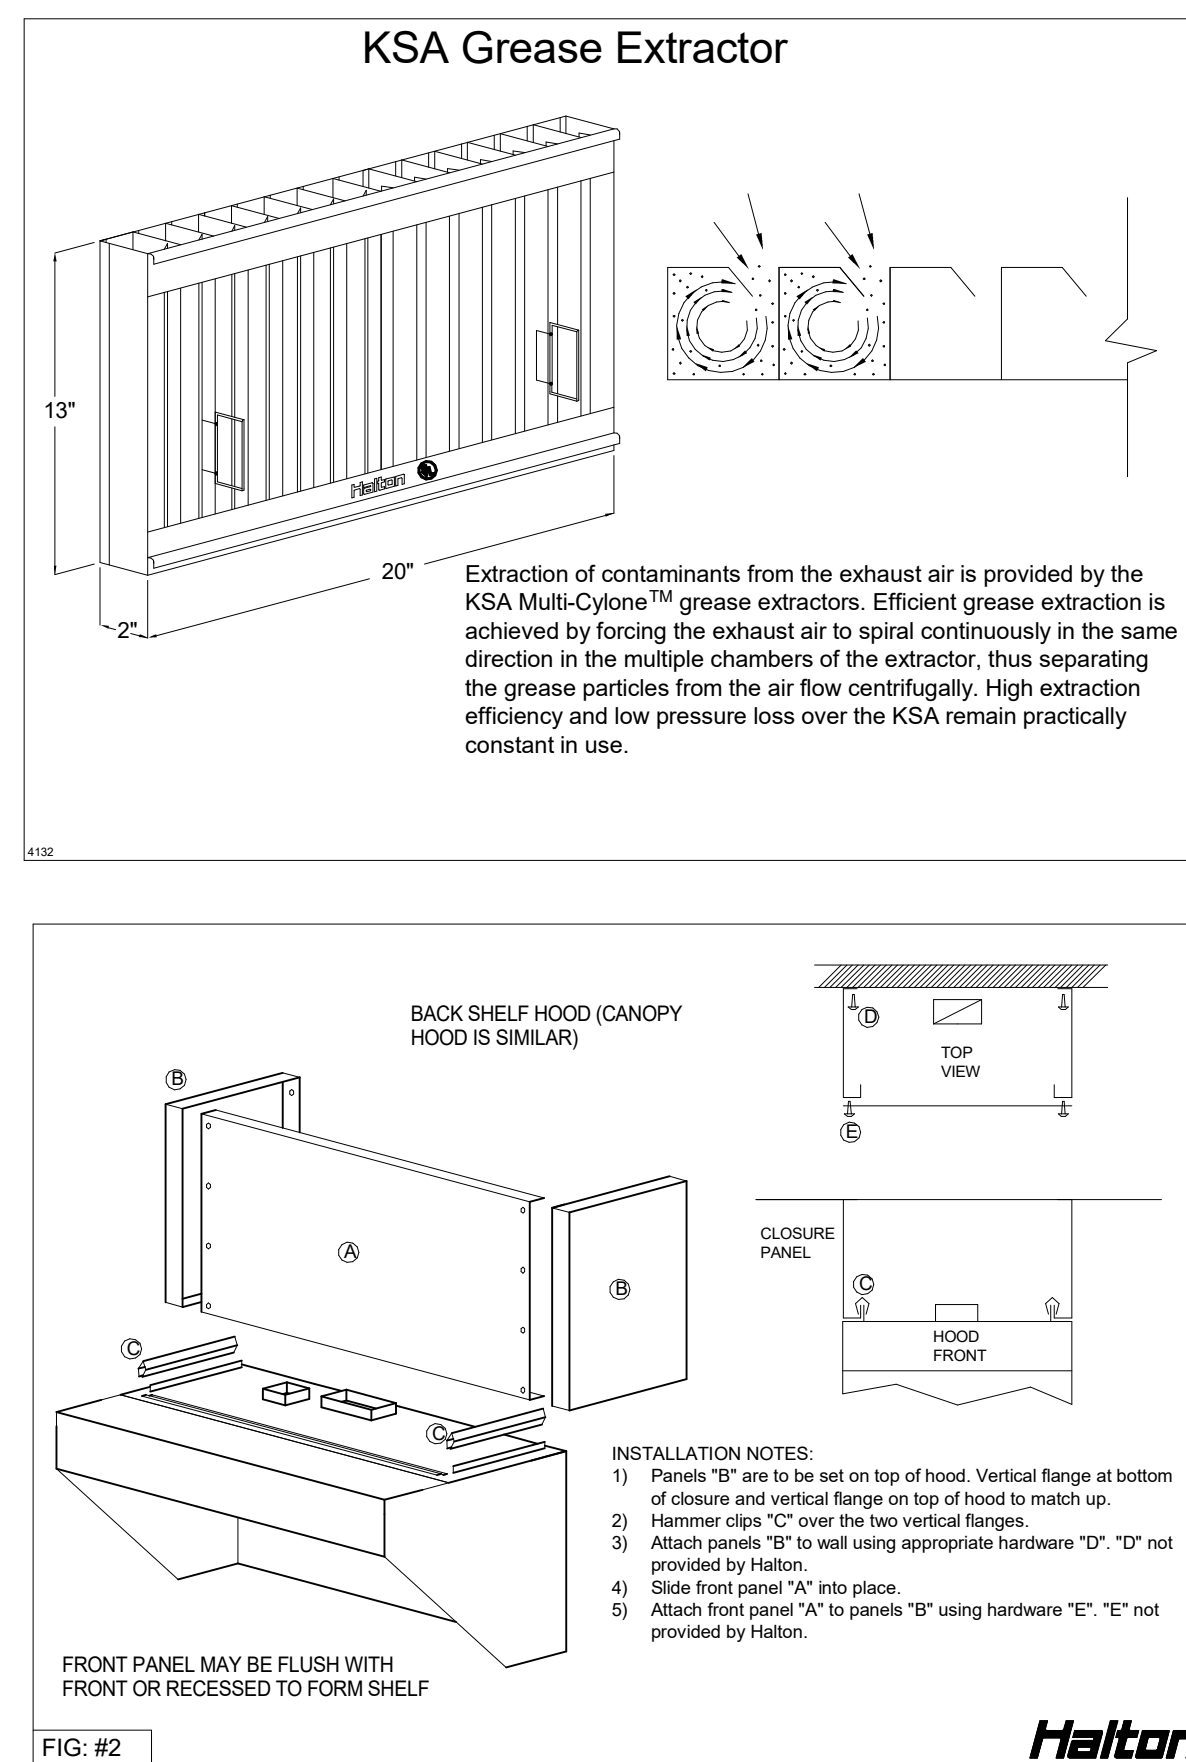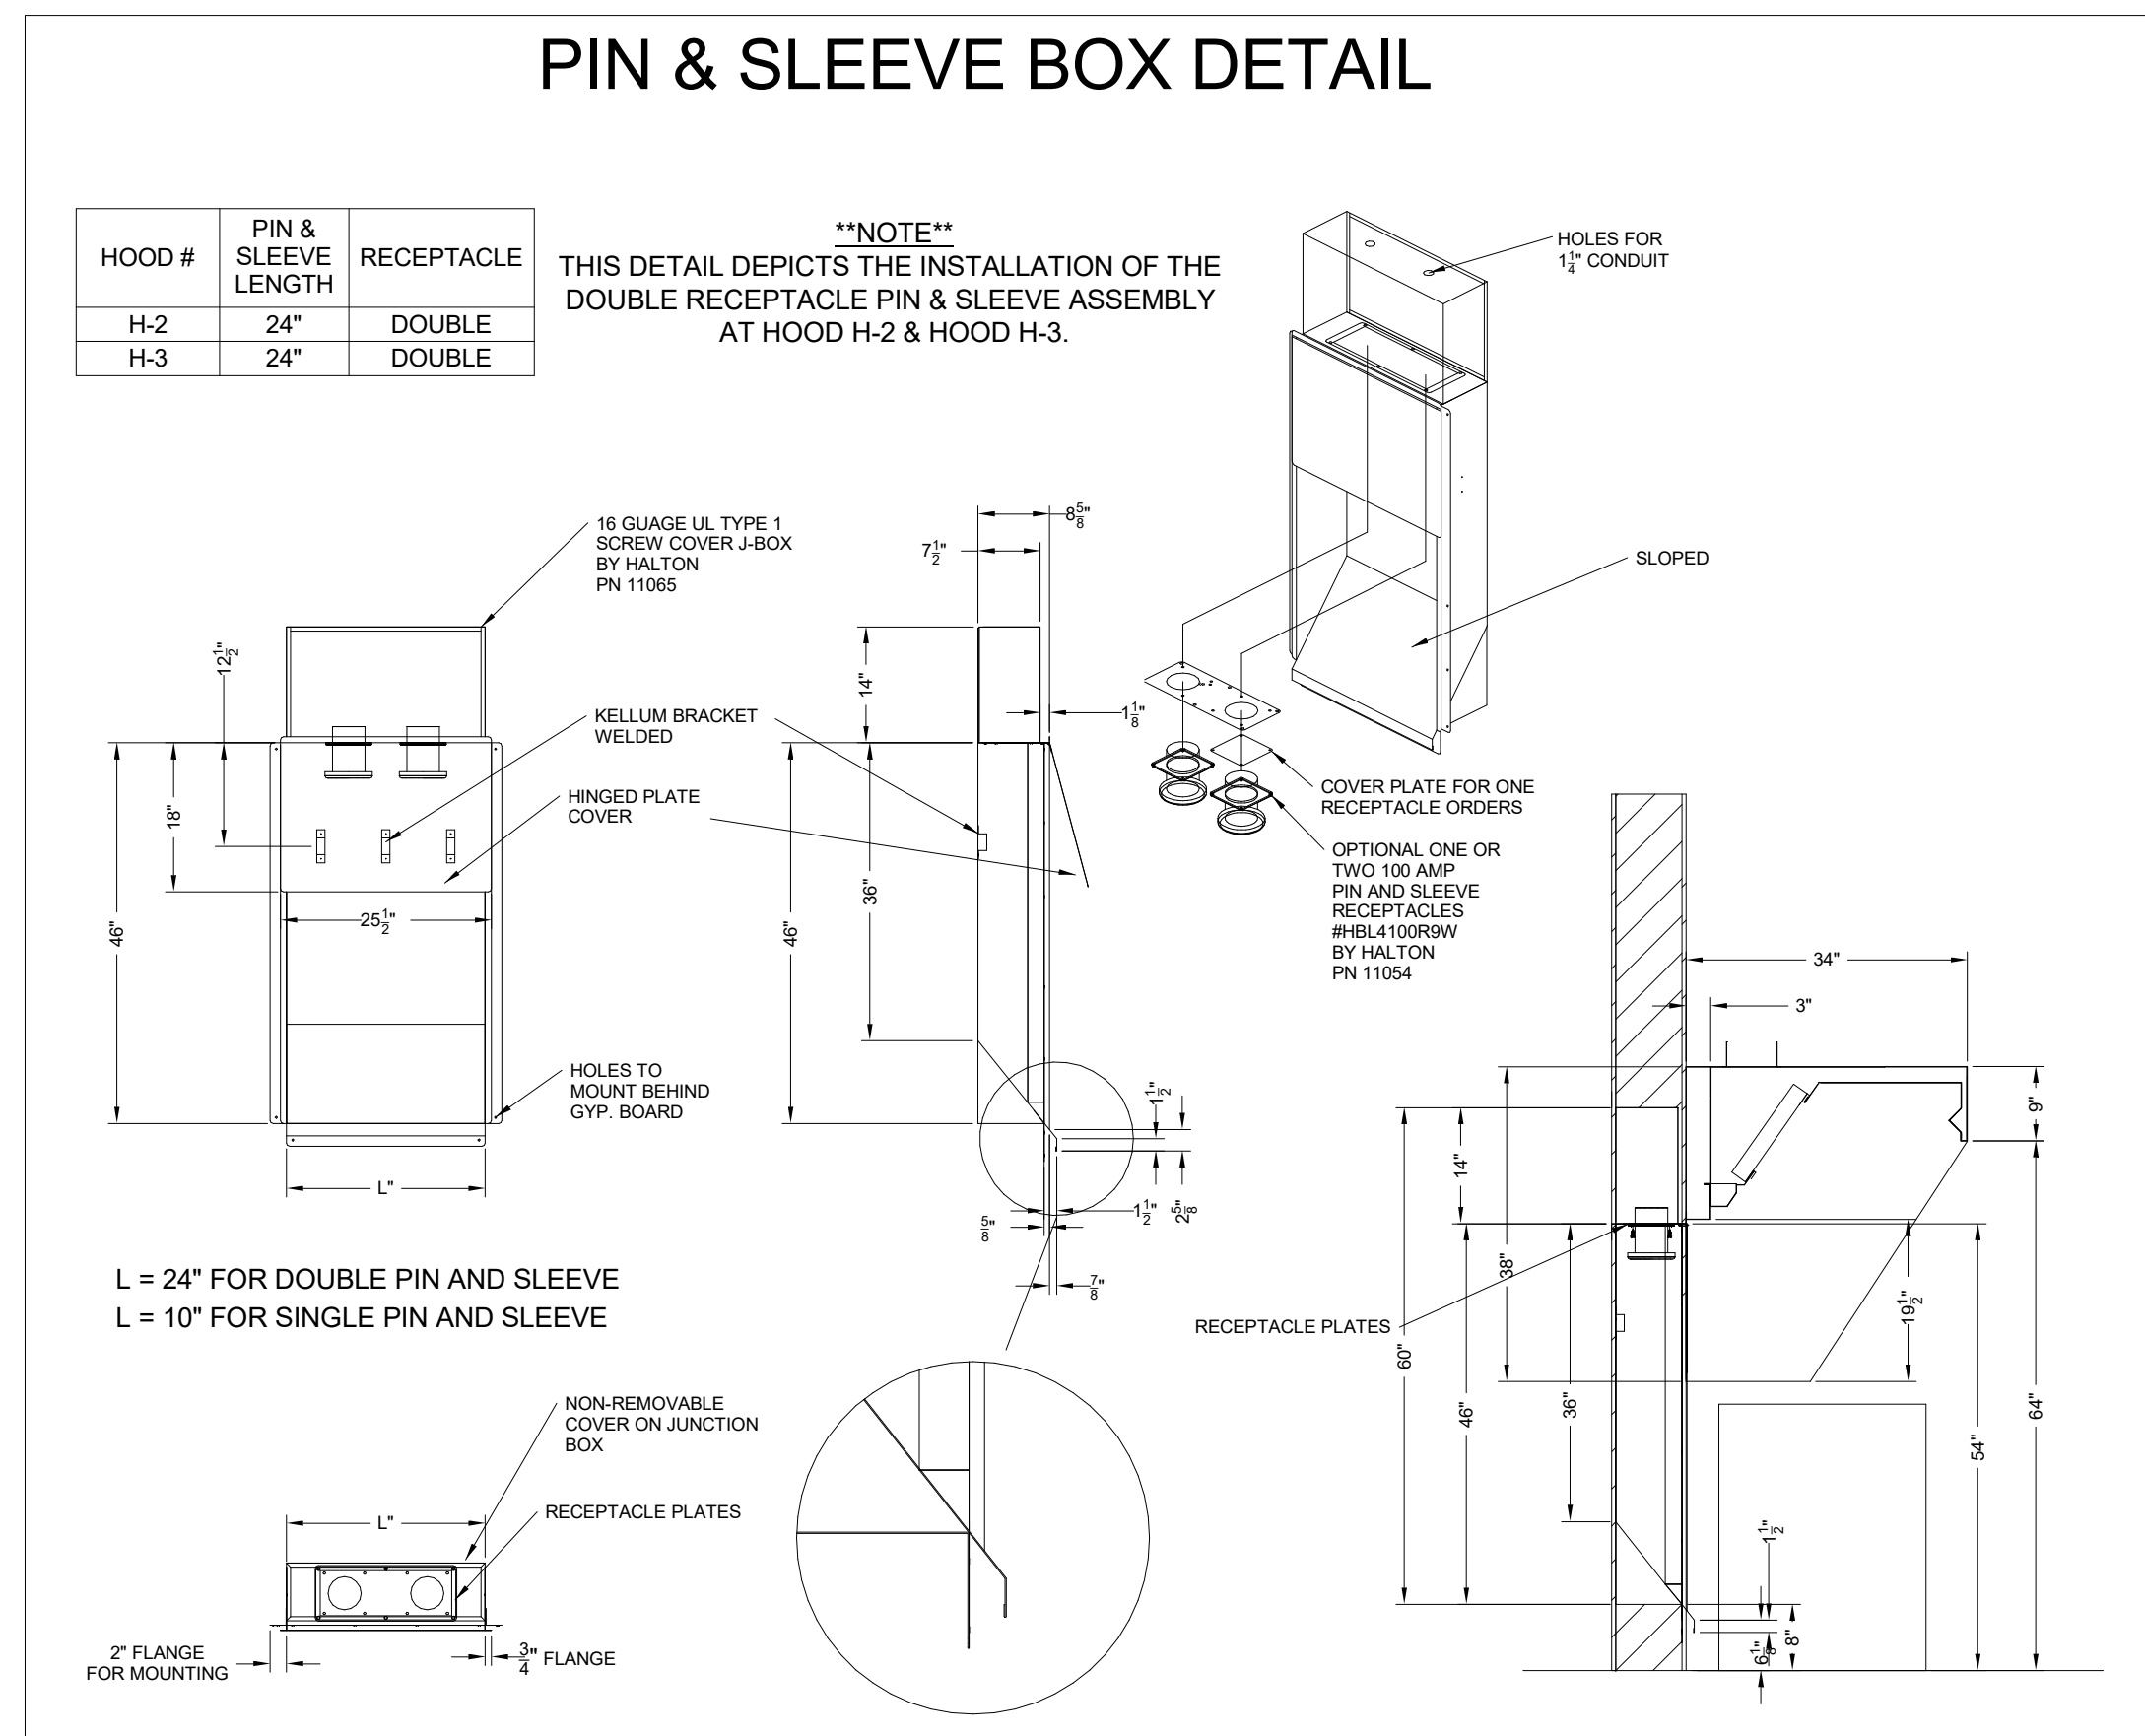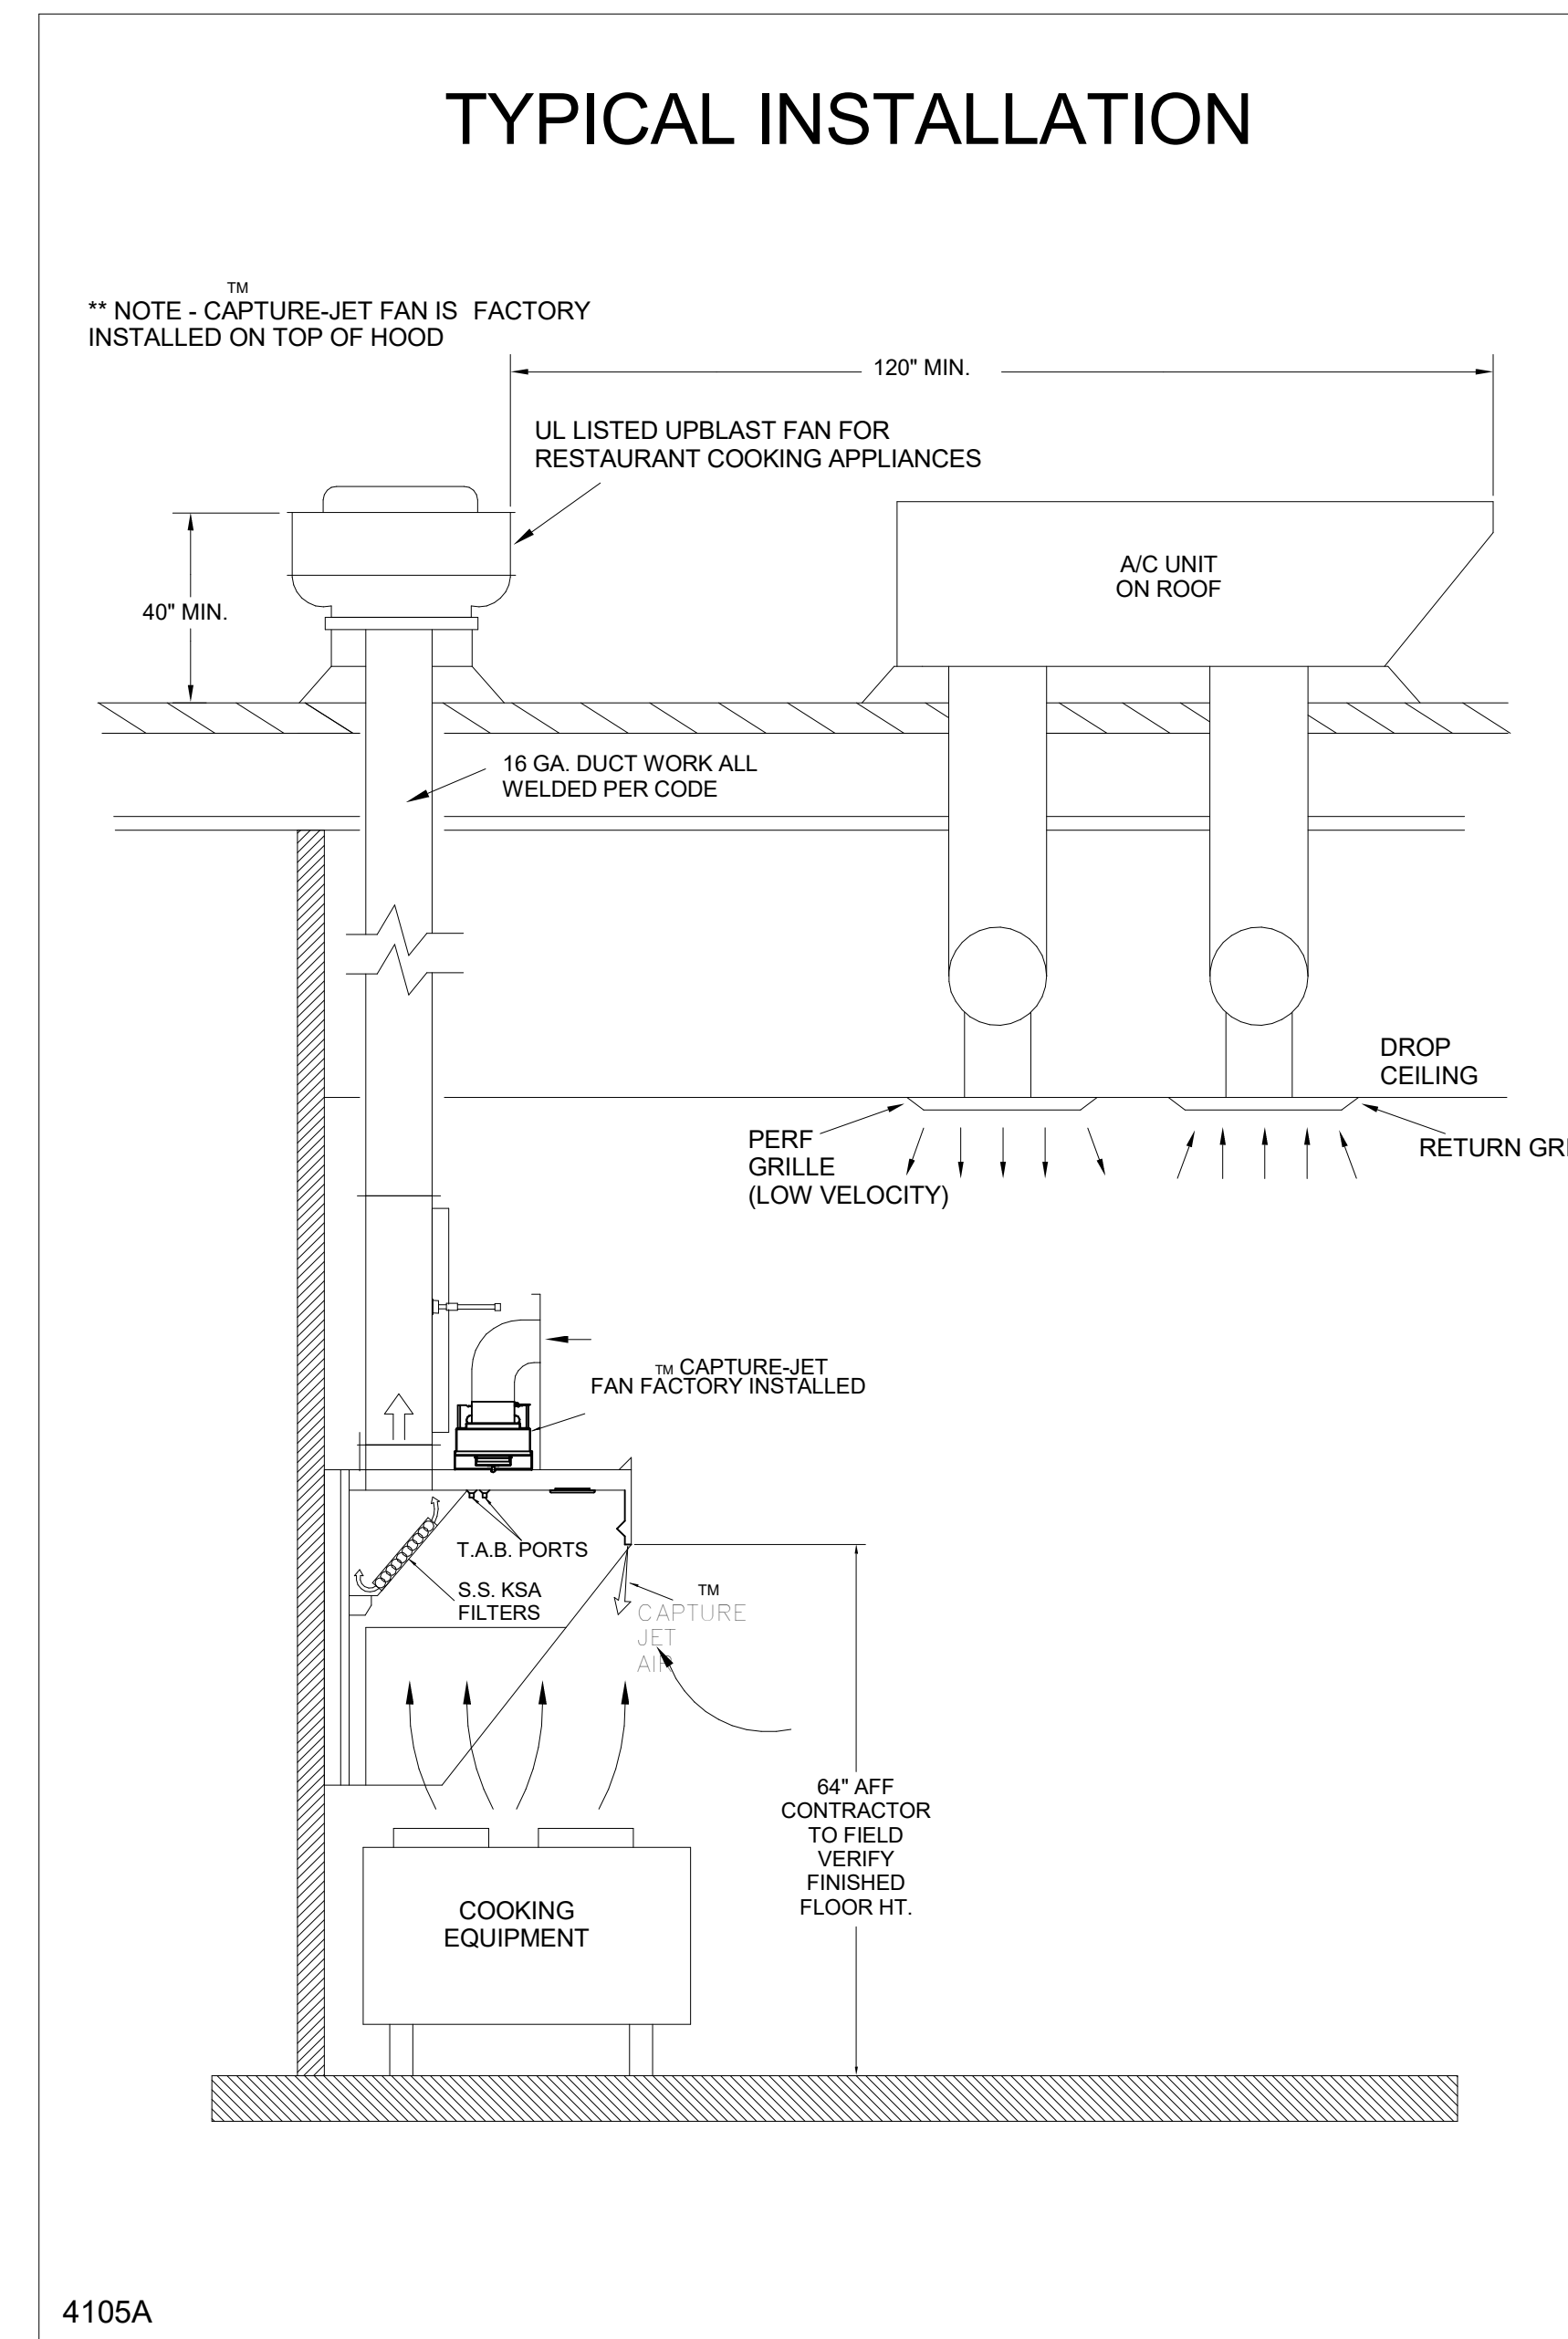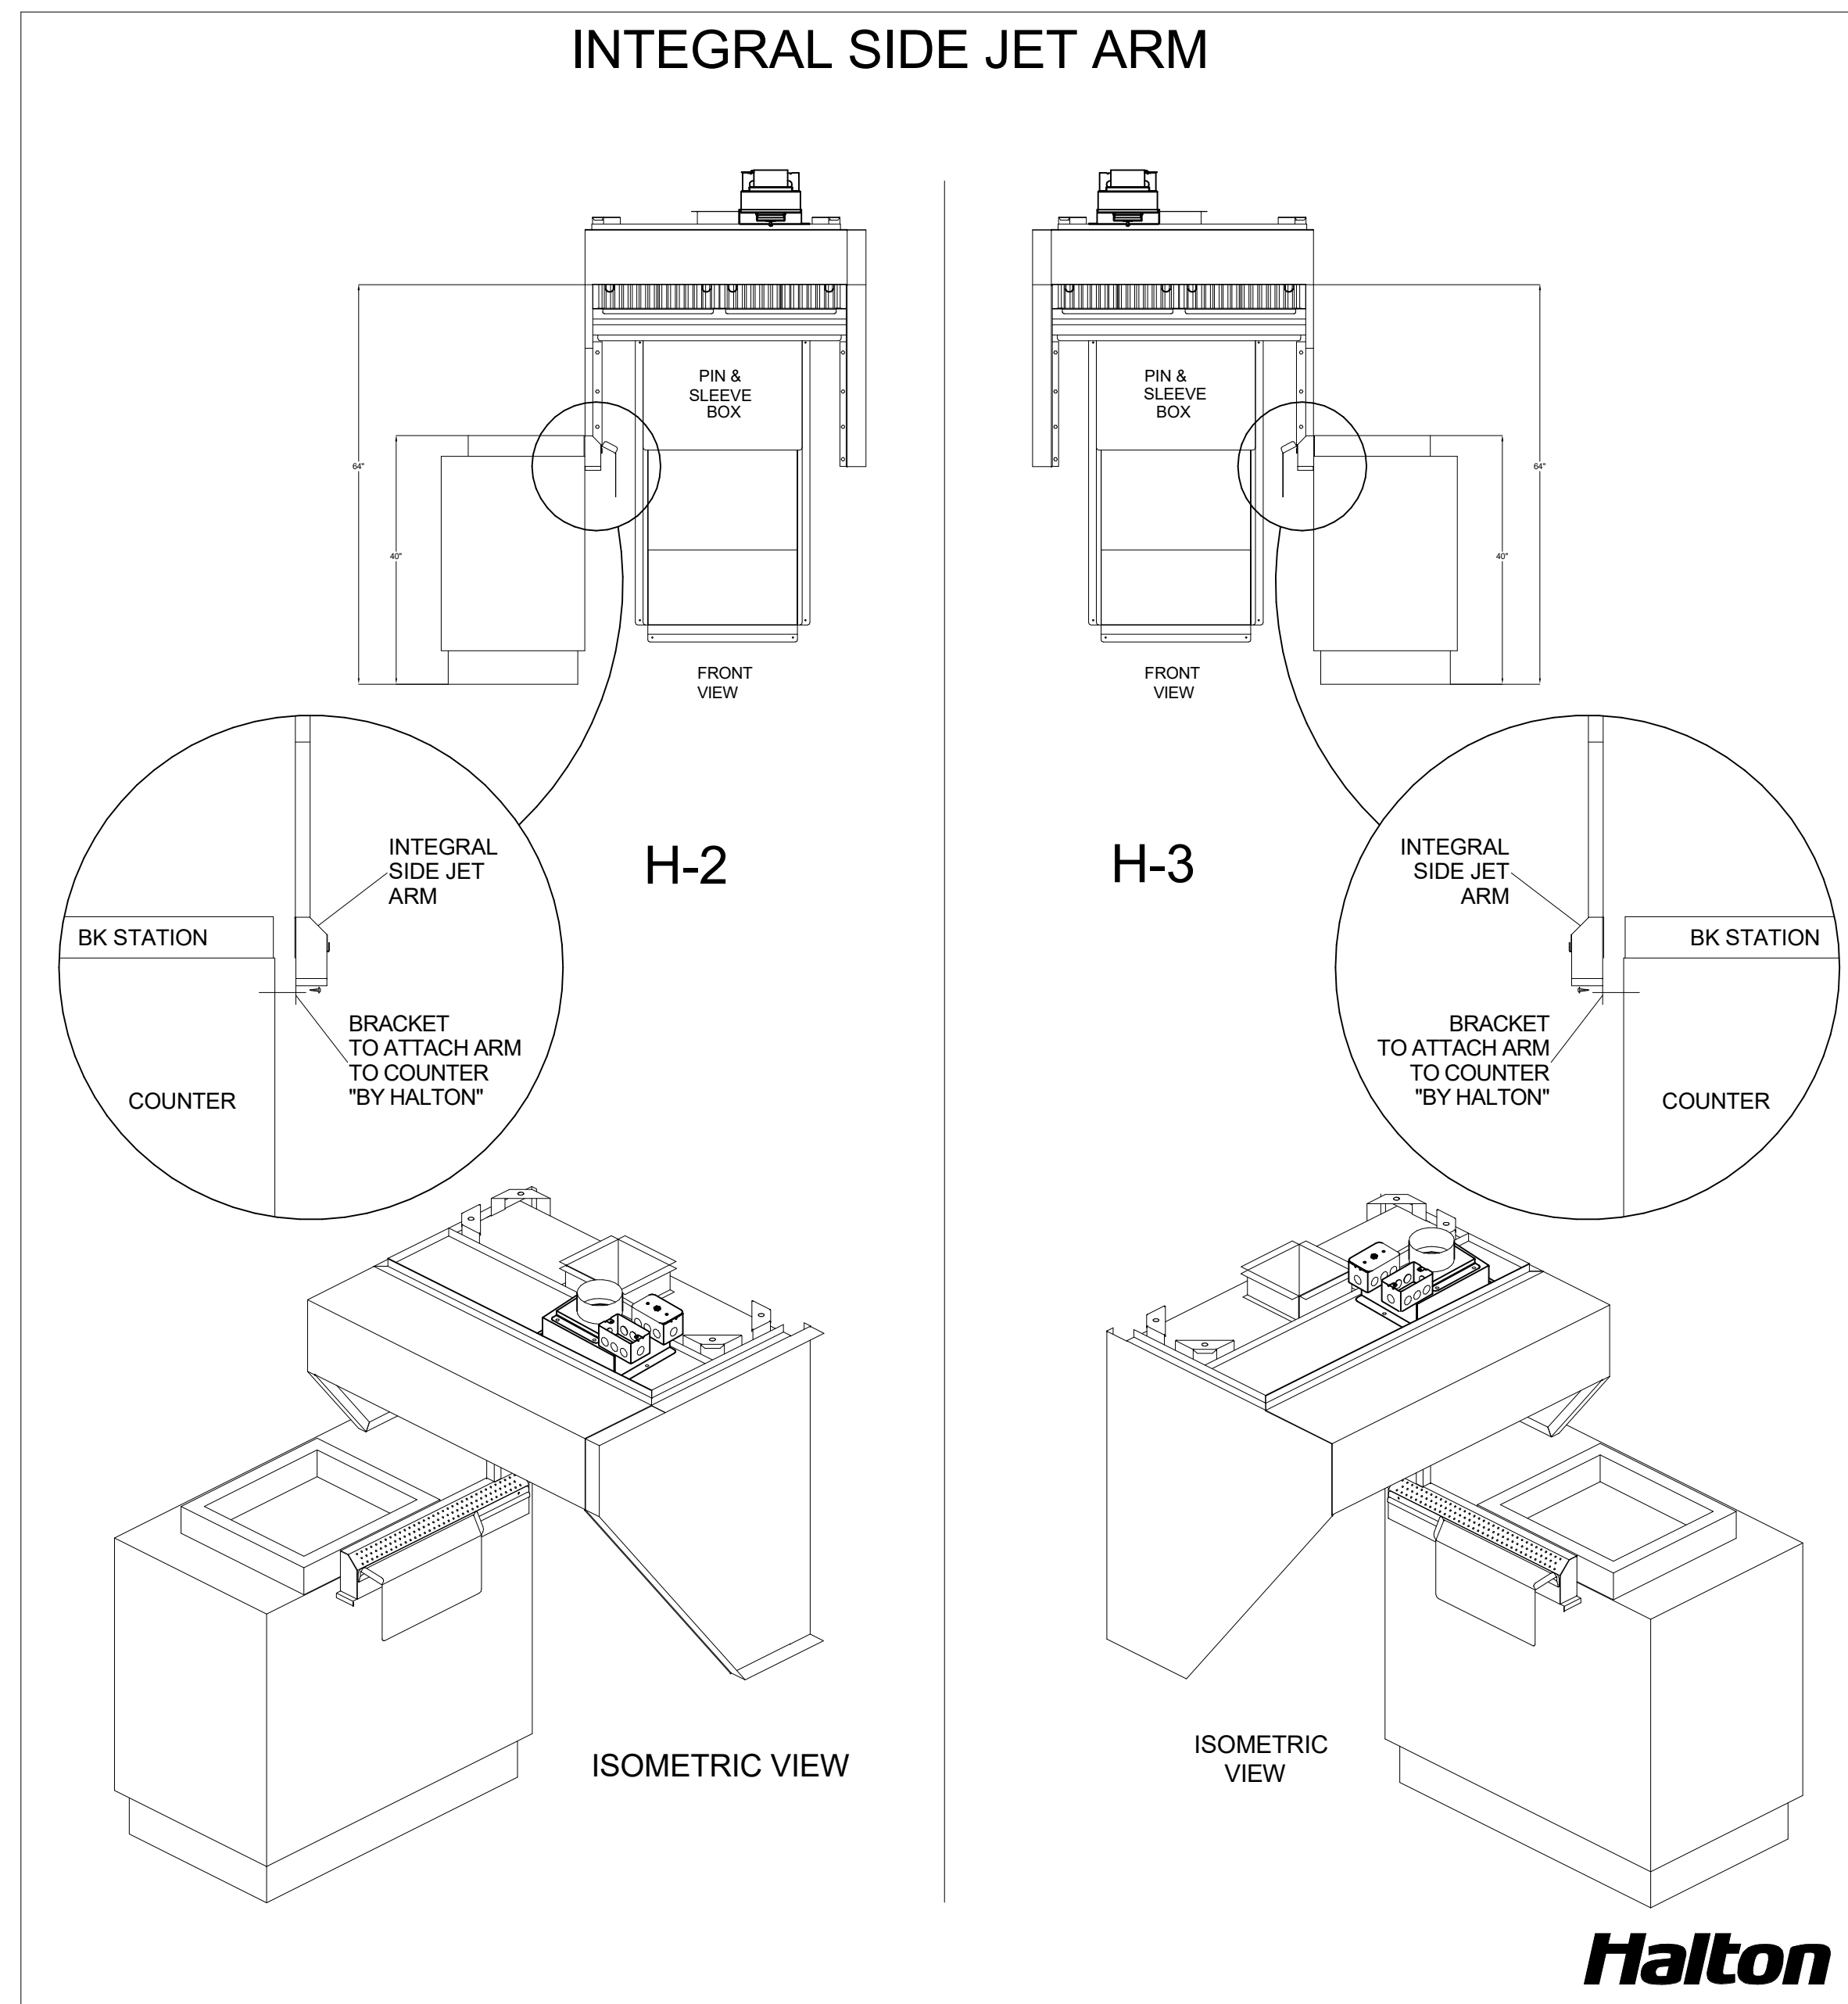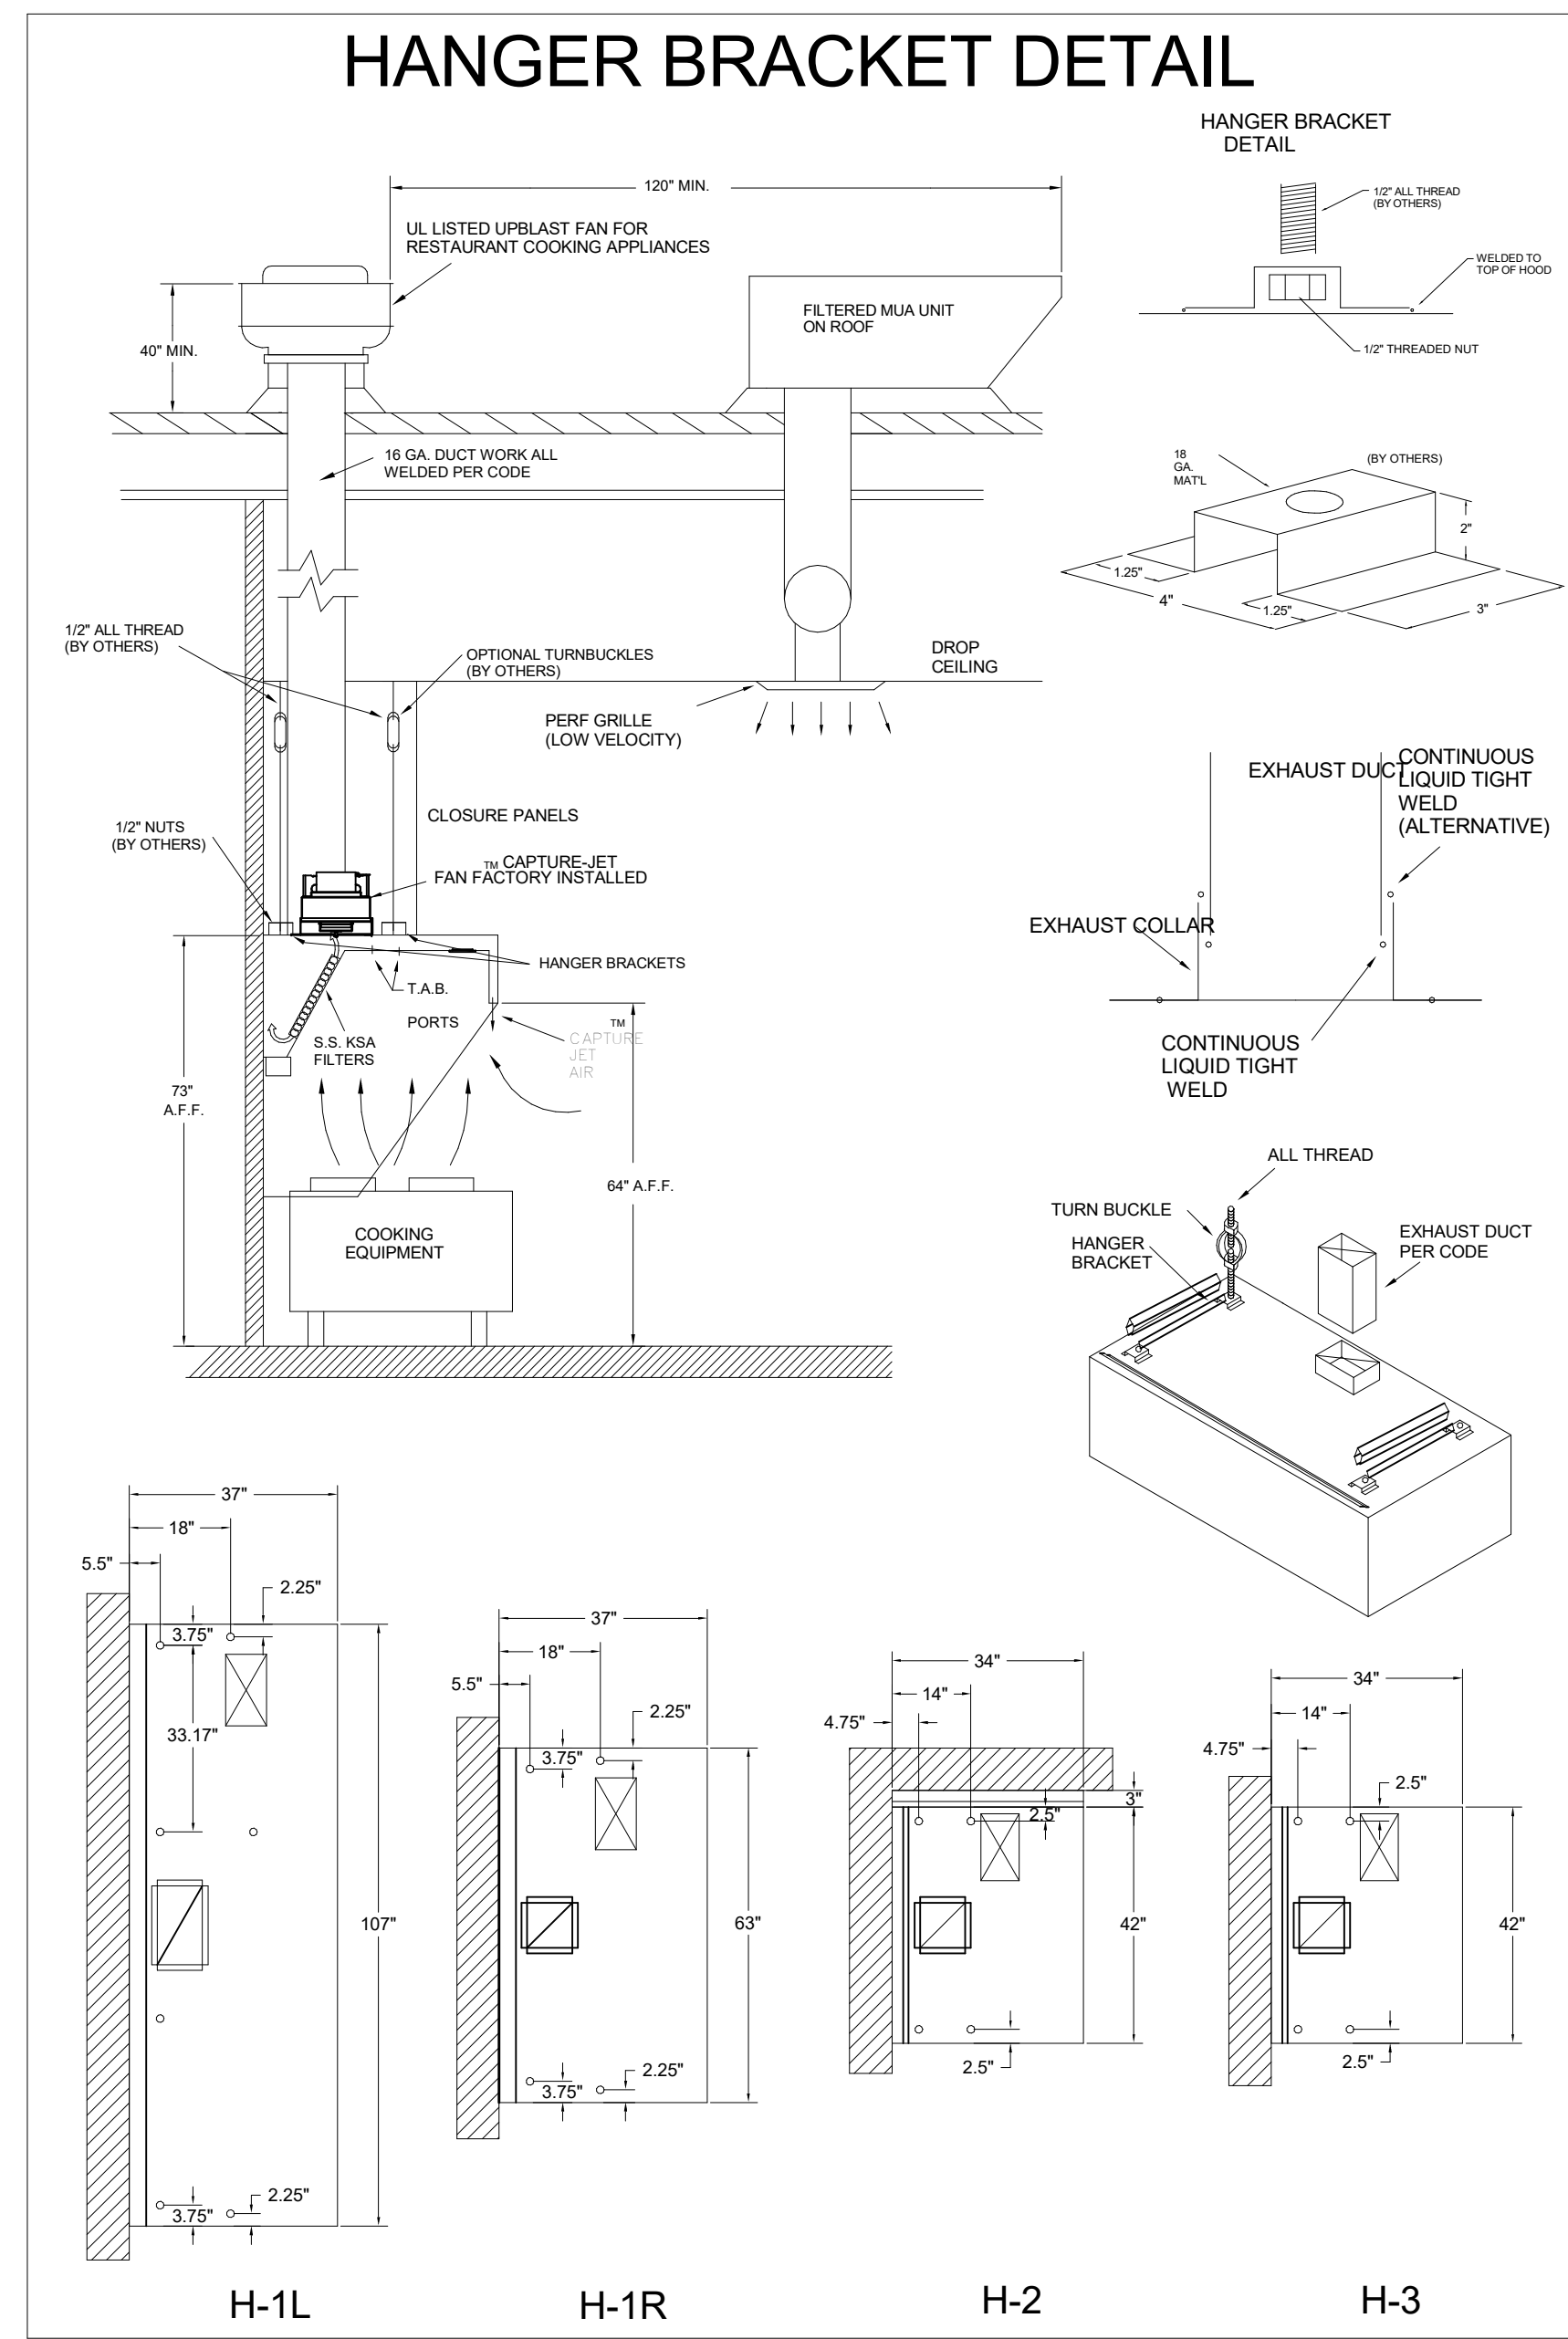

HALTON HOODS
- ETL LISTED PER LATEST 710 STANDARD
- BUILT PER NFPA 96
- NSF LISTED

NSF Halton CONFORMS TO UL STD UL STD 710 CERTIFIED TO ULC STD 5646

HALTON COMPANY, 101 INDUSTRIAL DR., SCOTTSVILLE, KY 42164

MODEL NO.	SERIAL NO.	ITEM NO.
KVL-2-IC		

GENERAL REQUIREMENTS

MINIMUM OVERHANG

DUTY LEVEL	MINIMUM OVERHANG	FRONT IN	SIDE IN	MAX	MIN. EXHAUST CAPACITY OF HOOD LENGTH
MEDIUM	6"	0	20	30	121
MEDIUM	6"	0	20	32	136
MEDIUM	6"	0	20	36	152
HEAVY	0	2	20	35	151
HEAVY	0	2	20	30	218

NET SUPPLY AIR FLOW SHALL ONLY BE SET AT 0.20 IN HOOD

NSF Halton CONFORMS TO UL STD UL STD 710 CERTIFIED TO ULC STD 5646

HALTON COMPANY, 101 INDUSTRIAL DR., SCOTTSVILLE, KY 42164

MODEL NO.	SERIAL NO.	ITEM NO.
KVL-2-IC		

GENERAL REQUIREMENTS

MINIMUM OVERHANG

DUTY LEVEL	MINIMUM OVERHANG	FRONT IN	SIDE IN	MAX	MIN. EXHAUST CAPACITY OF HOOD LENGTH
MEDIUM	6"	0	20	30	121
MEDIUM	6"	0	20	32	136
MEDIUM	6"	0	20	36	152
HEAVY	0	2	20	35	151
HEAVY	0	2	20	30	218

NET SUPPLY AIR FLOW SHALL ONLY BE SET AT 0.20 IN HOOD

FOR REFERENCE ONLY

MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY. BELOW WEBSITE: WWW.HALTONCOMPANY.COM

HALTON CO. (USA)
101 INDUSTRIAL DRIVE
SCOTTSVILLE, KY 42164
1-905-624-0301

HALTON CO. (CANADA)
1021 BREVIK PLACE
MISSISSAUGA, ON L4W 3R7
1-270-237-5600

PROJECT: **CHICK-FL-A**

LOCATION: **SARALAND FSU**

DRAWN BY: **DATE: 02/06/2025**

SCALE: **NTS**

Halton Dwg: **Halton**

Sheet **MH-1.2**

REVISION DESCRIPTION

REV.	DATE	BY
1		
2		
3		
4		
5		
6		
7		

APPROVED BY: _____

WITH CHANGES AS NOTED

ACCREDITED FOR FABRICATION

REVISE AND RESUBMIT


UL LISTED

ETL LISTED

NSF LISTED

ISO VIEW
W/BRACKET

FIRE EXTINGUISHER

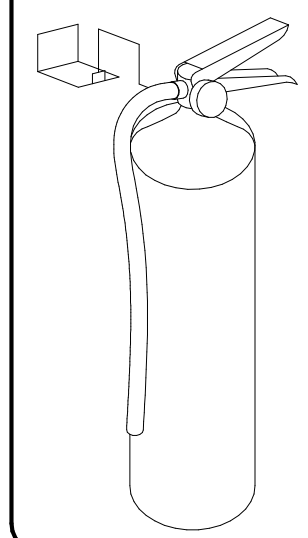


ANSUL


- 13051 5 LBS ABC MODEL AA05 QTY _____
- 13052 10 LBS ABC MODEL AA10S QTY _____
- 13053 6 LTR CLASS K-GUARD K01-3 QTY _____

SUPPLIED BY
HALTON


ANSUL MICROSWITCH DETAIL

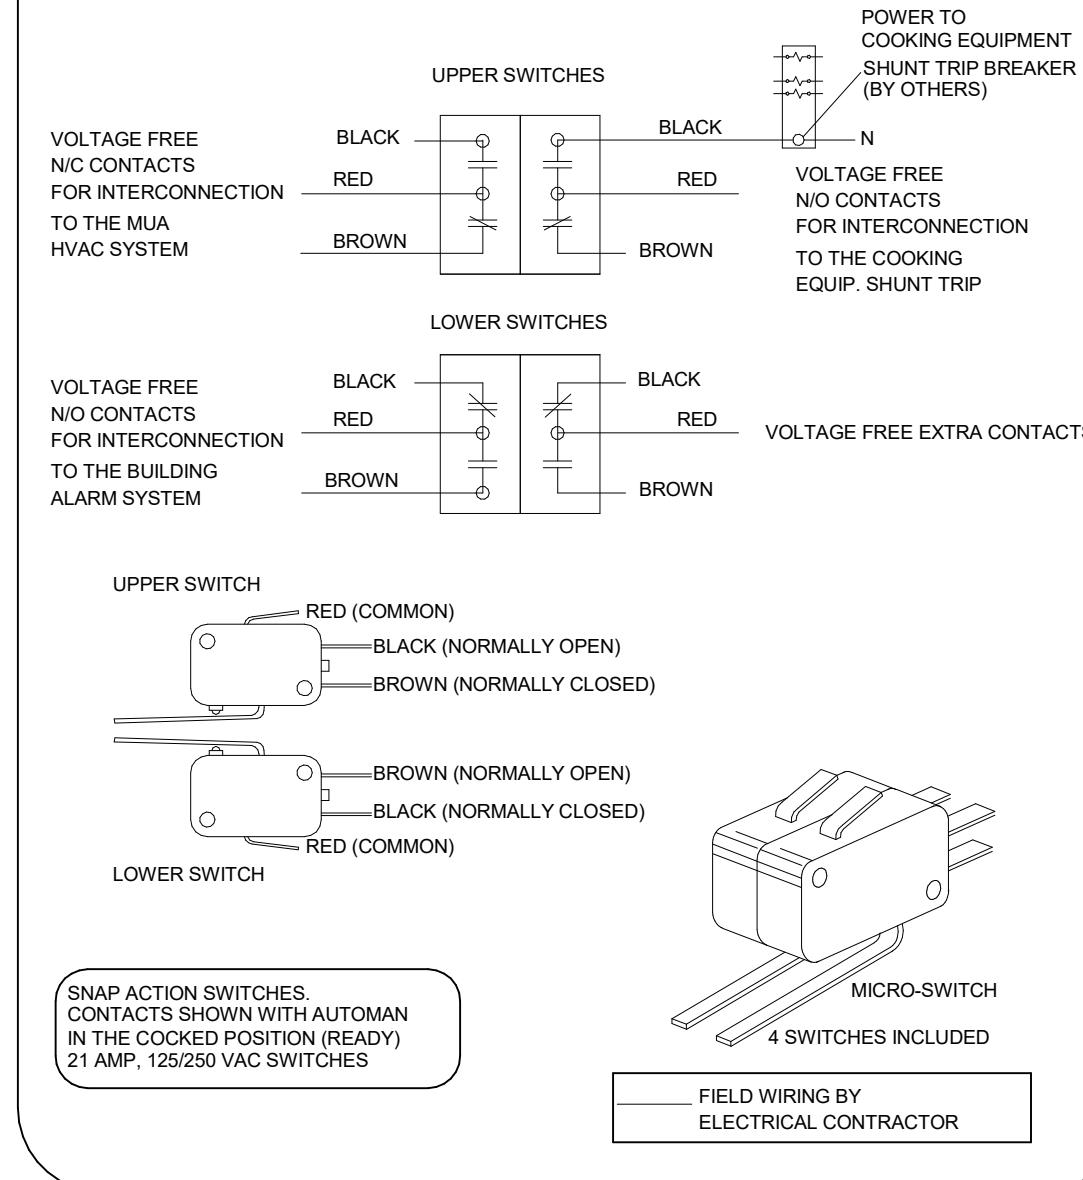

****PROTECTS HOODS H-2 & H-3****
REMOTE MOUNTED:
(1) REGULATED RELEASE (WITH ONE TANK)
(1) SINGLE TANK ENCLOSURE (WITH ONE TANK)

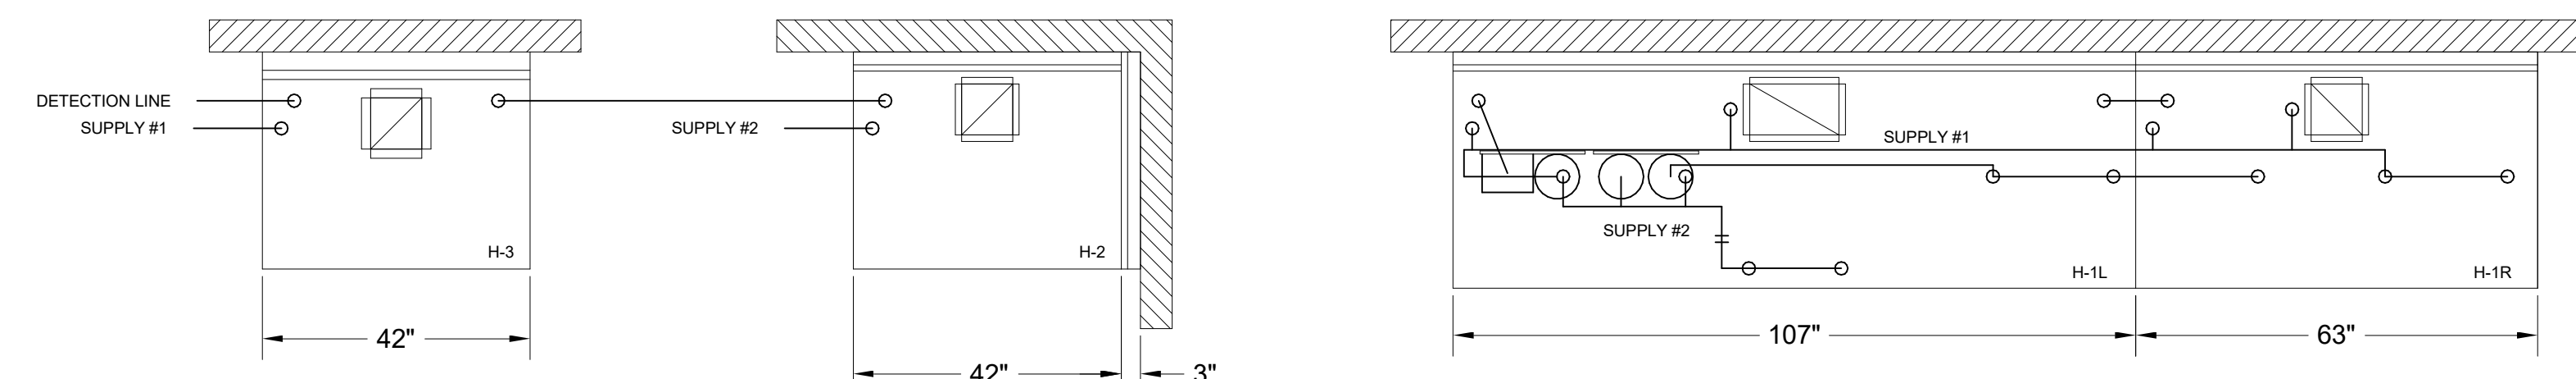

- ANSUL R-102 FIRE SYSTEM**
A) 3 GALLON SYSTEM (2 TANKS) (REMOTE MOUNTED) (FOR HOOD H-2 & H-3)
B) 3/8" BLACK IRON PIPING WITH 3/8" S.S. APPLIANCE DROPS
- (1) REGULATED RELEASE
(2) EXTRA MICRO SWITCH ASSEMBLIES (MOUNTED IN REG. REL.)
(3) SINGLE TANK ENCLOSURE
(4) 3 GALLON TANKS
- ANSUL R-102 FIRE SYSTEM**
A) 3 GALLON SYSTEM (3 TANKS) (MOUNTED ON HOOD H-1L)
B) 3/8" BLACK IRON PIPING WITH 3/8" S.S. APPLIANCE DROPS
- (1) OEM REGULATED RELEASE
(2) EXTRA MICRO SWITCH ASSEMBLIES (MOUNTED IN OEM REG. REL.)
(3) 3 GALLON TANKS

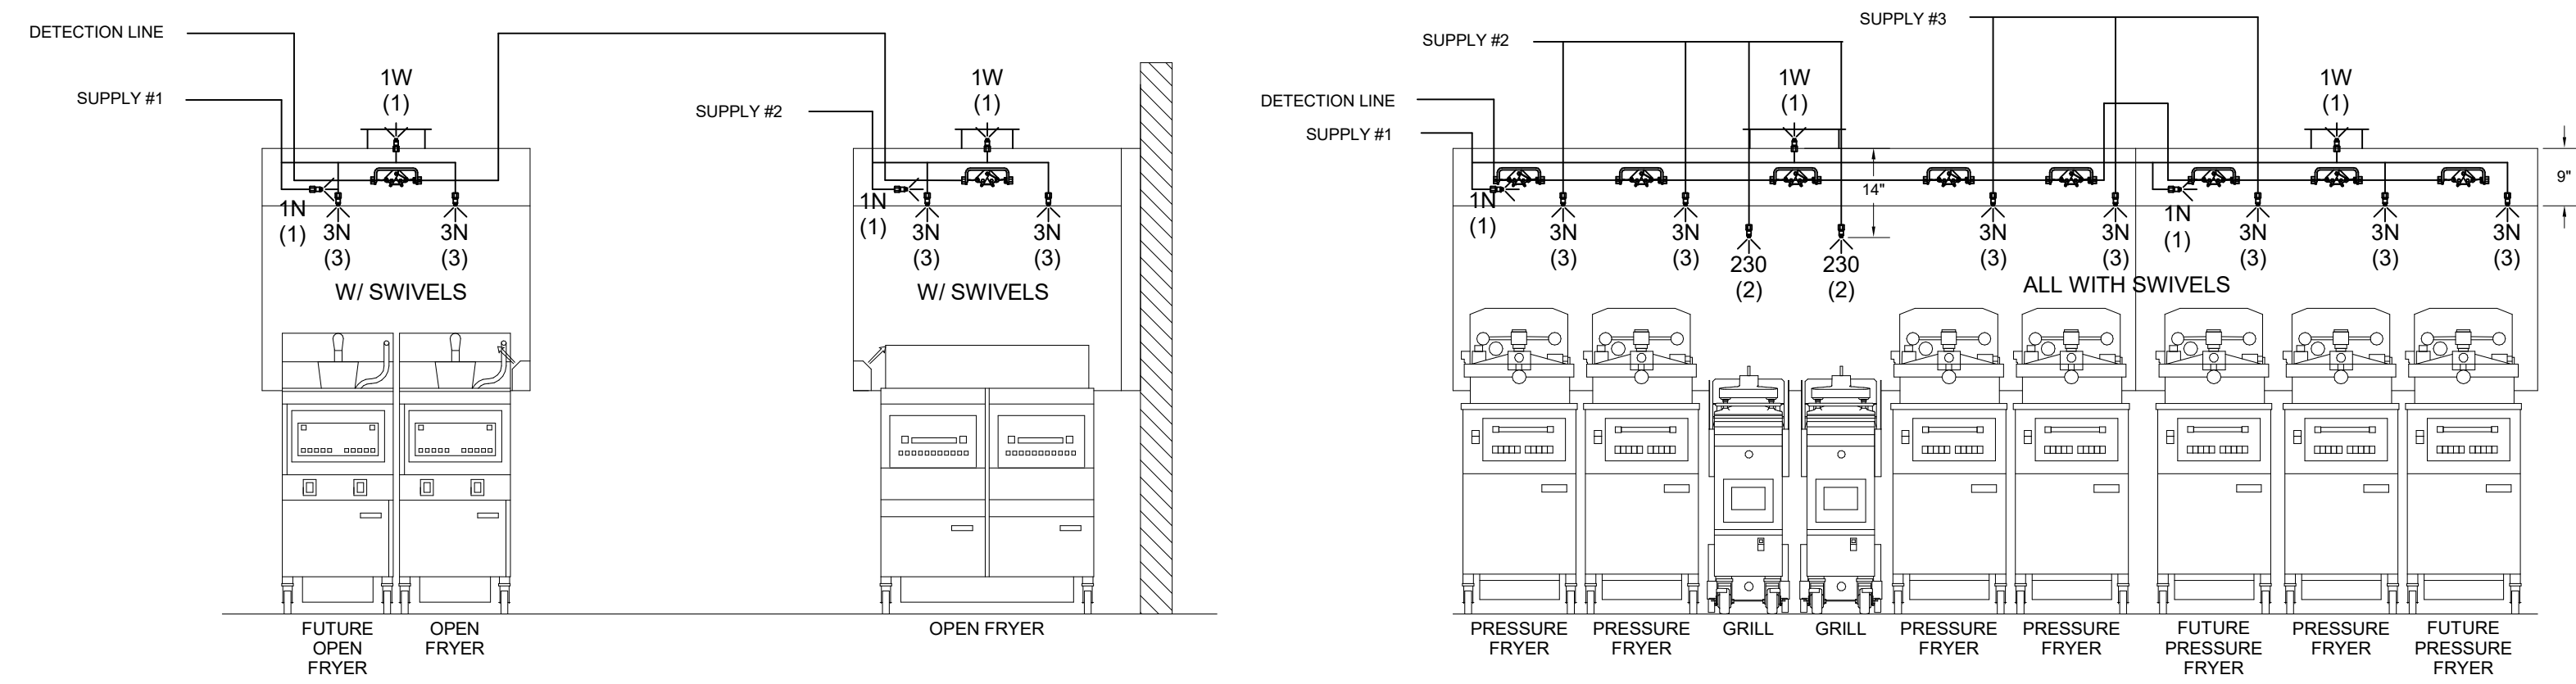

ANSUL R-102 FIRE SYSTEM LAYOUT

FOR REFERENCE ONLY

NOTE:
FIRE SYSTEM TYPE TO BE DETERMINED AT TIME OF ORDER RELEASE.

ANSUL

- FUSIBLE LINK RATINGS**
ITEM TEMP
OPEN FRYERS 450°
2 BURNER / FLAT TOP 450°
PRESSURE FRYERS 450°
GRILL 450°
EXHAUST COLLARS 450°
ANSUL R-102 FIRE SYSTEM NOTES
THREE TANK SYSTEM MOUNTED ON TOP OF (H-1L)
MAXIMUM FLOW POINTS = 33
ANSUL R-102 FIRE SYSTEM NOTES
TWO TANK SYSTEM REMOTE MOUNTED
MAXIMUM FLOW POINTS = 22


ITEM	PART #	QTY	DESCRIPTION	FLOW PTS (TOTAL)
1W	10023	4	DUCT NOZZLES	4
1N	10022	4	PLENUM NOZZLES	4
230	10025	2	APPLIANCE NOZZLES	4
3N	10021	11	APPLIANCE NOZZLES	33
TOTAL FLOW POINTS				45
ITEM	QTY	DESCRIPTION		
#200	10035	8	SERIES DETECTORS W/ FUSIBLE LINKS	
#201	11973	2	TERMINAL DETECTORS W/ FUSIBLE LINKS	
#202	10046	1	OEM REGULATED RELEASE W/ DOUBLE POLE MICRO SWITCH	
#202	10033	1	REGULATED RELEASE W/ DOUBLE POLE MICRO SWITCH	
#203	10333	5	3 GALLON TANKS	
#204	10044	1	SINGLE TANK ENCLOSURE	
#205	10040	2	REMOTE PULL STATION	
#206	10065	4	DOUBLE TANK NITROGEN CARTRIDGE	
#207	11128	5	3 GALLON ANSULEX CONTAINER	

- ANSUL R-102 FIRE SYSTEM**
UL LISTED PER STD LATEST STD 300
1. FINAL INSTALLATION IS TO BE MADE IN ACCORDANCE WITH ALL APPLICABLE CODES
2. ALL ELECTRICAL COMPONENTS FOR EQUIPMENT SHUT DOWN TO BE PROVIDED BY THE ELECTRICIAN. MICRO-SWITCH INSTALLED IN REGULATED RELEASE BY ANSUL INSTALLER
3. REMOTE PULL STATION LOCATED PER MECHANICAL DRAWINGS

THE DRAWING MUST BE CHECKED, SIGNED AND RETURNED TO THE APPROPRIATE FACTORY. PLEASE VERIFYING THE FOLLOWING:
1. ALL DIMENSIONAL INFORMATION, MOUNTING POSITIONS AND CLEARANCES.
2. THE TYPE OF COOKING EQUIPMENT.
3. THE TYPE OF COOKING EQUIPMENT.
4. THE TYPE OF COOKING EQUIPMENT.
5. THE TYPE OF COOKING EQUIPMENT.
6. THE TYPE OF COOKING EQUIPMENT.
7. THE TYPE OF COOKING EQUIPMENT.
8. THE TYPE OF COOKING EQUIPMENT.
9. THE TYPE OF COOKING EQUIPMENT.
10. THE TYPE OF COOKING EQUIPMENT.
11. THE TYPE OF COOKING EQUIPMENT.
12. THE TYPE OF COOKING EQUIPMENT.
13. THE TYPE OF COOKING EQUIPMENT.
14. THE TYPE OF COOKING EQUIPMENT.
15. THE TYPE OF COOKING EQUIPMENT.
16. THE TYPE OF COOKING EQUIPMENT.
17. THE TYPE OF COOKING EQUIPMENT.
18. THE TYPE OF COOKING EQUIPMENT.
19. THE TYPE OF COOKING EQUIPMENT.
20. THE TYPE OF COOKING EQUIPMENT.
21. THE TYPE OF COOKING EQUIPMENT.
22. THE TYPE OF COOKING EQUIPMENT.
23. THE TYPE OF COOKING EQUIPMENT.
24. THE TYPE OF COOKING EQUIPMENT.
25. THE TYPE OF COOKING EQUIPMENT.
26. THE TYPE OF COOKING EQUIPMENT.
27. THE TYPE OF COOKING EQUIPMENT.
28. THE TYPE OF COOKING EQUIPMENT.
29. THE TYPE OF COOKING EQUIPMENT.
30. THE TYPE OF COOKING EQUIPMENT.
31. THE TYPE OF COOKING EQUIPMENT.
32. THE TYPE OF COOKING EQUIPMENT.
33. THE TYPE OF COOKING EQUIPMENT.
34. THE TYPE OF COOKING EQUIPMENT.
35. THE TYPE OF COOKING EQUIPMENT.
36. THE TYPE OF COOKING EQUIPMENT.
37. THE TYPE OF COOKING EQUIPMENT.
38. THE TYPE OF COOKING EQUIPMENT.
39. THE TYPE OF COOKING EQUIPMENT.
40. THE TYPE OF COOKING EQUIPMENT.
41. THE TYPE OF COOKING EQUIPMENT.
42. THE TYPE OF COOKING EQUIPMENT.
43. THE TYPE OF COOKING EQUIPMENT.
44. THE TYPE OF COOKING EQUIPMENT.
45. THE TYPE OF COOKING EQUIPMENT.
46. THE TYPE OF COOKING EQUIPMENT.
47. THE TYPE OF COOKING EQUIPMENT.
48. THE TYPE OF COOKING EQUIPMENT.
49. THE TYPE OF COOKING EQUIPMENT.
50. THE TYPE OF COOKING EQUIPMENT.
51. THE TYPE OF COOKING EQUIPMENT.
52. THE TYPE OF COOKING EQUIPMENT.
53. THE TYPE OF COOKING EQUIPMENT.
54. THE TYPE OF COOKING EQUIPMENT.
55. THE TYPE OF COOKING EQUIPMENT.
56. THE TYPE OF COOKING EQUIPMENT.
57. THE TYPE OF COOKING EQUIPMENT.
58. THE TYPE OF COOKING EQUIPMENT.
59. THE TYPE OF COOKING EQUIPMENT.
60. THE TYPE OF COOKING EQUIPMENT.
61. THE TYPE OF COOKING EQUIPMENT.
62. THE TYPE OF COOKING EQUIPMENT.
63. THE TYPE OF COOKING EQUIPMENT.
64. THE TYPE OF COOKING EQUIPMENT.
65. THE TYPE OF COOKING EQUIPMENT.
66. THE TYPE OF COOKING EQUIPMENT.
67. THE TYPE OF COOKING EQUIPMENT.
68. THE TYPE OF COOKING EQUIPMENT.
69. THE TYPE OF COOKING EQUIPMENT.
70. THE TYPE OF COOKING EQUIPMENT.
71. THE TYPE OF COOKING EQUIPMENT.
72. THE TYPE OF COOKING EQUIPMENT.
73. THE TYPE OF COOKING EQUIPMENT.
74. THE TYPE OF COOKING EQUIPMENT.
75. THE TYPE OF COOKING EQUIPMENT.
76. THE TYPE OF COOKING EQUIPMENT.
77. THE TYPE OF COOKING EQUIPMENT.
78. THE TYPE OF COOKING EQUIPMENT.
79. THE TYPE OF COOKING EQUIPMENT.
80. THE TYPE OF COOKING EQUIPMENT.
81. THE TYPE OF COOKING EQUIPMENT.
82. THE TYPE OF COOKING EQUIPMENT.
83. THE TYPE OF COOKING EQUIPMENT.
84. THE TYPE OF COOKING EQUIPMENT.
85. THE TYPE OF COOKING EQUIPMENT.
86. THE TYPE OF COOKING EQUIPMENT.
87. THE TYPE OF COOKING EQUIPMENT.
88. THE TYPE OF COOKING EQUIPMENT.
89. THE TYPE OF COOKING EQUIPMENT.
90. THE TYPE OF COOKING EQUIPMENT.
91. THE TYPE OF COOKING EQUIPMENT.
92. THE TYPE OF COOKING EQUIPMENT.
93. THE TYPE OF COOKING EQUIPMENT.
94. THE TYPE OF COOKING EQUIPMENT.
95. THE TYPE OF COOKING EQUIPMENT.
96. THE TYPE OF COOKING EQUIPMENT.
97. THE TYPE OF COOKING EQUIPMENT.
98. THE TYPE OF COOKING EQUIPMENT.
99. THE TYPE OF COOKING EQUIPMENT.
100. THE TYPE OF COOKING EQUIPMENT.

ISO VIEW
W/BRACKET

FIRE EXTINGUISHER

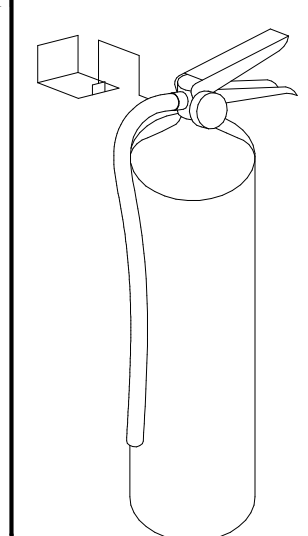


AMEREX


- 11238 5 LBS ABC MODEL B402 QTY _____
- 11239 10 LBS ABC MODEL B456 QTY _____
- 11240 6 LTR CLASS K MODEL C-260 QTY _____

SUPPLIED BY
HALTON

AMEREX MICROSWITCH DETAIL

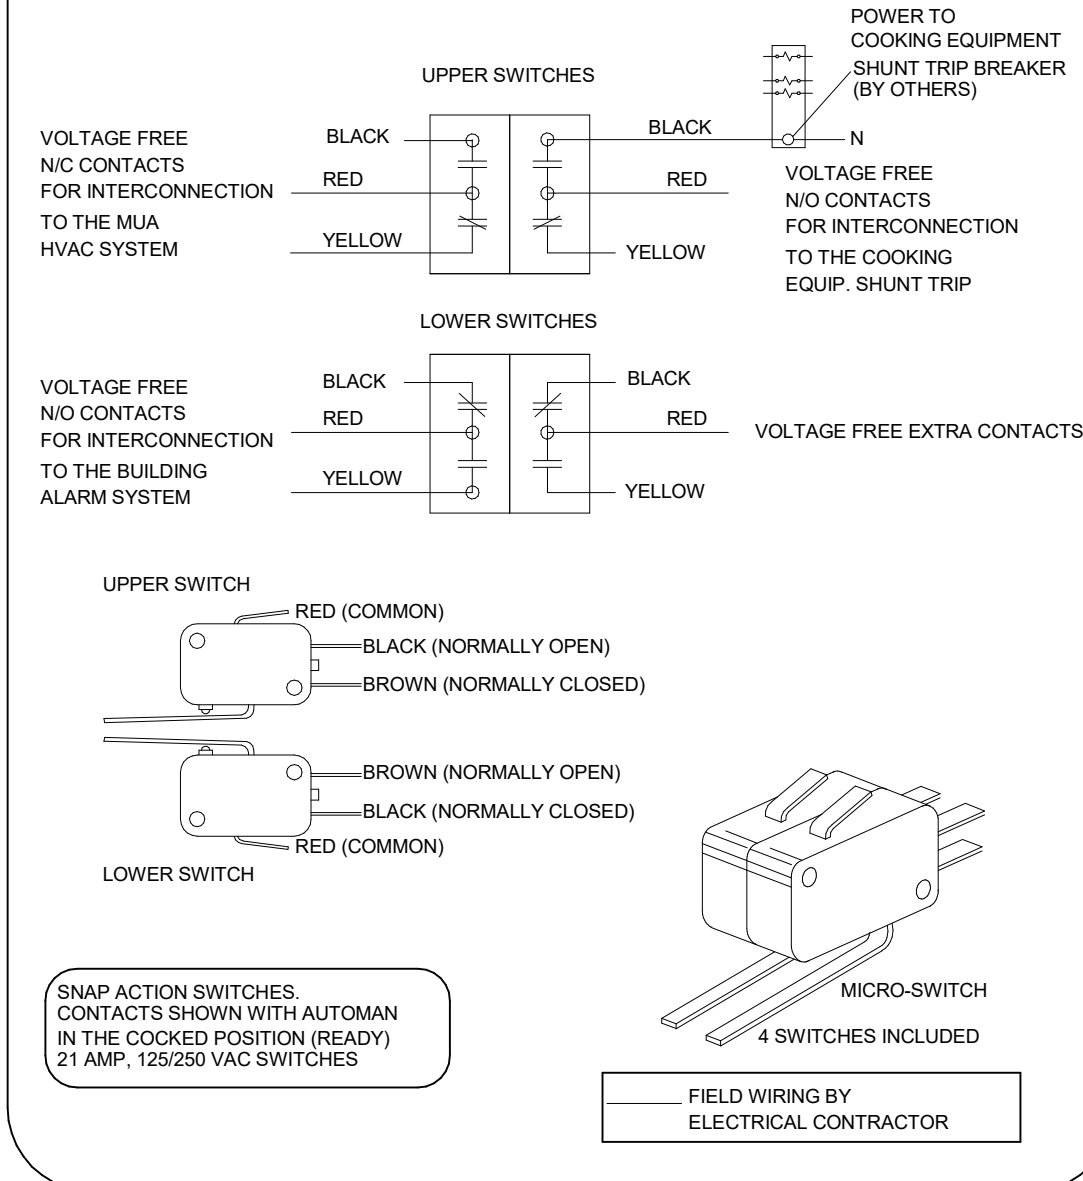


****PROTECTS HOODS H-2 & H-3****
REMOTE MOUNTED:
(1) SYSTEM ENCLOSURE W/
(1) MECHANICAL RELEASE MODULE
(1) KP475 AGENT CYLINDER (4.75 GALLON TANK)

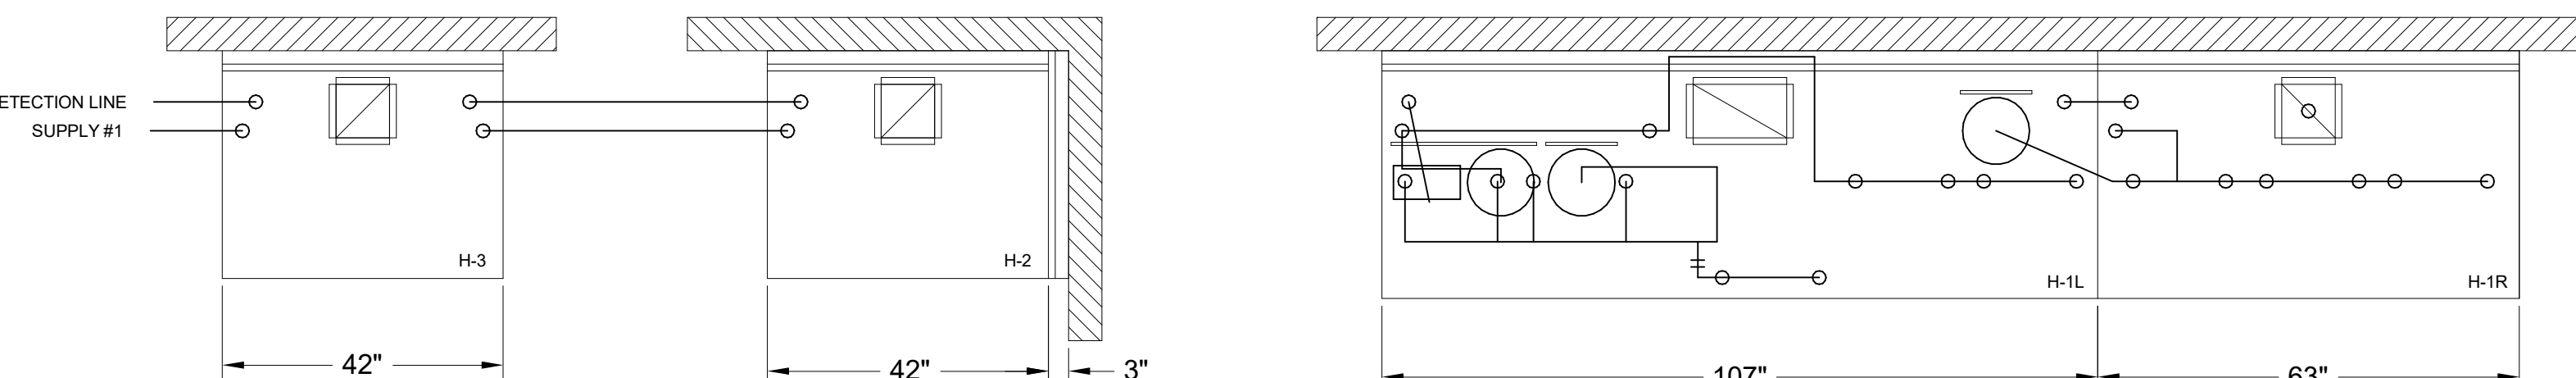

1/2" BLACK IRON SUPPLY LINE REQ'D FROM TANK TO FIRST BRANCH LINE FOR 475 TANKS ONLY!

NOZZLE	QTY	DESCRIPTION
16416	1 EA.	DUCT NOZZLES
11982	1 PER 10'	PLENUM NOZZLES
11982	2 PER FRYER	ALL OPEN FRYERS
13729	2 PER FRYER	ALL PRESSURE FRYERS
14178	1 PER GRILL	ALL GRILLS
ALL APPLIANCE NOZZLES WITH SWIVELS		

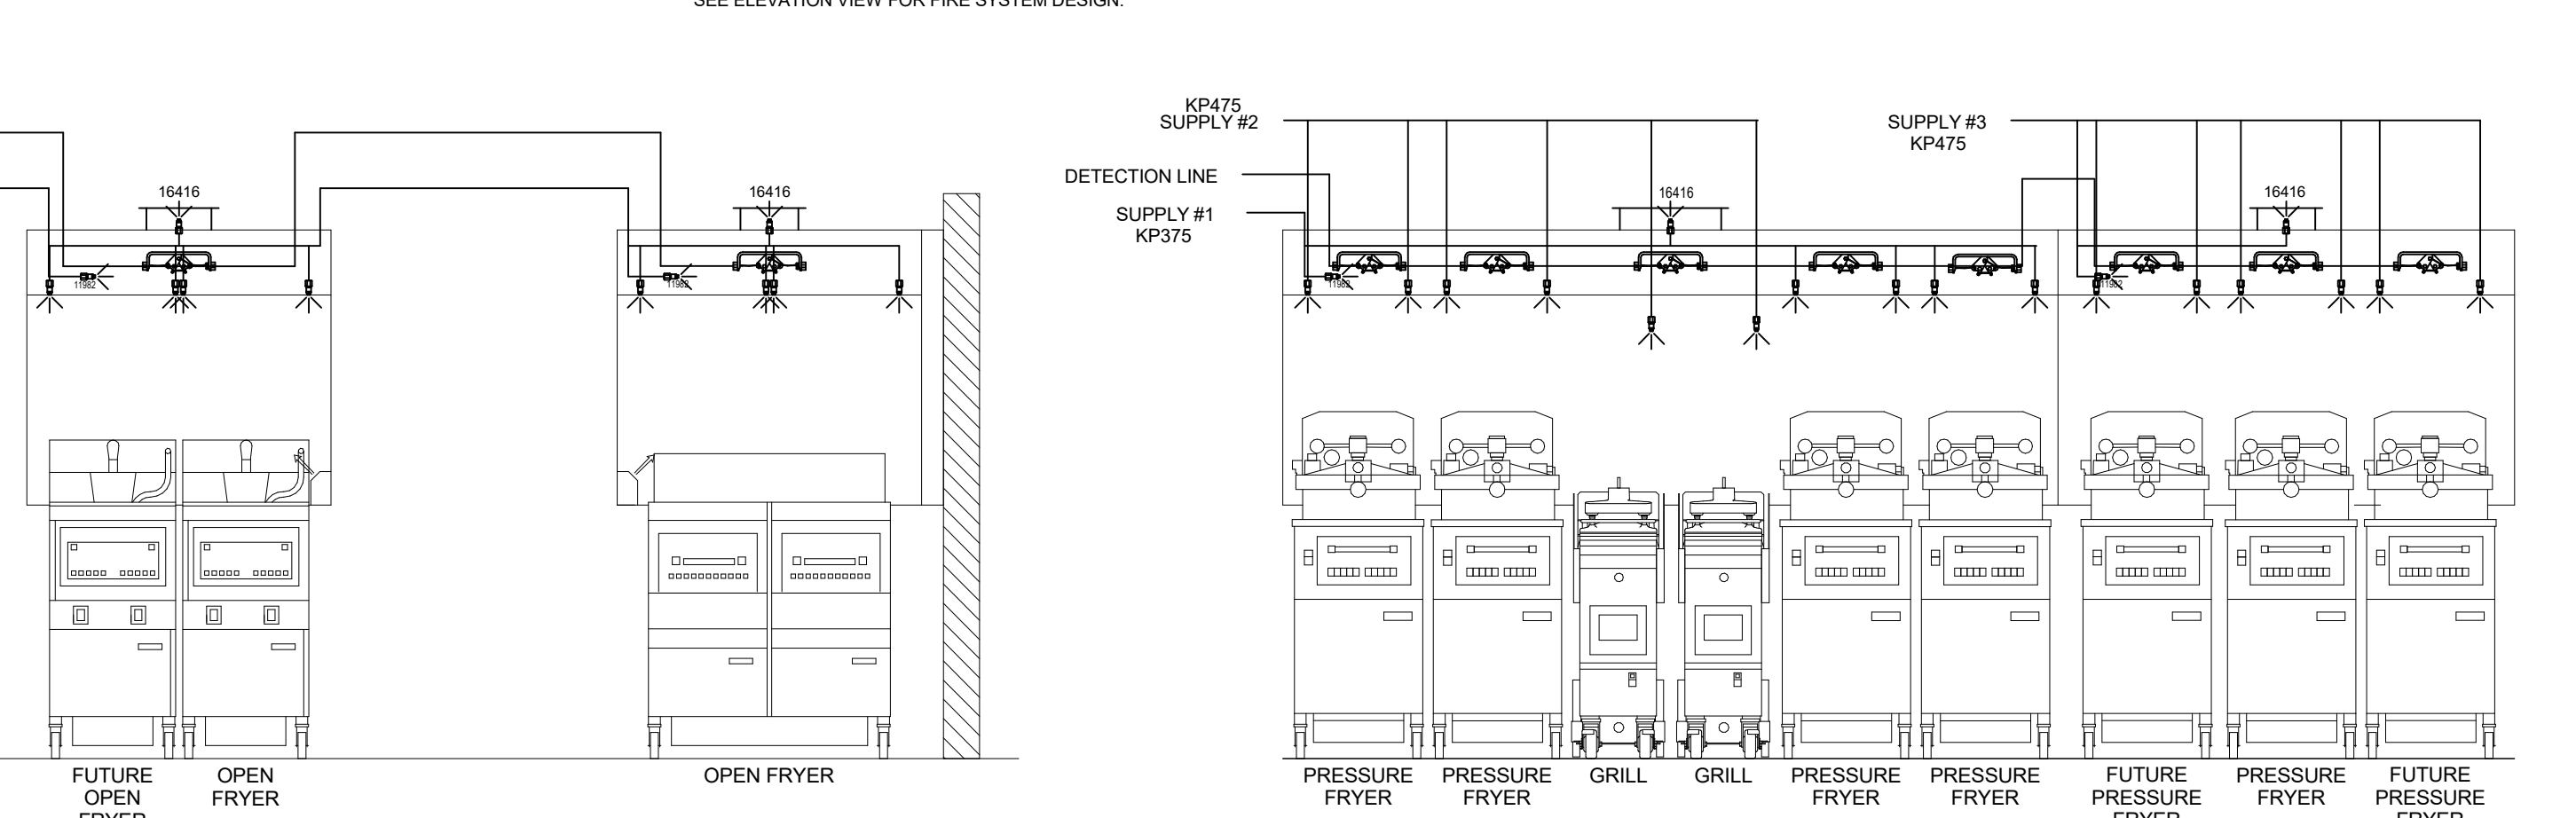

AMEREX FIRE SYSTEM LAYOUT

AMEREX

- FUSIBLE LINK RATINGS**
ITEM TEMP
OPEN FRYERS 450°
2 BURNER / FLAT TOP 450°
PRESSURE FRYERS 450°
GRILL 450°
EXHAUST COLLARS 450°
AMEREX FIRE SYSTEM NOTES
(1) KP375 & (2) KP475 TANK SYSTEM MOUNTED ON TOP OF (H-1L)
MAXIMUM FLOW POINTS = 39
AMEREX FIRE SYSTEM NOTES
(1) KP475 TANK SYSTEM REMOTE MOUNTED
MAXIMUM FLOW POINTS = 14

ITEM	QTY	DESCRIPTION	FLOW PTS (TOTAL)
16416	4	DUCT NOZZLES	4
11982	4	PLENUM NOZZLES	4
11982	8	APPLIANCE NOZZLES	8
14178	2	APPLIANCE NOZZLES	4
13729	14	APPLIANCE NOZZLES	28
TOTAL FLOW POINTS			48
ITEM	QTY	DESCRIPTION	
12508-P001	10	DETECTORS BRACKET ASSEMBLY	
13334	1	KP375 AGENT CYLINDER	
17379	3	KP475 AGENT CYLINDER	
18001	1	MECHANICAL RELEASE MODULE WITH ENCLOSURE WITH DOUBLE POLE MICRO SWITCH	
11977	1	MECHANICAL RELEASE MODULE WITHOUT ENCLOSURE WITH DOUBLE POLE MICRO SWITCH	
21481	2	REMOTE MANUAL PULL STATION	

- AMEREX FIRE SYSTEM**
UL LISTED PER STD LATEST STD 300
1. FINAL INSTALLATION IS TO BE MADE IN ACCORDANCE WITH ALL APPLICABLE CODES
2. ALL ELECTRICAL COMPONENTS FOR EQUIPMENT SHUT DOWN TO BE PROVIDED BY THE ELECTRICIAN. MICRO-SWITCH INSTALLED IN REGULATED RELEASE BY AMEREX INSTALLER
3. REMOTE PULL STATION LOCATED PER MECHANICAL DRAWINGS


MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY. BELOW WEBSITE: WWW.HALTONCOMPANY.COM
HALTON CO. (USA)
101 INDUSTRIAL DRIVE
SCOTTSDALE, AZ 85264
1-270-237-5600
HALTON CO. (CANADA)
101 BREVIAK PLACE
MISSISSAUGA, ON L4W 3R7
1-905-624-0301
REVISION DESCRIPTION BY DATE

PROJECT: **CHICK-FL-A**

LOCATION: SARALAND FSU
DRAWN BY: DATE: 02/06/2025
SCALE: NTS
Halton Dwg:
Sheet
SN# 05661



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

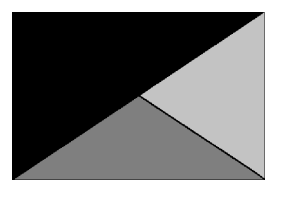

Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



5/15/25

CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION
6 05/15/25 IFC Set

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET VENTILATION SCHEDULES

SHEET NUMBER

M-602

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants People	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Zone Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation						Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM	Actual Exhaust CFM				
1	Kitchen	1,287	20	26	7.5	195	0.12	154	349	0.8	436	8,125	0.05	1,750	0.7	901	-	-	-	3,315	AC#1	EF-1 / EF-2			
Total Area		1,287				Total Vbz	349	Total Supply Airflow			8,125	1,750	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp			0.05														
						Uncorrected Outdoor Air Intake (You)	349	System Ventilation Efficiency (Ev)			1.00														
						Required Outdoor Air Intake (CFM)				349															

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants People	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Zone Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation						Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM	Actual Exhaust CFM				
1	Meal Fulfillment Area	418	15	7	7.5	53	0.12	50	103	0.8	129	3,600	0.04	720	-	-	-	-	-	-	-	-	AC#2	-	
Total Area		418				Total Vbz	103	Total Supply Airflow			3,600	720	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp			0.04														
						Uncorrected Outdoor Air Intake (You)	103	System Ventilation Efficiency (Ev)			1.00														
						Required Outdoor Air Intake (CFM)				103															



General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants People	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Zone Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation						Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM	Actual Exhaust CFM				
1	Dining	1,026	100	103	7.5	773	0.18	185	958	0.8	1,198	4,050	0.30	926	-	-	-	-	-	-	-	-	AC#3	-	
2	Queueing	563	15	9	7.5	68	0.12	68	136	0.8	170	1,650	0.10	377	-	-	-	-	-	-	-	-	AC#3	-	
3	Men's RR	176	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	-	-	AC#3	EF-3	
4	Women's RR	204	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	-	-	AC#3	EF-3	
5	RR Vestibule	110	-	-	-	-	0.06	7	7	0.8	9	125	0.05	29	-	-	-	-	-	-	-	-	AC#3	-	
Total Area		2,079				Total Vbz	1,101	Total Supply Airflow			6,125	1,400	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp			0.30														
						Uncorrected Outdoor Air Intake (You)	1,101	System Ventilation Efficiency (Ev)			0.80														
						Required Outdoor Air Intake (CFM)				1,376															

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants People	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Zone Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation						Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM	Actual Exhaust CFM				
1	Team Member Room	105	50	6	5	30	0.06	6	36	0.8	45	450	0.10	109	-	-	-	-	-	-	-	-	AC#4	-	
2	Riser Room	41	-	-	-	-	0.12	5	5	0.8	6	200	0.03	49	-	-	-	-	-	-	-	-	AC#4	-	
3	Service / Beverage	193	-	-	-	-	0.12	24	24	0.8	30	700	0.04	170	-	-	-	-	-	-	-	-	AC#4	-	
4	Office	46	5	1	5	5	0.06	3	8	0.8	10	275	0.04	67	-	-	-	-	-	-	-	-	AC#4	-	
5	Catering	66	-	-	-	-	0.12	8	8	0.8	10	125	0.08	30	-	-	-	-	-	-	-	-	AC#4	-	
Total Area		567				Total Vbz	81	Total Supply Airflow			1,750	425	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp			0.10														
						Uncorrected Outdoor Air Intake (You)	81	System Ventilation Efficiency (Ev)			1.00														
						Required Outdoor Air Intake (CFM)				81															

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants People	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Zone Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation						Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM	Actual Exhaust CFM				
1	Play Area	250	7	2	20	40	0.18	45	85	0.8	106	1,300	0.08	300	-	-	-	-	-	-	-	-	AC#5	-	
Total Area		250				Total Vbz	85	Total Supply Airflow			1,300	300	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp			0.08														
						Uncorrected Outdoor Air Intake (You)	85	System Ventilation Efficiency (Ev)			1.00														
						Required Outdoor Air Intake (CFM)				103															


Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 2:37:15 PM
30-LS-05661-M-602-VENTILATION SCHEDULES

FOR REFERENCE ONLY

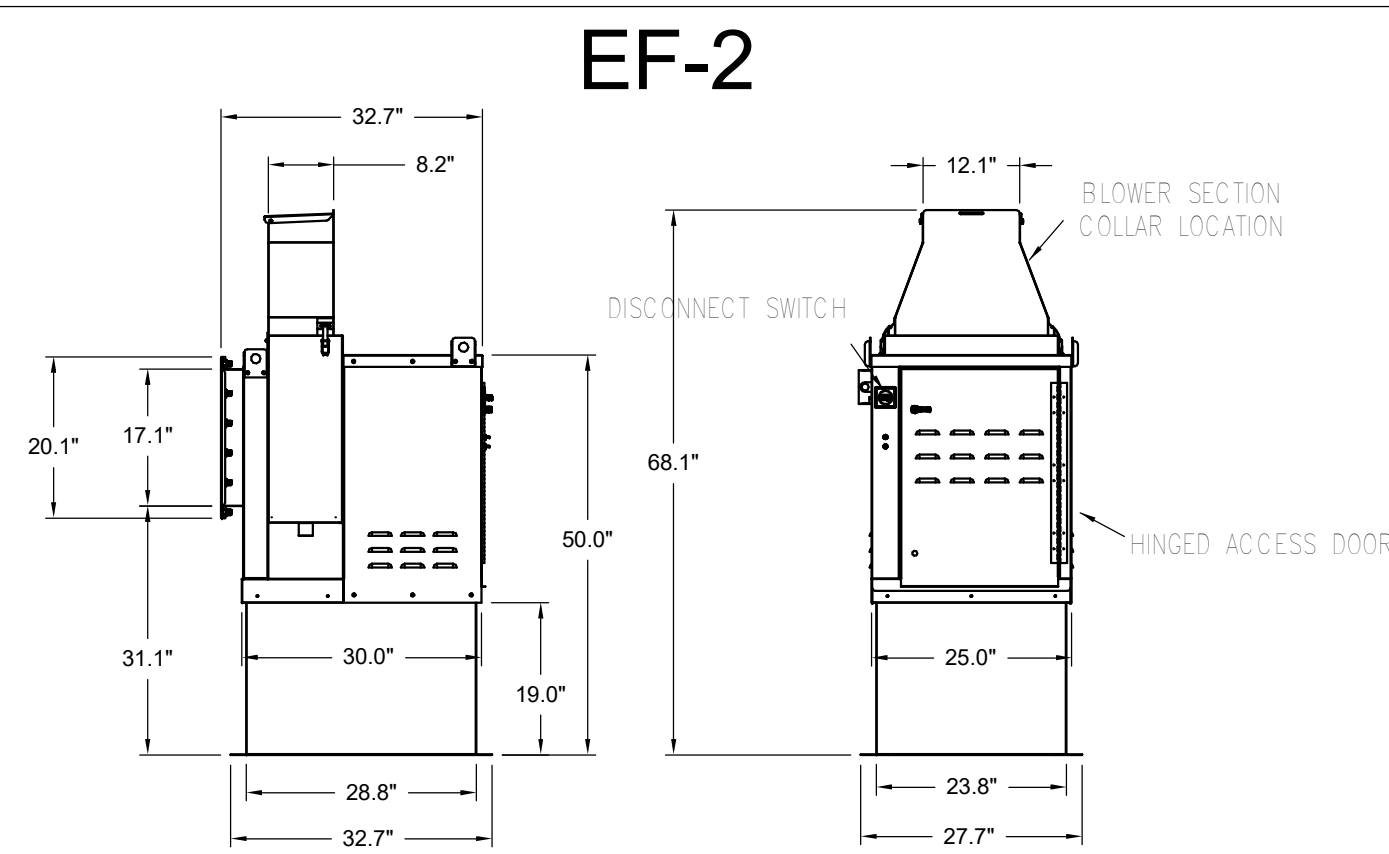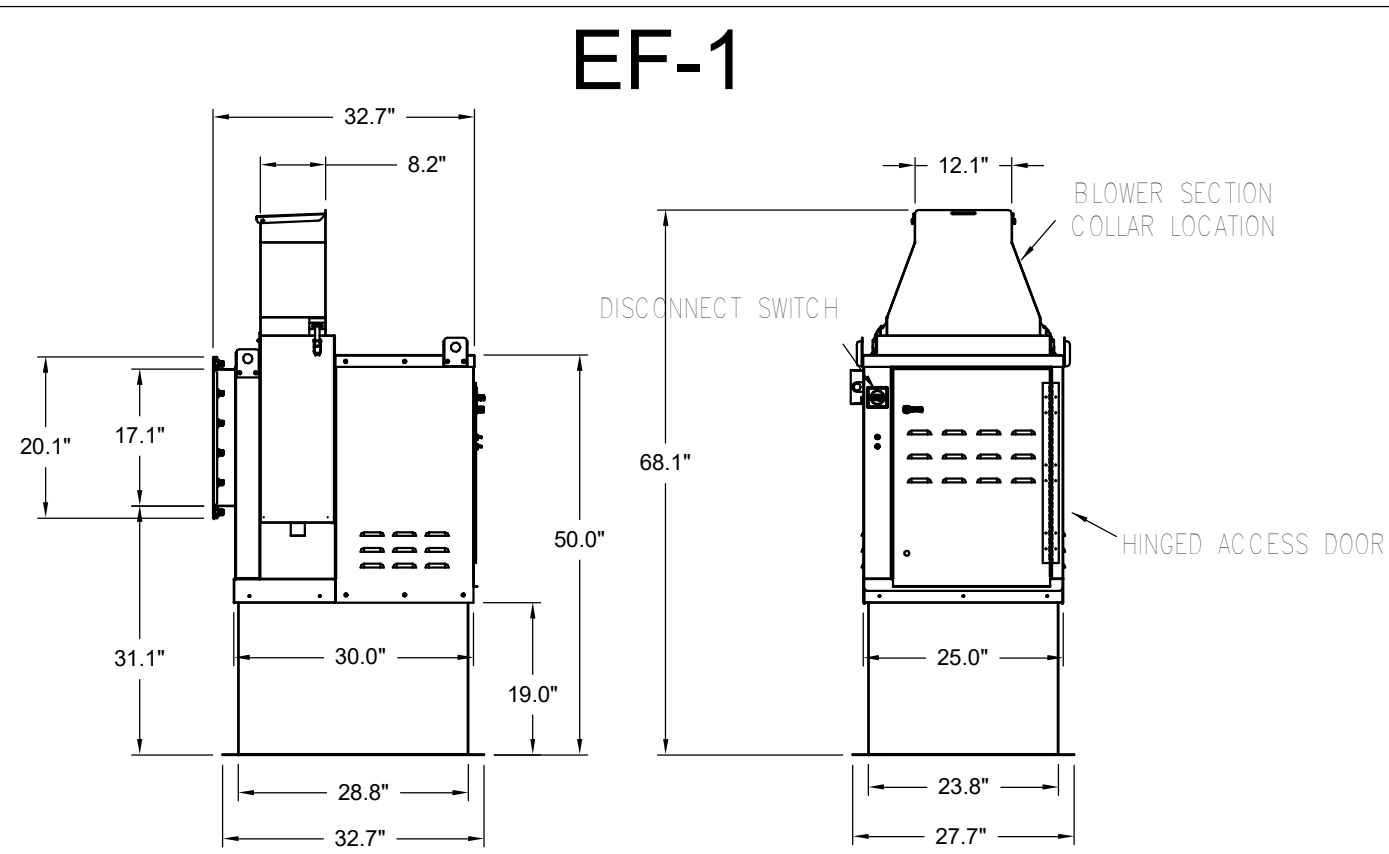


Halton KEFB Exhaust Fan

Job Name	Chick-FL-A	Location	EF-1	Item No	1747	Qty	115/160
Date	1/26/2023	Model	KEFB-14	Fan RPM	1747	Volts/Ph/Amps	115/1/60
Model	KEFB-14	Airflow, cfm	1,913	Fan BHP	0.95	Motor HP	85.3
Airflow, cfm	1,913	Fan BHP	0.95	Motor HP	85.3	Static Pressure, in WC	0.75
Static Pressure, in WC	0.75	TAB Port, in WC		4			

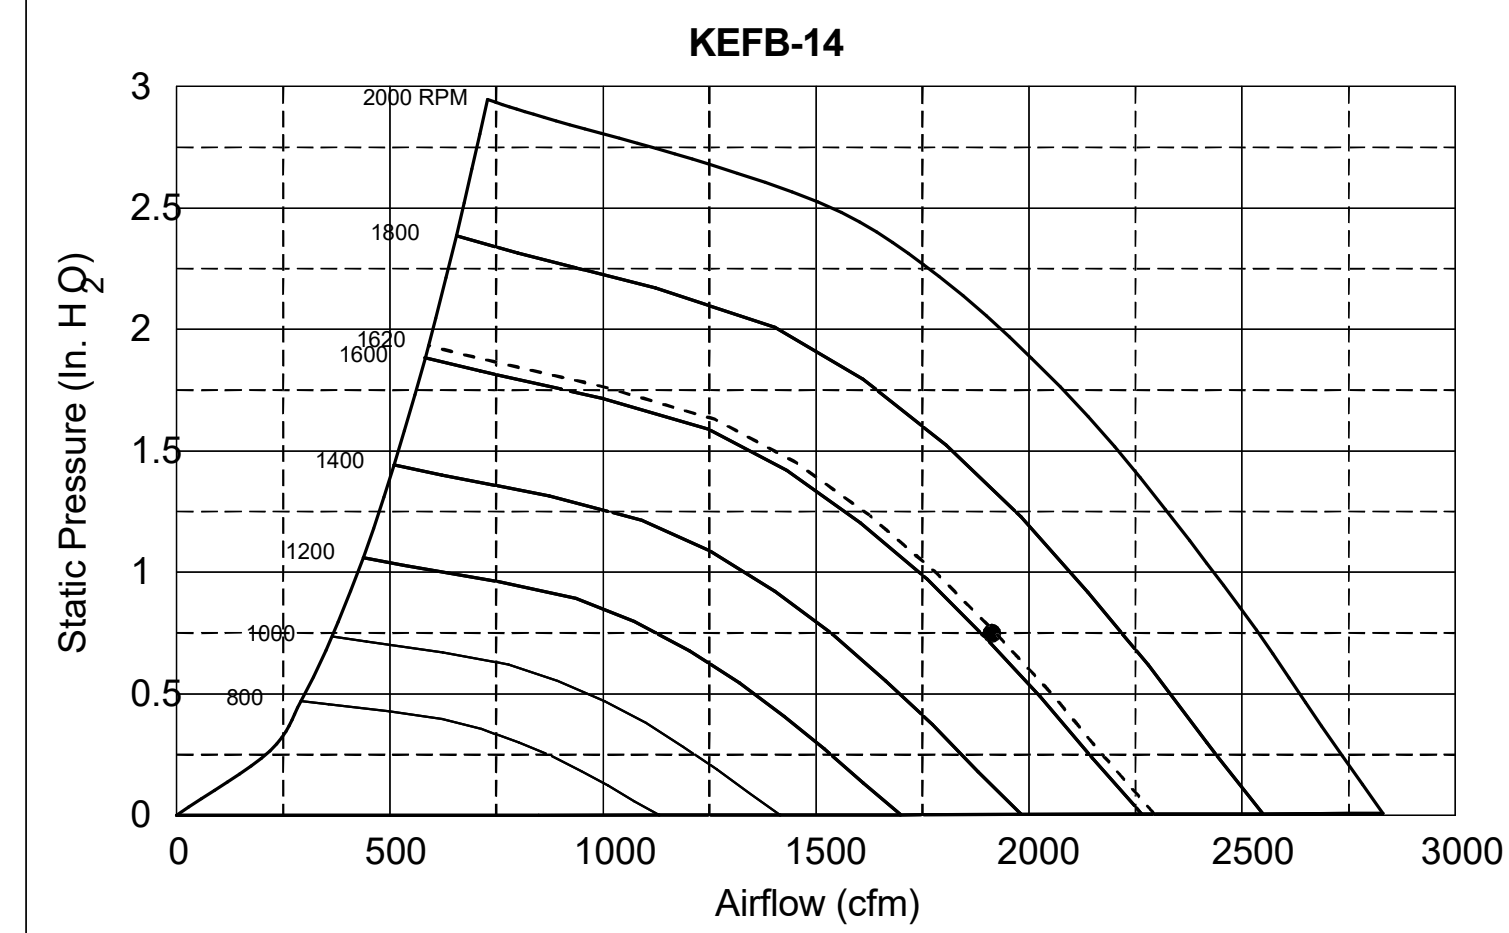


Halton KEFB Exhaust Fan

Job Name	Chick-FL-A	Location	EF-2	Item No	1,522	Qty	115/160
Date	1/26/2023	Model	KEFB-14	Fan RPM	1,522	Volts/Ph/Amps	115/1/60
Model	KEFB-14	Airflow, cfm	1,402	Fan BHP	0.95	Motor HP	81.6
Airflow, cfm	1,402	Fan BHP	0.95	Motor HP	81.6	Static Pressure, in WC	0.75
Static Pressure, in WC	0.75	TAB Port, in WC		2.1			

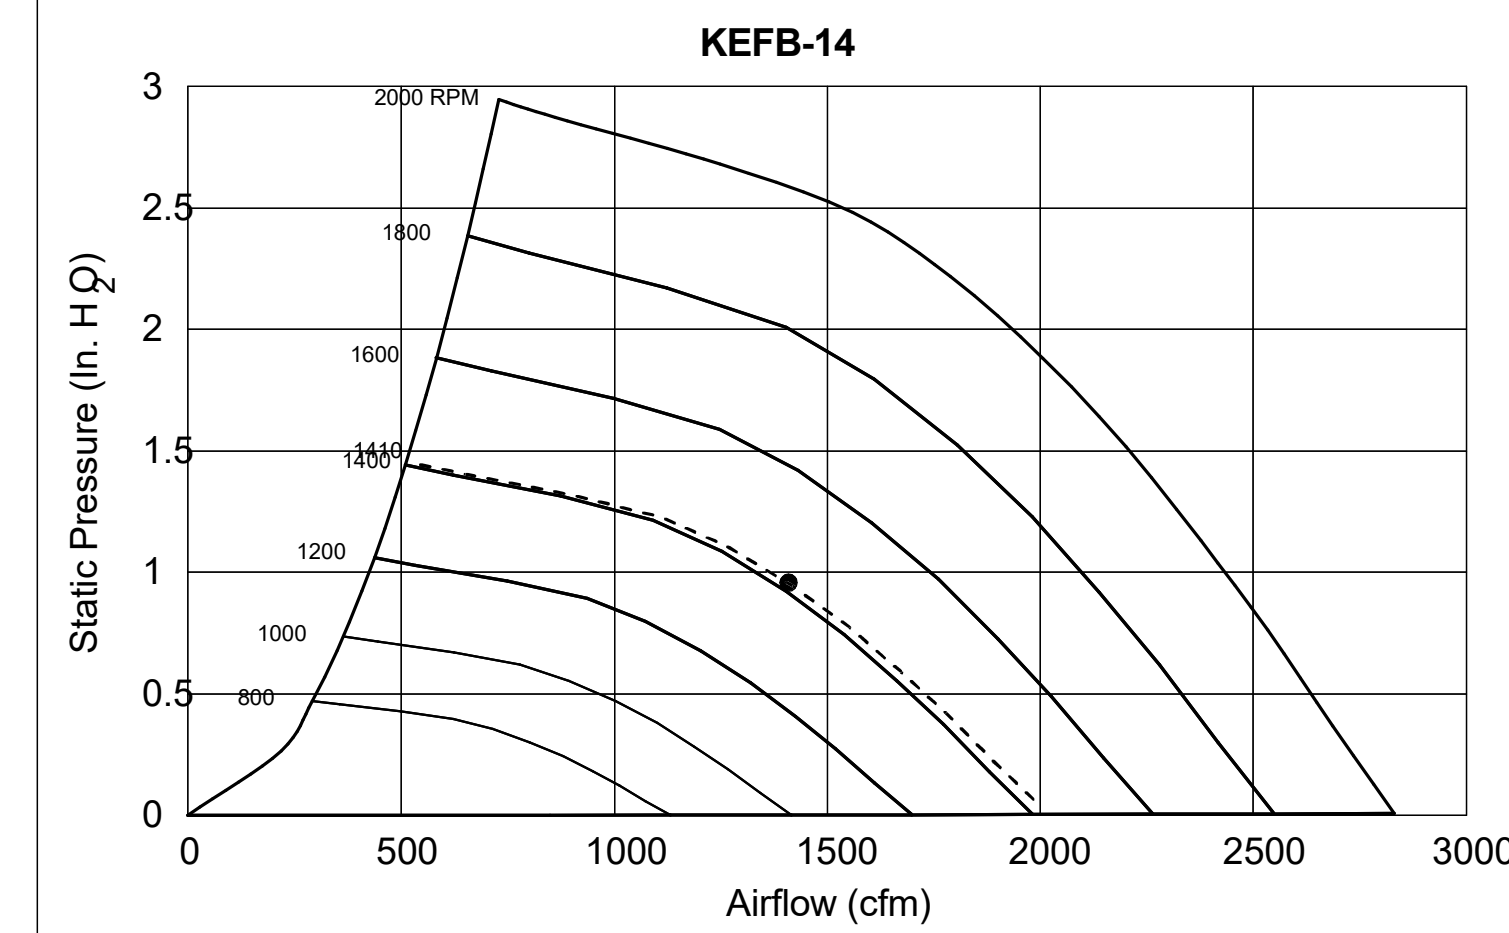


MODEL	DOOR				
	"A"	"B"	"C"	"E"	"F"
KAP0715	7	15	FLAT	5.5	13.5
KAP1015	10	15	1/2	7	12


ACCESS DOORS SHALL BE U.L. 1978 LISTED OR FIELD FABRICATED, REQUIRE NO TOOLS FOR REMOVAL AND MEET THE REQUIREMENTS OF THE CURRENT EDITION OF THE IMC. ACCESS DOOR SHALL BE SECURED WITH THUMB SCREWS. ACCESS DOORS SHALL BE SEALED WITH A MINIMUM 1500 DEREK GASKET MATERIAL.

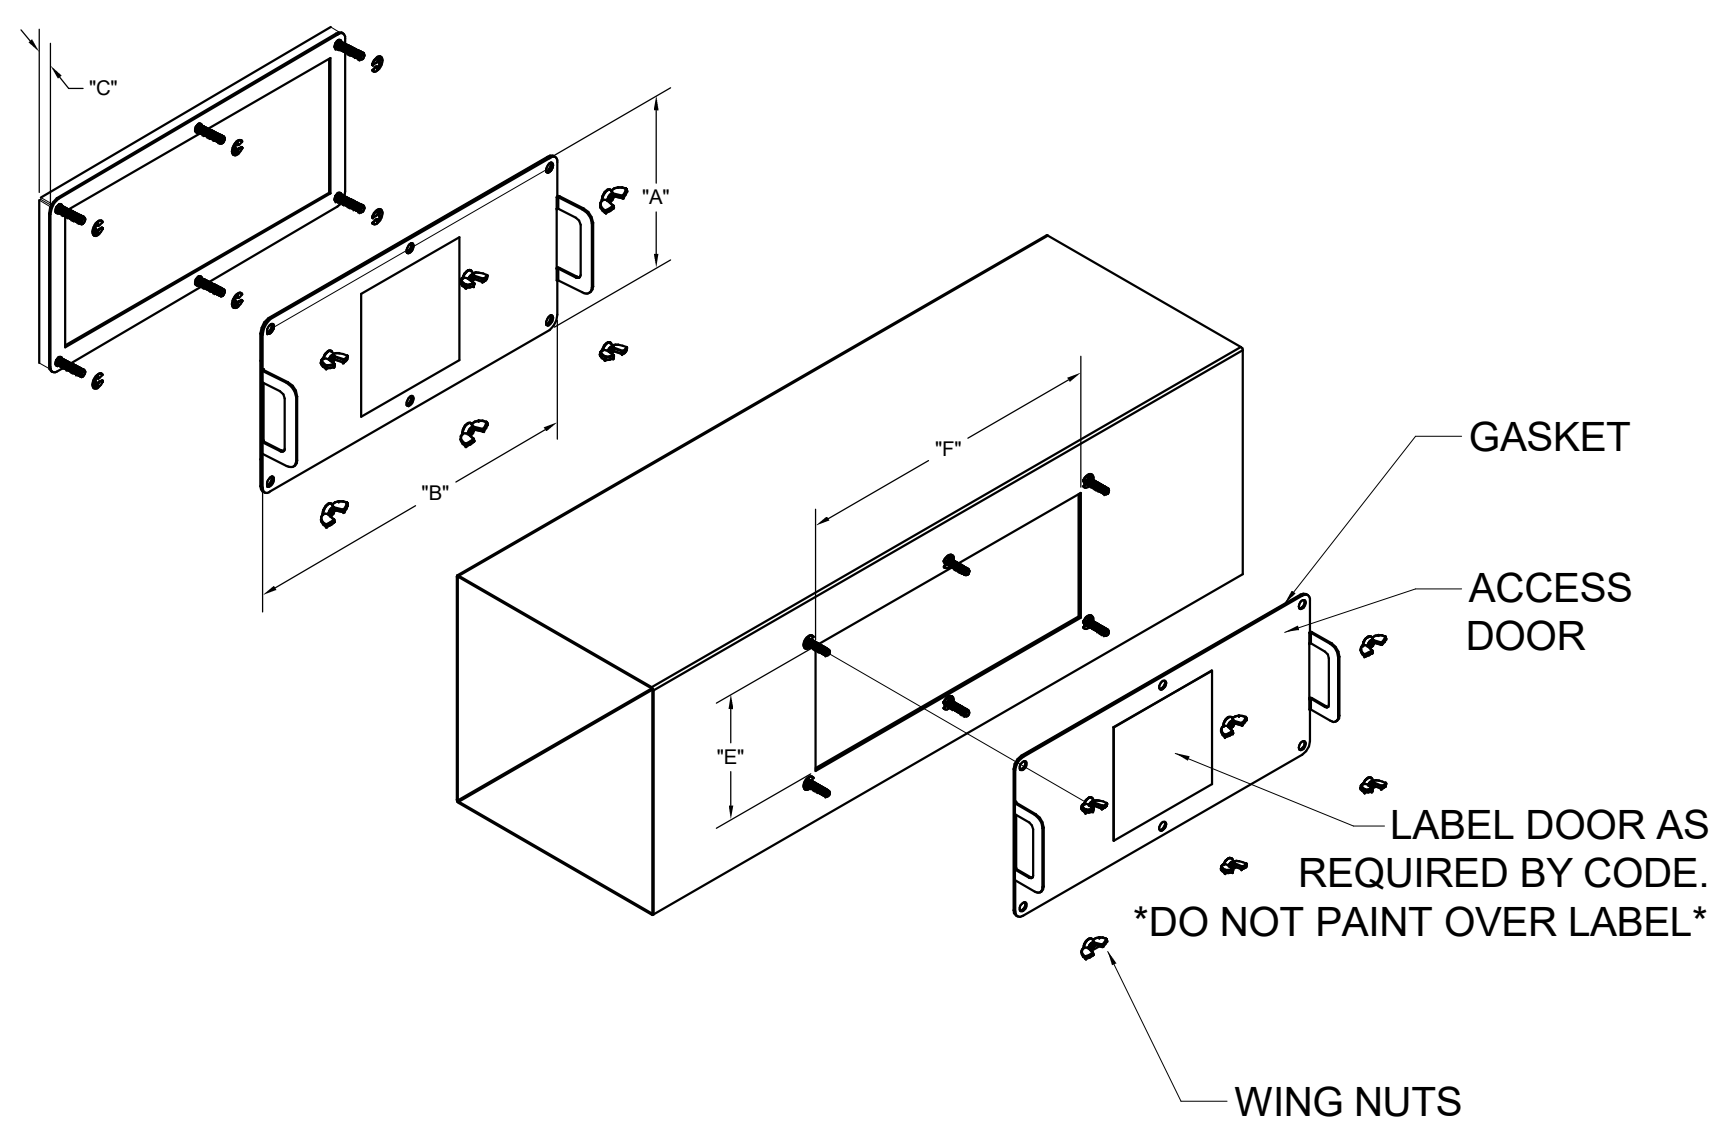

INSTALL PER MANUFACTURER'S INSTRUCTIONS

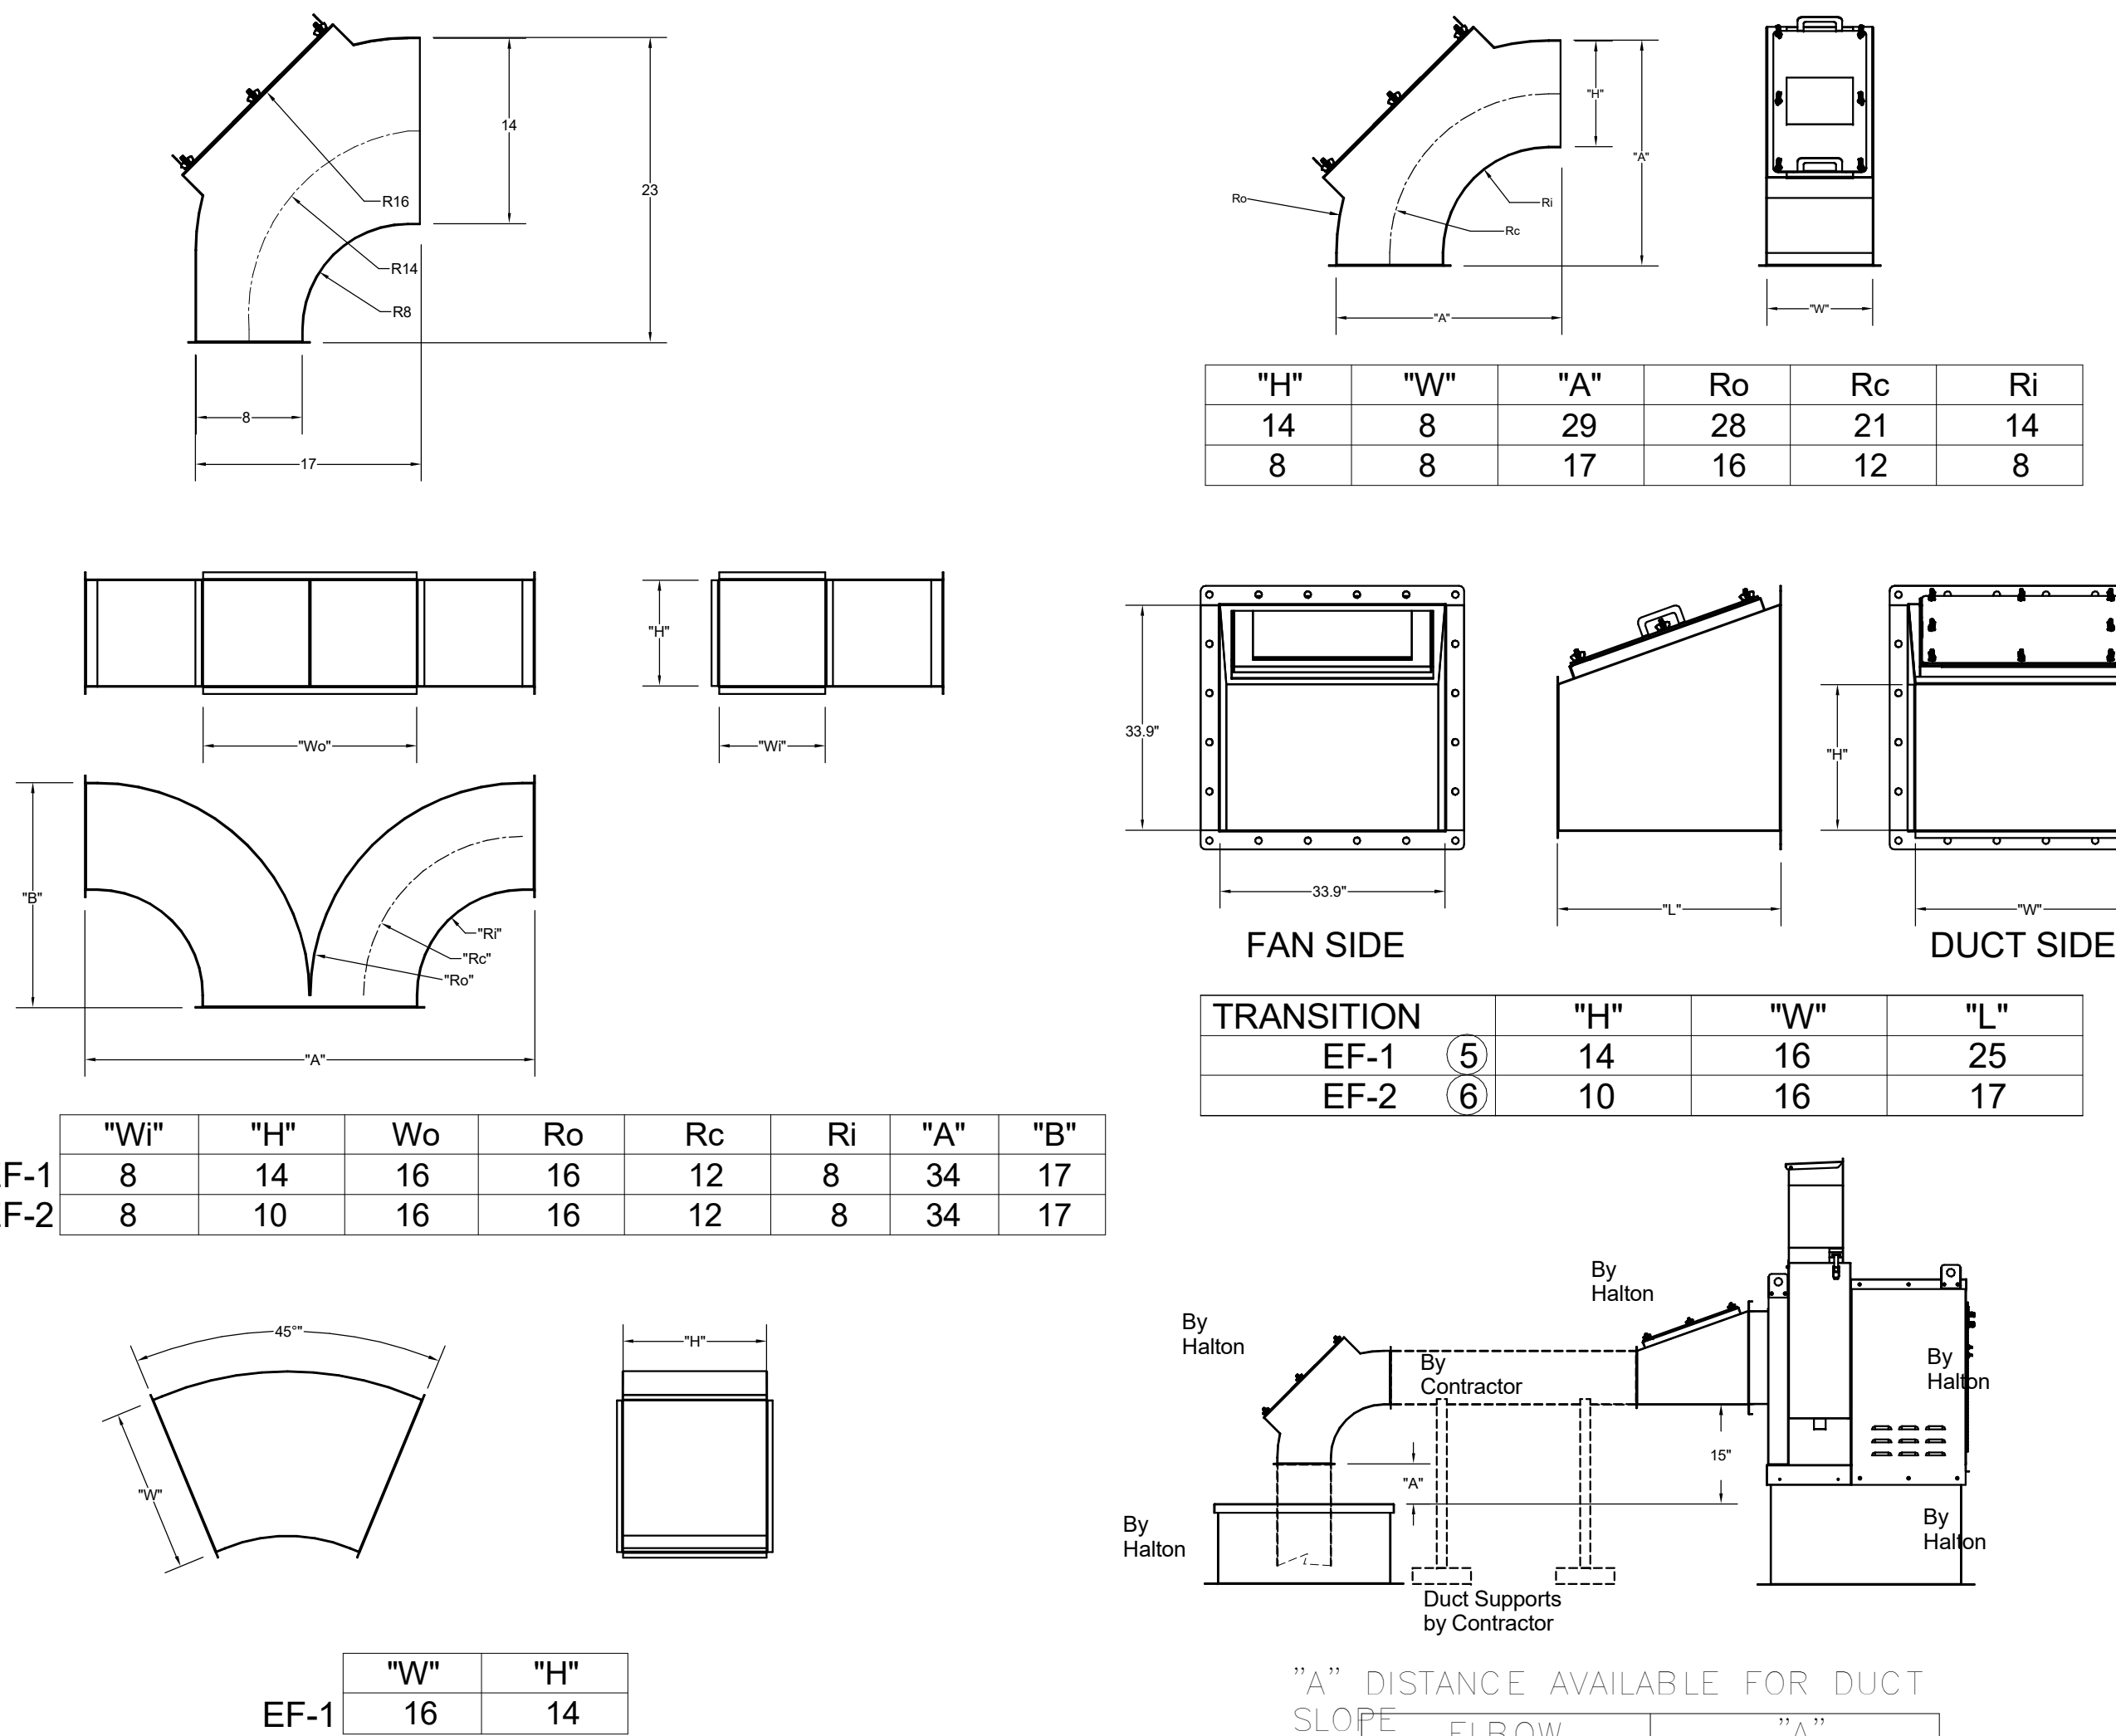


Halton Kitchen Exhaust Fan Curb Insulated Duct Curb

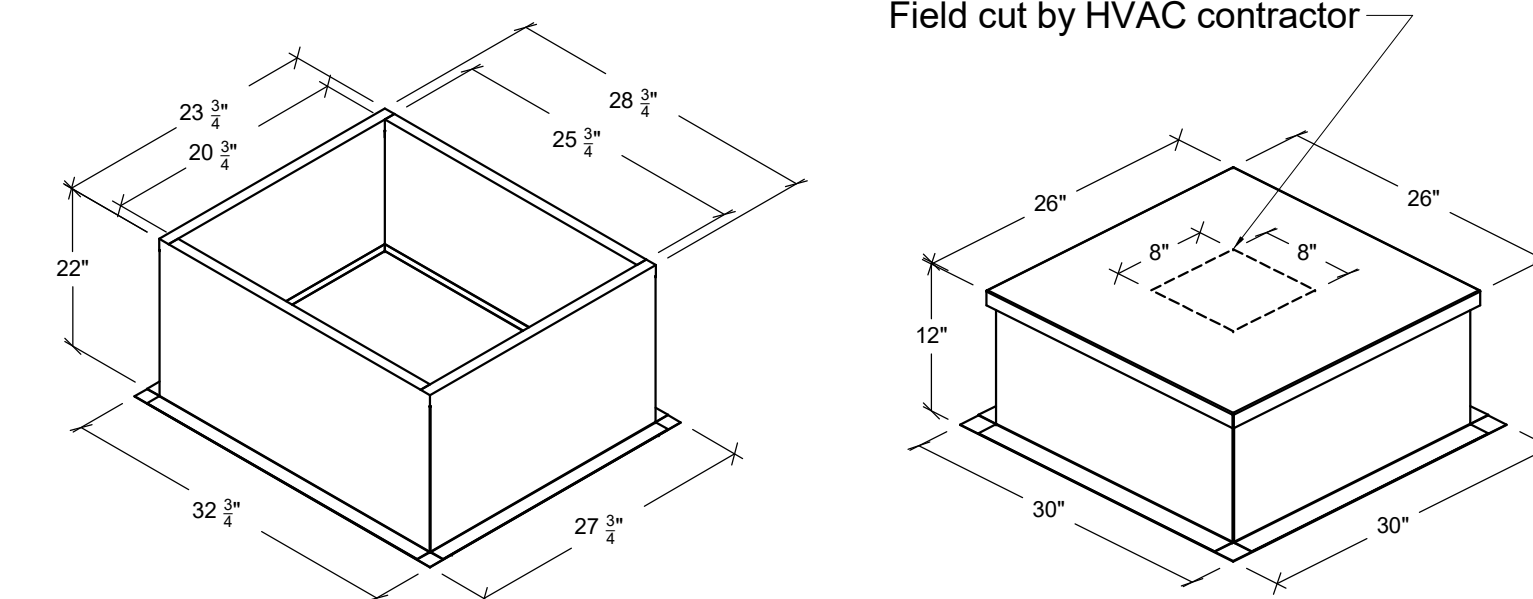

Kitchen Exhaust Fan Roof Curb
Standard Construction Features:
- Roof Curb fits between the building roof and the fan mounted directly to the roof support structure - Constructed of 18 ga aluminum steel - Straight Sided without a cant - 2 in. mounting flange - Height is 22 in.

Insulated Duct Curb
Standard Construction Features:
- Duct Curb fits between the building roof and the fan mounted directly to the roof support structure - Constructed of 18 ga aluminum steel - Straight Sided without a cant - 2 in. mounting flange - Height is 12 in. - 16 ga. cap

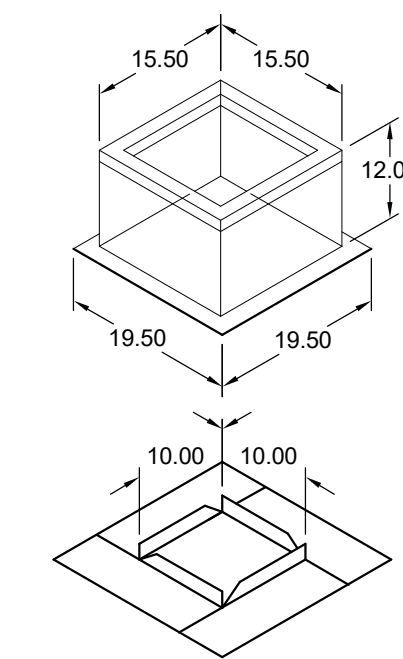


Model: GPI For Model: XRED-090-VG Curb & Damper Tray

Tag	Qty	Model	Sizing Method	Undersizing (in.)	Weight (lb)	Shipped Assembled	Union Label
EF-3	1	GPI-17	Nominal	1.5	14	Yes	No Preference

Material	Security Bars	Liner	Insulation (in.)	Insulation R Value
Galvanized	No	No	1	R4.3

Curb Height (in.)	Nominal Outside Width (in.)	Nominal Outside Length (in.)	Actual Outside Width (in.)	Actual Outside Length (in.)	Actual Inside Length (in.)	Actual Inside Width (in.)	Hinge Base Length (in.)	Hinge Base Width (in.)
12	17	17	15.5	15.5	12	12	19.5	16

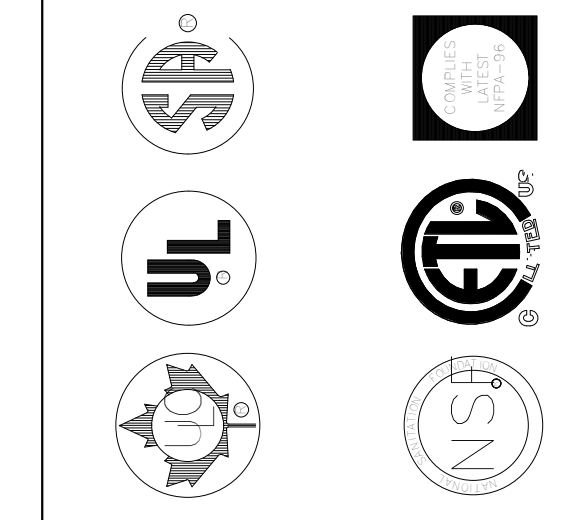

MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY. BELOW WEBSITE: WWW.HALTONCOMPANY.COM

HALTON CO. (USA)
101 INDUSTRIAL DRIVE
SCOTTSDALE, AZ 85264
1-270-237-5600

HALTON CO. (CANADA)
1021 BREVIK PLACE
MISSISSAUGA, ON L4W 3R7
1-905-624-0301

PROJECT: **CHICK-FL-A**

LOCATION: SARALAND FSU

DRAWN BY: NTS


DATE: 02/06/2025

SCALE: Halton Dwg.

SN#: 05661

Sheet **MH-1.4**

FOR REFERENCE ONLY

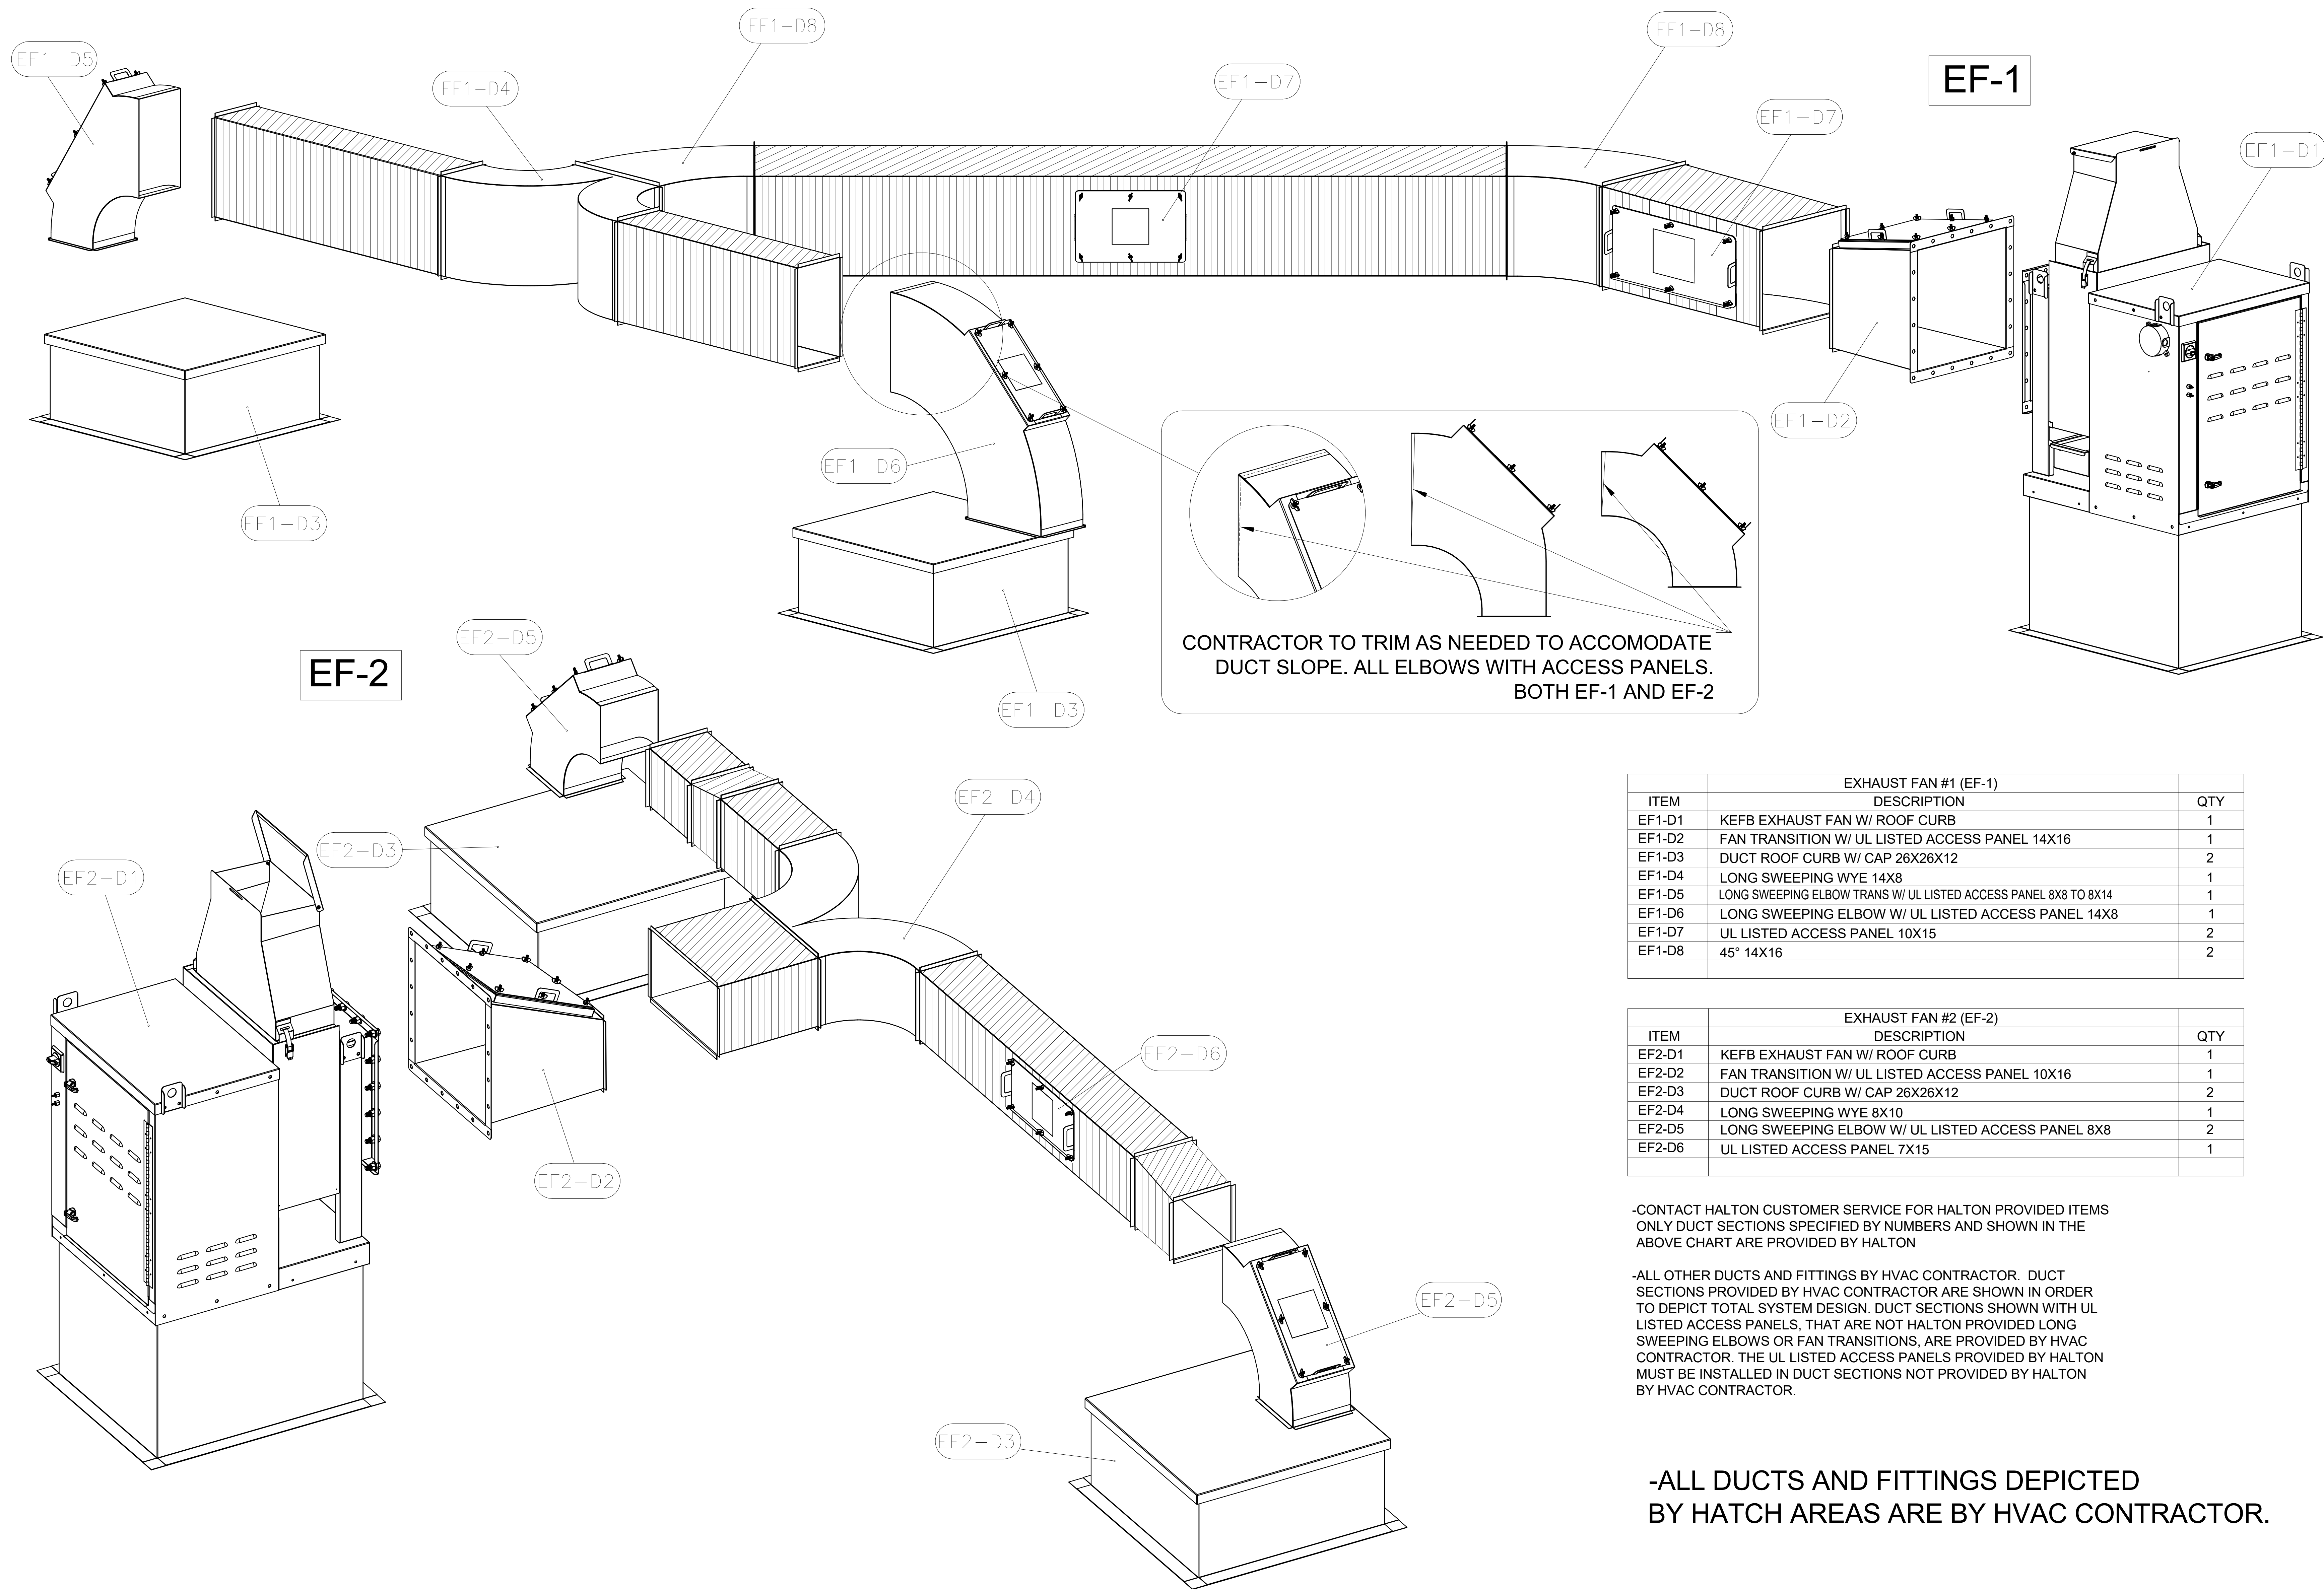

EXHAUST FAN #1 (EF-1)		
ITEM	DESCRIPTION	QTY
EF1-D1	KEFB EXHAUST FAN W/ ROOF CURB	1
EF1-D2	FAN TRANSITION W/ UL LISTED ACCESS PANEL 14X16	1
EF1-D3	DUCT ROOF CURB W/ CAP 26X26X12	2
EF1-D4	LONG SWEEPING WYE 14X8	1
EF1-D5	LONG SWEEPING ELBOW TRANS W/ UL LISTED ACCESS PANEL 8X8 TO 8X14	1
EF1-D6	LONG SWEEPING ELBOW W/ UL LISTED ACCESS PANEL 14X8	1
EF1-D7	UL LISTED ACCESS PANEL 10X15	2
EF1-D8	45° 14X16	2

EXHAUST FAN #2 (EF-2)		
ITEM	DESCRIPTION	QTY
EF2-D1	KEFB EXHAUST FAN W/ ROOF CURB	1
EF2-D2	FAN TRANSITION W/ UL LISTED ACCESS PANEL 10X16	1
EF2-D3	DUCT ROOF CURB W/ CAP 26X26X12	2
EF2-D4	LONG SWEEPING WYE 8X10	1
EF2-D5	LONG SWEEPING ELBOW W/ UL LISTED ACCESS PANEL 8X8	2
EF2-D6	UL LISTED ACCESS PANEL 7X15	1

-CONTACT HALTON CUSTOMER SERVICE FOR HALTON PROVIDED ITEMS ONLY DUCT SECTIONS SPECIFIED BY NUMBERS AND SHOWN IN THE ABOVE CHART ARE PROVIDED BY HALTON

-ALL OTHER DUCTS AND FITTINGS BY HVAC CONTRACTOR. DUCT SECTIONS PROVIDED BY HVAC CONTRACTOR ARE SHOWN IN ORDER TO DEPICT TOTAL SYSTEM DESIGN. DUCT SECTIONS SHOWN WITH UL LISTED ACCESS PANELS, THAT ARE NOT HALTON PROVIDED LONG SWEEPING ELBOWS OR FAN TRANSITIONS, ARE PROVIDED BY HVAC CONTRACTOR. THE UL LISTED ACCESS PANELS PROVIDED BY HALTON MUST BE INSTALLED IN DUCT SECTIONS NOT PROVIDED BY HALTON BY HVAC CONTRACTOR.

-ALL DUCTS AND FITTINGS DEPICTED BY HATCH AREAS ARE BY HVAC CONTRACTOR.

THE DRAWING MUST BE CHECKED, SIGNED AND RETURNED TO THE APPROPRIATE FACTORY. PLEASE VERIFYING THE FOLLOWING:
 1. ALL DIMENSIONAL INFORMATION, MOUNTING POSITIONS AND CLEARANCES.
 2. THE TYPE OF COOKING EQUIPMENT.
 3. THE TYPE OF EXHAUST SYSTEM.
 4. THE TYPE OF EXHAUST SYSTEM.
 5. THE TYPE OF EXHAUST SYSTEM.
 6. THE TYPE OF EXHAUST SYSTEM.
 7. THE TYPE OF EXHAUST SYSTEM.
 8. THE TYPE OF EXHAUST SYSTEM.
 9. THE TYPE OF EXHAUST SYSTEM.
 10. THE TYPE OF EXHAUST SYSTEM.
 11. THE TYPE OF EXHAUST SYSTEM.
 12. THE TYPE OF EXHAUST SYSTEM.
 13. THE TYPE OF EXHAUST SYSTEM.
 14. THE TYPE OF EXHAUST SYSTEM.
 15. THE TYPE OF EXHAUST SYSTEM.
 16. THE TYPE OF EXHAUST SYSTEM.
 17. THE TYPE OF EXHAUST SYSTEM.
 18. THE TYPE OF EXHAUST SYSTEM.
 19. THE TYPE OF EXHAUST SYSTEM.
 20. THE TYPE OF EXHAUST SYSTEM.
 21. THE TYPE OF EXHAUST SYSTEM.
 22. THE TYPE OF EXHAUST SYSTEM.
 23. THE TYPE OF EXHAUST SYSTEM.
 24. THE TYPE OF EXHAUST SYSTEM.
 25. THE TYPE OF EXHAUST SYSTEM.
 26. THE TYPE OF EXHAUST SYSTEM.
 27. THE TYPE OF EXHAUST SYSTEM.
 28. THE TYPE OF EXHAUST SYSTEM.
 29. THE TYPE OF EXHAUST SYSTEM.
 30. THE TYPE OF EXHAUST SYSTEM.
 31. THE TYPE OF EXHAUST SYSTEM.
 32. THE TYPE OF EXHAUST SYSTEM.
 33. THE TYPE OF EXHAUST SYSTEM.
 34. THE TYPE OF EXHAUST SYSTEM.
 35. THE TYPE OF EXHAUST SYSTEM.
 36. THE TYPE OF EXHAUST SYSTEM.
 37. THE TYPE OF EXHAUST SYSTEM.
 38. THE TYPE OF EXHAUST SYSTEM.
 39. THE TYPE OF EXHAUST SYSTEM.
 40. THE TYPE OF EXHAUST SYSTEM.
 41. THE TYPE OF EXHAUST SYSTEM.
 42. THE TYPE OF EXHAUST SYSTEM.
 43. THE TYPE OF EXHAUST SYSTEM.
 44. THE TYPE OF EXHAUST SYSTEM.
 45. THE TYPE OF EXHAUST SYSTEM.
 46. THE TYPE OF EXHAUST SYSTEM.
 47. THE TYPE OF EXHAUST SYSTEM.
 48. THE TYPE OF EXHAUST SYSTEM.
 49. THE TYPE OF EXHAUST SYSTEM.
 50. THE TYPE OF EXHAUST SYSTEM.
 51. THE TYPE OF EXHAUST SYSTEM.
 52. THE TYPE OF EXHAUST SYSTEM.
 53. THE TYPE OF EXHAUST SYSTEM.
 54. THE TYPE OF EXHAUST SYSTEM.
 55. THE TYPE OF EXHAUST SYSTEM.
 56. THE TYPE OF EXHAUST SYSTEM.
 57. THE TYPE OF EXHAUST SYSTEM.
 58. THE TYPE OF EXHAUST SYSTEM.
 59. THE TYPE OF EXHAUST SYSTEM.
 60. THE TYPE OF EXHAUST SYSTEM.
 61. THE TYPE OF EXHAUST SYSTEM.
 62. THE TYPE OF EXHAUST SYSTEM.
 63. THE TYPE OF EXHAUST SYSTEM.
 64. THE TYPE OF EXHAUST SYSTEM.
 65. THE TYPE OF EXHAUST SYSTEM.
 66. THE TYPE OF EXHAUST SYSTEM.
 67. THE TYPE OF EXHAUST SYSTEM.
 68. THE TYPE OF EXHAUST SYSTEM.
 69. THE TYPE OF EXHAUST SYSTEM.
 70. THE TYPE OF EXHAUST SYSTEM.
 71. THE TYPE OF EXHAUST SYSTEM.
 72. THE TYPE OF EXHAUST SYSTEM.
 73. THE TYPE OF EXHAUST SYSTEM.
 74. THE TYPE OF EXHAUST SYSTEM.
 75. THE TYPE OF EXHAUST SYSTEM.
 76. THE TYPE OF EXHAUST SYSTEM.
 77. THE TYPE OF EXHAUST SYSTEM.
 78. THE TYPE OF EXHAUST SYSTEM.
 79. THE TYPE OF EXHAUST SYSTEM.
 80. THE TYPE OF EXHAUST SYSTEM.
 81. THE TYPE OF EXHAUST SYSTEM.
 82. THE TYPE OF EXHAUST SYSTEM.
 83. THE TYPE OF EXHAUST SYSTEM.
 84. THE TYPE OF EXHAUST SYSTEM.
 85. THE TYPE OF EXHAUST SYSTEM.
 86. THE TYPE OF EXHAUST SYSTEM.
 87. THE TYPE OF EXHAUST SYSTEM.
 88. THE TYPE OF EXHAUST SYSTEM.
 89. THE TYPE OF EXHAUST SYSTEM.
 90. THE TYPE OF EXHAUST SYSTEM.
 91. THE TYPE OF EXHAUST SYSTEM.
 92. THE TYPE OF EXHAUST SYSTEM.
 93. THE TYPE OF EXHAUST SYSTEM.
 94. THE TYPE OF EXHAUST SYSTEM.
 95. THE TYPE OF EXHAUST SYSTEM.
 96. THE TYPE OF EXHAUST SYSTEM.
 97. THE TYPE OF EXHAUST SYSTEM.
 98. THE TYPE OF EXHAUST SYSTEM.
 99. THE TYPE OF EXHAUST SYSTEM.
 100. THE TYPE OF EXHAUST SYSTEM.



MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY. BELOW WEBSITE: WWW.HALTONCOMPANY.COM

REV.	DATE	BY
1		
2		
3		
4		
5		
6		
7		

PROJECT: **CHICK-FIL-A**
 LOCATION: SARALAND FSU
 DRAWN BY: SARALAND FSU
 DATE: 02/06/2025
 SCALE: NTS
 Halton Dwg:
 SN#: 05661
 HALTON CO. (CANADA)
 1021 BREVIK PLACE
 MISSISSAUGA, ON L4W 3R7
 1-905-624-0301
 REVISION DESCRIPTION

ROOFTOP UNIT SCHEDULE - LENNOX

MARK	MANUFACTURER	MODEL	EER	IEER	TOTAL WEIGHT	SUPPLY (CFM)	OA (CFM)	HP	ESP (in-wg)	TOTAL COOLING MBH	SENSIBLE COOLING MBH	HEATING INPUT MBH	HEATING OUTPUT MBH	VOLTAGE (V)	PHASE	MCA (A)	MOCP (A)	REMARKS
AC#1L	LENNOX	LGT300H5M	10.6	14.3	3205.00 lb	8,125	1,750	7.5	0.8	287.5	212.80	480	389	208	3	138	150	1,3-14
AC#2L	LENNOX	LGT120H5E	12.1	15.5	1476.00 lb	3,600	720	3.8	0.8	122.8	85.30	240	194	208	3	51	60	1,3-14
AC#3L	LENNOX	LGT210H5M	12	16.1	3123.00 lb	6,125	1,400	5	0.8	212.1	143.40	360	292	208	3	91	100	1,3-14
AC#4L	LENNOX	LGT060H5E	12.5	16.4	1038.00 lb	1,750	425	1.5	0.8	61.3	43.50	108	87	208	3	23	35	2-14
AC#5L	LENNOX	LGT048H5E	13	17.3	1033.00 lb	1,300	300	1.5	0.8	47.6	31.90	65	52	208	3	23	30	1,3-14

NOTES
 • MECHANICAL CONTRACTOR TO VERIFY LENNOX SUBMITTAL WITH CONSTRUCTION DOCUMENTS. NATIONAL ACCOUNT - NO SUBSTITUTIONS PERMITTED - SEE DRAWING G-004.

REMARKS
 1. DIFFERENTIAL ENTHALPY ECONOMIZER WITH POWER EXHAUST.
 2. DIFFERENTIAL ENTHALPY ECONOMIZER WITH BAROMETRIC EXHAUST.
 3. 14" HIGH ROOF CURB. PROVIDE CURBS PLUS RESTRAINT CLIPS FOR PROJECT WINDSPEED. WINDSPEED = 142 MPH.
 4. SEE DETAIL 2/M-701L FOR SETTING OF CONTROL PARAMETERS BY MC.
 5. FACTORY INSTALLED 115V GFI SERVICE OUTLET. SEPERATE 115V CIRCUIT PROVIDED BY ELECTRICAL CONTRACTOR.
 6. FACTORY INSTALLED RETURN AIR SMOKE DETECTOR.
 7. FACTORY INSTALLED NON-FUSED DISCONNECT.
 8. 2" MERV 8 THROW AWAY FILTERS.
 9. HINGED PANELS FOR ACCESS TO FILTER(S), FAN BLOWER & MOTOR, COMPRESSOR(S) ACCESS AND CONTROLS.
 10. FACTORY INSTALLED COIL HAIL GUARD.
 11. PROVIDE HIGH FAULT (100K) SCCR.
 12. HOT GAS DEHUMIDIFICATION OPTION WITH WALL MOUNTED HUMIDITY SENSOR.
 13. FACTORY CONFIGURED PHASE LOSS PROTECTION.
 14. FACTORY INSTALLED CONDENSATE PAN DRAIN OVERFLOW SWITCH.

HOOD SCHEDULE

MARK	EXHAUST CFM	SP @ TAB PORT (in-wg)	CAPTURE JET CFM & S.P.	TYPE	COLLAR SIZE	WIDTH	DEPTH	HEIGHT	MANUFACTURER	MODEL	REMARKS
HOOD#1L	1,204	0.13	80 @ 0.30"	BACKSHELF	14"x8"	107"	36"	38"	HALTON	KVL-2 IC 1	
HOOD#1R	709	0.13	47 @ 0.30"	BACKSHELF	8"x8"	63"	36"	38"	HALTON	KVL-2 IC 1	
HOOD#2	701	0.3	30 @ 0.29"	BACKSHELF	8"x8"	45"	34"	38"	HALTON	KVL-C-IC 1	
HOOD#3	701	0.3	30 @ 0.29"	BACKSHELF	8"x8"	42"	34"	38"	HALTON	KVL-C-IC 1	

NOTES
 DIMENSIONS OF HOODS INCLUDE BACK AND SIDE SPACERS (HEIGHT DOES NOT INCLUDE CLOSURE PANELS). NATIONAL ACCOUNTS - NO SUBSTITUTIONS PERMITTED - SEE DRAWING G-004.

REMARKS
 1. REFER TO HOOD SHOP DRAWINGS FOR HOOD CONSTRUCTION AND OPTIONS. PRELIMINARY HOOD SHOP DRAWINGS ARE INCLUDED FOR REFERENCE ON SHEETS MH-1.1, MH-1.2, AND MH-1.3.

FAN SCHEDULE

MARK	FAN CFM	ESP (in-wg)	MOTOR RPM	HP	AREA SERVED	VOLTAGE (V)	PHASE	FLA (A)	MOCP (A)	MODEL	MANUFACTURER	REMARKS
CF#1	1,900	0.01	1,625	0.1	OUTDOOR CANOPY	120	1	1.1	20	U-18-TE-HD	TPI	20,21,22
EF#1	1,913	0.75	1,747	0.75	HOOD#1	120	1	13.8	25	KEFB-14-CFA	HALTON	1,2,3,4,5,6,7,8,9,10,11
EF#2	1,402	0.95	1,522	0.75	HOOD#2 & HOOD#3	120	1	13.8	25	KEFB-14-CFA	HALTON	1,2,3,4,5,6,7,8,9,10,11
EF#3	360	0.375	1,207	0.125	RESTROOMS	120	1	2.2	20	XRED-095-VG	ACCUREX	1,3,11,12,13,14,15,16
TF#1	450	0.3	1,070	0.127	TECH CLOSET	120	1	2.5	20	SP-A510-VG	GREENHECK	1,17,18,19
TF#2	300	0.3	1,725	0.167	VESTIBULE	115	1	1.3	20	XID-7-VG	ACCUREX	1,17,20

NOTES
 • NATIONAL ACCOUNT - NO SUBSTITUTIONS PERMITTED - SEE DRAWING G-004

REMARKS
 1. FANS SUPPLIED BY HALTON.
 2. U.L. 705 LISTED AND LABELED FOR RESTUARANT APPLICATIONS.
 3. FACTORY INSTALLED PREWIRED DISCONNECT SWITCH.
 4. 22" HIGH ROOF CURB.
 5. INSTALL ROOFTOP SOLUTIONS G2 DRIP GUARD. MECHANICAL CONTRACTOR TO CONTACT ROOFTOP SOLUTIONS AT 800-913-7034.
 6. FACTORY WEATHER HOUSING W/ HINGED ACCESS DOOR.
 7. FACTORY DRAIN CONNECTION.
 8. FACTORY BOLTED ACCESS DOOR ON SCROLL.
 9. FACTORY INSTALLED BELT DRIVE WITH ADJUSTABLE MOTOR SHEAVE, SPARE BELT, AND BELT TENSIONER.
 10. FACTORY INSTALLED OUTLET WITH QUICK RELEASE, HINGED ACCESS, AND GRAVITY BACKDRAFT DAMPER.
 11. INTEGRAL THERMAL OVERLOAD.
 12. BIRDSCREEN.
 13. BACKDRAFT DAMPER IN DUCT BY MECHANICAL CONTRACTOR AS SHOWN ON 3/M-501.
 14. STARTER BY ELECTRICAL CONTRACTOR. INTERLOCK WITH LIGHTS BY ELECTRICAL CONTRACTOR.
 15. 12" HIGH CURB.
 16. FACTORY INSTALLED AND WIRED SPEED CONTROLLER.
 17. PROVIDE NEMA 1 PREWIRED DISCONNECT.
 18. INTEGRAL POTENTIOMETER ON FAN MOTOR. SET TO FULL SPEED.
 19. PROVIDE THERMOSTAT / TEMPERATURE CONTROLLER, SET TO 76°F.
 20. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
 21. PROVIDE WITH ON/OFF SWITCH.
 22. FAN SUPPLIED BY TOM BARROW OR POWERS OF ARKANSAS FOR THE SOUTHWEST REGION.

AIR DEVICE SCHEDULE - LARGE BLDG

MARK	DESCRIPTION	LOCATION	NECK SIZE	FACE SIZE	FRAME TYPE	REMARKS
A	PRICE MODEL APDC ALUMINUM SUPPLY AIR DIFFUSER WITH INDIVIDUALLY ADJUSTABLE CURVED AIR PATTERN CONTROLLERS.	DINING/ KITCHEN	VARIES	24"x24"	LAY-IN	1,7
B	VARITHERM PLAQUE DIFFUSER	OFFICE / TEAM ROOM	VARIES	24"x24"	LAY-IN	1,7,8
C	PRICE MODEL SMCD STEEL SUPPLY AIR DIFFUSER FIELD ADJUSTABLE AIR PATTERN CONTROLLERS.	ENTRY	14"x14"	19"x19"	BEVELLED	1,3,5,6
D	PRICE MODEL APDC ALUMINUM SUPPLY AIR DIFFUSER WITH INDIVIDUALLY ADJUSTABLE CURVED AIR PATTERN CONTROLLERS.	DINING/ KITCHEN	VARIES	16"x16"	LAY-IN	1,2,3,5,6
E	PRICE MODEL 22 DOUBLE DEFLECTION ALUMINUM SIDEWALL SUPPLY GRILLE, FRONT BLADE PARALLEL TO LONG SIDE.	PLAY AREA	12"x10"	14"x12"	SURFACE	1
F	PRICE MODEL 80 EGGCRATE RETURN AIR GRILLE WITH REMOVABLE WHITE CORE, FACTORY FLAT BLACK BACKPAN AND ROUND NECK.	KITCHEN / DINING / OFFICE	VARIES	24"x24"	LAY-IN	1,7
J	PRICE MODEL SMCD STEEL SUPPLY AIR DIFFUSER FIELD ADJUSTABLE AIR PATTERN CONTROLLERS.	RESTROOMS	10"x10"	15"x15"	BEVELLED	1,3,4,5,6
K	PRICE MODEL APDDR ALUMINUM PERFORATED FACE RETURN AIR GRILLE.	RESTROOMS / ENTRY	14"x14"	16"x16"	SURFACE	1,4,5,6
L	PRICE MODEL 21 ALUMINUM SIDEWALL RETURN GRILLE, FRONT BLADE PARALLEL TO LONG SIDE.	PLAY AREA	24"x12"	26"x14"	SURFACE	1

NOTES
 • NATIONAL ACCOUNT - NO SUBSTITUTIONS PERMITTED - SEE DRAWING G-004

REMARKS
 1. STANDARD OFF WHITE FINISH.
 2. PROVIDE PRICE MODEL AMF SURFACE MOUNT FRAME.
 3. SEE DRAWING M-101 FOR THROW.
 4. PROVIDE FACTORY MOUNTED MODEL VCS3 NECK DAMPER AND FIELD INSTALLED RECTANGULAR TO ROUND TRANSITION.
 5. PROVIDE BACKPAN. MC TO SEAL JOINTS WITH MASTIC AND INSULATE EXTERNALLY.
 6. FIELD INSULATE BACKPAN AS SHOWN ON DETAIL 1/M-501.
 7. FACTORY INSULATED R-6 BACKPAN.
 8. PROVIDE RELIEF COLLAR ACCESSORY FOR VAV DIFFUSER.

AIR DOOR SCHEDULE


MARK	CFM	VELOCITY (FPM)	HEATING (KW)	MOTOR HP	MCA (A)	MOCP (A)	VOLTAGE (V)	PHASE	AREA SERVED	MODEL	MANUFACTURER	REMARKS
AD#1	1,543	2,338	0	0.75	8	20	120	1	DRIVE THRU	CHA-1-48	POWERED AIRE	1,2,3,5
AD#2	3,867	4,218	0	0.75	8	20	120	1	REAR DOOR	RBT-1-48	POWERED AIRE	4

NOTES
 • NATIONAL ACCOUNT - NO SUBSTITUTIONS PERMITTED - SEE DRAWING G-004


REMARKS
 1. FACTORY PROVIDED, WIRED, AND UNIT MOUNTED SPEED CONTROLLER ABOVE CEILING.
 2. FACTORY WIRED DISCONNECT.
 3. FACTORY PROVIDED, FIELD INSTALLED BY MC, REMOTE WALL SWITCHES FOR FAN ON/AUTO SWITCH. SEE DETAILS ON M-701.
 4. FACTORY PROVIDED MAGNETIC DOOR CONTACT WITH FACTORY INSTALLED LOW VOLTAGE CONTROLS LOCATED IN AIR DOOR CABINET.
 5. PROVIDE WITH A DIVERTER BOX. PROVIDE WITH MOUNTING BRACKETS PER MANUFACTURER'S RECOMMENDATIONS.



Chick-fil-A
 5200 Buffington Road
 Atlanta, Georgia
 30349-2998

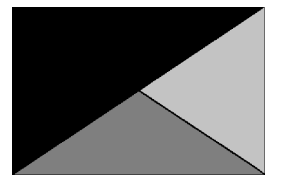

Kurzynske & Associates
 2705 Lebanon Pike - Suite One
 Nashville, Tennessee 37214
 Telephone: (615) 255-5203

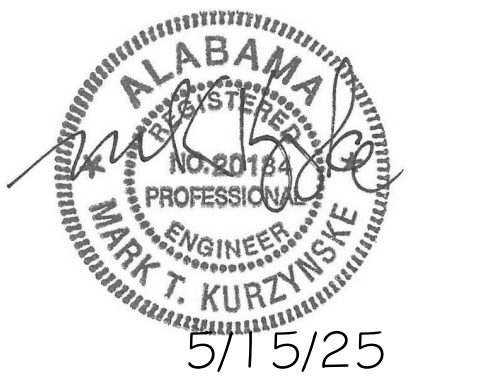

CHICK-FIL-A
SARALAND FSU
 SEC HIGHWAY 158 & SHELL STREET
 SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P14 LS BN
 RELEASE:
 PRINTED FOR:
 CONSTRUCTION
REVISION SCHEDULE
 NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
 DATE 02/06/2025
 DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
 SHEET
 EQUIPMENT SCHEDULES
 - LENNOX

SHEET NUMBER

M-601L

General		Ventilation													Exhaust					Served by						
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture						Required Fixture Exhaust CFM							
1	Kitchen	1,287	20	26	7.5	195	0.12	154	349	0.8	436	8,125	0.05	1,750	0.7	901	-	-	-	3,315	AC#1	EF-1/EF-2				
Total Area		1,287				Total Vbz	349	Total Supply Airflow		8,125			1,750	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp		0.05																
						Uncorrected Outdoor Air Intake (Vou)	349	System Ventilation Efficiency (Ev)		1.00																
						Required Outdoor Air Intake (CFM)	349																			

General		Ventilation													Exhaust					Served by						
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture						Required Fixture Exhaust CFM							
1	Meal Fulfillment Area	418	15	7	7.5	53	0.12	50	103	0.8	129	3,600	0.04	720	-	-	-	-	-	-	-	-	-	AC#2	-	
Total Area		418				Total Vbz	103	Total Supply Airflow		3,600			720	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp		0.04																
						Uncorrected Outdoor Air Intake (Vou)	103	System Ventilation Efficiency (Ev)		1.00																
						Required Outdoor Air Intake (CFM)	103																			

General		Ventilation													Exhaust					Served by						
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture						Required Fixture Exhaust CFM							
1	Dining	1,026	100	103	7.5	773	0.18	185	958	0.8	1,198	4,050	0.30	926	-	-	-	-	-	-	-	-	-	AC#3	-	
2	Queueing	563	15	9	7.5	68	0.12	68	136	0.8	170	1,650	0.10	377	-	-	-	-	-	-	-	-	-	AC#3	-	
3	Men's RR	176	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	-	-	-	AC#3	EF-3	
4	Women's RR	204	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	-	-	-	AC#3	EF-3	
5	RR Vestibule	110	-	-	-	0.06	7	7	7	0.8	9	125	0.05	29	-	-	-	-	-	-	-	-	-	AC#3	-	
Total Area		2,079				Total Vbz	1,101	Total Supply Airflow		6,125			1,400	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp		0.30																
						Uncorrected Outdoor Air Intake (Vou)	1,101	System Ventilation Efficiency (Ev)		0.80																
						Required Outdoor Air Intake (CFM)	1,376																			


General		Ventilation													Exhaust					Served by						
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture						Required Fixture Exhaust CFM							
1	Team Member Room	105	50	6	5	30	0.06	6	36	0.8	45	450	0.10	109	-	-	-	-	-	-	-	-	-	-	AC#4	-
2	Riser Room	41	-	-	-	-	0.12	5	5	0.8	6	200	0.03	49	-	-	-	-	-	-	-	-	-	-	AC#4	-
3	Service / Beverage	193	-	-	-	-	0.12	24	24	0.8	30	700	0.04	170	-	-	-	-	-	-	-	-	-	-	AC#4	-
4	Office	46	5	1	5	5	0.06	3	8	0.8	10	275	0.04	67	-	-	-	-	-	-	-	-	-	AC#4	-	
5	Catering	66	-	-	-	-	0.12	8	8	0.8	10	125	0.08	30	-	-	-	-	-	-	-	-	-	-	AC#4	-
Total Area		567				Total Vbz	81	Total Supply Airflow		1,750			425	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp		0.10																
						Uncorrected Outdoor Air Intake (Vou)	81	System Ventilation Efficiency (Ev)		1.00																
						Required Outdoor Air Intake (CFM)	81																			

General		Ventilation													Exhaust					Served by						
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone		Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM	Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture						Required Fixture Exhaust CFM							
1	Play Area	250	7	2	20	40	0.18	45	85	0.8	106	1,300	0.08	300	-	-	-	-	-	-	-	-	-	-	AC#5	-
Total Area		250				Total Vbz	85	Total Supply Airflow		1,300			300	Actual Outdoor Airflow												
						Diversity (D)	1.00	Maximum Zp		0.08																
						Uncorrected Outdoor Air Intake (Vou)	85	System Ventilation Efficiency (Ev)		1.00																
						Required Outdoor Air Intake (CFM)	103																			



Chick-fil-A

Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

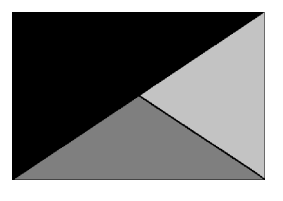

Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION
6 05/15/25 IFC Set

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
SHEET
VENTILATION SCHEDULES

SHEET NUMBER
M-602

Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 2:37:15 PM
30-LS-05661-M-602-VENTILATION SCHEDULES

VENTILATION SCHEDULE

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone Outdoor Airflow CFM Vbz	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/ft2 Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM							Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM					
1	Kitchen	1,287	20	26	7.5	195	0.12	154	349	0.8	436	8,125	0.05	1,750	0.7	901	-	-	-	-	-	3,315	AC#1	EF-1 / EF-2	
Total Area		1,287				Total Vbz			349	Total Supply Airflow			8,125	Actual Outdoor Airflow		1,750									
						Diversity (D)			1.00	Maximum Zp			0.05												
						Uncorrected Outdoor Air Intake (You)			349	System Ventilation Efficiency (Ev)			1.00												
						Required Outdoor Air Intake (CFM)			349																

VENTILATION SCHEDULE

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone Outdoor Airflow CFM Vbz	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/ft2 Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM							Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM					
1	Meal Fulfillment Area	418	15	7	7.5	53	0.12	50	103	0.8	129	3,600	0.04	720	-	-	-	-	-	-	-	-	-	AC#2	-
Total Area		418				Total Vbz			103	Total Supply Airflow			3,600	Actual Outdoor Airflow		720									
						Diversity (D)			1.00	Maximum Zp			0.04												
						Uncorrected Outdoor Air Intake (You)			103	System Ventilation Efficiency (Ev)			1.00												
						Required Outdoor Air Intake (CFM)			103																

VENTILATION SCHEDULE

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone Outdoor Airflow CFM Vbz	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/ft2 Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM							Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM					
1	Dining	1,026	100	103	7.5	773	0.18	185	958	0.8	1,198	4,050	0.30	926	-	-	-	-	-	-	-	-	-	AC#3	-
2	Queueing	563	15	9	7.5	68	0.12	68	136	0.8	170	1,650	0.10	377	-	-	-	-	-	-	-	-	-	AC#3	-
3	Men's RR	176	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	AC#3	EF-3	-	-	
4	Women's RR	204	-	-	-	-	-	-	-	0.8	-	150	-	34	-	-	Continuous	50	150	180	AC#3	EF-3	-	-	
5	RR Vestibule	110	-	-	-	-	0.06	7	7	0.8	9	125	0.05	29	-	-	-	-	-	-	-	-	AC#3	-	
Total Area		2,079				Total Vbz			1,101	Total Supply Airflow			6,125	Actual Outdoor Airflow		1,400									
						Diversity (D)			1.00	Maximum Zp			0.30												
						Uncorrected Outdoor Air Intake (You)			1,101	System Ventilation Efficiency (Ev)			0.80												
						Required Outdoor Air Intake (CFM)			1,376																

VENTILATION SCHEDULE

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone Outdoor Airflow CFM Vbz	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/ft2 Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM							Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM					
1	Team Member Room	105	50	6	5	30	0.06	6	36	0.8	45	450	0.10	109	-	-	-	-	-	-	-	-	-	AC#4	-
2	Riser Room	41	-	-	-	-	0.12	5	5	0.8	6	200	0.03	49	-	-	-	-	-	-	-	-	-	AC#4	-
3	Service / Beverage	193	-	-	-	-	0.12	24	24	0.8	30	700	0.04	170	-	-	-	-	-	-	-	-	-	AC#4	-
4	Office	46	5	1	5	5	0.06	3	8	0.8	10	275	0.04	67	-	-	-	-	-	-	-	-	-	AC#4	-
5	Catering	66	-	-	-	-	0.12	8	8	0.8	10	125	0.08	30	-	-	-	-	-	-	-	-	-	AC#4	-
Total Area		567				Total Vbz			81	Total Supply Airflow			1,750	Actual Outdoor Airflow		425									
						Diversity (D)			1.00	Maximum Zp			0.10												
						Uncorrected Outdoor Air Intake (You)			81	System Ventilation Efficiency (Ev)			1.00												
						Required Outdoor Air Intake (CFM)			81																


VENTILATION SCHEDULE

General		Ventilation													Exhaust					Served by					
Room #	Room Name	Area Az ft2	People			Area						Breathing Zone Outdoor Airflow CFM Vbz	Zone Air Distribution Effectiveness Ez	Zone Outdoor Airflow CFM Voz	Primary Zone Airflow CFM Vpz	Primary Outdoor Air Fraction Zp	Actual Outdoor Airflow CFM	Area			Toilet		Actual Exhaust CFM	Supply	Exhaust
			Occupant Density People/1,000 ft2	Occupants Pz	Outdoor Airflow Rate CFM/Person Rp	Outdoor Airflow CFM Pz x Rp	Outdoor Airflow Rate CFM/ft2 Ra	Outdoor Airflow CFM Az x Ra	Outdoor Airflow CFM Vbz	Required Exhaust Rate CFM/ft2	Total Required Exhaust CFM							Exhaust Control/Operation	Fixture Exhaust Rate CFM/Fixture	Required Fixture Exhaust CFM					
1	Play Area	250	7	2	20	40	0.18	45	85	0.8	106	1,300	0.08	300	-	-	-	-	-	-	-	-	-	AC#5	-
Total Area		250				Total Vbz			85	Total Supply Airflow			1,300	Actual Outdoor Airflow		300									
						Diversity (D)			1.00	Maximum Zp			0.08												
						Uncorrected Outdoor Air Intake (You)			85	System Ventilation Efficiency (Ev)			1.00												
						Required Outdoor Air Intake (CFM)			103																



Chick-fil-A

Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

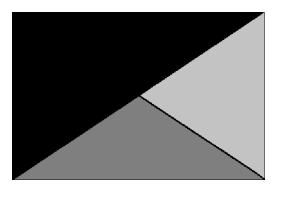

Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION
6 05/15/25 IFC Set

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
SHEET
VENTILATION SCHEDULES

SHEET NUMBER
M-602

Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 2:37:15 PM
30-LS-05661-M-602-VENTILATION SCHEDULES

DIVISION 15 SPECIFICATIONS

PART I - GENERAL

1.01 SCOPE

- A. IT IS THE RESPONSIBILITY OF CONTRACTOR TO READ ALL SPECIFICATIONS AND CONSULT ALL DRAWINGS WHICH MAY AFFECT THE INSTALLATION AND COORDINATION OF WORK WITH OTHER TRADES. CONTRACTOR SHALL COORDINATE AND MAKE MINOR ADJUSTMENTS IN LOCATION OF EQUIPMENT AND MATERIALS AS NECESSARY FOR COORDINATION.
- B. COMPLETED INSTALLATION SHALL CONFORM TO ALL APPLICABLE FEDERAL, STATE AND LOCAL CODES AND ORDINANCES.
- C. SYSTEM LAYOUT IS SCHEMATIC AND EXACT LOCATIONS SHALL BE DETERMINED BY STRUCTURAL CONDITIONS. COORDINATION WITH OTHER TRADES, COORDINATION WITH FINISHES AND OTHER CONDITIONS. STRUCTURAL SUPPORTS SHALL NOT BE CUT OR ALTERED TO ASSURE FIT OF HVAC SYSTEM. TEN FOOT CLEARANCE SHALL BE MAINTAINED BETWEEN OUTSIDE AIR INTAKES AND EXHAUST FANS AND PLUMBING VENT TERMINALS.
- D. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DEFECTS, REPAIRS AND REPLACEMENTS IN MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR AFTER FINAL PAYMENT IS APPROVED. CONTRACTOR SHALL HONOR FACTORY WARRANTIES ON ALL EQUIPMENT PROVIDED AS PART OF THIS SYSTEM.
- E. UPON COMPLETION OF PROJECT, ALL SYSTEM EQUIPMENT AND MATERIALS SHALL BE IN NEW, CLEAN CONDITION WITH ALL DAMAGE RESTORED TO CONDITION ACCEPTABLE TO THE OWNERS REPRESENTATIVE. ALL EQUIPMENT, COMPONENTS, DUCTWORK AND AIR DEVICES SHALL BE INSPECTED AND THOROUGHLY CLEANED, CLEARED OF DEBRIS, AND READY FOR USE. AT COMPLETION OF JOB, ALL MISCELLANEOUS TOOLS, SCAFFOLDING, SURPLUS MATERIALS, RUBBISH AND DEBRIS SHALL BE REMOVED BY CONTRACTOR.
- F. CONTRACTOR SHALL PROVIDE TWO SETS OF 2" MERV 8 OR HIGHER THROW AWAY TYPE FILTERS. A CLEAN SET SHALL BE PROVIDED PRIOR TO TEST AND BALANCE AND AGAIN PRIOR TO OPENING.

PART II - PRODUCTS

2.01 HEATING AND COOLING EQUIPMENT

- A. FURNISH AND INSTALL R-410A ROOFTOP SINGLE PACKAGE COMBINATION ELECTRIC COOLING AND NATURAL GAS FIRED HEATING UNITS AS SHOWN ON DRAWINGS. EQUIPMENT SHALL BE ARI CERTIFIED AND A.G.A. AND U.L. LISTED.
- B. ACCESSORIES SHALL INCLUDE LOW AND HIGH PRESSURE SAFETIES, CRANK CASE HEATER, OVERCURRENT AND OVERTEMPERATURE SAFETY, COMPRESSOR VIBRATION ISOLATORS, FILTER DRIERS, REFRIGERANT SERVICE VALVES, COIL HAIL GUARDS WHERE SCHEDULED, CONVENIENCE OUTLETS FACTORY INSTALLED ON SCHEDULED UNITS, UNIT MOUNTED NON-FUSED DISCONNECTS, LOW AMBIENT OPERATION DOWN TO 30 DEGREES F AND EVAPORATOR FREEZE STAT.
- C. COMPRESSORS SHALL BE HERMETIC SCROLL TYPE WITH INTERNAL VIBRATION ISOLATORS. COMPRESSORS SHALL BE PROVIDED WITH A MINIMUM FIVE (5) YEAR FULL WARRANTY.
- D. THE UNIT HEAT EXCHANGERS SHALL BE ALUMINIZED STEEL COATING. HEATING CONTROLS SHALL CONSIST OF REDUNDANT GAS VALVES, INTERMITTENT PILOT WITH ELECTRONIC SPARK OR HOT PLATE IGNITION SYSTEM, COMBUSTION/EXHAUST FAN PROTECTED BY CENTRIFUGAL SWITCHES, HEAT LIMIT SWITCHES, TIME-DELAY RELAY, FLAME, AND PILOT SENSORS. HEAT EXCHANGERS SHALL HAVE A TEN (10) YEAR WARRANTY. BURNERS SHALL BE IN-SHOT TYPE. THE DRAFT MOTOR SHALL BE MONITORED BY THE CONTROL SYSTEM.

2.02 DUCTWORK (C15735)

- A. ACCEPTABLE MANUFACTURERS OF INSULATION SHALL BE: JOHNS MANVILLE, OWENS CORNING OR KNAUF.
- B. ALL DUCTWORK SHALL BE SHEET METAL, UNLESS NOTED OTHERWISE (U.N.O.).
- C. DUCT DIMENSIONS SHOWN ARE INSIDE CLEAR DIMENSIONS, U.N.O.
- D. CONSTRUCTION OF DUCTWORK SHALL MEET SMACNA 1" W.C. PRESSURE CLASS STANDARD AND RECOMMENDATIONS. SMACNA SHALL BE FOLLOWED WITH RESPECT TO GAGE THICKNESS, JOINTS, REINFORCING, CONSTRUCTION, INSTALLATION AND SUPPORT FOR PRESSURE CLASS STATED. ALL TRANSVERSE JOINTS IN RECTANGULAR AND ROUND DUCT INCLUDING DUCT CONNECTION TO AIR DEVICE COLLAR SHALL BE SEALED PER SMACNA SEAL CLASS A WITH U.L. DUCT MASTIC SEALANT APPROVED FOR INTENDED USE. DUCT TAPE IS NOT AN ACCEPTABLE SUBSTITUTE FOR MASTIC UNLESS EQUAL TO HARDCAST FOIL-GRIP 1402 BUTYL RUBBER ADHESIVE TAPE.
- E. DUCT SHALL BE SUPPORTED AT BASE OF DUCT DROPS. CURB DUCT RAILS ARE NOT INTENDED TO AND SHALL NOT SUPPORT THE WEIGHT OF THE DUCT.
- F. ALL DUCT WRAP SHALL BE MINIMUM 2" THICK, 3/4 PCF AND 6 R-VALUE INSTALLED WITH EITHER A VAPOR BARRIER WITH MAXIMUM PERMEANCE 0.05 OR A MINIMUM 2 MIL ALUMINUM REINFORCED FOIL/KRAFT FACING.
- G. ALL DUCT DROPS FROM THE ROOFTOP UNITS SHALL BE EXTERNALLY INSULATED.
- H. SUPPLY AND RETURN AIR DUCTWORK SERVING ALL AREAS SHALL BE EXTERNALLY INSULATED.
- I. ALL AIR CONVEYANCE COMPONENTS SUCH AS, BUT NOT LIMITED TO DUCT, DUCT PLENUMS, GRILLES/DIFFUSERS, BACK PANS, AND BOOTS SHALL BE INSULATED. INSULATION TYPE IS COVERED ELSEWHERE IN THIS SPECIFICATION.
- J. RESTROOM RECTANGULAR EXHAUST AIR DUCTWORK SHALL BE LINED WITH 1" THICK, 1-1/2 PCF INSULATION. RESTROOM ROUND EXHAUST DUCT SHALL BE EXTERNALLY INSULATED PER SECTION 2.02F.
- K. DUCT DROPS SHALL BE ISOLATED FROM UNIT VIBRATION WITH THE USE OF NFPA AND U.L. APPROVED FLEXIBLE CONNECTORS INSTALLED AT THE TOP OF BOTH SUPPLY AND RETURN DROPS.
- L. INSULATED FLEXIBLE DUCT MAY BE UTILIZED FOR RUNOUTS TO GRILLES AND DIFFUSERS ONLY IN THE HORIZONTAL POSITION AND IN MAXIMUM LENGTHS OF 4'-0". NO EXCEPTIONS.
- M. CONSTRUCTION OF FLEXIBLE DUCTWORK SHALL INCLUDE SPIRAL METAL HELIX BONDED TO A POLYESTER CORE, FIBERGLASS INSULATION WITH POLYETHYLENE OR MYLAR VAPOR BARRIER. ALL COMPONENTS SHALL HAVE APPROPRIATE U.L. APPROVAL AND SHALL BE EQUIVALENT TO THERMAFLEX MKE. FLEX DUCT SHALL HAVE A MINIMUM R-VALUE OF 6.
- N. FLEXIBLE DUCT SHALL BE INSTALLED PER THE "ADC FLEXIBLE DUCT PERFORMANCE AND INSTALLATION STANDARDS, 4TH ED" USING FOIL TAPE AND DRAWBAND ON THE INNER CORE AND TAPE OR DRAWBAND ON THE OUTER JACKET.
- O. DUCT TAPE SHALL BE EQUAL TO FASSON 181-B FX, 2-1/2" WIDE.
- P. SINGLE THICKNESS TURNING VANES SHALL BE INSTALLED IN SUPPLY DUCT AT ALL 90 DEGREE ELBOWS WHERE THE CENTERLINE RADIUS (R) IS LESS THAN THE WIDTH OF THE DUCT AND ANY ONE DIMENSION IS GREATER THAN 12".
- Q. EXTERNAL INSULATION ON BOTTOM OF DUCTS 24" OR WIDER SHALL BE SUPPORTED WITH STICK PINS ON 18" CENTERS. STICK PIN WASHERS SHALL BE COVERED WITH DUCT TAPE OR MASTIC.

2.03 CONTROLS

- A. SYSTEMS SHALL BE COMPLETE WITH CONNECTIONS TO CFA-500 TEMPERATURE CONTROL PANEL AS MANUFACTURED BY SUNCOAST ENVIRONMENTAL CONTROLS (S.E.C.) (PH: 877-544-6879). THE PANEL IS PROVIDED AND MOUNTED BY THE ELECTRICAL CONTRACTOR. CONTROL WIRING TERMINATIONS ARE BY THE MECHANICAL CONTRACTOR WHERE PERMITTED BY AHJ.
- B. THE SMOKE DETECTORS SHALL BE FACTORY INSTALLED AND WIRED BY THE ROOFTOP UNIT MANUFACTURER.
- C. A FACTORY INSTALLED SMOKE DETECTOR IN THE RETURN AIR SECTION OF EACH AIR CONDITIONING UNIT SHALL STOP THE INDOOR FAN AND CLOSE THE OUTSIDE AIR DAMPER IN THE EVENT OF EXCESSIVE TEMPERATURE OR SMOKE. SMOKE DETECTOR SHALL BE LOCATED PRIOR TO ANY EXHAUST FROM THE BUILDING OR MIXING WITH FRESH AIR MAKE-UP. UPON DETECTION, THE SYSTEM SHALL NOT RESTART UNTIL THE DEVICE IS MANUALLY RESET. DEVICES SHALL BE LOCATED WHERE THEY CAN BE EASILY ACCESSED AND WHERE CLEAR OF FILTERS.
- D. CHICK-FIL-A HAS A NATIONAL ACCOUNT WITH SUNCOAST ENVIRONMENTAL CONTROLS FOR THE SMOKE DETECTOR TEST/RESET ANNUNCIATOR STATIONS. THE TEST/RESET STATIONS WILL BE PURCHASED BY THE ELECTRICAL CONTRACTOR AS A PART OF A NATIONAL ACCOUNT PACKAGE AND TURNED OVER TO THE MECHANICAL CONTRACTOR FOR INSTALLATION.
- E. THE REMOTE TEST/RESET ANNUNCIATORS SHALL BE PROVIDED BY THE ELECTRICAL CONTRACTOR AND INSTALLED BY THE MECHANICAL CONTRACTOR. INSTALLATION BY MECHANICAL SHALL INCLUDE MOUNTING OF THE ANNUNCIATORS AND ALL WIRING FROM EACH DEVICE TO THE RTU. ELECTRICAL WILL PROVIDE A JUNCTION BOX IN THE WALL WITH 1/2" CONDUIT STUBBED UP ABOVE THE CEILING FOR EACH REMOTE TEST STATION AS SHOWN ON THE ELECTRICAL PLANS. ANNUNCIATOR SHALL BE SUNCOAST CONTROLS REMOTE TEST/RESET STATION WITH POWER LED, TROUBLE LED, ALARM LED, 90DB HORN AND TEST/RESET BUTTON.
- F. THE RESTROOM FAN SHALL BE INTERLOCKED TO THE LIGHTS SERVING THE MEN AND WOMEN'S RESTROOMS. THE HOOD FANS SHALL BE CONTROLLED VIA THE SUNCOAST CFA-500 CONTROL PANEL. WIRING, RELAYS AND SWITCHES FOR CONTROL OF ALL FANS ARE BY ELECTRICAL CONTRACTOR.
- G. THERMOSTATS ARE PROVIDED AND INTEGRATED INTO THE TEMPERATURE CONTROL PANEL BY SUNCOAST ENVIRONMENT CONTROLS. SUNCOAST WILL PROVIDE A NETWORK THERMOSTAT US32-CFA THERMOSTAT PRE-WIRED IN THE TEMPERATURE CONTROL PANEL. REMOTE TEMPERATURE SENSOR(S) FOR EACH THERMOSTAT IS ALSO PROVIDED. MECHANICAL CONTRACTOR SHALL INSTALL ALL WIRING BETWEEN THE THERMOSTAT, THE REMOTE SENSOR(S) AND THE ROOFTOP UNIT.
- H. MECHANICAL CONTRACTOR SHALL INSTALL CONTROL WIRING IN 1/2" CONDUIT WHERE REQUIRED BY CODE. WHERE NOT REQUIRED TO BE IN CONDUIT, ALL WIRING SHALL BE RUN PARALLEL TO STRUCTURAL MEMBERS OR PERPENDICULAR WITH NO DIAGONAL ROUTING. ALL WIRING SHALL BE SECURED TO THE FRAMING TO PREVENT SAGGING IN RUNS. WIRING TO ROOFTOP UNITS SHALL BE ROUTED THROUGH THE FACTORY THRU-BASE FITTING IN THE UNIT BASE. NO SPLICING OF WIRING WILL BE ACCEPTED. ALL WIRING ABOVE THE ROOF SHALL BE INSTALLED IN EXTERIOR GRADE FLEXIBLE CONDUIT. ALL CONTROL WIRING AND CONTROL WIRING CONDUIT SHALL BE FURNISHED AND INSTALLED BY THE MECHANICAL CONTRACTOR. WIRING SHALL BE INSTALLED IN ACCORDANCE WITH LATEST EDITION OF NEC. ALL LOW VOLTAGE CONTROL WIRING SHALL BE NO LESS THAN 18 AWG MIN. CONTROL WIRING CONDUCTORS SHALL BE SIZED TO ACCOUNT FOR LOAD AND LENGTH OF RUN TO ALLOW SUFFICIENT VOLTAGE AVAILABLE AT CONTROLLED DEVICE TO OPERATE THE SYSTEM RELIABLY.

2.04 PIPING

- A. ALL ABOVE GRADE NATURAL GAS PIPING SHALL BE SCHEDULE 40 STEEL MEETING ASTM A53 WITH SCREWED OR WELDED FITTINGS AND GASKET TYPE UNIONS AND FLANGES. FOR SCREWED PIPING, PIPING SHALL BE JOINED WITH BLACK 150 POUND MALLEABLE IRON SCREWED FITTINGS AS ALLOWED BY LOCAL AUTHORITY. CONTRACTOR SHALL VERIFY THE NEED FOR WELDED PIPING AS REQUIRED BY THE LOCAL GAS CODE AND/OR APPLICABLE LOCAL ORDINANCES AND AMENDMENTS.
- B. ALL BELOW GRADE NATURAL GAS PIPING SHALL BE MEDIUM DENSITY POLYETHYLENE (PE) MEETING ASTM D2513 AS MANUFACTURED BY GASTITE WITH JOINING SYSTEM AS MANUFACTURED BY CON-STAB. TRANSITIONS FROM ABOVE GRADE RIGID PIPING TO PE BELOW GRADE PIPING SHALL BE MADE WITH ANODE-LESS RISER ASSEMBLY AS MANUFACTURED BY CON-STAB.

- C. PROVIDE AND INSTALL A CUT-OFF VALVE, UNION AND FULL SIZE DIRT LEG AT CONNECTION TO EACH GAS-FIRED PIECE OF EQUIPMENT. INSTALL PIPING AT AND AROUND EQUIPMENT SO AS TO NO WAY OBSTRUCT EQUIPMENT ACCESS PANELS AND/OR ACCESS DOORS.
- D. ALL GAS PIPING ABOVE ROOF SHALL BE CLEANED FREE OF RUST AND PAINTED WITH COAT OF ZINC RUST PRIMER AND ONE COAT OF ALUMINUM BASE PAINT. METER AND GAS RISER SHALL BE PRIMED AND PAINTED TO MATCH BUILDING.
- E. NATURAL GAS PIPING SHALL BE LEAK TESTED IN ACCORDANCE WITH APPLICABLE CODE REQUIREMENTS AND MANUFACTURERS RECOMMENDATIONS.

PART III - EXECUTION

3.01 SCOPE

- A. FURNISH AND INSTALL SYSTEM IN ACCORDANCE WITH REFERENCED STANDARDS, APPLICABLE CODES, MANUFACTURER'S RECOMMENDATIONS AND AS INDICATED ON DRAWINGS.
- B. CONTRACTOR SHALL INSTRUCT THE OWNER'S REPRESENTATIVE IN ALL MATTERS PERTAINING TO THE PROPER MAINTENANCE OF EQUIPMENT FURNISHED UNDER THIS CONTRACT THROUGH DEMONSTRATION AND EXPLANATION OF OPERATING & MAINTENANCE MANUALS.
- C. CONTRACTOR SHALL PROVIDE A "SAMPLE MAINTENANCE PROPOSAL" TO THE OWNER'S REPRESENTATIVE IN ALL MATTERS PERTAINING TO THE PROPER MAINTENANCE OF EQUIPMENT FURNISHED UNDER THIS CONTRACT.
- D. CONTRACTOR SHALL COMPLETE A/C EQUIPMENT STARTUP DOCUMENTATION PROVIDED BY OWNER AND/OR MANUFACTURER. THIS SHALL INCLUDE RE-TORQUE OF ALL FIELD AND FACTORY HIGH VOLTAGE CONNECTIONS.

3.02 LEED PROJECTS

- A. CONTRACTOR SHALL COMPLETE RECEIPT INSPECTION CHECKLISTS PROVIDED IN THE COMMISSIONING PLAN WITHIN 5 DAYS OF RECEIVING EQUIPMENT ON SITE.
- B. CONTRACTOR SHALL COMPLETE PRE-FUNCTIONAL CHECKLISTS PROVIDED IN THE COMMISSIONING PLAN. CHECKLISTS SHALL BE RETURNED AT LEAST 5 DAYS PRIOR TO SCHEDULING FUNCTIONAL PERFORMANCE TESTING.
- C. CONTRACTOR SHALL PROVIDE A TECHNICIAN TO ASSIST THE THIRD PARTY COMMISSIONING AUTHORITY WITH FUNCTIONAL TESTING. FUNCTIONAL TESTING SHALL OCCUR AFTER ALL CONTROLS HAVE BEEN INSTALLED AND VERIFIED AND AFTER TEST AND BALANCE IS COMPLETE. THE FUNCTIONAL PERFORMANCE TEST PROCEDURES CAN BE FOUND IN THE COMMISSIONING PLAN.
- D. IF THE TOTAL TIME REQUIRED TO CORRECT PROBLEMS DURING TESTING IS GREATER THAN FORTY-FIVE (45) MINUTES (UNLESS EXTENUATING CIRCUMSTANCES EXIST), THE TEST SHALL BE CONSIDERED FAILED AND MUST BE REPEATED IN ITS ENTIRETY.
- E. RE-TESTING: DURING THE COURSE OF THE RETEST, IF AT ANY POINT A MAJOR DEFICIENCY IS DISCOVERED, THE TEST WILL BE STOPPED, REPEAT TESTS UNTIL ACCEPTABLE RESULTS ARE ACHIEVED. IF MORE THAN TWO FUNCTIONAL PERFORMANCE TESTS (ONE INITIAL TEST AND ONE RETEST) FOR ANY TYPE OF EQUIPMENT DUE TO ISSUES THAT THE CONTRACTOR HAD DIRECT OR INDIRECT CONTROL OVER ARE REQUIRED, THE COSTS FOR THE CQA TO WITNESS RETESTING OF SIMILAR TYPES OF EQUIPMENT UNTIL SATISFACTORY RESULTS ARE OBTAINED SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

3.03 TEST & BALANCE

- A. OWNER SHALL TEST AND BALANCE MECHANICAL SYSTEM IN ACCORDANCE WITH NEBB, NBC OR AABC STANDARDS TO ASSURE CONFORMANCE WITH DESIGN. G.C. WILL MAKE MECHANICAL CONTRACTOR AVAILABLE DURING TEST AND BALANCE TO ASSIST TESTING AGENCY AND TO MAKE CORRECTIONS IMMEDIATELY NECESSARY. CONTRACTOR SHALL CORRECT ITEMS ON WRITTEN TEST AND BALANCE REPORT.
- B. ALL EQUIPMENT TO BE BALANCED MUST HAVE GONE THRU SUCCESSFUL START-UP PROCEDURE BY THE MECHANICAL CONTRACTOR (MC) PRIOR TO TAB VISIT.
- C. THE FLOOR OF THE RESTAURANT SHALL BE CLEARED OF DEBRIS, STAGED CONSTRUCTION MATERIALS, EQUIPMENT, ETC. WHICH MAY, IN THE OPINION OF THE TAB TECHNICIAN, OBSTRUCT ACCESS TO AIR DISTRIBUTION COMPONENTS IN AND ABOVE THE CEILING.
- D. EQUIPMENT ACCESS PANELS, DUCT AIR DEVICES SUCH AS BALANCING DAMPERS AND ACTUATORS SHALL BE ACCESSIBLE AND CLEAR OF PIPING, CONDUIT, FRAMING, SUPPORTS ETC...
- E. PROVIDE AN 8 FT PORTABLE A-FRAME STYLE LADDER DEDICATED FOR THE TAB TECHNICIAN'S USE DURING THE ENTIRE TAB EFFORT DURATION.

KITCHEN HOOD SYSTEMS NOTES

1. CHICK-FIL-A MAINTAINS A NATIONAL ACCOUNT WITH HALTON CO. FOR THE HOODS. CHICK-FIL-A WILL PURCHASE AND PROVIDE THE HOODS FOR INSTALLATION BY THE MECHANICAL CONTRACTOR. THE MECHANICAL CONTRACTOR SHALL BE RESPONSIBLE FOR RECEIVING THE HOODS. CONTACT HALTON CO. AT 270-237-5600 FOR MORE INFO.
2. THE FIRE SUPPRESSION SYSTEM SHALL CONSIST OF A COMPLETE WET CHEMICAL SYSTEM FURNISHED BY HALTON. THE HOOD SHALL BE FURNISHED PRE-PIPED BY HALTON.
3. THE FIRE SUPPRESSION SYSTEM EXTERNAL TO THE HOODS SHALL BE INSTALLED IN ACCORDANCE WITH HOOD MANUFACTURER'S SHOP DRAWINGS BY AN AUTHORIZED INSTALLER SELECTED AND HIRED BY HALTON. COST FOR INSTALLATION INCLUDED IN PRICE OF HOODS TO CFA.
4. HOOD EXHAUST DUCTWORK SHALL BE 16 GA. BLACK STEEL WITH CONTINUOUS LIQUID TIGHT WELD OF JOINTS & SEAMS.
5. TURNS IN GREASE EXHAUST DUCTWORK SHALL BE LONG RADIUS TYPE, WITH A CENTERLINE RADIUS R=3W/2, UNLESS OTHERWISE NOTED. NO MITERED FITTINGS ALLOWED.
6. ALL STAINLESS STEEL CLOSURE PANELS SHALL BE SUPPLIED BY HOOD MANUFACTURER AND INSTALLED BY THE MECHANICAL CONTRACTOR ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
7. SLOPE ALL GREASE EXHAUST DUCT BACK TO HOOD AT 1/4" PER FOOT OF RUN.
8. WRAP NEW GREASE DUCT WITH UNIFRAX FYREWRA. INSULATION ON ACCESS DOORS SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S INSTALLATION RECOMMENDATIONS. UNIFRAX FYREWRA PRODUCT USED SHALL MEET LOCAL CODE REQUIREMENTS.
9. SUPPORT ALL HOODS WITH THREADED ROD AT EACH FACTORY SUPPORT POINT. EACH SUPPORT POINT MUST SUPPORT THE HOOD WEIGHT EQUALLY. ATTACH TO STRUCTURE AS DETAILED ON STRUCTURAL DRAWINGS. ATTACH HOOD TO WALL AT 16" INTERVALS ALONG FULL LENGTH OF HOOD ON TOP AND BOTTOM. ATTACHMENT TO WALL REQUIRES FIELD DRILLING OF SUPPORT ANGLE AT BACK OF HOODS. EACH WALL ATTACHMENT POINT MUST OCCUR AT A WALL STUD. ATTACHMENT HARDWARE TO BE #12-24 HEX HEAD SHEET METAL SCREW EQUAL TO TEXTRON SDS EDT265, LENGTH AS REQUIRED TO FULLY PENETRATE THE STUD.

LEGEND

A-12-400	TYPE - NECK SIZE - CFM	EF#1	EXHAUST FAN #1 (TYP.)
	SPIN-IN FITTING WITH MANUAL BALANCING DAMPER, WITHOUT SCOOP		AIR CONDITIONING UNIT #1 (TYP.)
	SPIN-IN HARD FLEXIBLE DIFFUSER		RETURN/EXHAUST (TYP.)
	REMOTE TEMPERATURE SENSOR		SUPPLY DIFFUSER, SQ FACE (TYP.)
	HUMIDITY SENSOR		PLAN NOTE REFERENCE
	SMOKE DETECTOR		MANUAL VOLUME DAMPER
	DUCT SIZE (reverse for elevation views)		DIRECTION OF THROW ON DIFFUSER
	1ST NUMBER - HORIZONTAL DIMENSION		CLOSED AIR PATTERN DEFLECTOR
	2ND NUMBER - VERTICAL DIMENSION		GAS INFRARED HEATER (TYP.)
	AIR DOOR SWITCH		BELOW GRADE
	ELECTRIC INFRARED HEATER		THERMOSTAT

ABBREVIATIONS


EC	ELECTRICAL CONTRACTOR
GC	GENERAL CONTRACTOR
MC	MECHANICAL CONTRACTOR
PC	PLUMBING CONTRACTOR
O.C.	ON CENTER
IRH	INFRARED HEATER
CF	CIRCULATING FAN
TF	TRANSFER FAN
EF	EXHAUST FAN

GENERAL NOTES

1. DUCT SIZES SERVING DIFFUSERS AND GRILLES ARE SAME SIZE AS DIFFUSER OR GRILLE NECK UNLESS NOTED OTHERWISE.
2. FLEXIBLE DUCT AND INSULATION NOT SHOWN FOR CLARITY.
3. FOR ALL ROOF EQUIPMENT, PROVIDE A PLASTIC ENGRAVED LABEL WITH 1" HIGH WHITE LETTERS ON A BLACK BACKGROUND. WITH A SELF ADHESIVE BACKING.
4. UNLESS NOTED OTHERWISE, MC TO ADJUST ALL DIFFUSER AIR PATTERN DEFLECTORS TO THROW HORIZONTALLY ALONG THE CEILING.
5. ALL EXHAUST DUCTWORK AND UNFINISHED METAL ON ROOF EXCEPT STAINLESS SHALL BE PREPARED WITH TWO COATS OF SHERWIN WILLIAMS PRO INDUSTRIAL DTM ACRYLIC COATING, SEMI-GLOSS, WHITE, DEGREASE AND PRIME BARE METAL SURFACE WITH ONE COAT OF SHERWIN WILLIAMS PRO INDUSTRIAL PRO-CRYLACRYLIC UNIVERSAL PRIMER, WHITE, PRIOR TO PAINTING.
6. MAINTAIN 18" CLEARANCE FROM GREASE EXHAUST DUCTWORK ABOVE ROOF TO ANY COMBUSTIBLE CONSTRUCTION INCLUDING PARAPET WALLS.



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske
& Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



5/15/25

CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE

NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM


Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

GENERAL NOTES,
LEGENDS, SYMBOLS, AND
ABBREVIATIONS
SHEET NUMBER

M-001

HOOD MODEL	HOOD NUMBER	EXHAUST COLLAR			EXHAUST AIR INFORMATION			CAPTURE AIR INFORMATION		S.S. KSA FILTERS		LED LIGHTS	QTY	CEILING CLOSURES			KBD DAMPER	K FACTOR (CFM = K FACTOR * √DP)	MATERIAL
		QTY	LENGTH	WIDTH	CFM	TAB	SP	CFM	SP	FULL	HALF			CLOSURE HEIGHT	CEILING HEIGHT	HOOD WEIGHT			
KVL-2-IC	H-1L	1	14"	8"	1204	0.13"	0.22"	80	0.30"	5	-	3	2	51"	122"	669 LBS	*	3365	EXPOSED SURFACES 18 GA. S.S.
KVL-2-IC	H-1R	1	8"	8"	709	0.13"	0.23"	47	0.30"	3	-	2	2			394 LBS	*	1959	
KVL-C-IC	H-2	1	8"	8"	701	0.30"	0.39"	30	0.29"	2	-	1	2			245 LBS	*	1291	
KVL-C-IC	H-3	1	8"	8"	701	0.30"	0.39"	30	0.29"	2	-	1	3			245 LBS	*	1291	

FOR REFERENCE ONLY


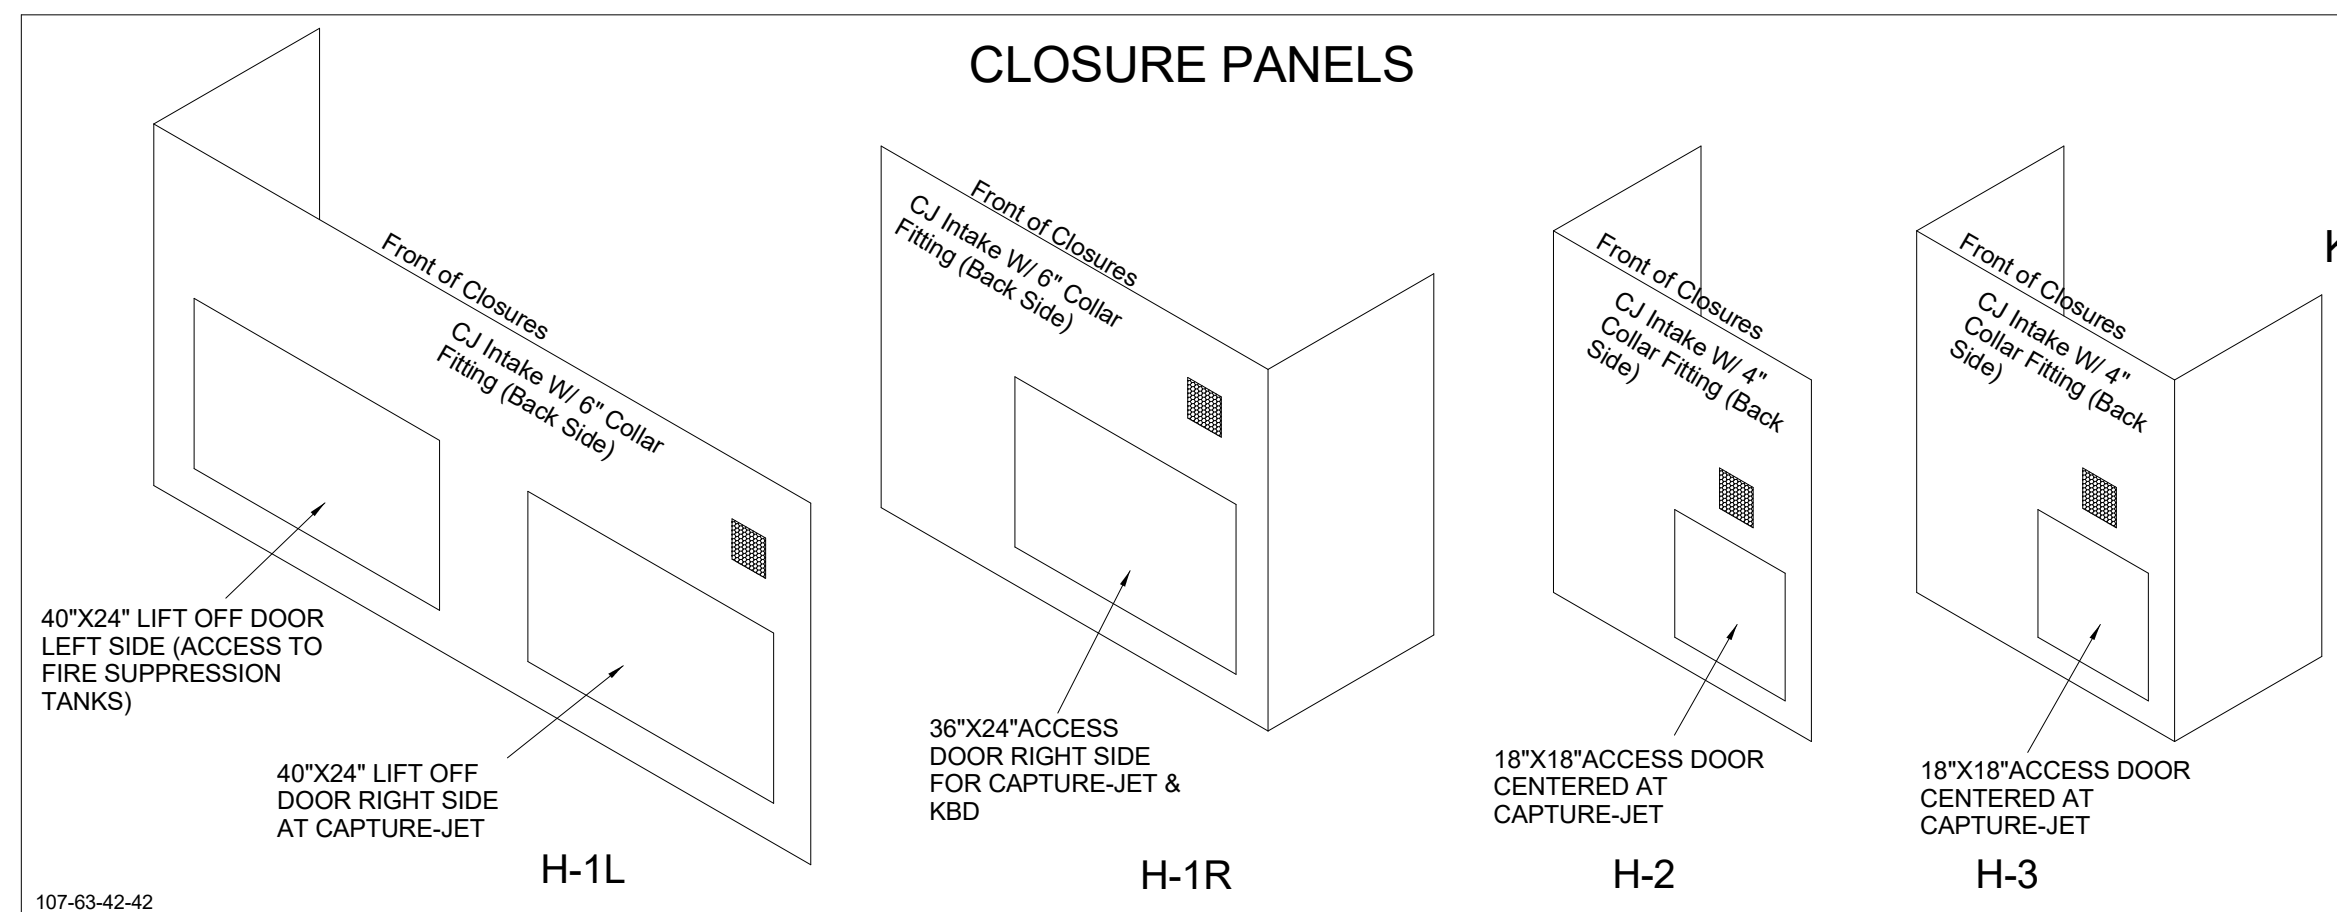


MODEL:KBD CALIBRATED


KITCHEN BALANCING DAMPER EXHAUST VOLUME DAMPER

TAG	"L"	"W"	QUANTITY
H-1L	14"	8"	1
H-1R	8"	8"	1
H-2	8"	8"	1
H-3	8"	8"	1

MATERIAL: FRAME - 16GA CONT. GALV. ADJUSTABLE PANEL 18GA S.S.

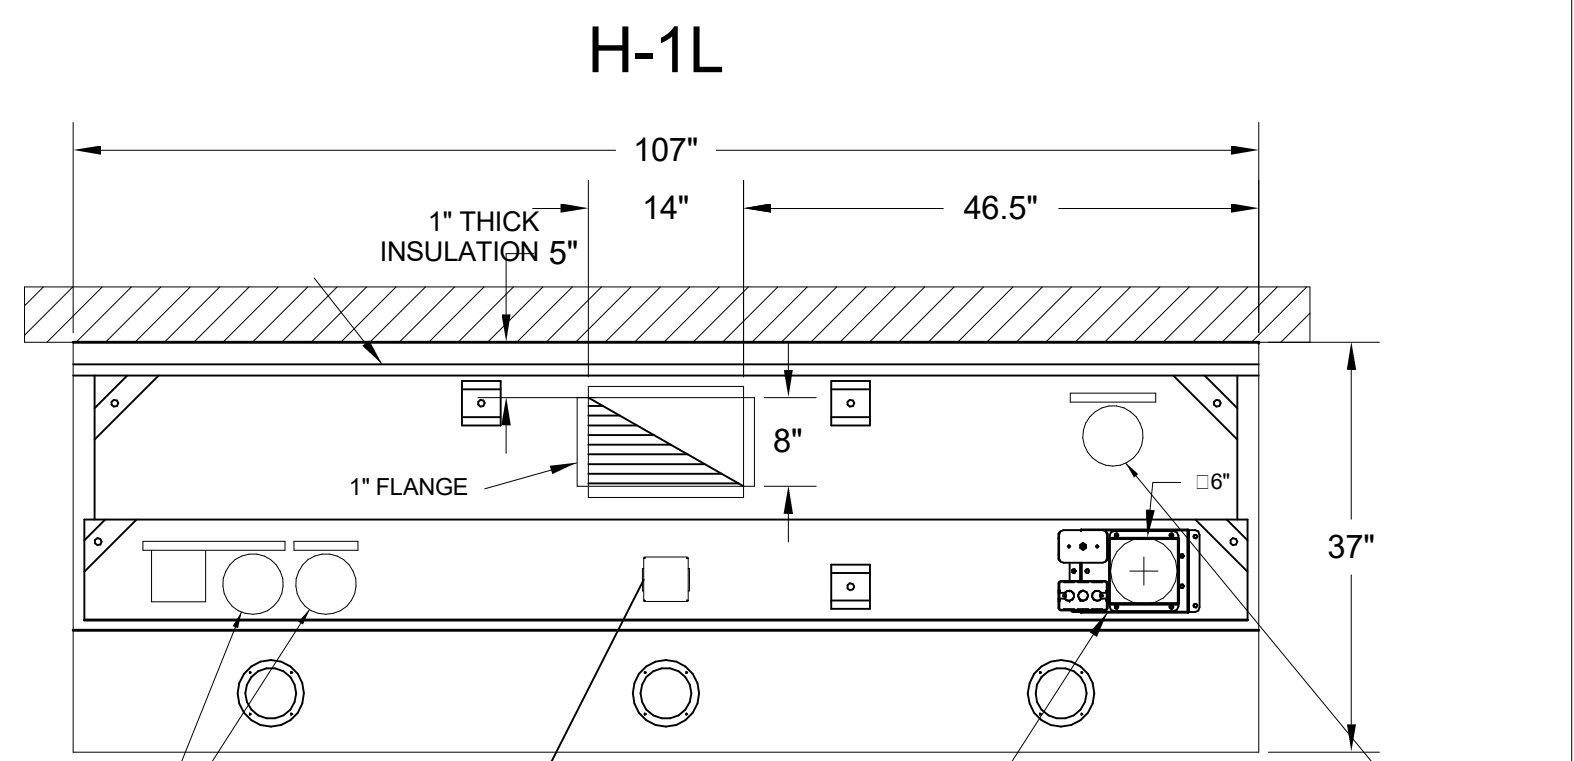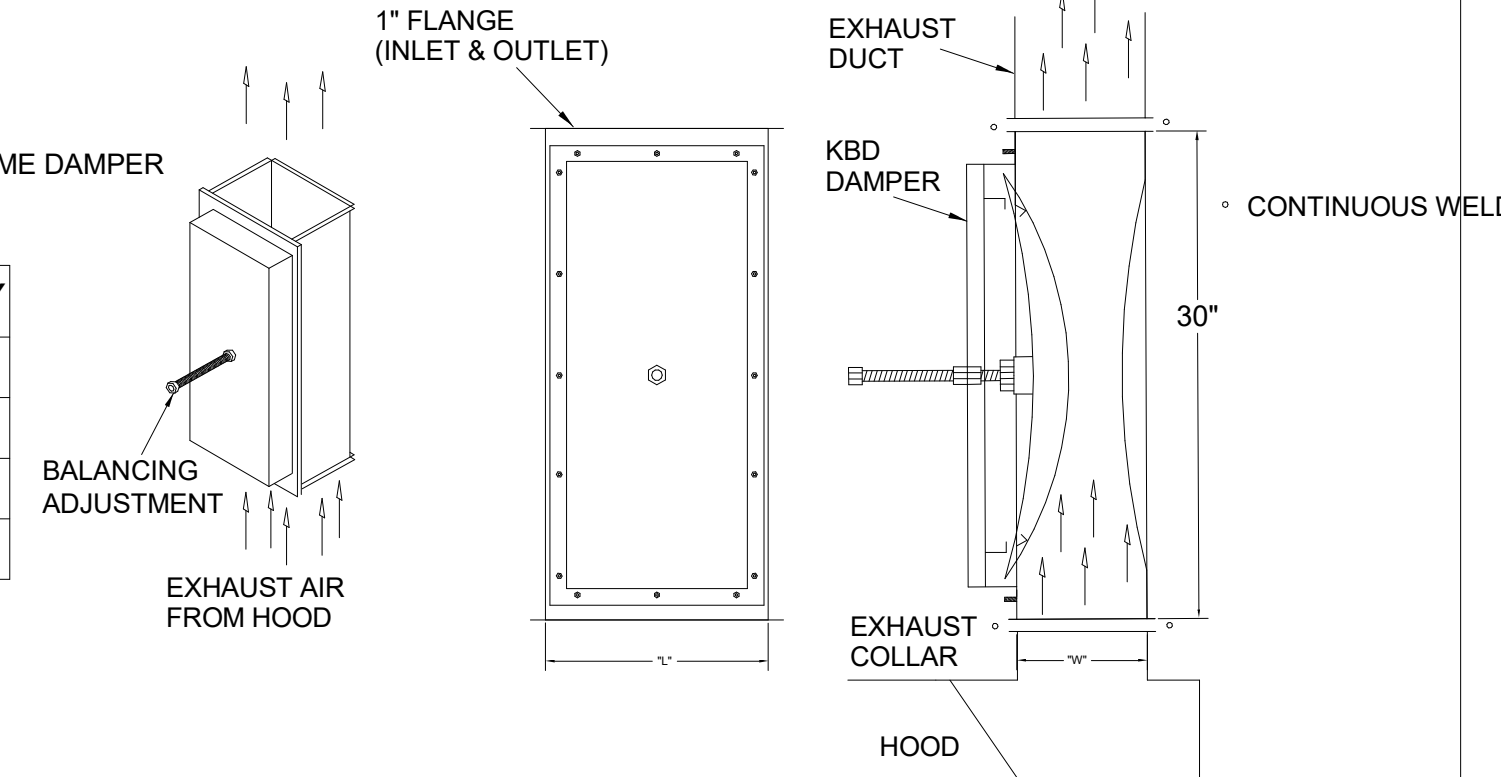


PLAN VIEW

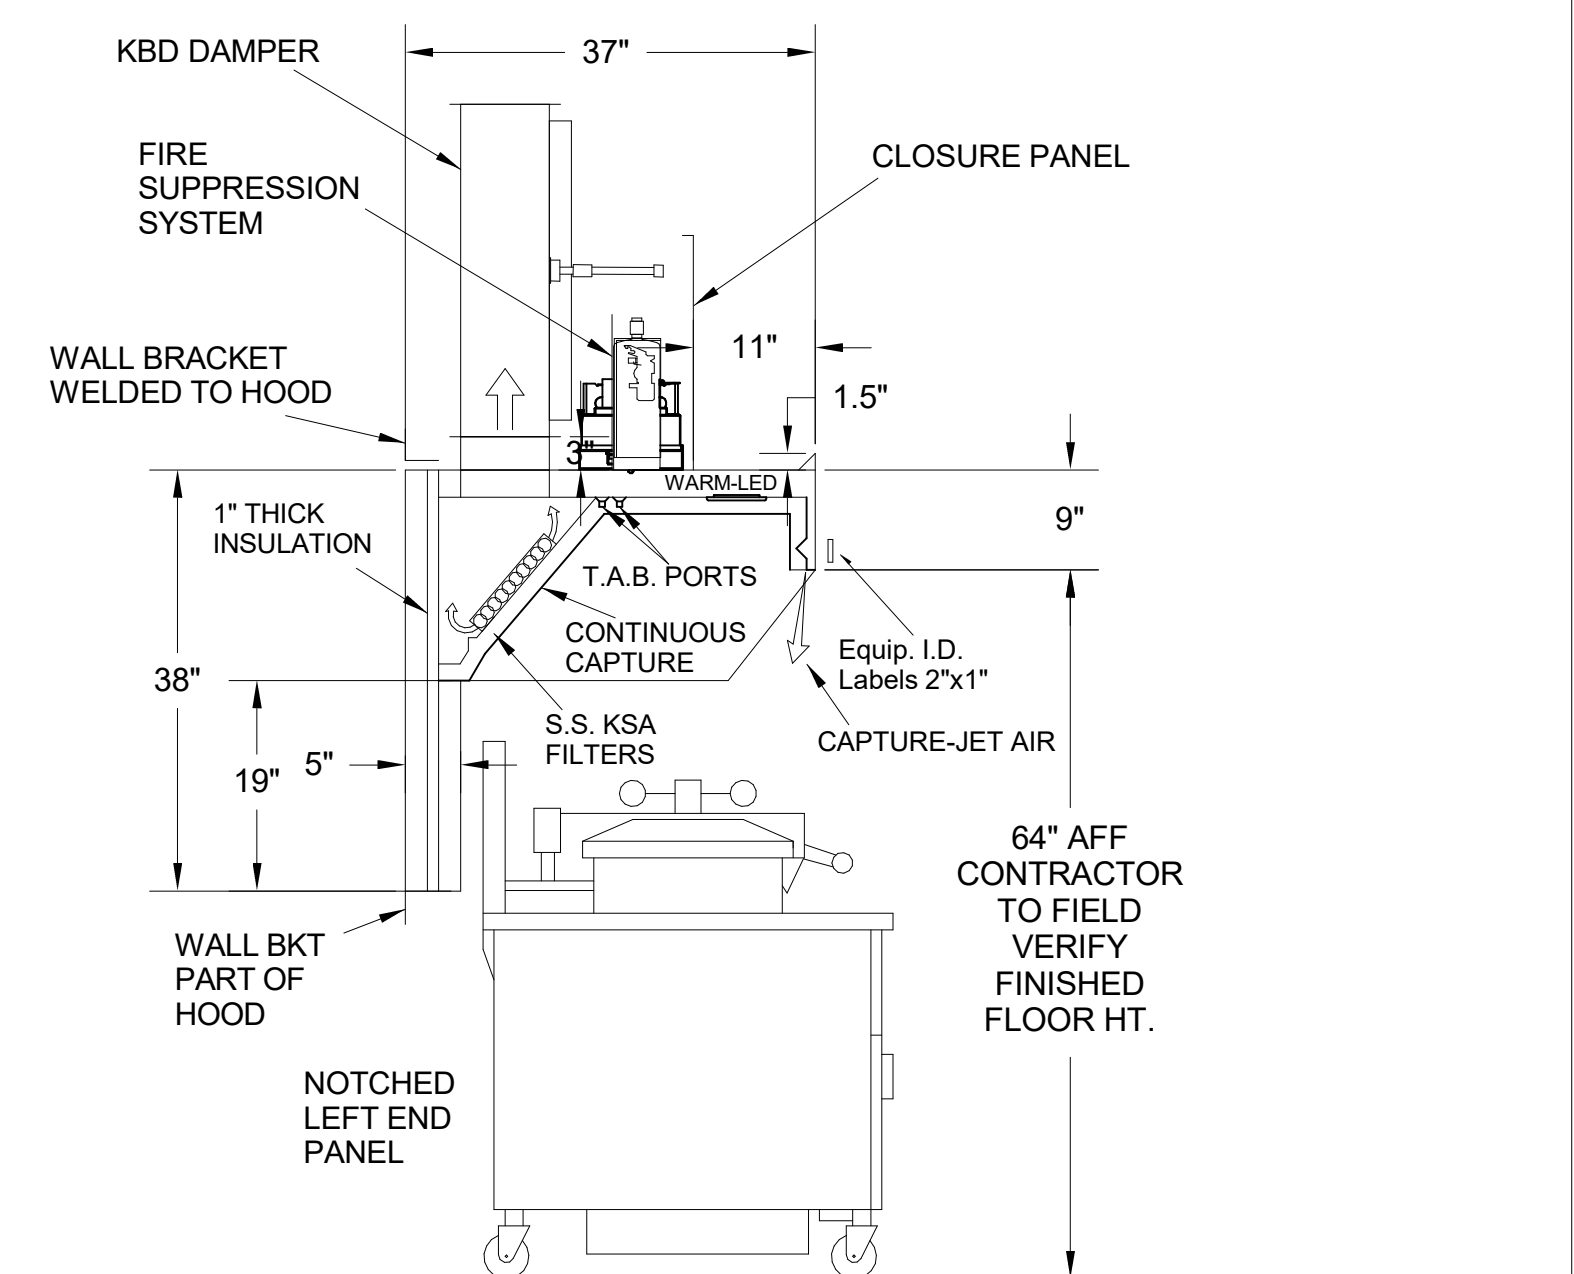


H-1L SECTION VIEW

- CEILING CLOSURE RECESSED 11" FROM FRONT TO CREATE SHELF
- FRONT CLOSURE PANEL WITH 40"X24" LIFT OUT DOOR LEFT SIDE (ACCESS TO FIRE SUPPRESSION)
- 40"X24" LIFT DOOR RIGHT SIDE AT CAPTURE-JET WITH FRONT CJ INTAKE
- CONTINUOUS CAPTURE INTERNAL RIGHT END CUTOUT
- 3" REAR STAND-OFF TO HAVE 1" THICK INSULATION
- NOTCHED LEFT END PANEL
- EQUIPMENT COVERED:
(4) PRESSURE FRYERS
(2) GRILLS
- ANSUL WEIGHT = 286 LBS
- AMEREX WEIGHT = 264 LBS

MODEL NO.	SERIAL NO.	ITEM NO.

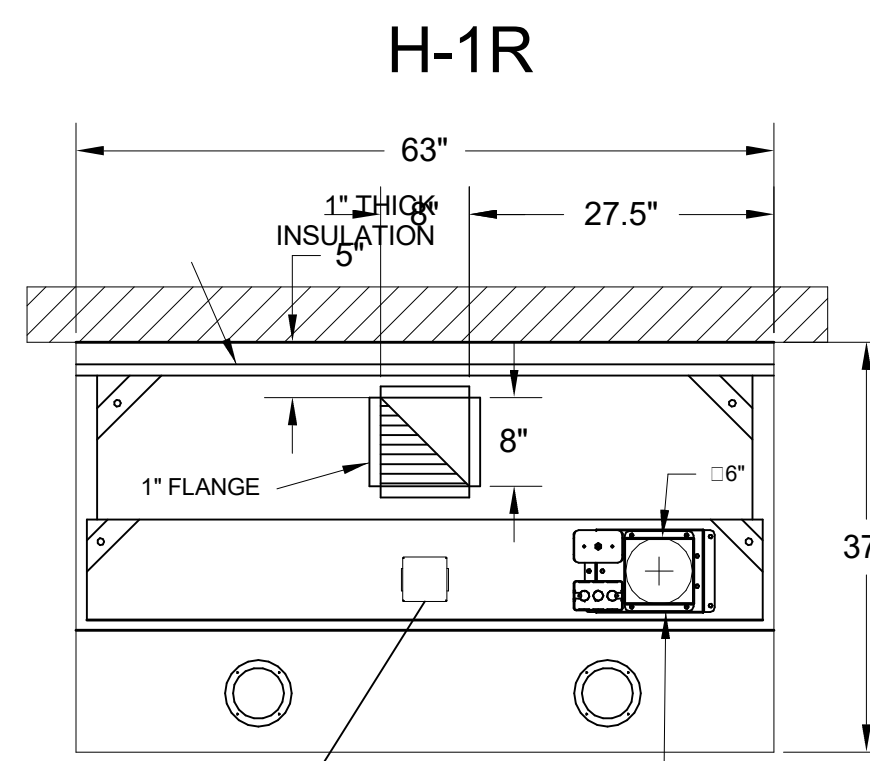


PLAN VIEW

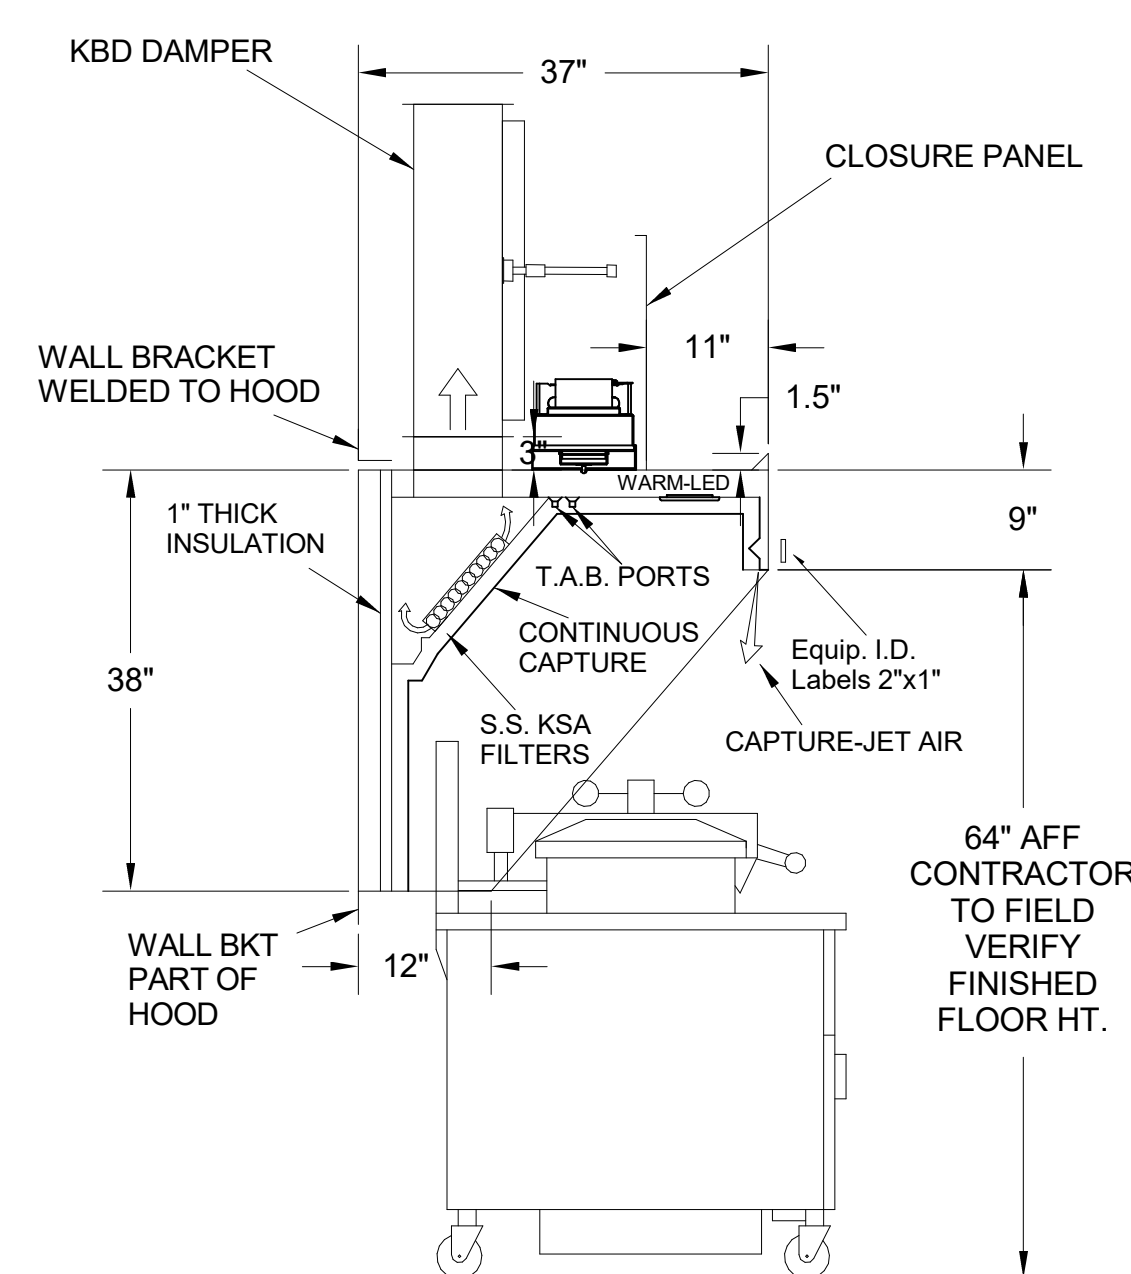


H-1R SECTION VIEW

- CEILING CLOSURE RECESSED 11" FROM FRONT TO CREATE SHELF
- 36"X24" ACCESS DOOR RIGHT SIDE FOR ACCESS TO CAPTURE-JET WITH FRONT CJ INTAKE & KBD
- CONTINUOUS CAPTURE INTERNAL LEFT END CUTOUT
- 3" REAR STAND-OFF TO HAVE 1" THICK INSULATION
- EQUIPMENT COVERED:
(3) PRESSURE FRYERS

MODEL NO.	SERIAL NO.	ITEM NO.

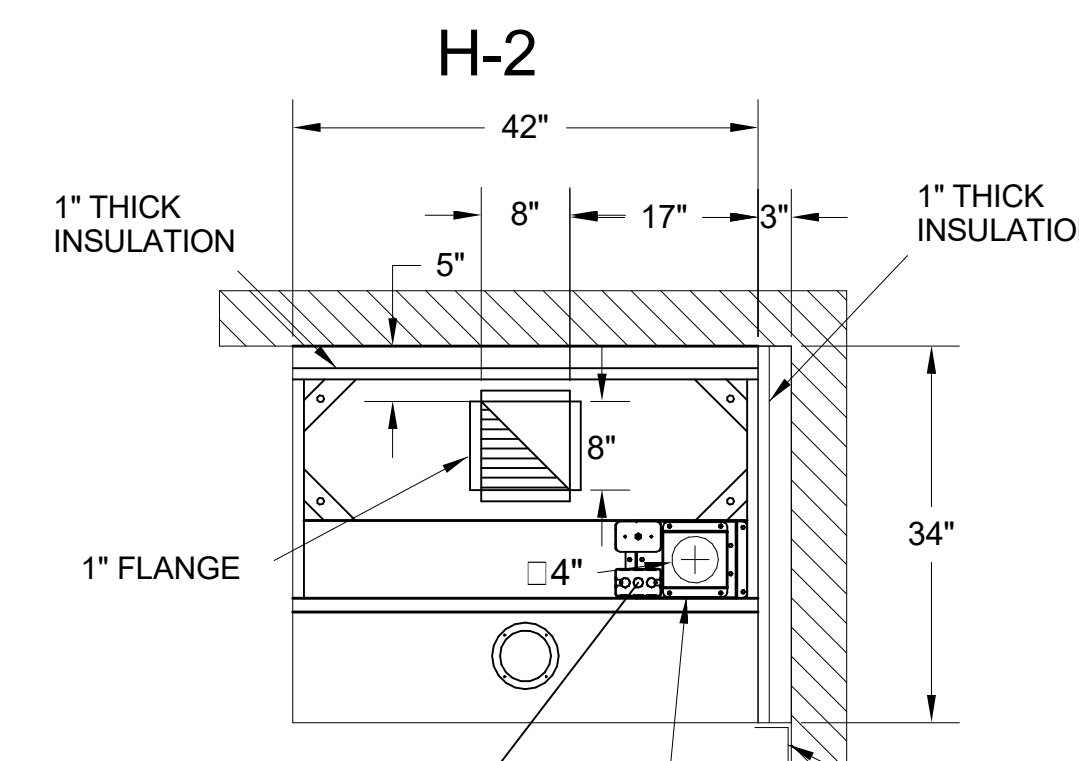


PLAN VIEW

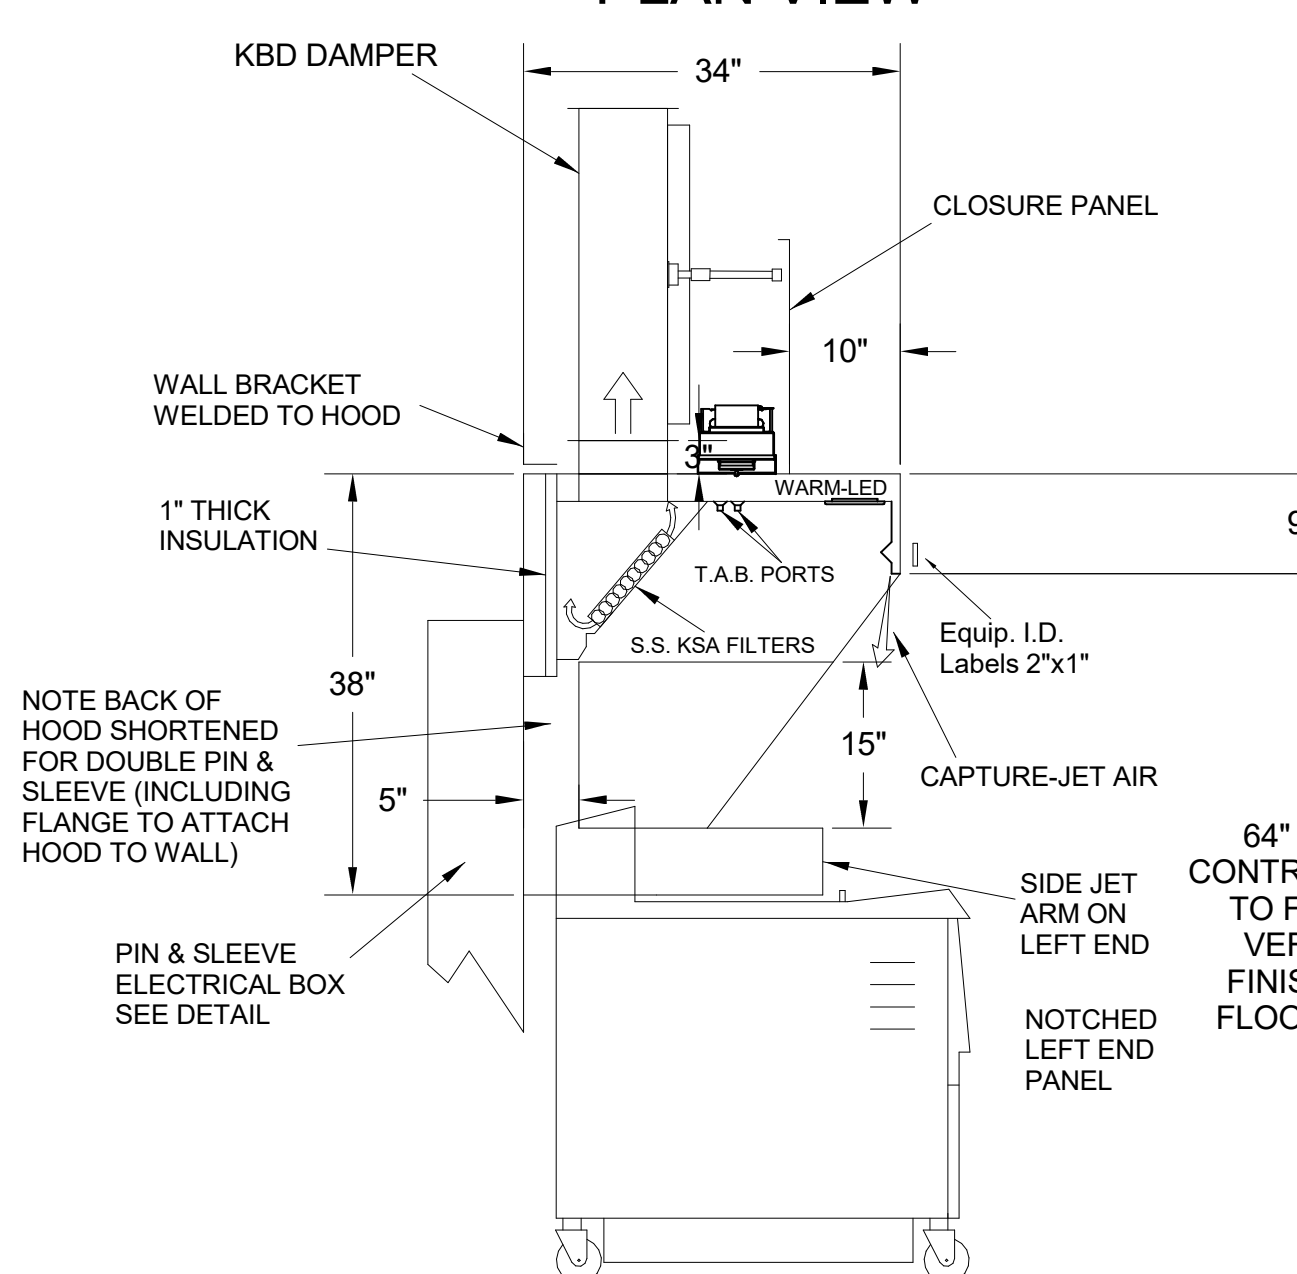


H-2 SECTION VIEW

- CEILING CLOSURE RECESSED 10" FROM FRONT TO CREATE SHELF
- 18"X18" ACCESS DOOR CENTERED AT CAPTURE-JET WITH FRONT CJ INTAKE
- NOTCHED LEFT END PANEL
- DOUBLE RECEPTACLE PIN & SLEEVE
- 3"X3" TRIM STRIP FOR STANDOFF ON RIGHT END
- 3" SIDE & REAR STAND-OFF TO HAVE 1" THICK INSULATION
- EQUIPMENT COVERED:
(2) FRYERS

MODEL NO.	SERIAL NO.	ITEM NO.

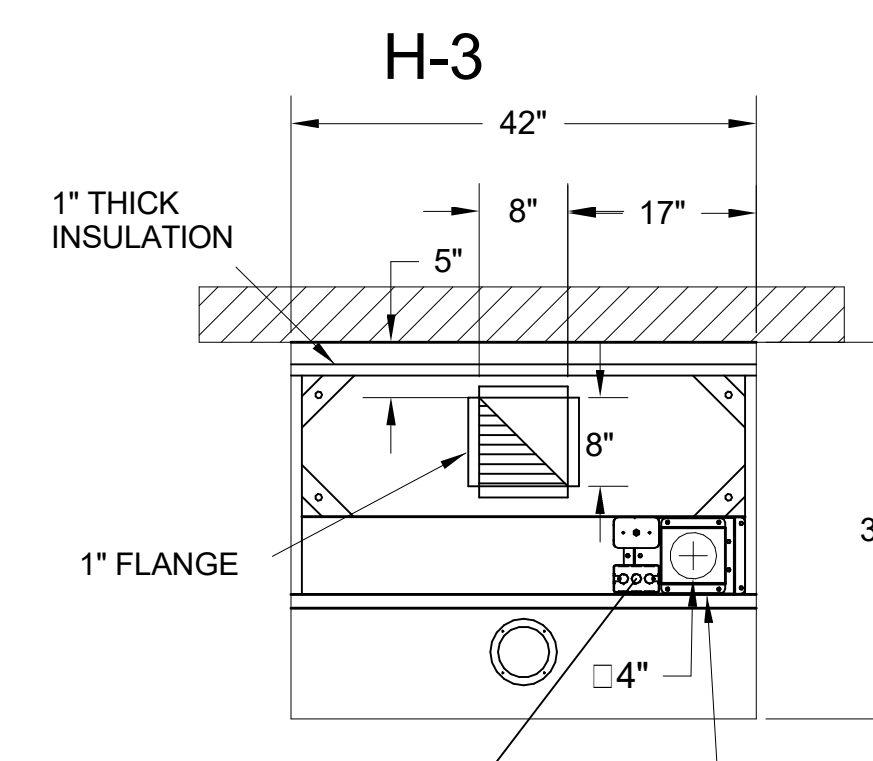


PLAN VIEW

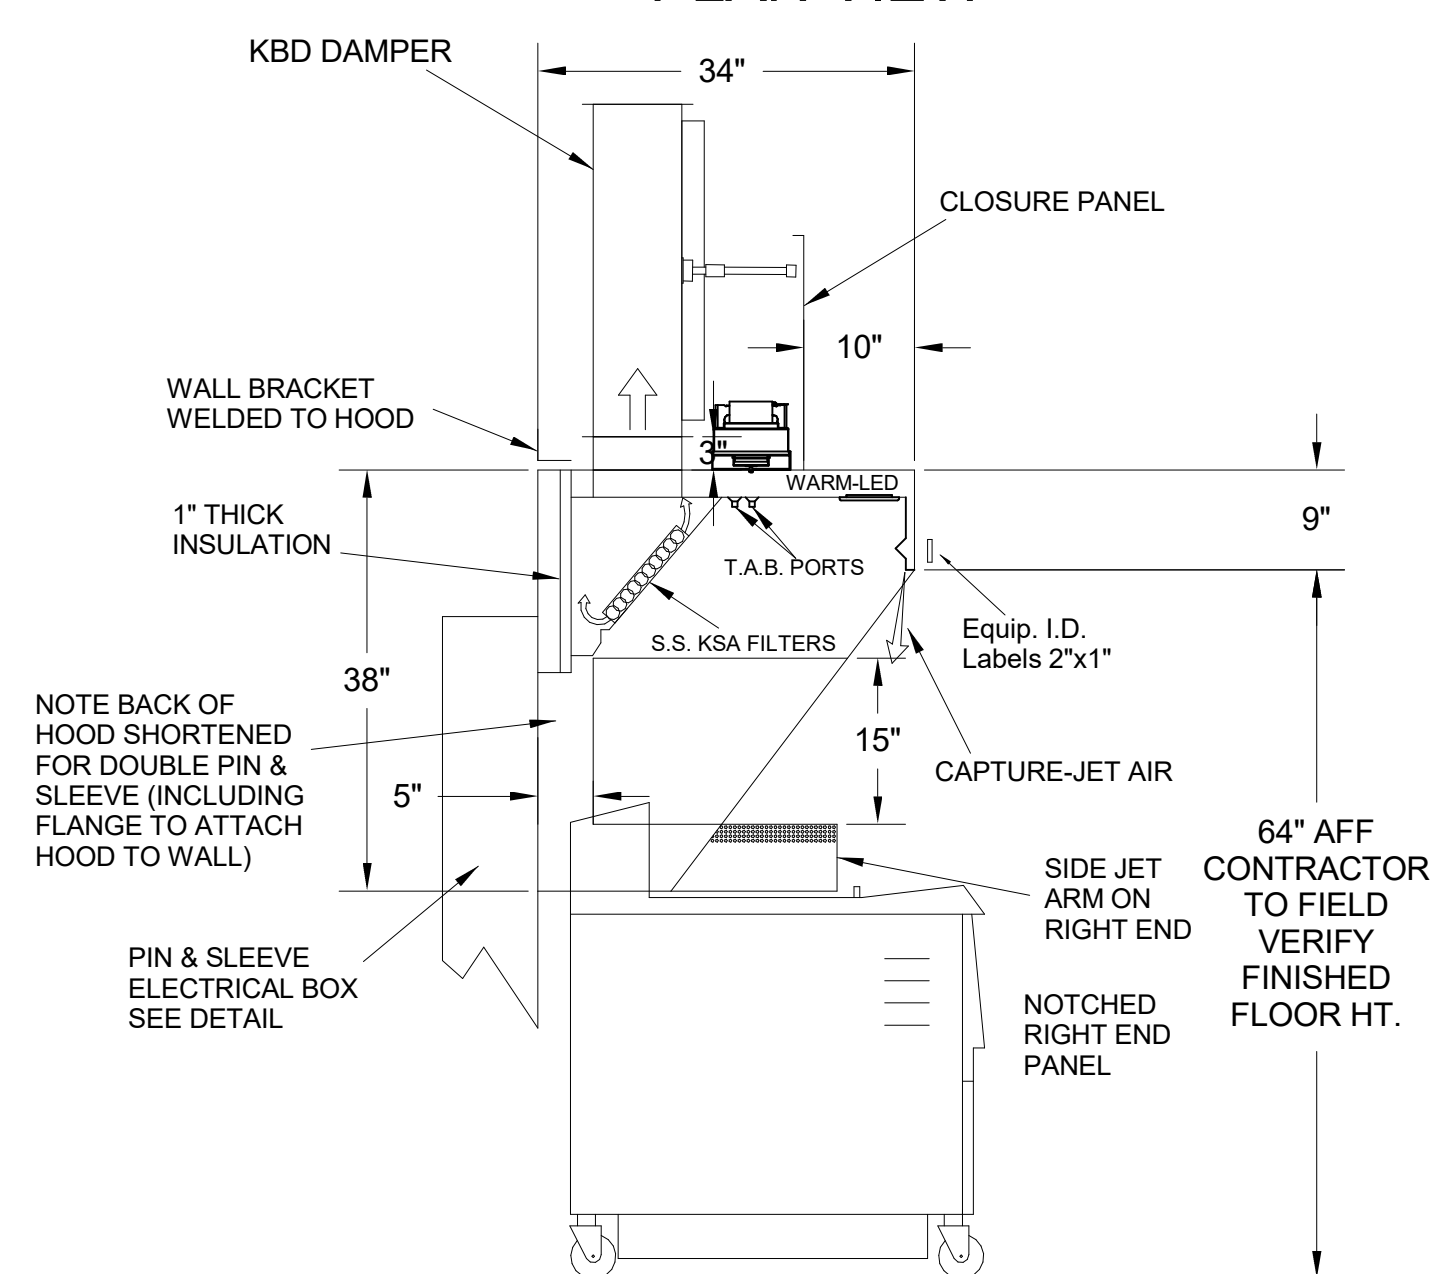

H-3 SECTION VIEW

- CEILING CLOSURE RECESSED 10" FROM FRONT TO CREATE SHELF
- 18"X18" ACCESS DOOR CENTERED AT CAPTURE-JET WITH FRONT CJ INTAKE
- NOTCHED RIGHT END PANEL
- DOUBLE RECEPTACLE PIN & SLEEVE
- 3" REAR STAND-OFF TO HAVE 1" THICK INSULATION
- EQUIPMENT COVERED:
(2) FRYERS

MODEL NO.	SERIAL NO.	ITEM NO.

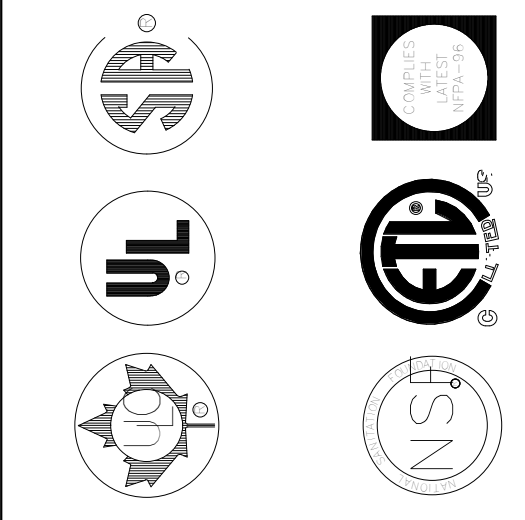

MAIL APPROVED DRAWINGS TO APPROPRIATE FACTORY: BELOW WEBSITE: WWW.HALTONCOMPANY.COM	DATE
HALTON CO. (CANADA)	BY
HALTON CO. (USA)	DATE
1021 BREVIK PLACE	DATE
MISSISSAUGA, ON L4W 3R7	DATE
1-905-624-0301	DATE
1-270-237-5600	DATE
REVISION DESCRIPTION	DATE
1	
2	
3	
4	
5	
6	
7	

PROJECT: **CHICK-FIL-A**

LOCATION: SARALAND FSU

DRAWN BY: DATE: 02/06/2025

SCALE: NTS

SN#: 05661

Halton
CAPRE FOR INDOOR AIR

IECC COMMISSIONING REQUIREMENTS FOR MECHANICAL

IECC COMMISSIONING REQUIREMENTS

C408.1 MECHANICAL SYSTEMS SHALL BE DOCUMENTED IN ACCORDANCE WITH THE FOLLOWING SECTIONS.

C408.1.1 - PROVIDE AN OPERATION AND MAINTENANCE MANUAL WHICH INCLUDES THE FOLLOWING:

1. PROVIDE HVAC EQUIPMENT SUBMITTAL DATA.
2. PROVIDE MANUFACTURER'S OPERATION AND MAINTENANCE MANUALS FOR HVAC EQUIPMENT. ROUTINE MAINTENANCE ACTIONS SHALL BE CLEARLY IDENTIFIED.
3. PROVIDE THE NAME AND ADDRESS OF AT LEAST ONE HVAC SERVICE AGENCY.
4. PROVIDE HVAC CONTROL SYSTEM MAINTENANCE AND CALIBRATION INFORMATION INCLUDING WIRING DIAGRAMS, SCHEMATICS, AND CONTROL SEQUENCES. TENANT DESIRED DRAWINGS AT CONTROL DEVICES OR IN SYSTEM PROGRAMMING INSTRUCTIONS.
5. PROVIDE A NARRATIVE OF HOW EACH SYSTEM IS INTENDED TO OPERATE, INCLUDING RECOMMENDED SETPOINTS.

C408.2 COMMISSIONING OF MECHANICAL SYSTEMS SHALL BE PERFORMED IN ACCORDANCE WITH THE FOLLOWING SECTIONS.

C408.2.1 - A COMMISSIONING PLAN SHALL BE DEVELOPED IN ACCORDANCE WITH THIS SECTION AND SHALL INCLUDE THE FOLLOWING ITEMS.

1. A NARRATIVE DESCRIPTION OF THE ACTIVITIES TO BE PERFORMED.
2. A LIST OF THE SYSTEMS AND EQUIPMENT REQUIRED TO BE COMMISSIONED.
3. A LIST OF THE TEST FUNCTIONS TO BE PERFORMED ON THE CORRESPONDING EQUIPMENT.
4. CONDITIONS UNDER WHICH THE TEST WILL BE PERFORMED.
5. MEASURABLE CRITERIA FOR PERFORMANCE.

C408.2.2 - MECHANICAL SYSTEMS SHALL UNDERGO TEST AND BALANCE AND SHALL BE IN ACCORDANCE WITH THE CONSTRUCTION SPECIFICATIONS AS WELL AS THE 2018 IECC. AIR AND WATER FLOW RATES SHALL BE MEASURED AND ADJUSTED TO DELIVER FINAL FLOW RATES WITHIN THE TOLERANCES PROVIDED IN THE CONSTRUCTION SPECIFICATIONS.

C408.2.2.1 - CONDUCT AIR SYSTEMS TEST AND BALANCE IN ACCORDANCE WITH THE REQUIREMENTS OF THIS SECTION AND THE CONSTRUCTION SPECIFICATIONS.

C408.2.2.2 - CONDUCT WATER SYSTEMS TEST AND BALANCE IN ACCORDANCE WITH THE REQUIREMENTS OF THIS SECTION AND THE CONSTRUCTION SPECIFICATIONS.

C408.2.3 - PERFORM FUNCTIONAL PERFORMANCE TESTING IN ACCORDANCE WITH THE FOLLOWING SECTIONS.

C408.2.3.1 - PERFORM FUNCTIONAL PERFORMANCE TESTING FOR HVAC EQUIPMENT IN ORDER TO DEMONSTRATE THE OPERATION OF COMPONENTS, SYSTEM AND SYSTEM-TO-SYSTEM INTERACTION IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS AND MANUFACTURER REQUIREMENTS. TESTING SHALL INCLUDE FULL-LOAD, PART-LOAD, AND EMERGENCY OPERATING CONDITIONS AND SHALL COVER ALL OPERATING MODES LISTED IN THE SEQUENCE OF OPERATIONS AS DEFINED IN THE CONSTRUCTION DOCUMENTS.

C408.2.3.2 - HVAC SYSTEMS SHALL BE TESTED IN ORDER TO DOCUMENT THAT CONTROL DEVICES, COMPONENTS, EQUIPMENT AND SYSTEMS ARE CALIBRATED AND ADJUSTED TO OPERATE IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS AND SPECIFICATIONS. HVAC CONTROL SYSTEMS SHALL BE TESTED FOR ALL OPERATING MODES LISTED IN THE SEQUENCE OF OPERATIONS AS DEFINED IN THE CONSTRUCTION DOCUMENTS.

C408.2.3.3 - AIRSIDE ECONOMIZERS SHALL UNDERGO FUNCTIONAL PERFORMANCE TESTING IN ORDER TO ENSURE OPERATIONAL MODES ARE FUNCTIONING IN ACCORDANCE WITH MANUFACTURER RECOMMENDATIONS.

C408.2.4 - COMPLETE A PRELIMINARY COMMISSIONING REPORT OUTLINING TEST PROCEDURES AND RESULTS IN ACCORDANCE WITH THIS SECTION. THE REPORT SHALL IDENTIFY:

1. ITEMIZATION OF DEFICIENCIES FOUND DURING TESTING REQUIRED BY THIS SECTION THAT HAVE NOT BEEN CORRECTED AT THE TIME OF REPORT PREPARATION.
2. DEFERRED TESTS THAT CANNOT BE PERFORMED AT THE TIME OF THE REPORT PREPARATION DUE TO CLIMATIC CONDITIONS.
3. CLIMATIC CONDITIONS REQUIRED FOR PERFORMANCE OF THE DEFERRED TESTS.
4. RESULTS OF FUNCTIONAL PERFORMANCE TESTS.
5. FUNCTIONAL PERFORMANCE TEST PROCEDURES USED DURING THE COMMISSIONING PROCESS, INCLUDING MEASURABLE CRITERIA FOR TEST ACCEPTANCE.

C408.2.4.1 - THE OWNER SHALL RECEIVE A COPY OF THE PRELIMINARY COMMISSIONING REPORT BEFORE FINAL INSPECTION BY THE CODE OFFICIAL OCCURS.

C408.2.4.2 - THE PRELIMINARY COMMISSIONING REPORT SHALL BE MADE AVAILABLE TO THE PROJECT CODE OFFICIAL UPON REQUEST.

C408.2.5 - COMMISSIONING DOCUMENTATION OUTLINED IN SECTION C408 SHALL BE PROVIDED TO THE OWNER WITHIN 90 DAYS OF RECEIPT OF THE CERTIFICATE OF OCCUPANCY.


C408.2.5.1 - PROVIDE AIR AND WATER SYSTEM TEST AND BALANCE REPORTS IN ACCORDANCE WITH SECTION C408.2.2.

C408.2.5.2 - PROVIDE A FINAL COMMISSIONING REPORT TO THE OWNER INCLUDING THE FOLLOWING:

1. RESULTS OF THE FUNCTIONAL TESTS.
2. DISPOSITION OF DEFICIENCIES FOUND DURING TESTING, INCLUDING DETAILS OF CORRECTIVE MEASURES USED OR PROPOSED.
3. FUNCTIONAL PERFORMANCE TESTING PROCEDURES USED DURING THE COMMISSIONING PROCESS, INCLUDING MEASURABLE CRITERIA FOR TEST ACCEPTANCE, PROVIDED FOR REPEATABILITY.
4. LIST OUT ANY DEFERRED TESTS STILL OUTSTANDING DUE TO CLIMATIC CONDITIONS.



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske
& Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE

NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.


SHEET
COMMISSIONING
REQUIREMENTS -
MECHANICAL
SHEET NUMBER

M-002



Chick-fil-A

Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

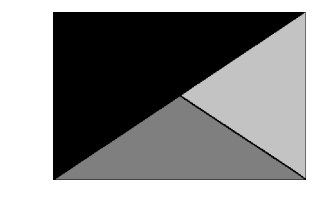

Kurzynske
& Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571


FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE:
PRINTED FOR
CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
SHEET
EQUIPMENT ROOF PLAN - LENNOX

SHEET NUMBER
M-102L

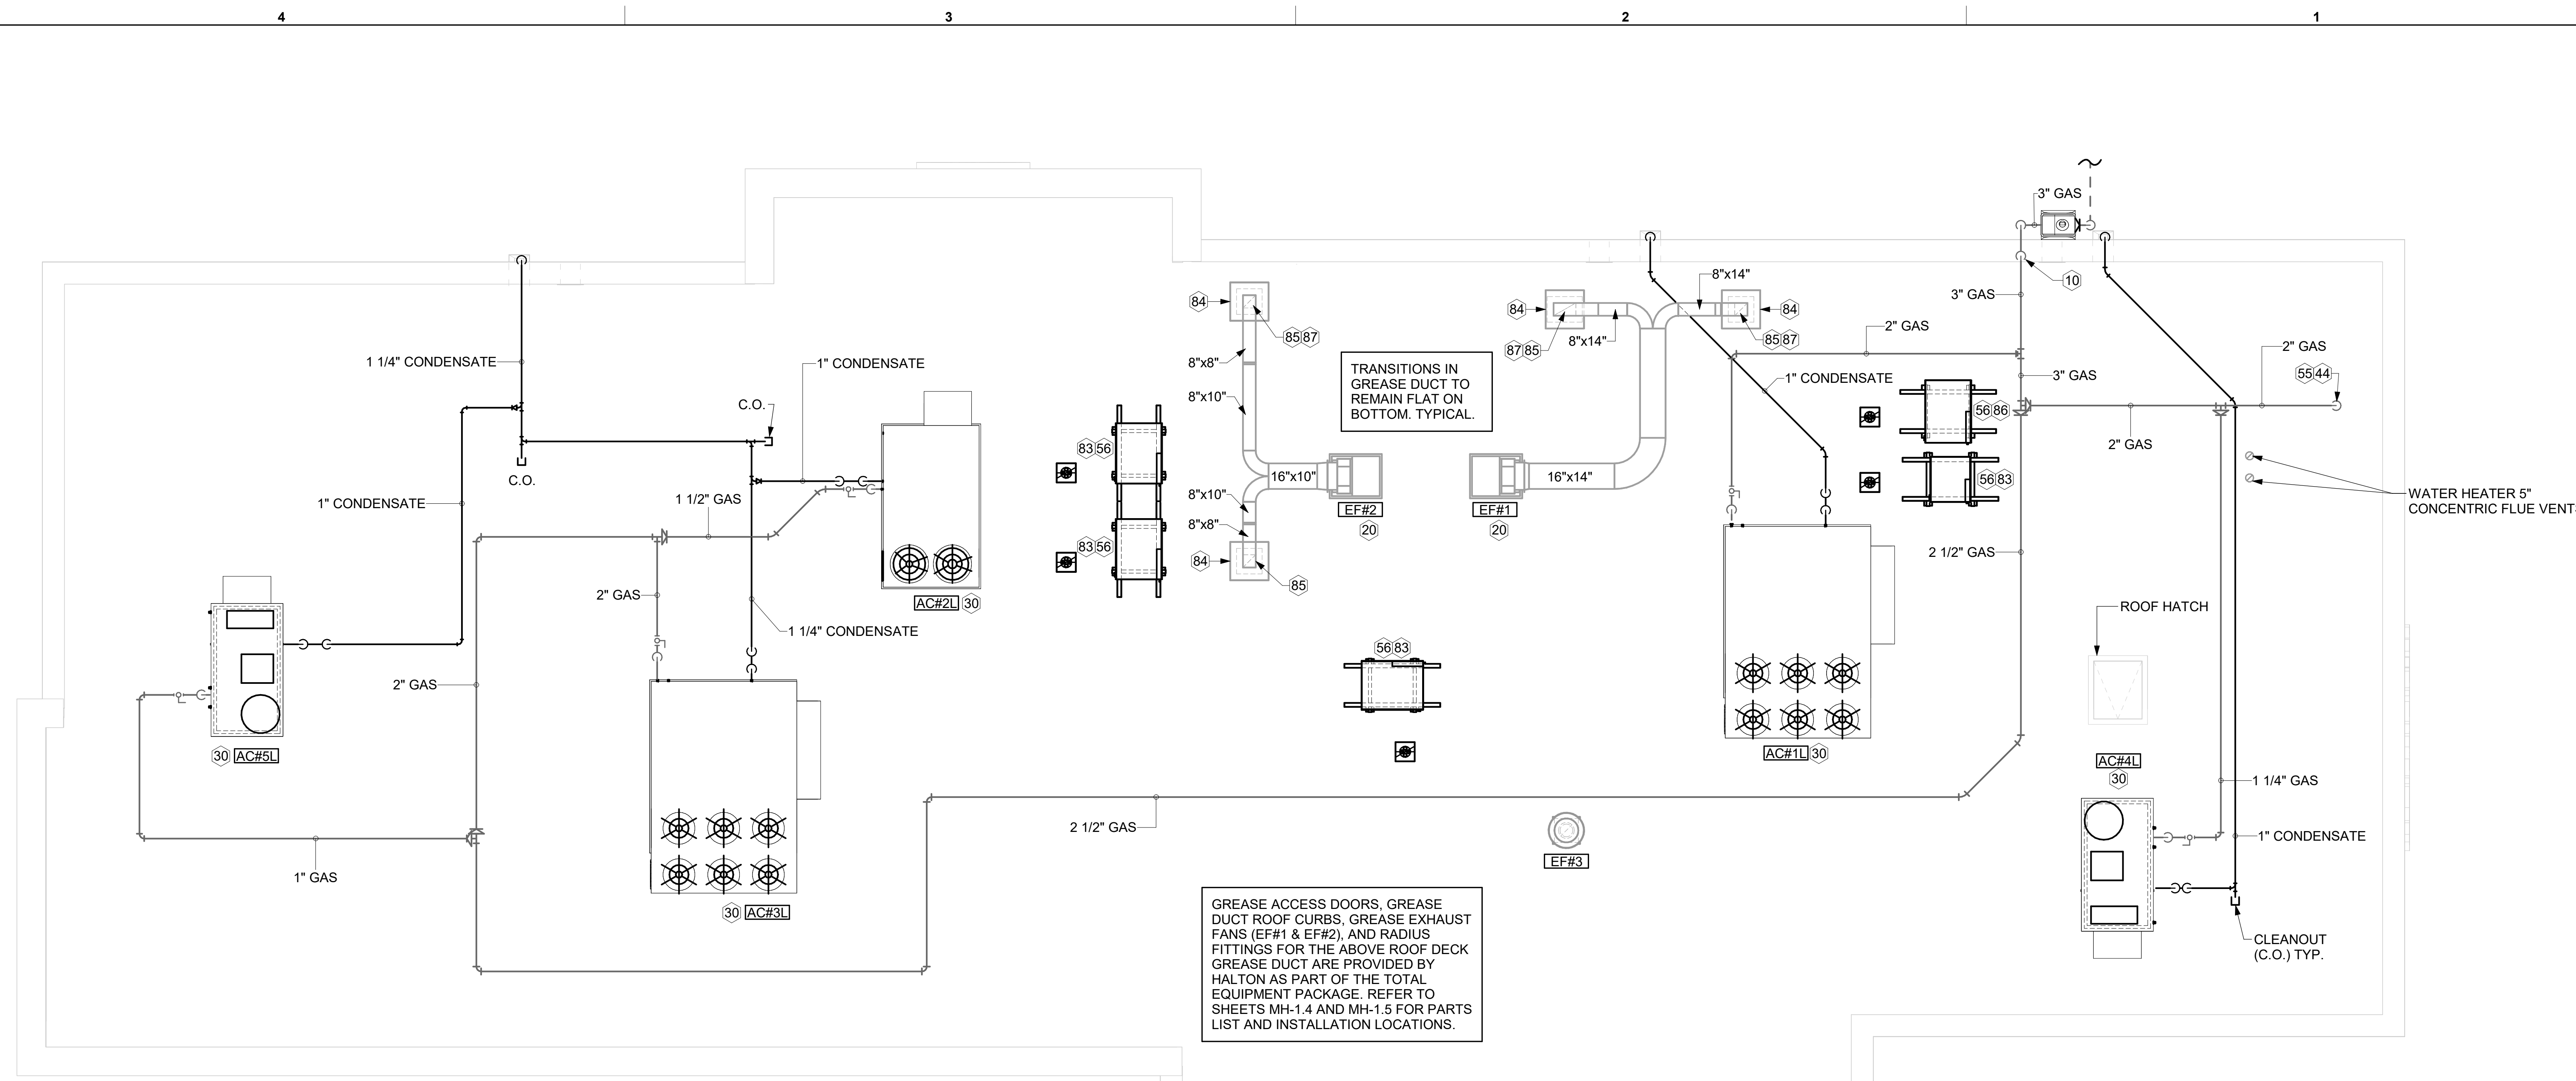

1 EQUIPMENT ROOF PLAN - LENNOX
1/4" = 1'-0"


KEY NOTES

- 10 TURN 3" GAS UP WITHIN WALL, THRU PARAPET AND ONTO ROOF.
- 20 GREASE EXHAUST DUCT LOCATED ON ROOF SHALL SLOPE 1/4" PER FOOT TOWARDS THE HOOD, THE FAN, OR A COMBINATION OF THE TWO SUCH THAT NO PORTION OF THE RADIUS ELBOW AT THE CURB IS BELOW THE CURB CAP AND SUCH THAT THE FAN BASE SETS DIRECTLY ON THE CURB RAILS. THE BOTTOM OF THE RADIUS ELBOW MAY BE EVEN OR FLUSH WITH THE CURB CAP, BUT NOT BELOW THE CAP. THE DUCT AT THE FAN MUST BE CENTERED ON THE FAN INLET.
- 30 MECHANICAL CONTRACTOR TO SEE ARCHITECTURAL ROOF PLAN FOR NOTES REGARDING LEVELING FRAMES FOR RTUS. COORDINATE WITH GENERAL CONTRACTOR EXACT LOCATIONS AND SIZE NEEDED.
- 44 2" GAS DOWN THRU ROOF TO WATER HEATER. SEE DETAIL 2/M-502 FOR MORE INFORMATION ON CONSTRUCTION AND PENETRATION.
- 55 SEE ARCHITECTURAL DETAILS FOR ROOFTOP PIPE PENETRATIONS.
- 56 GC SHALL PROVIDE EQUIPMENT STANDS AS MANUFACTURED BY AVCOA OR EQUAL. STANDS SHALL BE INSTALLED PRIOR TO ROOF INSULATION SO THAT THE INSULATION IS CONTINUOUS UP TO THE PIPE POSTS. POSTS SHALL BE FLASHED IN ACCORDANCE WITH ROOFING MANUFACTURER'S INSTALLATION INSTRUCTIONS. COORDINATE BLOCKING BELOW THE ROOF DECK AS REQUIRED.
- 83 DO NOT DISCHARGE OF CONDENSING UNITS INTO CONDENSER SECTION OF ROOFTOP UNITS, TYP.
- 84 ROOF CURB FOR DUCT PENETRATION. REFER TO MH-1.4 AND MH-1.5 FOR DETAILS.
- 85 TURN DOWN THRU ROOF. SEE M-101L/M-101T FOR CONTINUATION.
- 86 ACCESS DOOR ON TOP OF DUCT.
- 87 DUCT PENETRATIONS ON ROOF MUST BE AT LEAST 18" FROM ADJACENT PARAPETS.

3. GAS LOAD SCHEDULE	
EQUIPMENT	GAS LOAD
AC#1L	480,000 BTUS
AC#2L	240,000 BTUS
AC#3L	360,000 BTUS
AC#4L	108,000 BTUS
AC#5L	65,000 BTUS
WATER HEATER	398,000 BTUS
TOTAL FUTURE CONNECTED LOAD	1,651,000 BTUS
REMARKS:	1. EQUIVALENT TO 1,651.0 CFH 2. 7" W.C. DELIVERY PRESSURE 3. DEVELOPED LENGTH: 250 FT. (METER TO AC#2) 4. SIZED PER IFGC TABLE 402.4(2).


Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 1:33:00 PM
30-LS-05661-M-102L-EQUIPMENT ROOF PLAN - LENNOX

SECURE FAN TO CURB WITH HEX WASHER HEAD SELF-DRILLING SCREW (#12 x 2"). THE FASTENERS SHALL BE 2" FROM EACH CORNER OF THE FAN BASE AND THE DISTANCE BETWEEN FASTENERS SHALL BE 4" OR LESS. MINIMUM 5 FASTENERS PER SIDE OF CURB. ALL FASTENERS ARE TO BE HIGH QUALITY CORROSION RESISTANT STEEL OR STAINLESS STEEL. REFER TO STRUCTURAL DRAWINGS FOR ANCHORAGE OF FAN/CURB TO STRUCTURE.

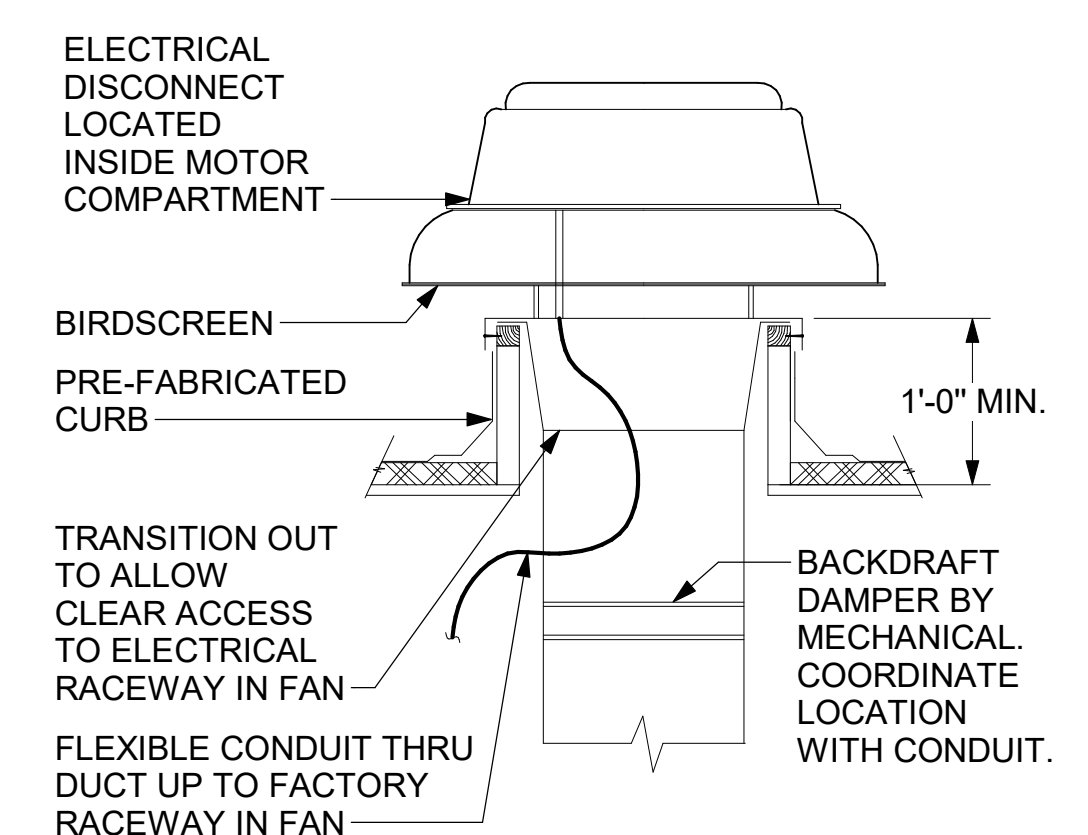


3 RESTROOM EXHAUST FAN
NOT TO SCALE


CHICK-FIL-A HAS A NATIONAL ACCOUNT WITH TOM BARROW COMPANY FOR THE ROYAL METAL PRODUCTS START COLLARS FOR BOTH WITH AND WITHOUT A MANUAL BALANCING DAMPER. THE MECHANICAL CONTRACTOR IS REQUIRED TO PURCHASE THE ROYAL METAL PRODUCTS START COLLARS DIRECTLY FROM TOM BARROW COMPANY. CONTACT MR. SCOTT GEORGE AT 404-351-1010 FOR PRICING AND AVAILABILITY. ROYAL METAL PRODUCTS START COLLARS NOT PURCHASED THRU TOM BARROW COMPANY WILL NOT BE ACCEPTED.

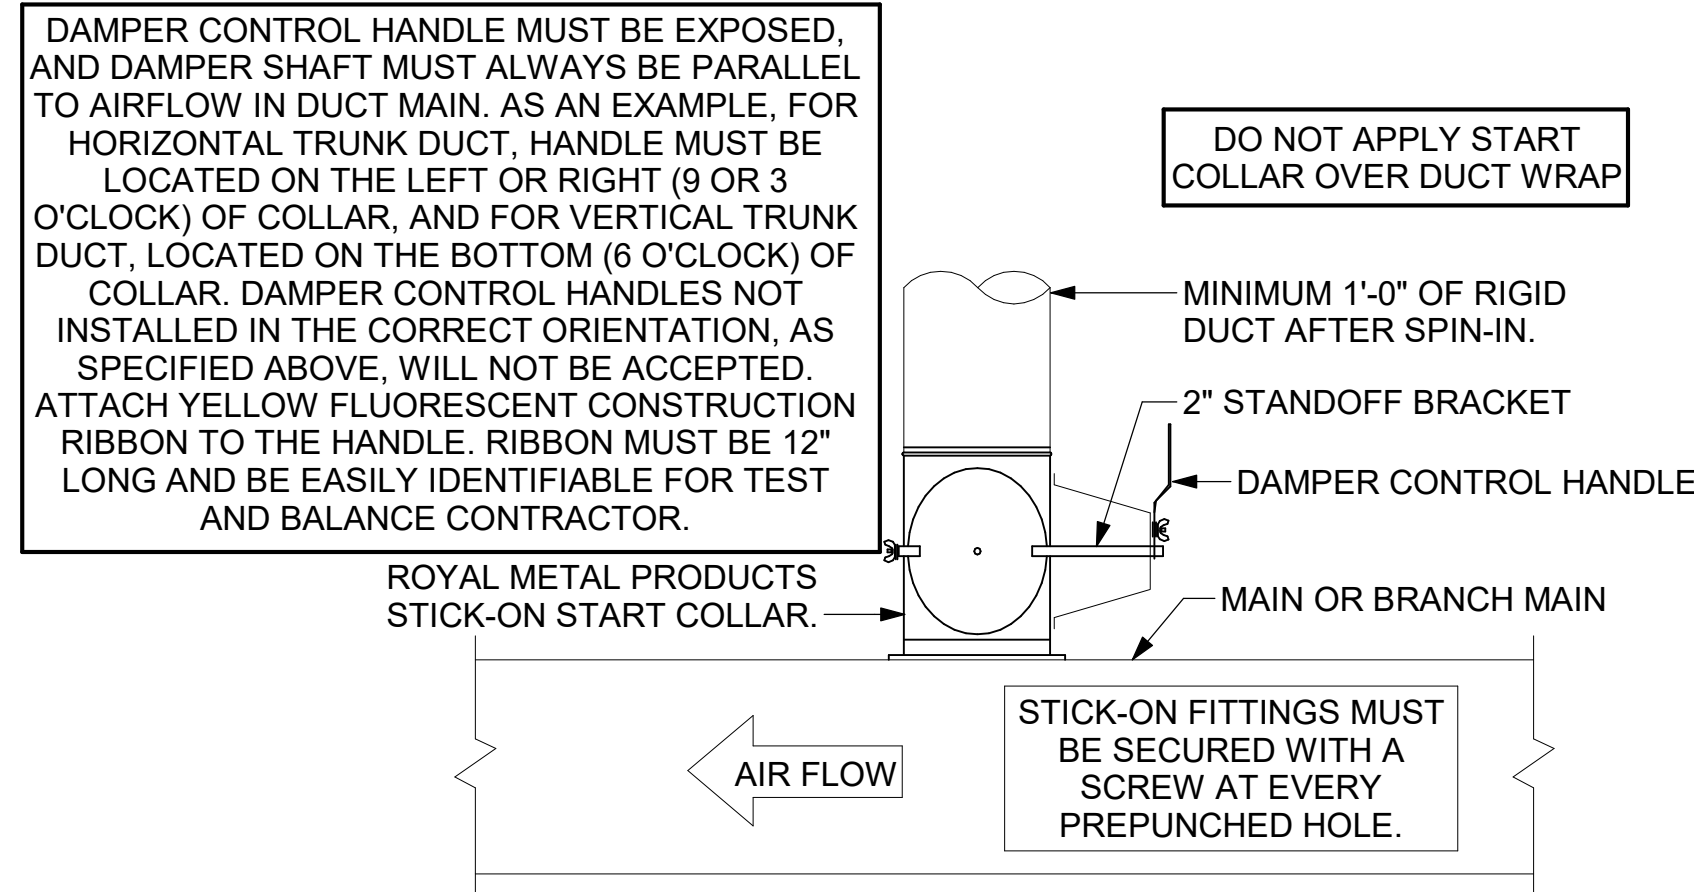

2 START COLLAR - LARGE
NOT TO SCALE

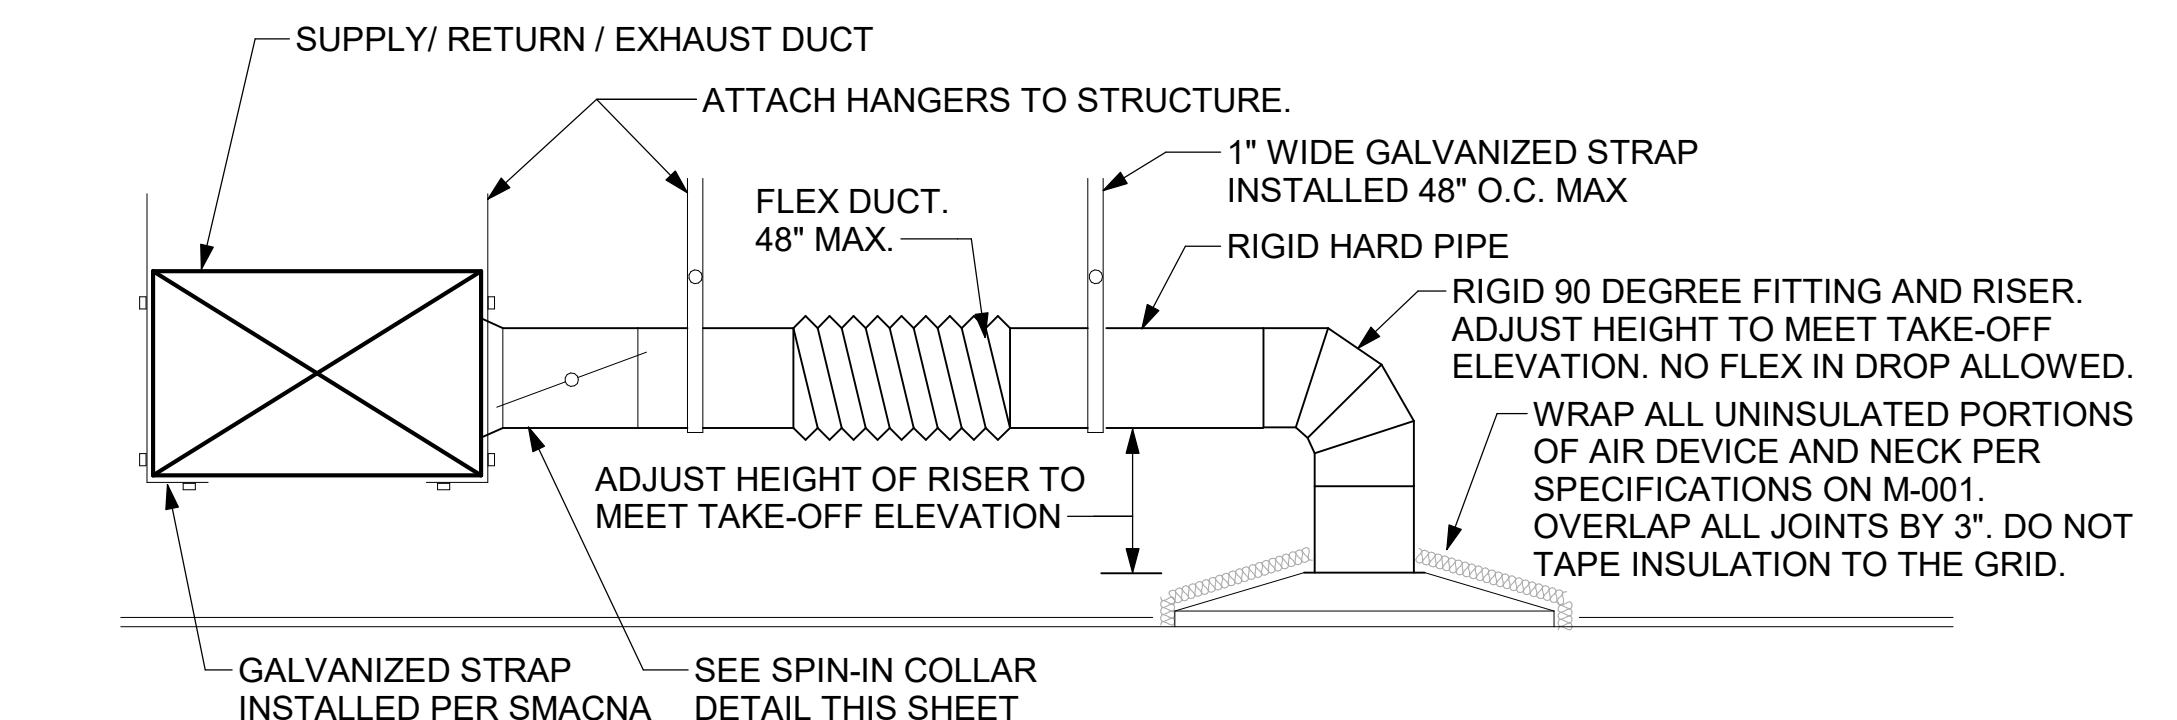


1 SAG/RAG/GRILLE TAKE-OFF - LARGE
NOT TO SCALE

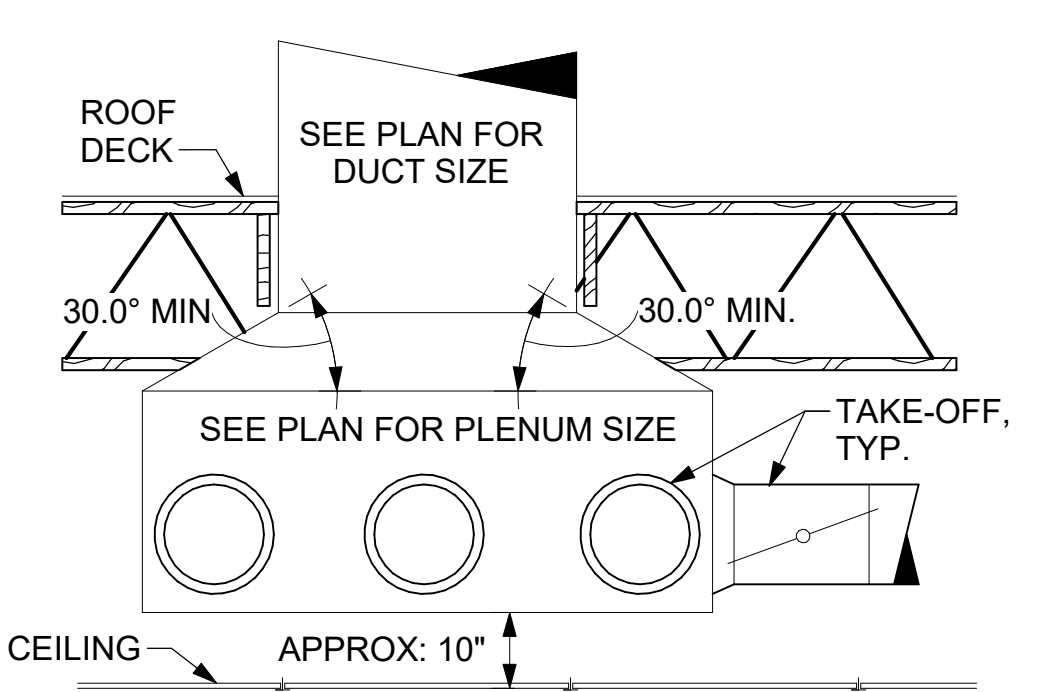

6 RETURN DROP GEOMETRY
NOT TO SCALE

EQUIPMENT STANDS AND ATTACHMENTS FOR FAN, CURB, AND STANDS TO BE PROVIDED AND INSTALLED BY CONTRACTOR FOR PROJECT WINDSPEED. PROJECT WINDSPEED FOR THIS LOCATION IS 142 MPH.


- KEYED NOTES:
- 22" EQUIPMENT CURB FURNISHED BY HALTON.
 - DUCT SUPPORT SHALL BE PROVIDED EVERY 8', AND WITHIN 12" OF ANY FITTING OR WELD SEAM. SUPPORTS SHALL BE SECURELY ATTACHED TO THE STRUCTURE AND DESIGNED TO CARRY GRAVITY, WIND, AND SEISMIC LOADS PER CODE.
 - 12" HIGH INSULATED CURB FURNISHED BY HALTON. MECHANICAL CONTRACTOR TO PROVIDE MINIMUM 18 GA STAINLESS STEEL CURB CAP AND FLASHING.
 - ALL DUCTWORK AND UNFINISHED METAL ON ROOF EXCEPT STAINLESS SHALL BE PREPARED WITH TWO COATS OF SHERWIN WILLIAMS B66-200 SERIES DTM WHITE ACRYLIC SEMI-GLOSS INDUSTRIAL MAINTENANCE COATING. DEGREASE AND PRIME BARE METAL SURFACE WITH ONE COAT OF SHERWIN WILLIAMS DTM ACRYLIC PRIMER PRIOR TO PAINTING.
 - SUPPORT DUCT FROM STRUCTURE WITH 1-1/2"x1/8" STEEL ANGLE OR B-LINE B24 STRUT AND 3/8" ATR ON 6'-0" CENTERS, TYP.
 - FULL PERIMETER LIQUID TIGHT WELD BETWEEN CURB CAP AND DUCT. GREASE EXHAUST DUCT IS CONTINUOUS THRU CURB CAP.
 - INSTALL ROOFTOP SOLUTIONS G2 DRIP GUARD AS CLOSE AS POSSIBLE TO FAN SCROLL DRAIN. EXTEND DRAIN TO CENTER OF DRIP GUARD.

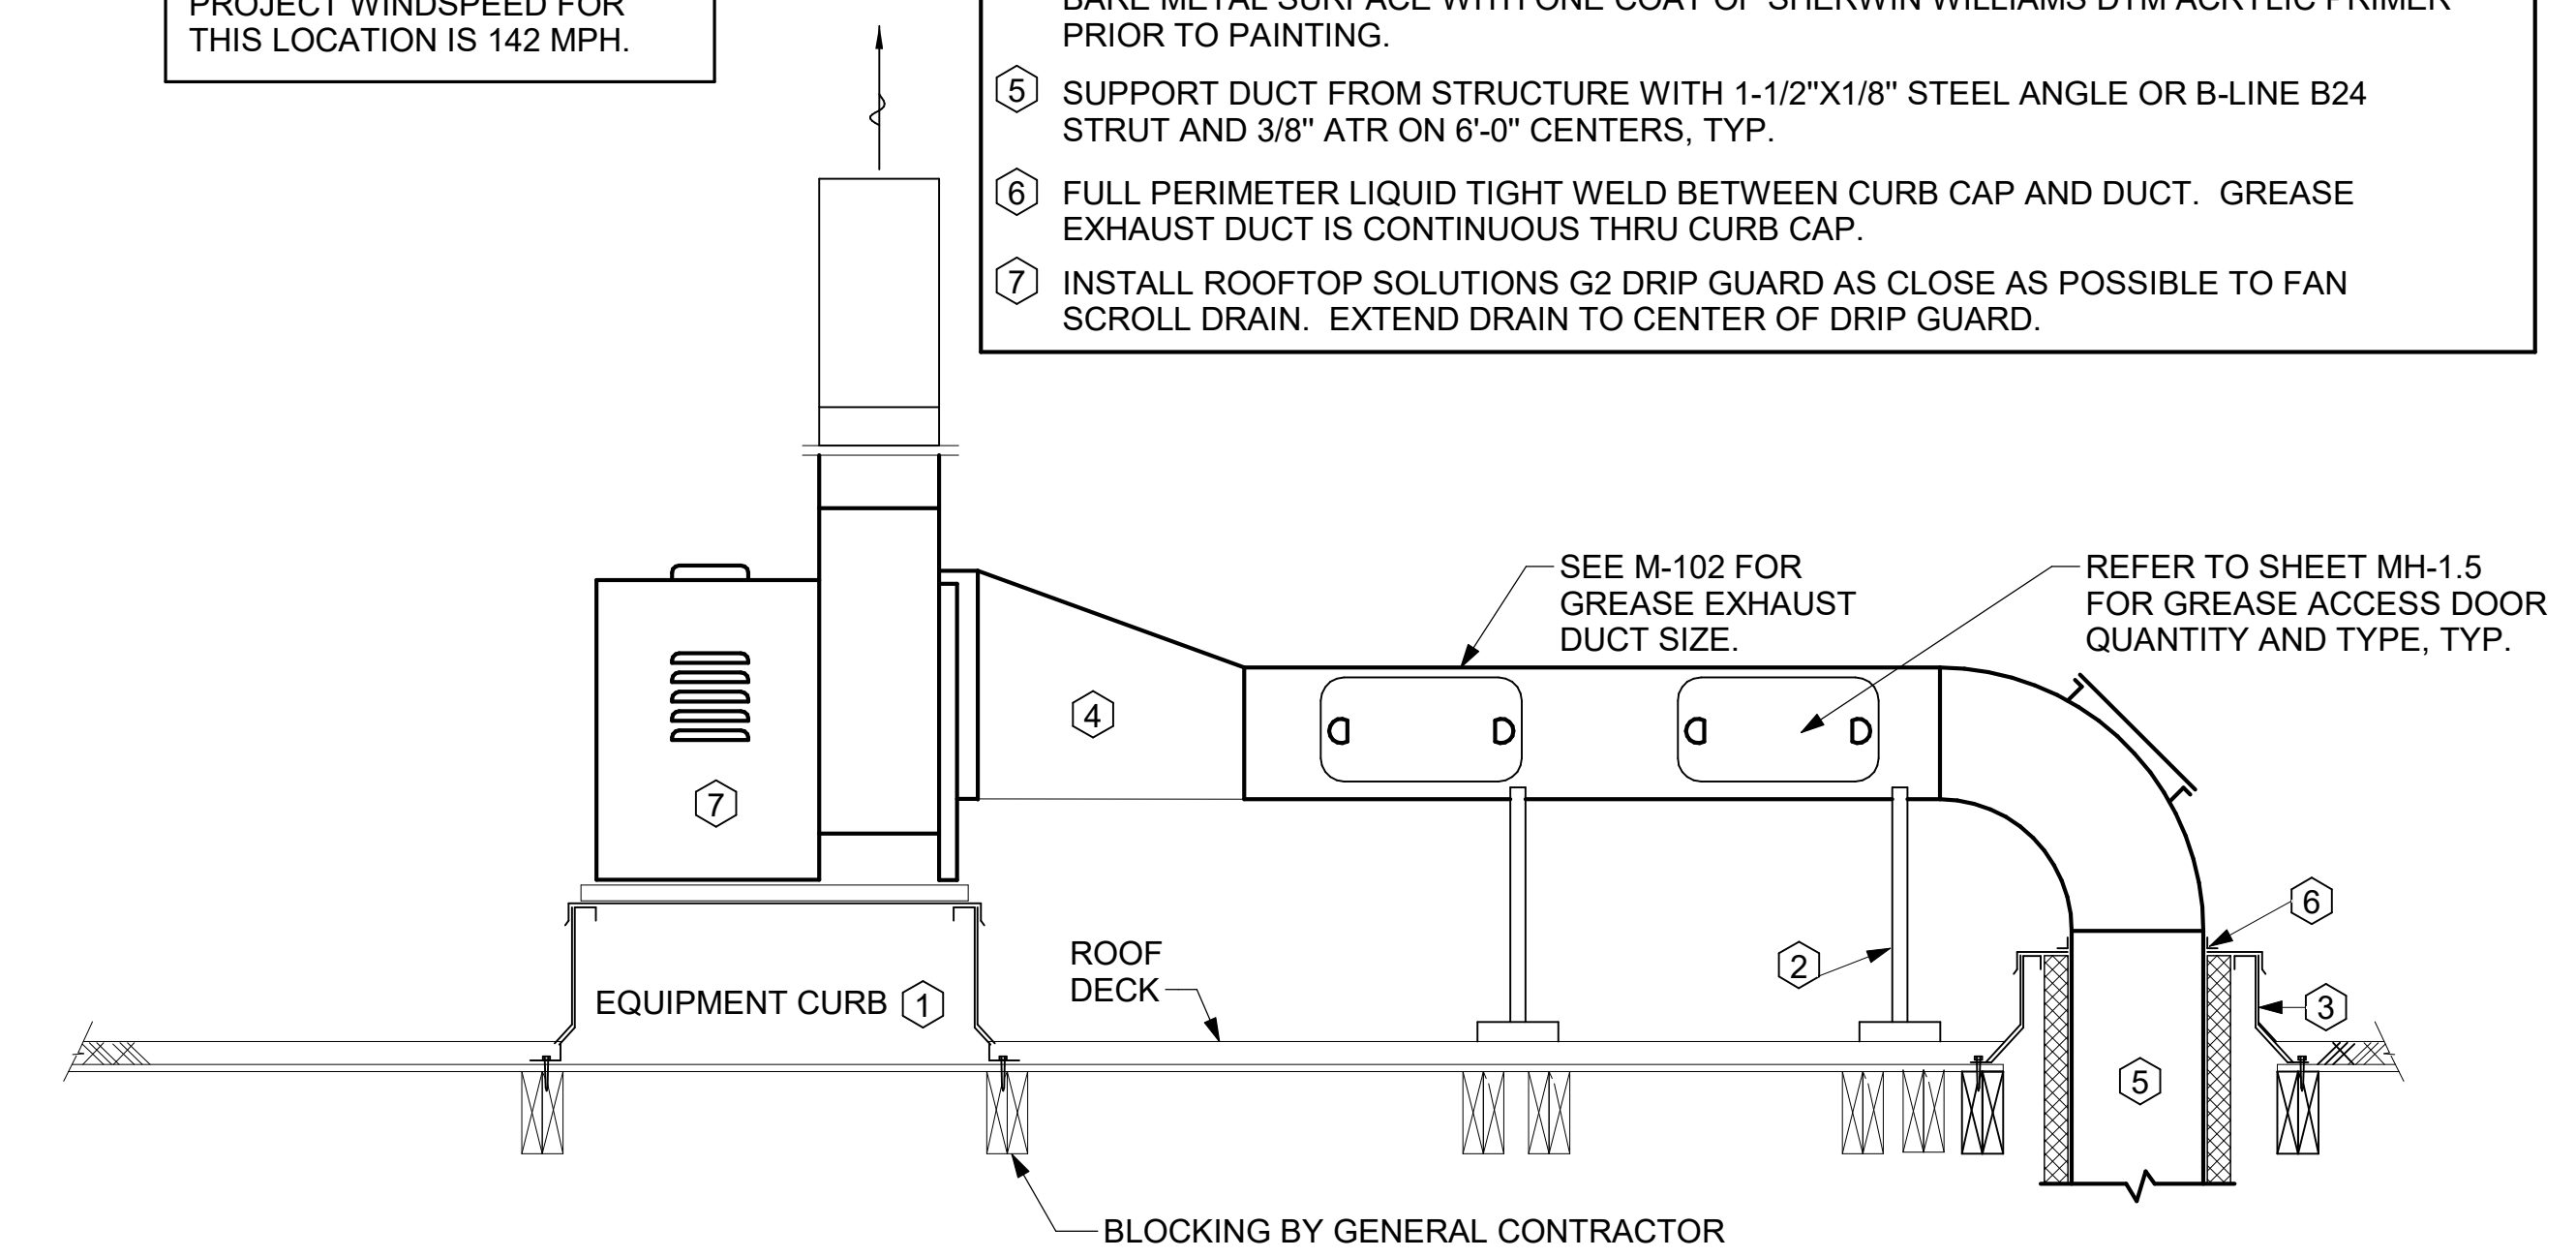

5 KITCHEN HOOD EXHAUST FANS
NOT TO SCALE

TURNING VANE SCHEDULE		
R	SP	GA
2"	1.5"	24

1. NO TRAILING EDGE.
2. SINGLE THICKNESS CONSTRUCTION.

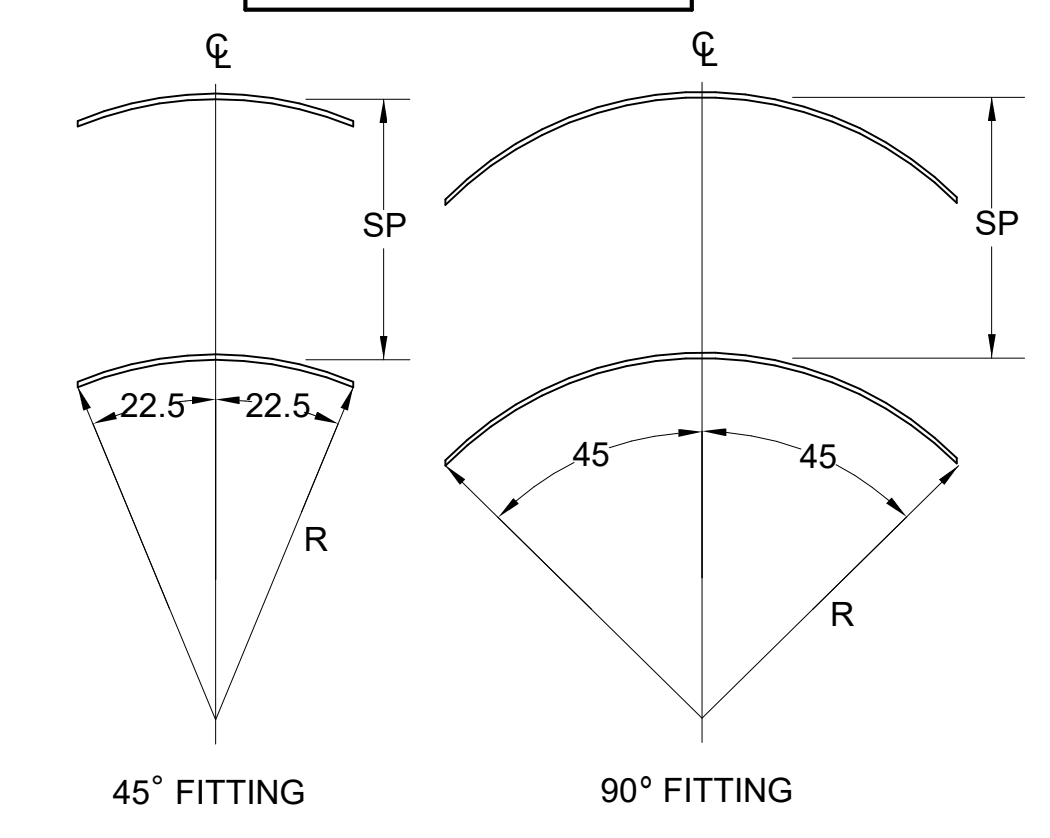

4 TURNING VANES
NOT TO SCALE



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203




CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661
BUILDING TYPE / SIZE: P14 LS BN
RELEASE: PRINTED FOR CONSTRUCTION
REVISION SCHEDULE
NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM


Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
SHEET
DETAILS

SHEET NUMBER
M-501

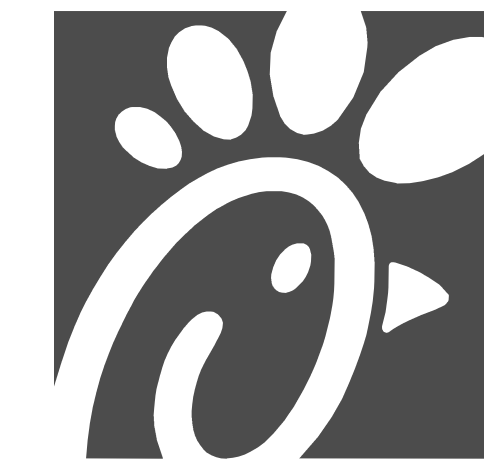


Chick-fil-A

Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998

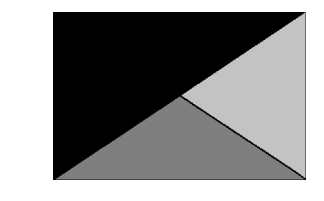

Kurzynske
& Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203

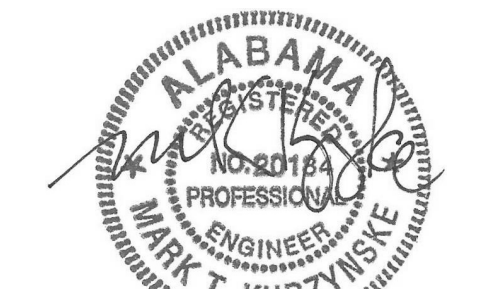

5/15/25

CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P14 LS BN
RELEASE:
PRINTED FOR:
CONSTRUCTION
REVISION SCHEDULE


NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY
AUTHOR


Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET CONTROL WIRING DIAGRAMS - LENNOX

SHEET NUMBER M-701L

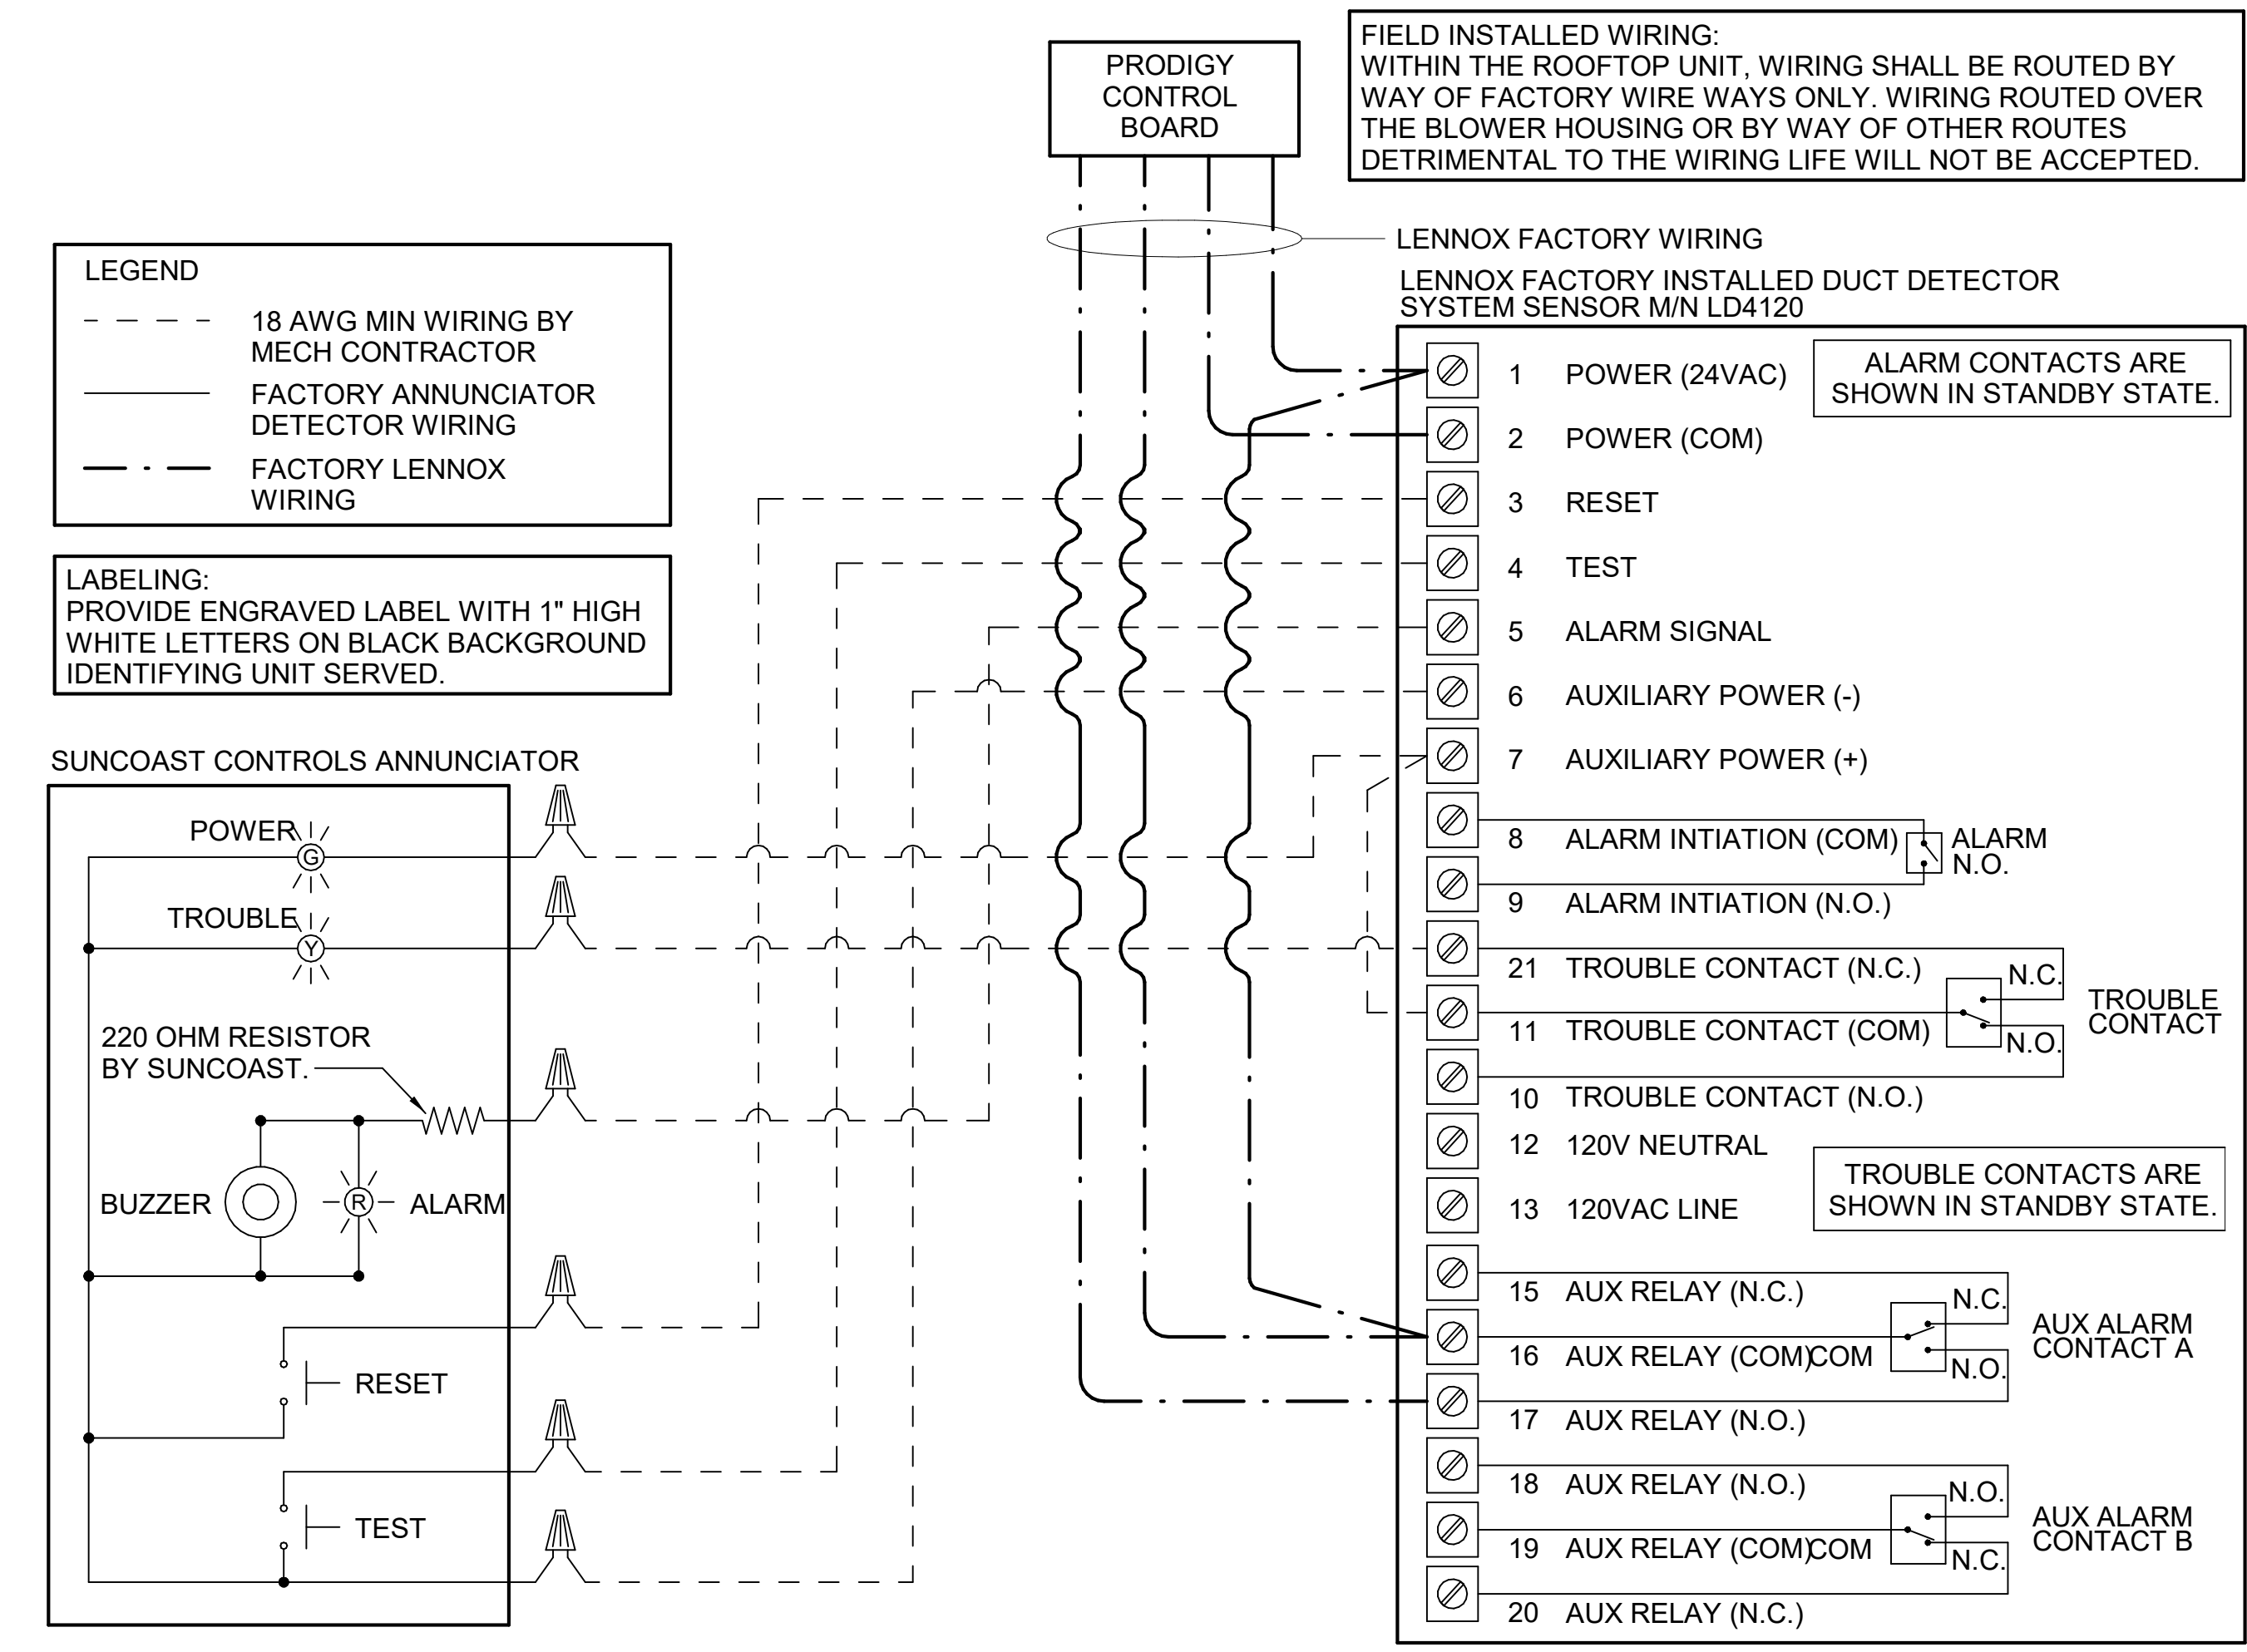

1 SMOKE DETECTOR AND ANNUNCIATOR WIRING DIAGRAM - LENNOX
NOT TO SCALE

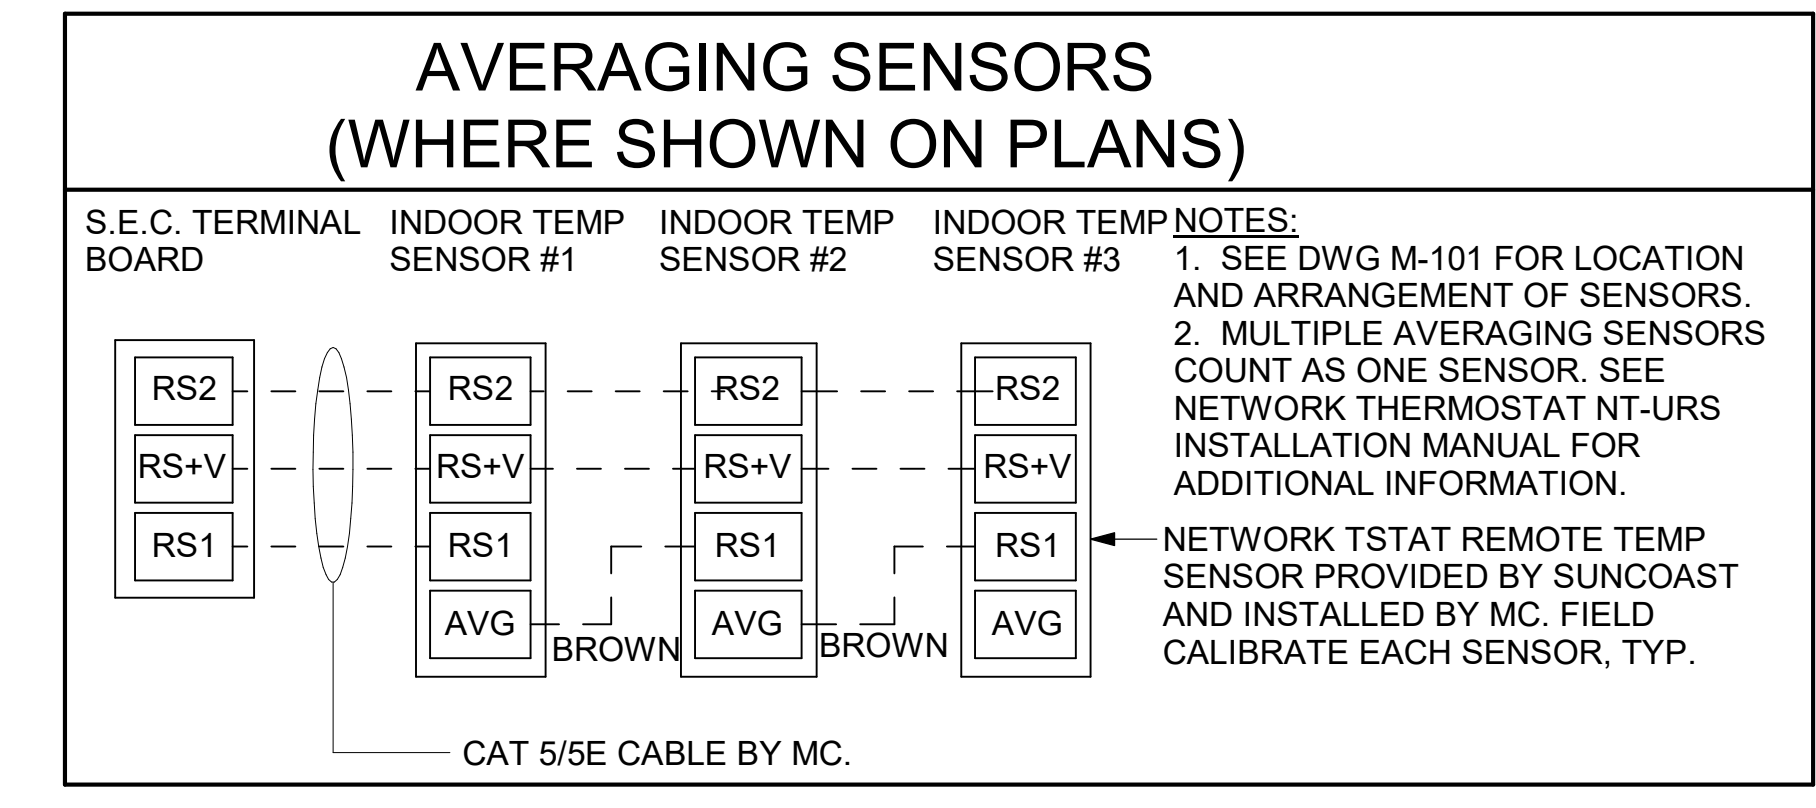


- NOTES:
- MECHANICAL CONTRACTOR SHALL MAKE PLASTIC LAMINATE OF THIS DETAIL AND INSTALL PERMANENTLY ON INSIDE DOOR OF ROOFTOP UNIT CONTROL COMPARTMENT.
 - SEE DETAILS THIS SHEET FOR SMOKE DETECTOR AND ANNUNCIATOR WIRING.
 - SET ALL THERMOSTATS FOR AUTO CHANGEOVER.
 - PROVIDE PLASTIC ENGRAVED LABEL AT ALL NEW SENSORS WITH 1/4" HIGH WHITE LETTERING ON BLACK BACKGROUND, I.E. "AC#2 HUMIDITY SENSOR" OR "AC#2 TEMP SENSOR". PLACE LABELS ON WALL ADJACENT TO DEVICE, DO NOT APPLY DIRECTLY TO DEVICE.

- KEYED NOTES:
- LOW VOLTAGE WIRING TO RTU TO BE ROUTED TO UNIT THRU FACTORY WIREWAY.
 - HUMIDITROL UNITS ONLY: WIRING TO HUMIDITY SENSOR TO BE MADE WITH TWO SEPARATE RUNS OF SHIELDED TWISTED PAIR. TERMINATE SHIELD WIRES AT TB-1. LEAVE OPEN AT SENSOR.
 - NETWORK TSTAT REMOTE TEMP SENSOR PROVIDED BY SUNCOAST AND INSTALLED BY MC. SENSOR IS INTENDED TO BE SURFACE MOUNTED AND DOES NOT REQUIRE A SINGLE GANG BOX OF CONDUIT. FIELD CALIBRATE EACH SENSOR.

LEGEND

S.E.C.	SUNCOAST ENVIRONMENTAL CONTROLS (SUPPLIER OF TEMP/FAN CONTROL PANEL) LOCATED IN KITCHEN
1	KEY NOTE REFERENCE
MC	MECHANICAL CONTRACTOR
AC	SUNCOAST RELAY FACTORY INSTALLED AND WIRED IN CFA-500 PANEL. ENERGIZED BY PUTTING STORE SWITCH IN "STORE OCCUPIED" POSITION.
AN	SUNCOAST RELAY FACTORY INSTALLED AND WIRED IN CFA-500 PANEL. DENERGIZED WHEN ANSUL FIRE SUPPRESSION SYSTEM IS ACTIVATED, AS NOTED.
---	ALL LOW VOLTAGE CABLING BY MC. ONLY USE CABLE SPECIFIED. NO SUBSTITUTIONS.
---	LOW VOLTAGE WIRING BY S.E.C.
---	LINE VOLTAGE BY ELECTRICIAN OR S.E.C.

USE TWO SEPARATE SHIELDED CABLES CONTAINING 18AWG MINIMUM, TWISTED PAIR CONDUCTORS WITH OVERALL SHIELD. BELDEN TYPE 8760 OR 88760 (PLENUM) OR EQUIVALENT. INSTALL PER LENNOX'S RELATIVE HUMIDITY SENSOR INSTALLATION INSTRUCTIONS.

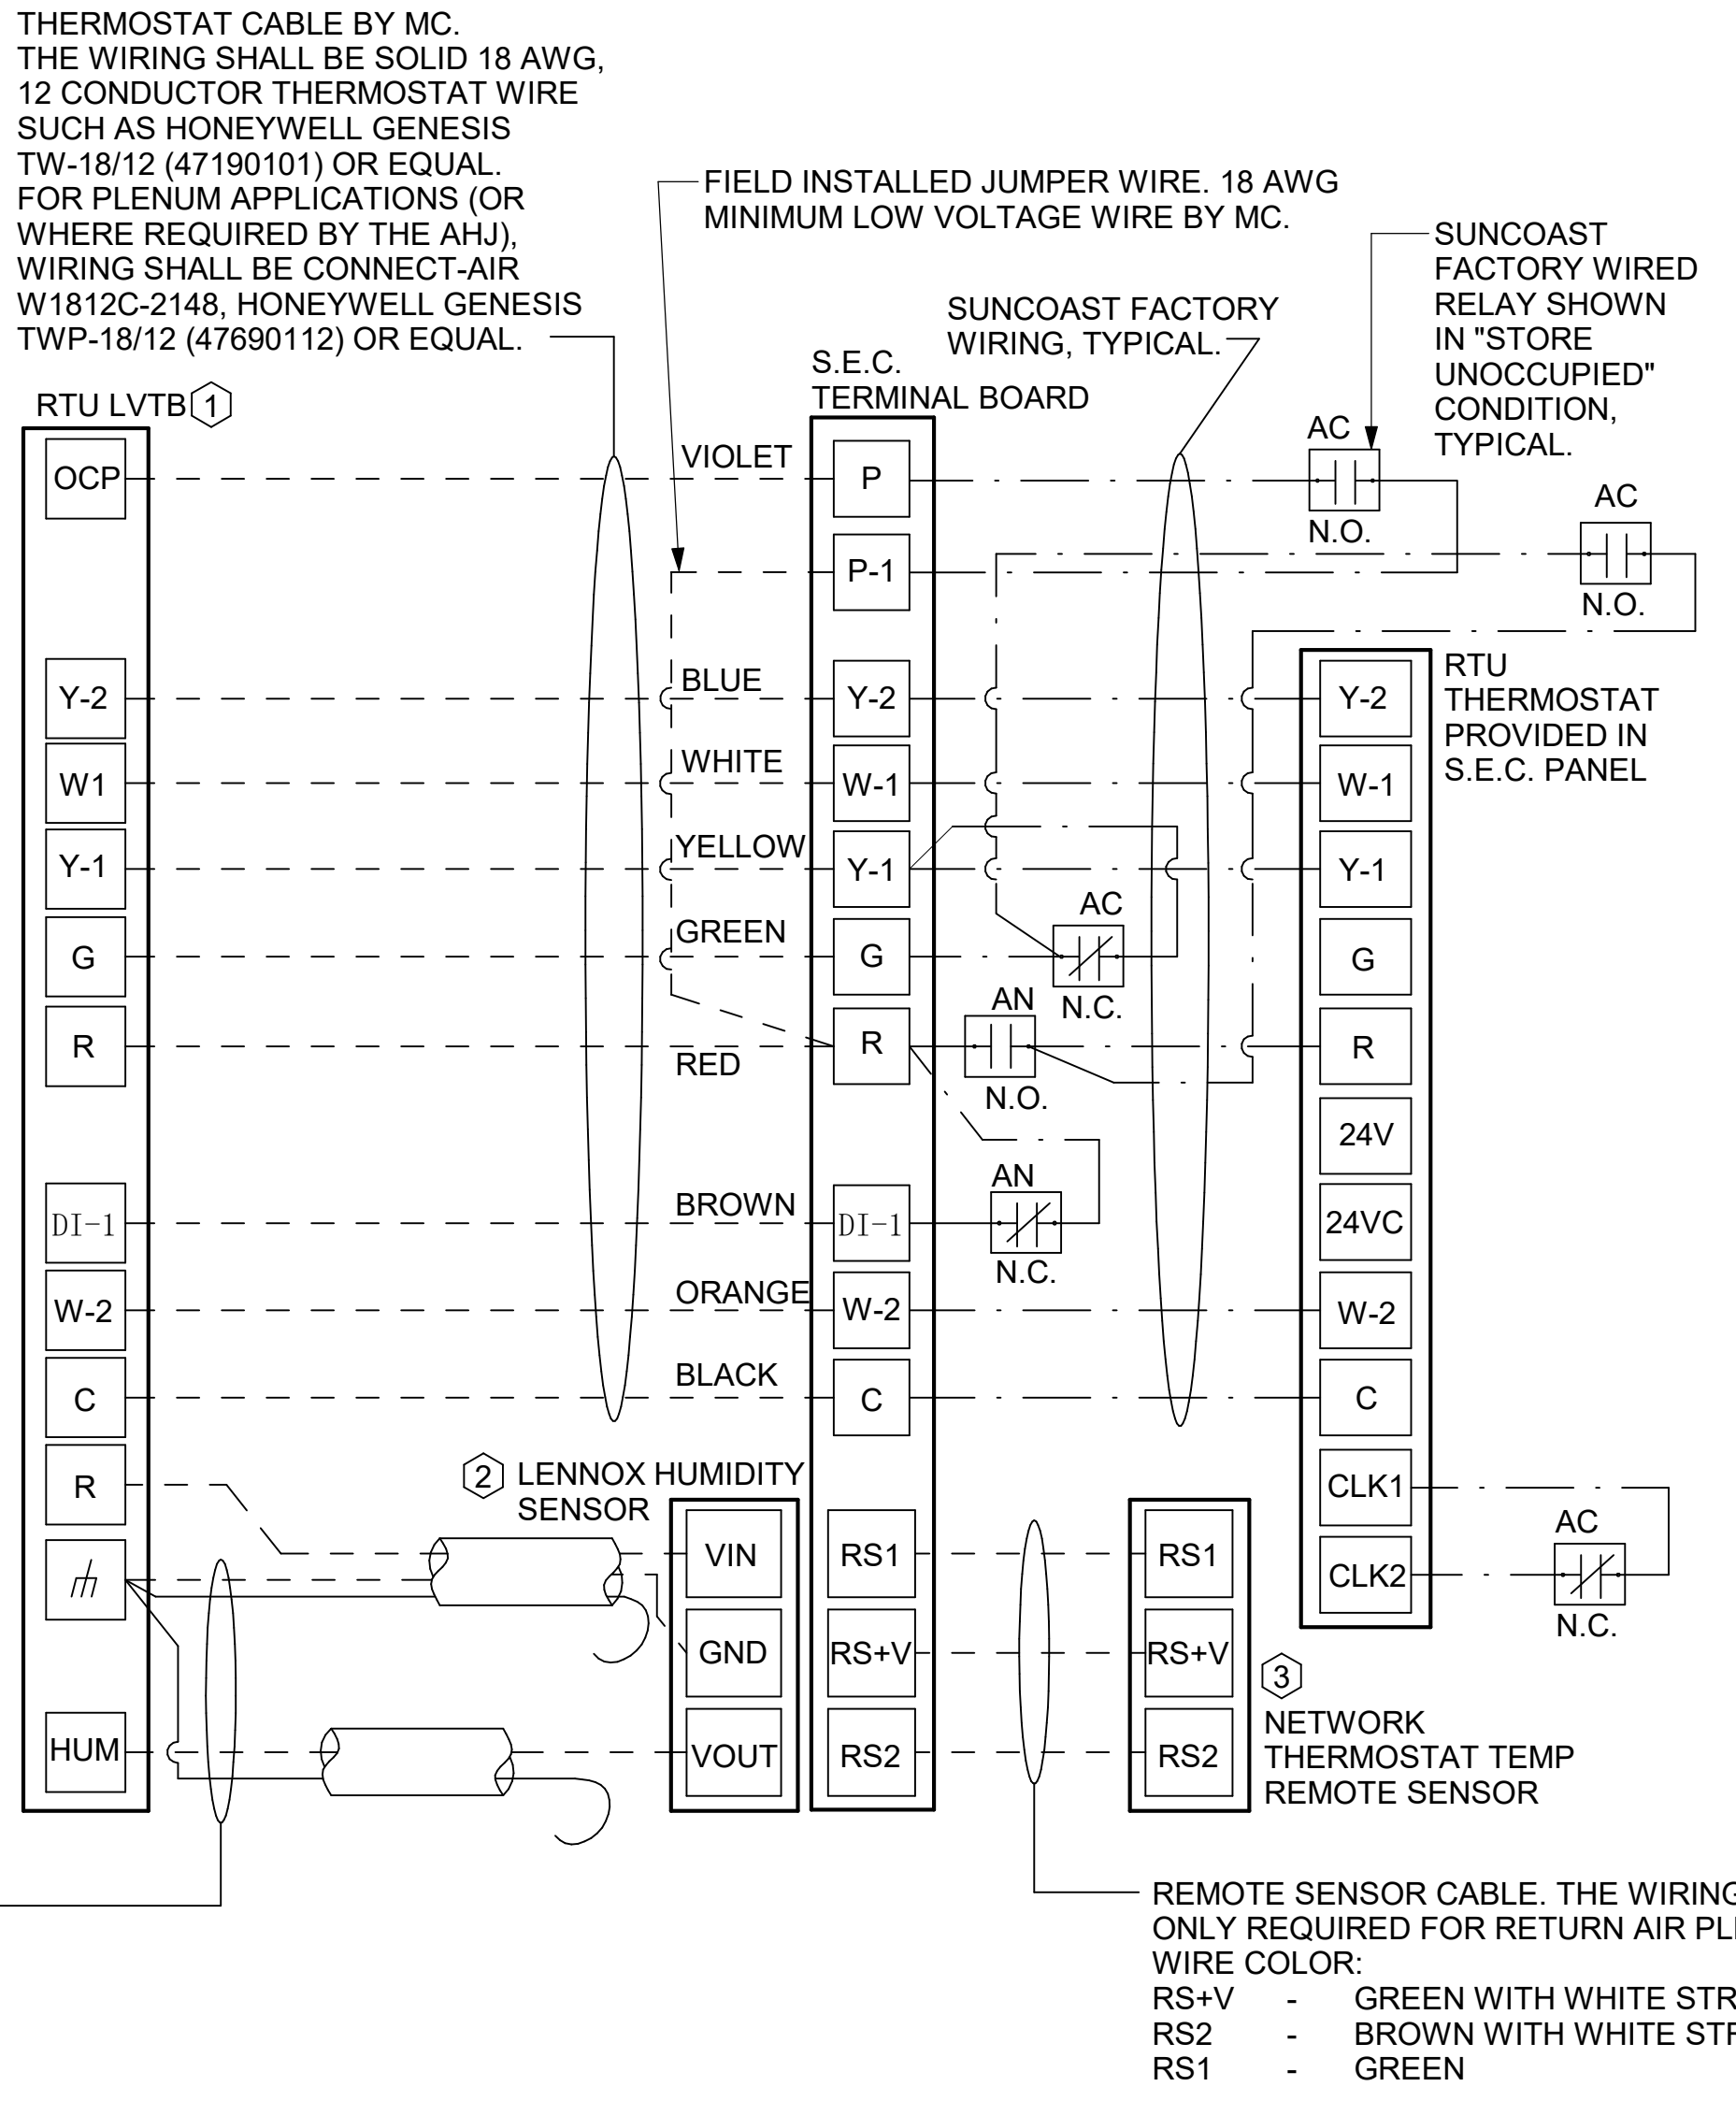


2 ROOFTOP UNIT CONTROL WIRING - LENNOX
NOT TO SCALE

Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 1:33:19 PM
30-LS-05661-M-701L-CONTROL WIRING DIAGRAMS - LENNOX



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
RELEASE: PRINTED FOR CONSTRUCTION
REVISION SCHEDULE


NO.	DATE	DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM


Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET SECTIONS


SHEET NUMBER **M-301**

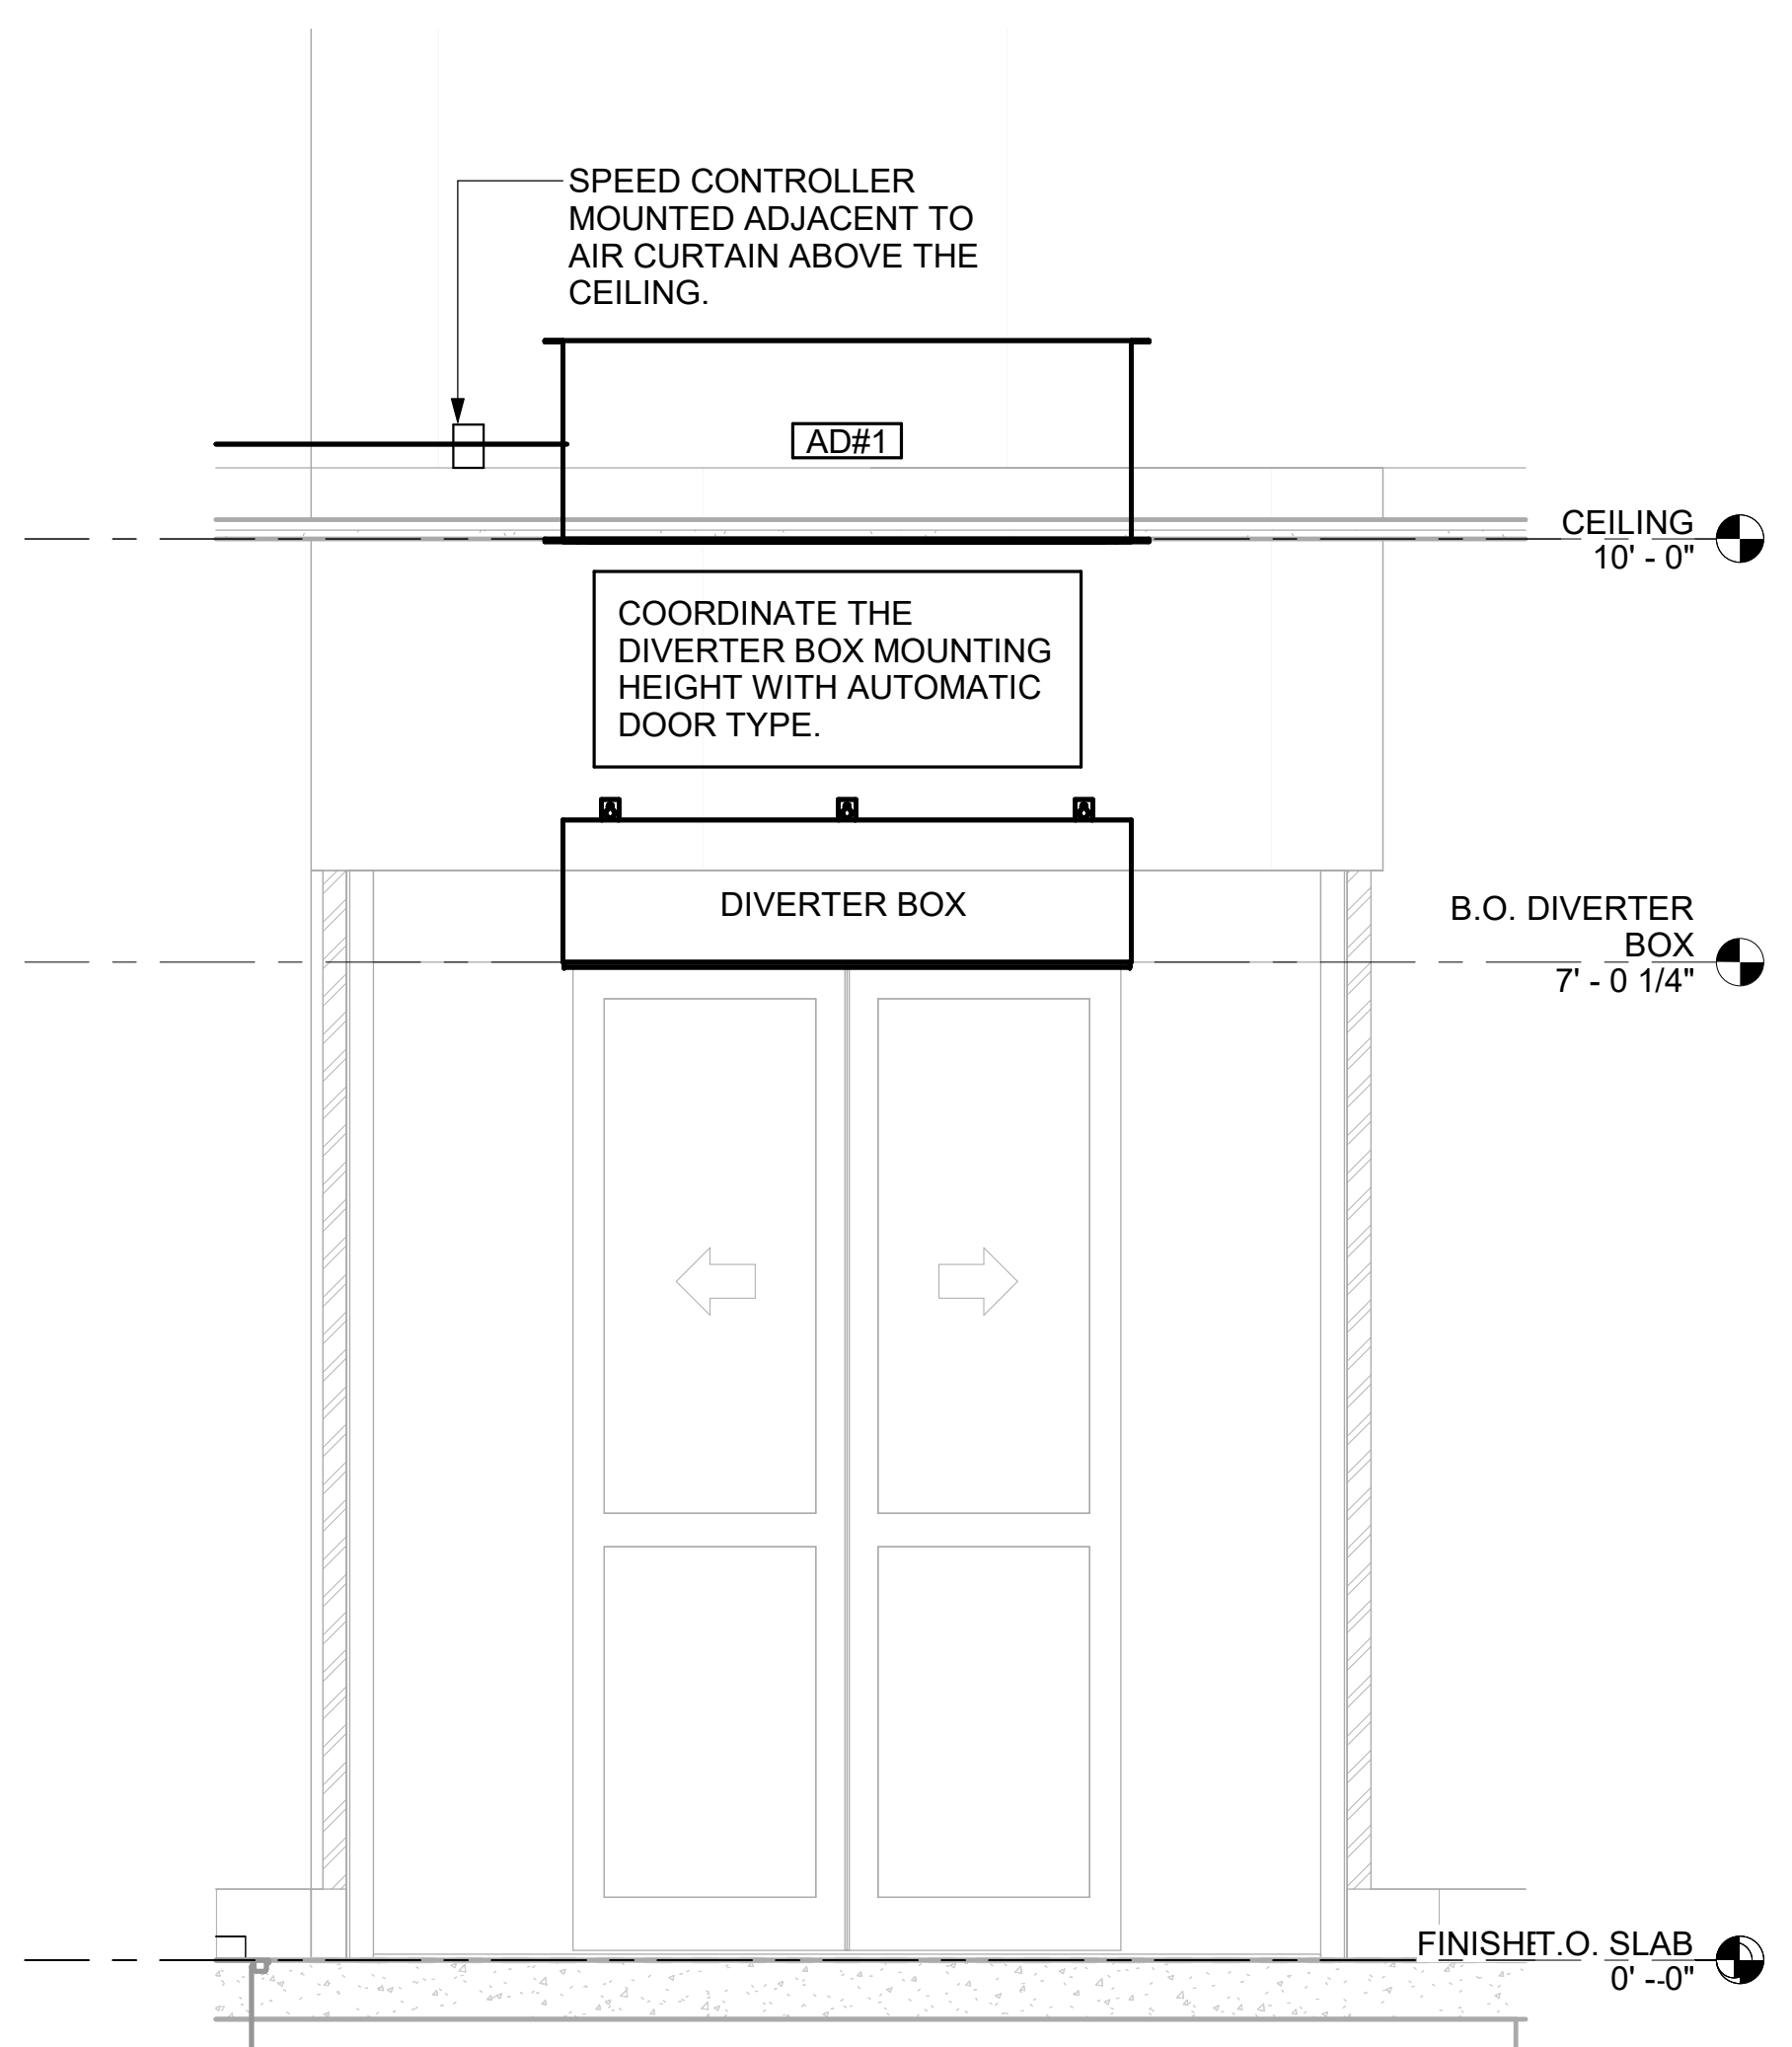


2 AD#1 FRONT VIEW
3/4" = 1'-0"

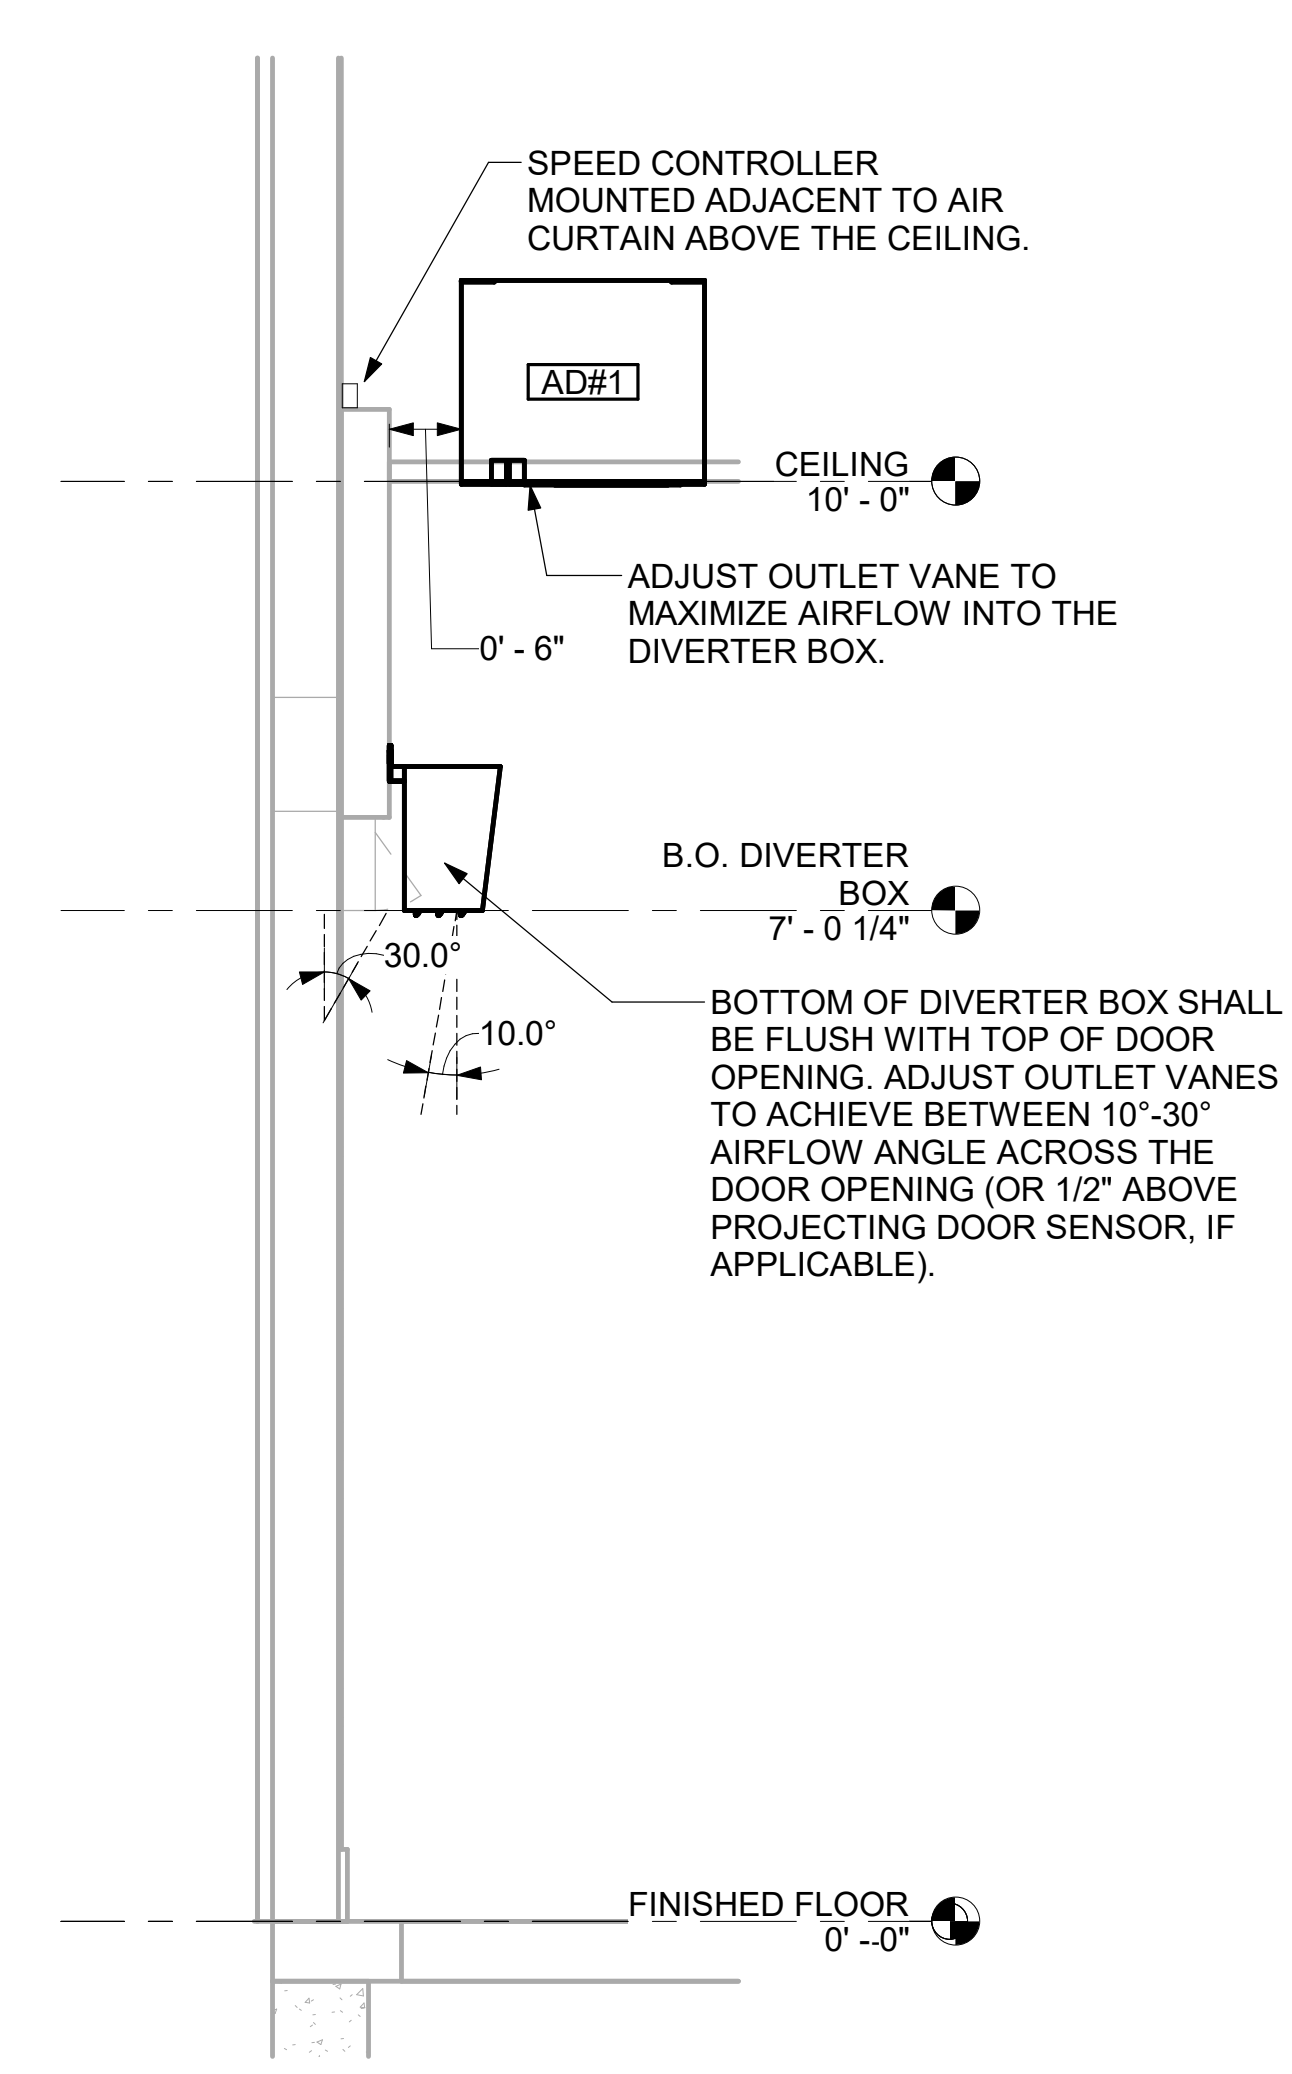


3 AD#1 SIDE VIEW
3/4" = 1'-0"

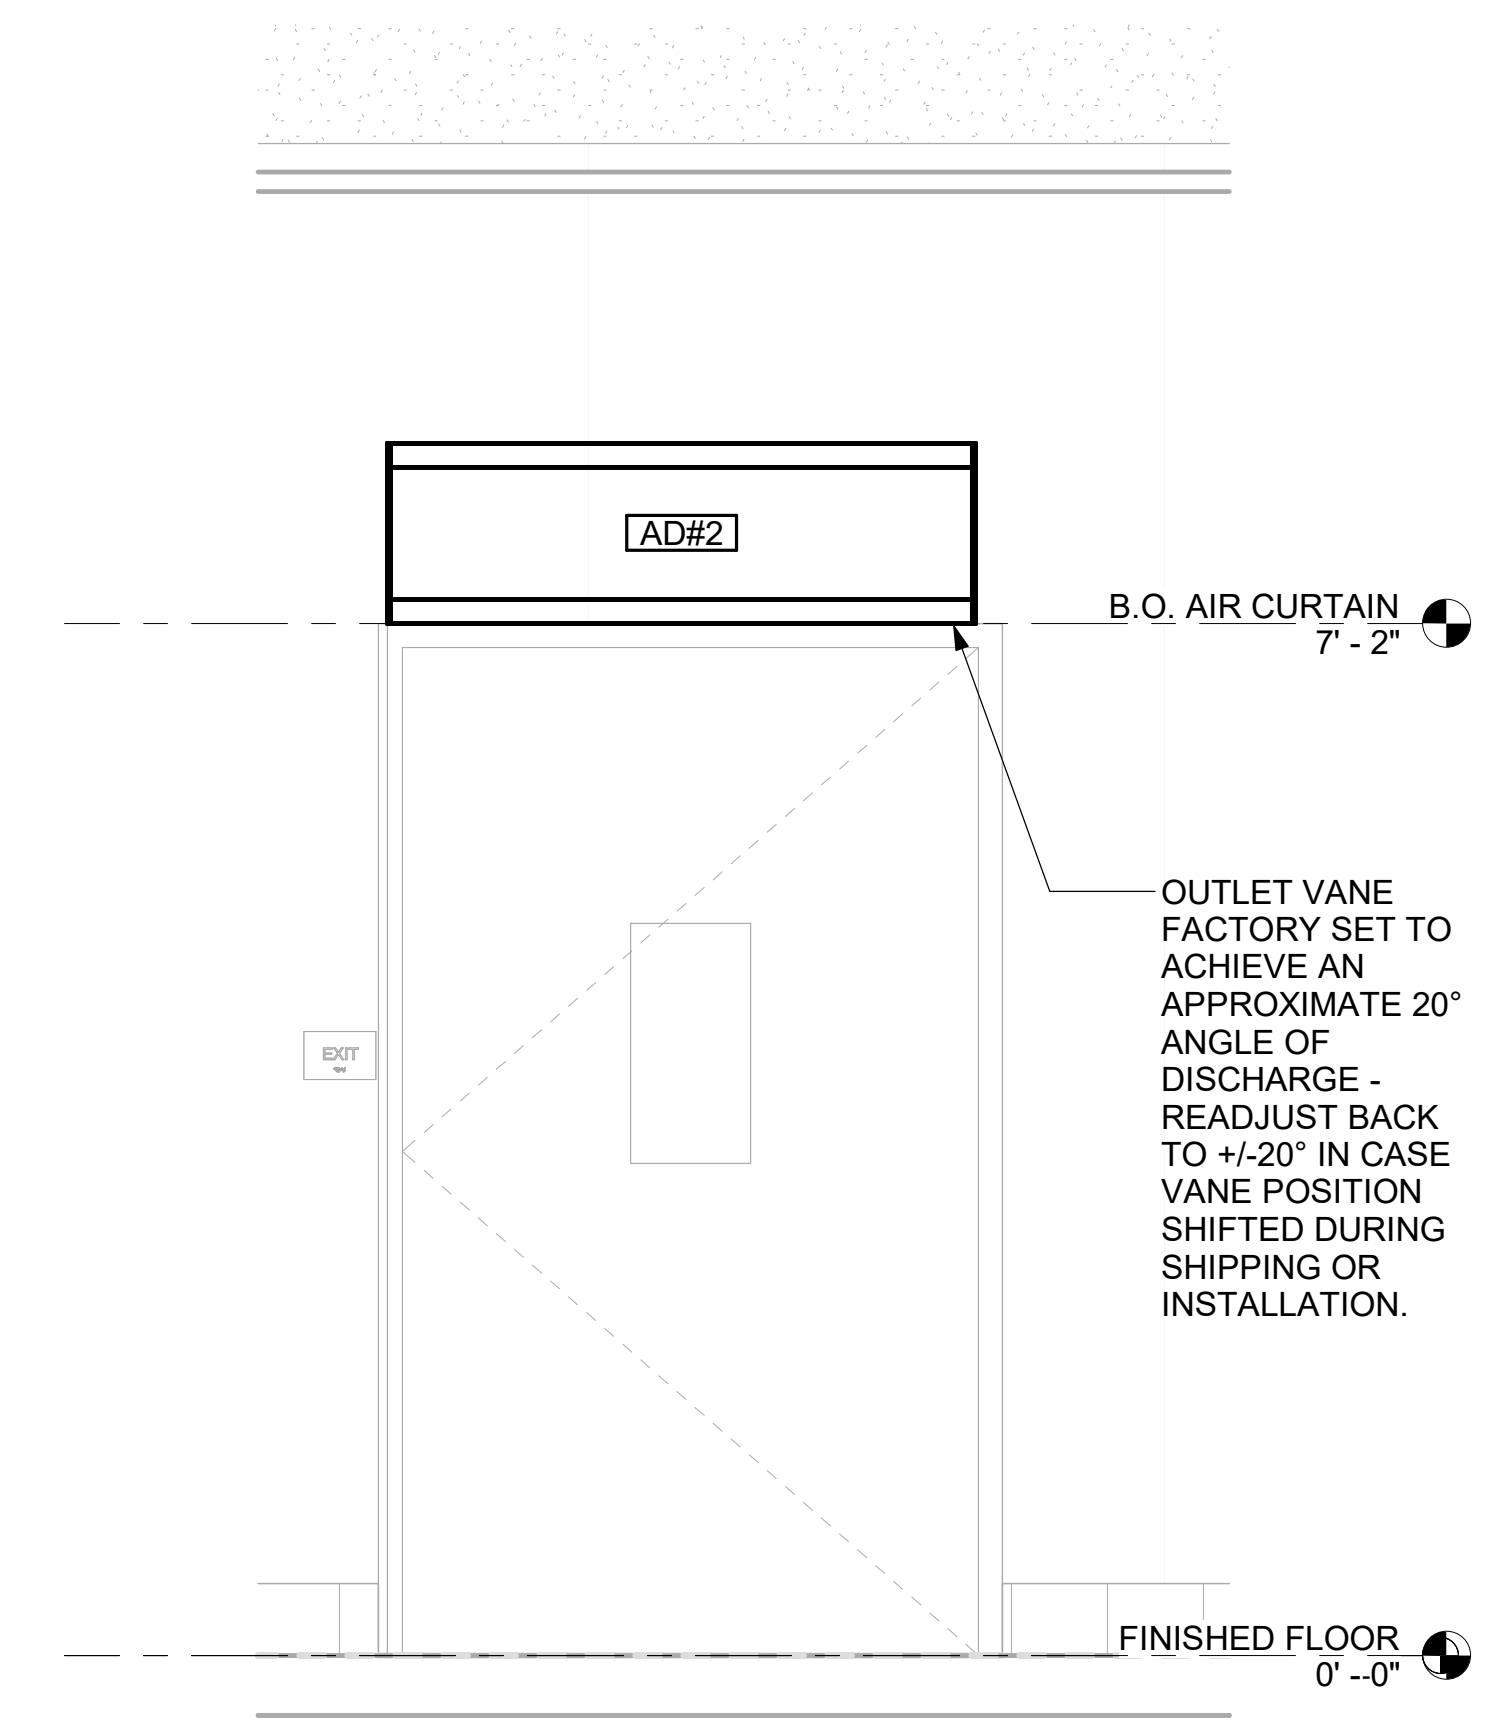

4 AD#4 FRONT VIEW
3/4" = 1'-0"

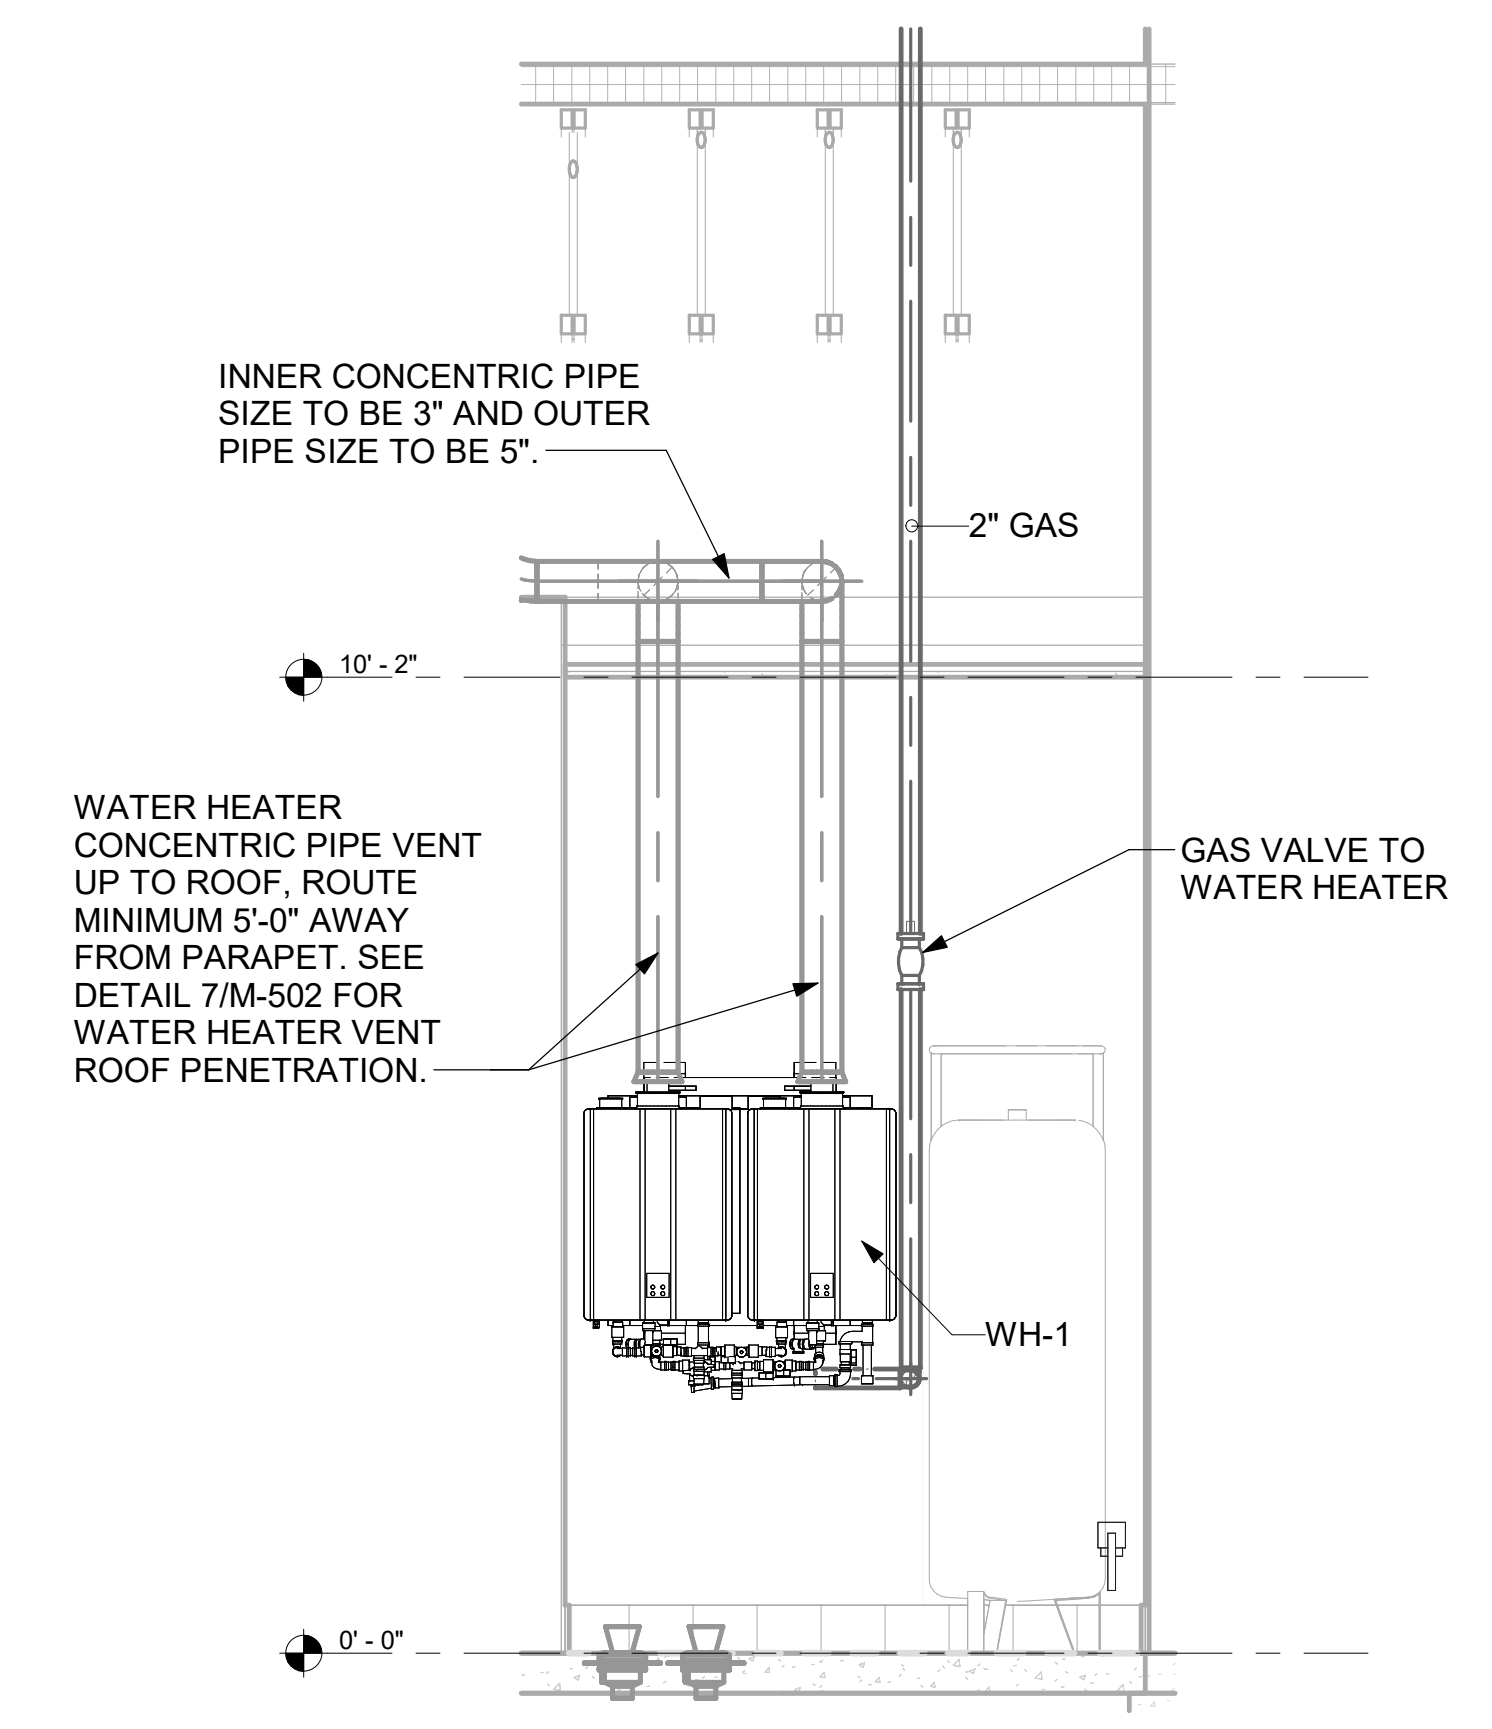

5 WATER HEATER GAS PIPING AND VENTING
NOT TO SCALE

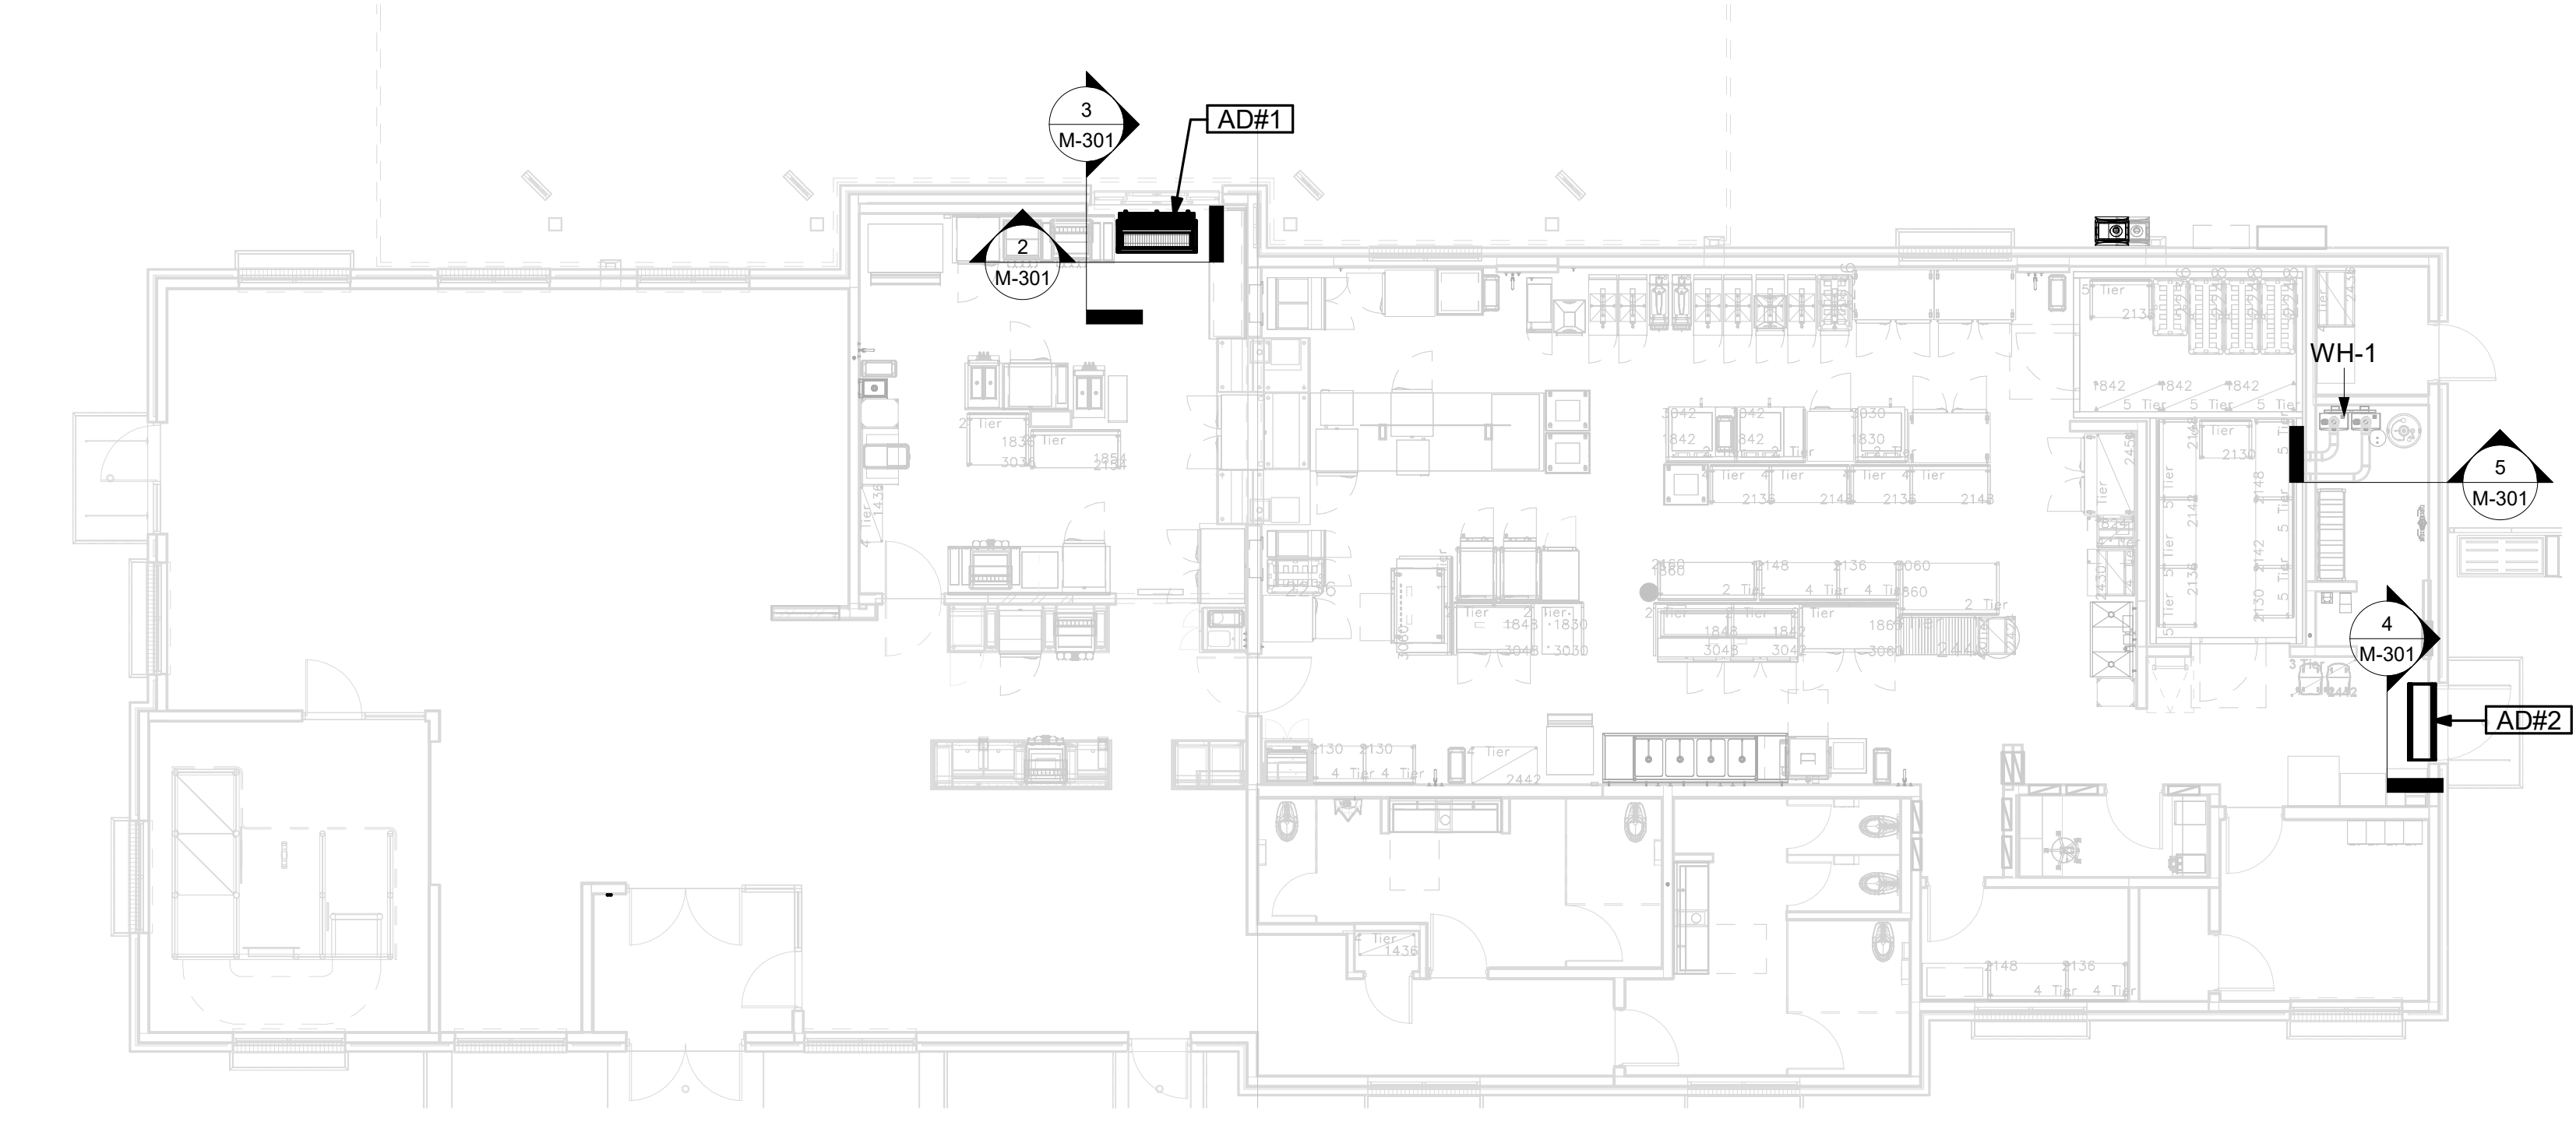


1 VARIOUS SECTIONS
1/8" = 1'-0"

Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 1:33:08 PM
30-LS-05661-M-301-SECTIONS



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203



CHICK-FIL-A
SARALAND FSU
SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661


BUILDING TYPE / SIZE: P14 LS BN
RELEASE:
PRINTED FOR
CONSTRUCTION

NO.	DATE	DESCRIPTION


CONSULTANT PROJECT # 25011.CC.S
DATE 02/06/2025
DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
SHEET
HVAC CONTROLS

SHEET NUMBER
M-702

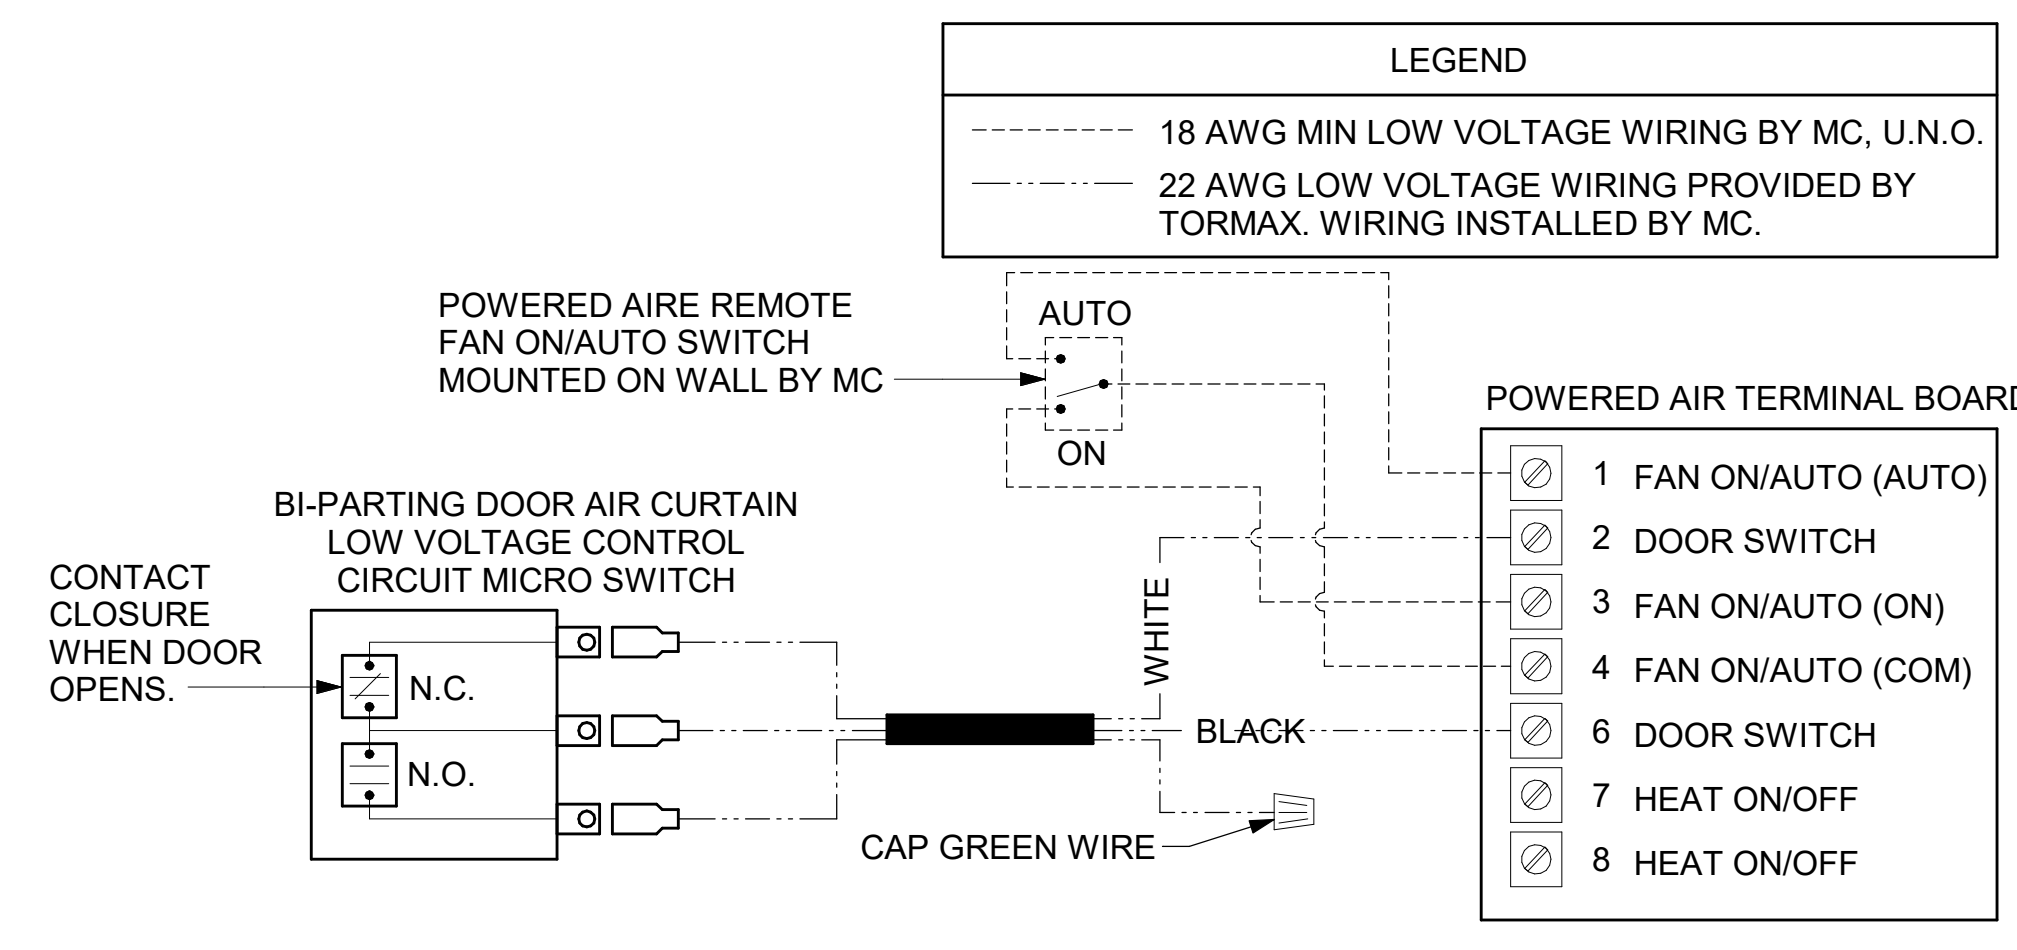


2 AIR CURTAIN WIRING DIAGRAM
NOT TO SCALE

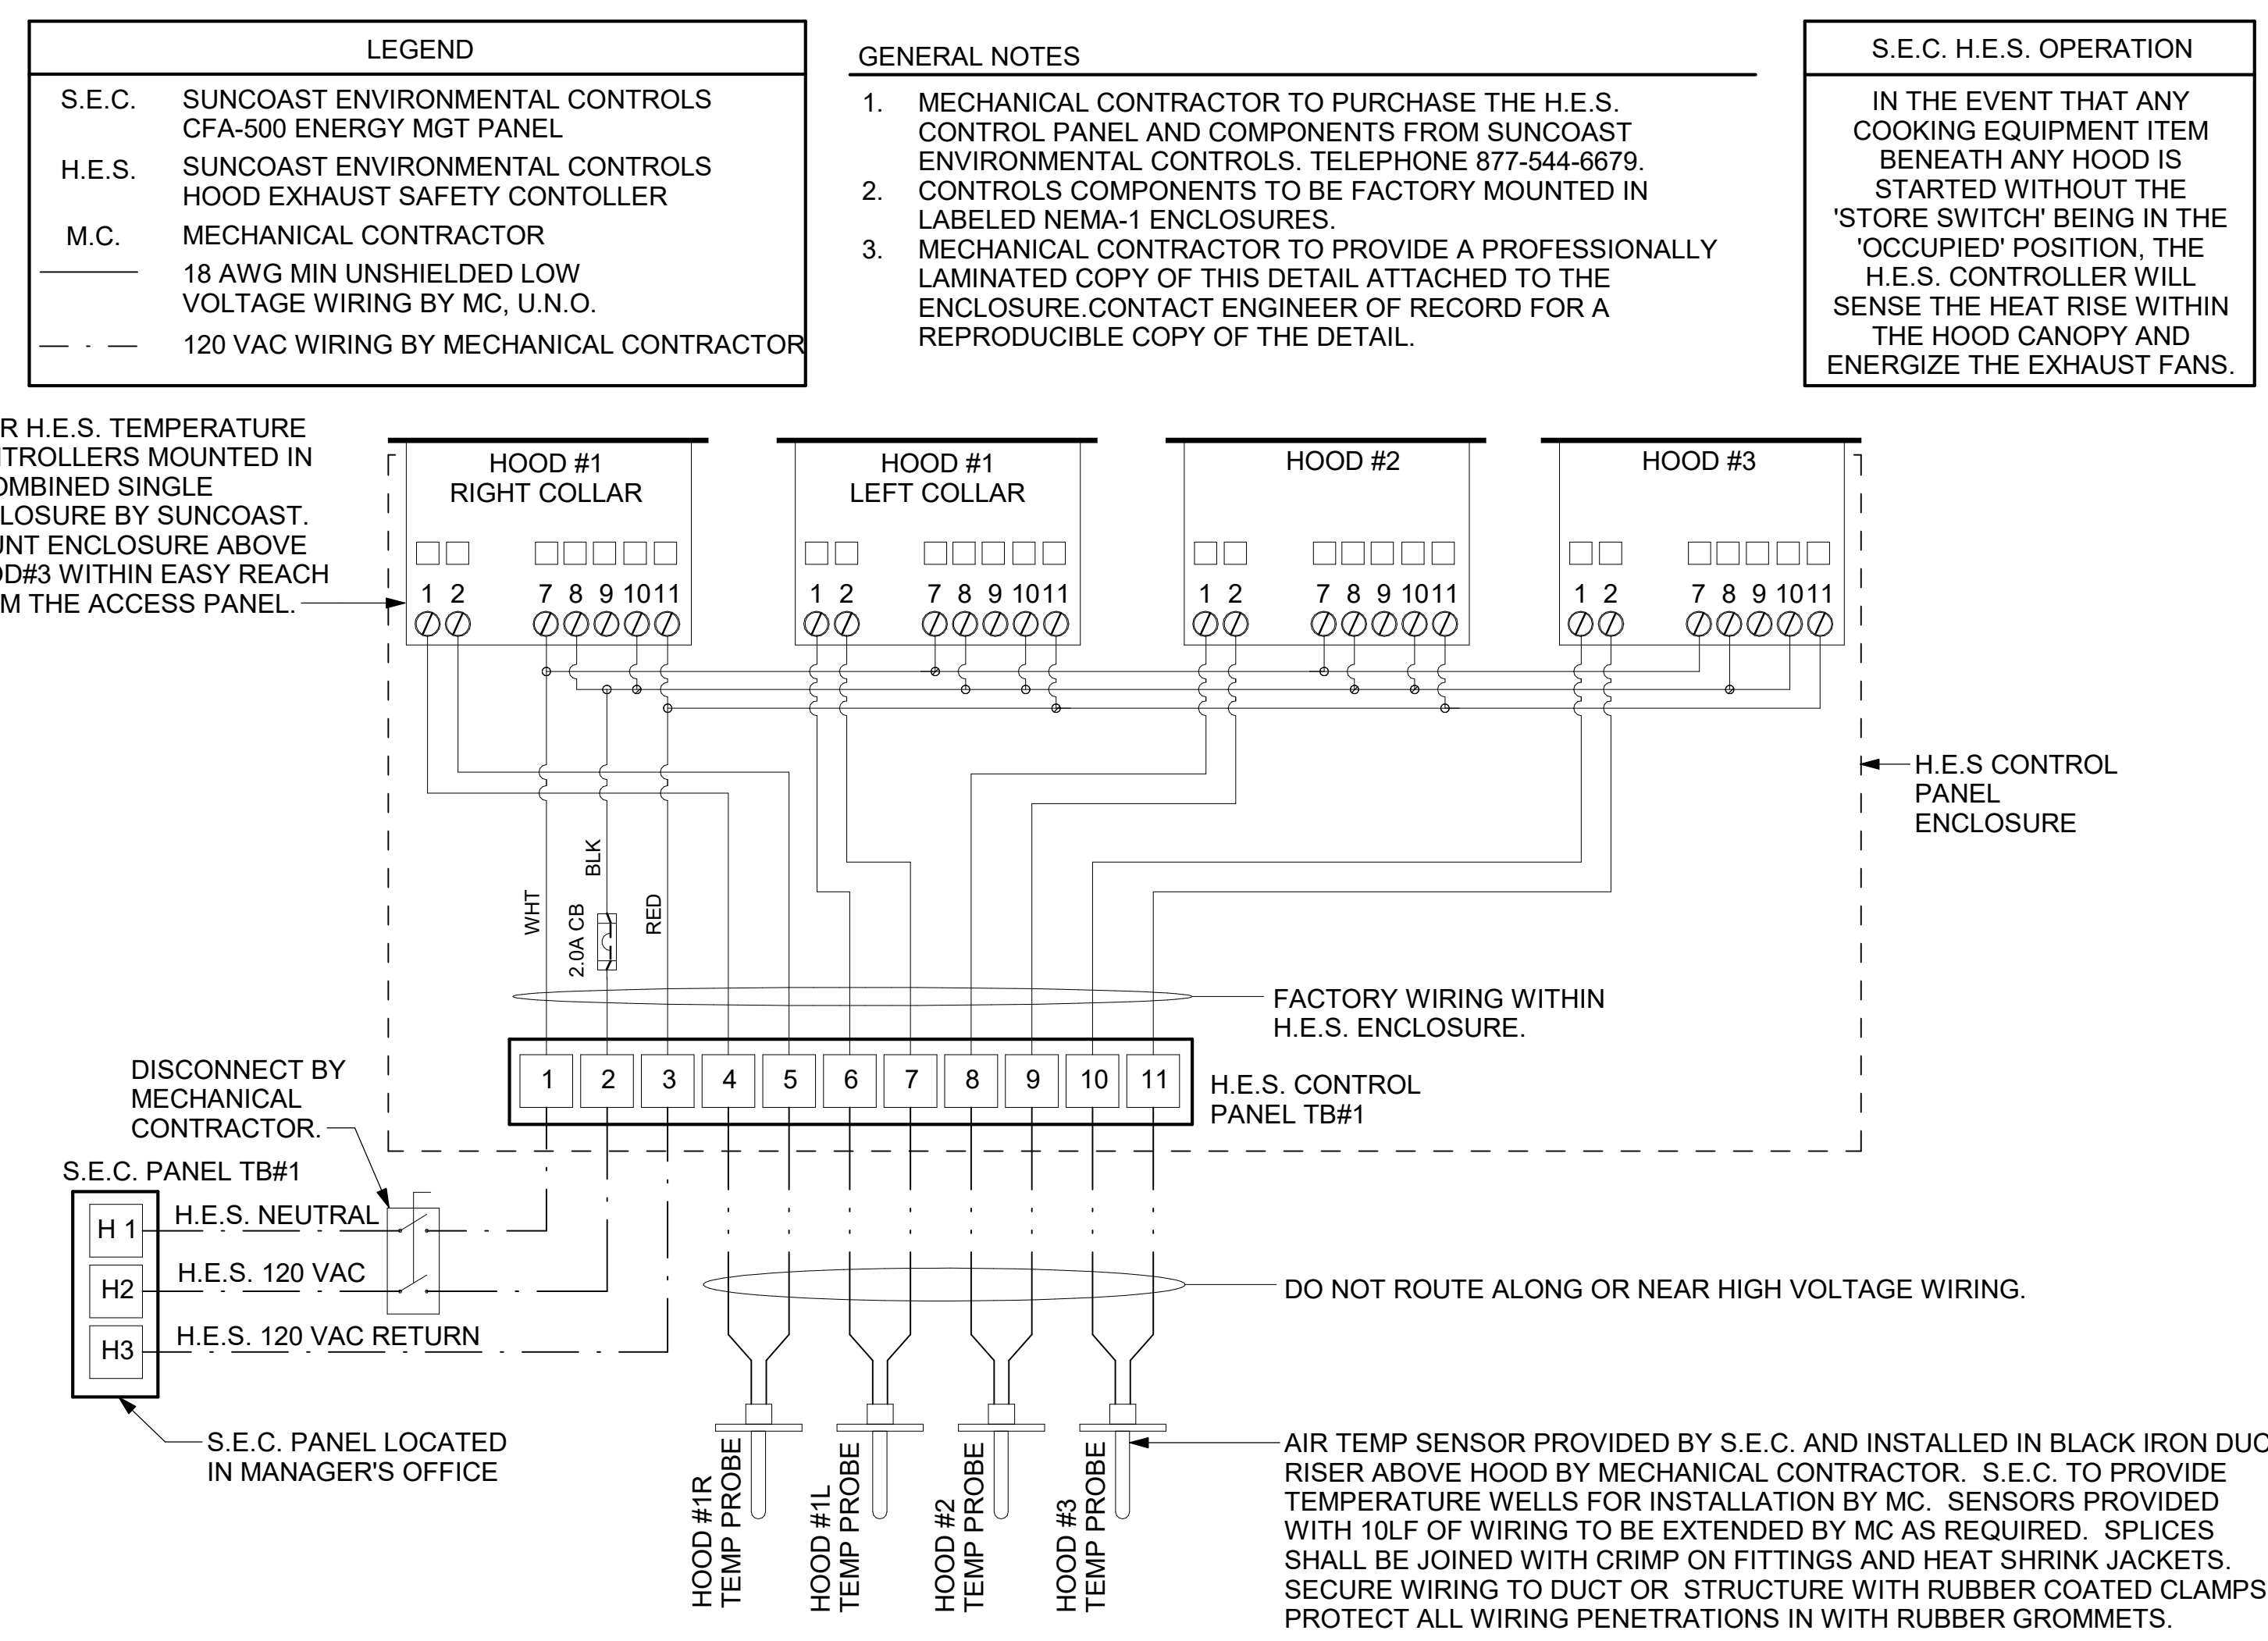

1 HOOD FAN/EQUIPMENT INTERLOCK
NOT TO SCALE


Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
5/15/2025 1:33:21 PM
30-LS-05661-M-702-HVAC CONTROLS

- NOTES:**
1. INSTALL GAS PIPING SUCH THAT HVAC EQUIPMENT ACCESS PANELS AND/OR DOORS ARE IN NO WAY OBSTRUCTED BY PIPING, VALVES, OR SUPPORTS.
 2. TO AVOID CONFLICT WITH AC UNIT ACCESS DOORS, INSTALL GAS PIPING NO CLOSER THAN 3'-6" FROM AC UNIT. (EXCEPT FOR BRANCH LINE CONNECTED TO AC UNIT.)
 3. ROUTE BRANCH TAKE-OFF DIRECTLY FROM MAIN TO ROOFTOP UNIT AS SHOWN ON PLAN AND DETAILS WITHOUT LATERAL OFFSETS WHICH MAY OBSTRUCT UNIT ACCESS DOORS.

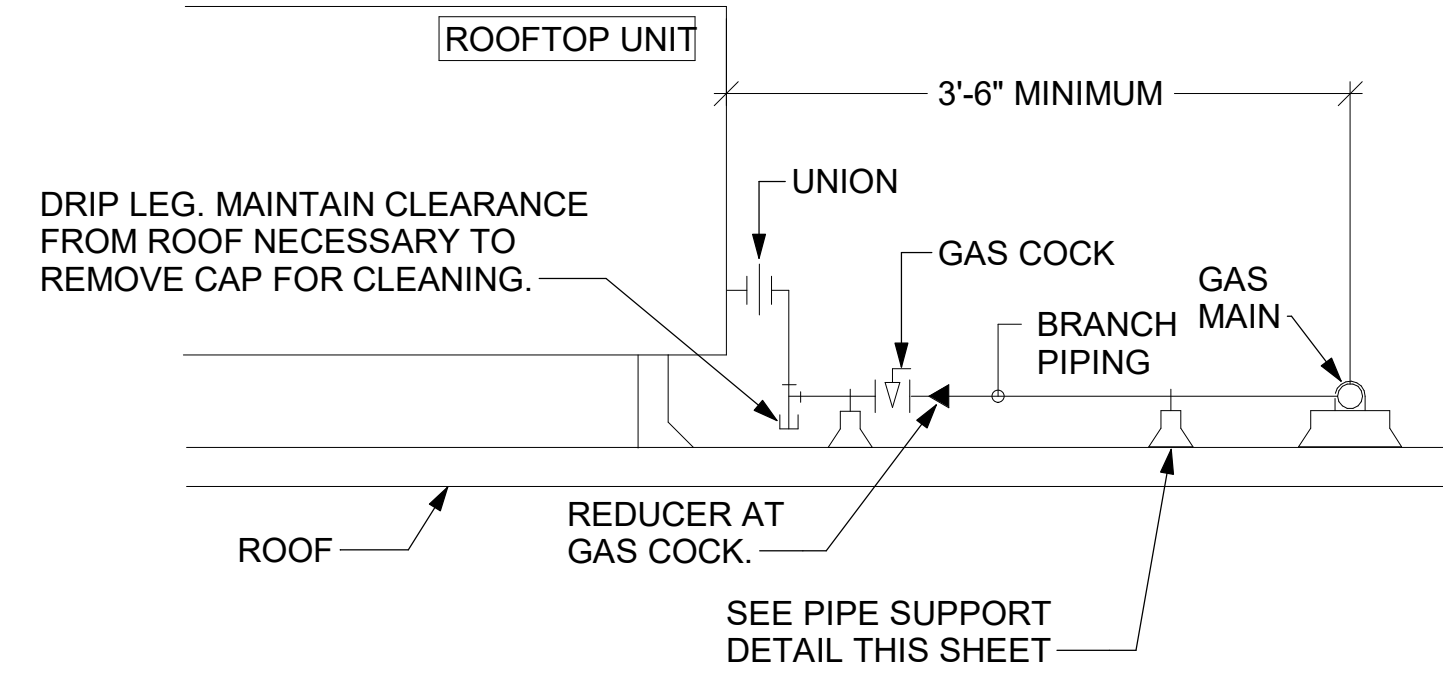


3 GAS PIPING AT RTU
NOT TO SCALE

OFFSET PIPING A MINIMUM OF 6" ABOVE TOP EDGE OF FLASHING.

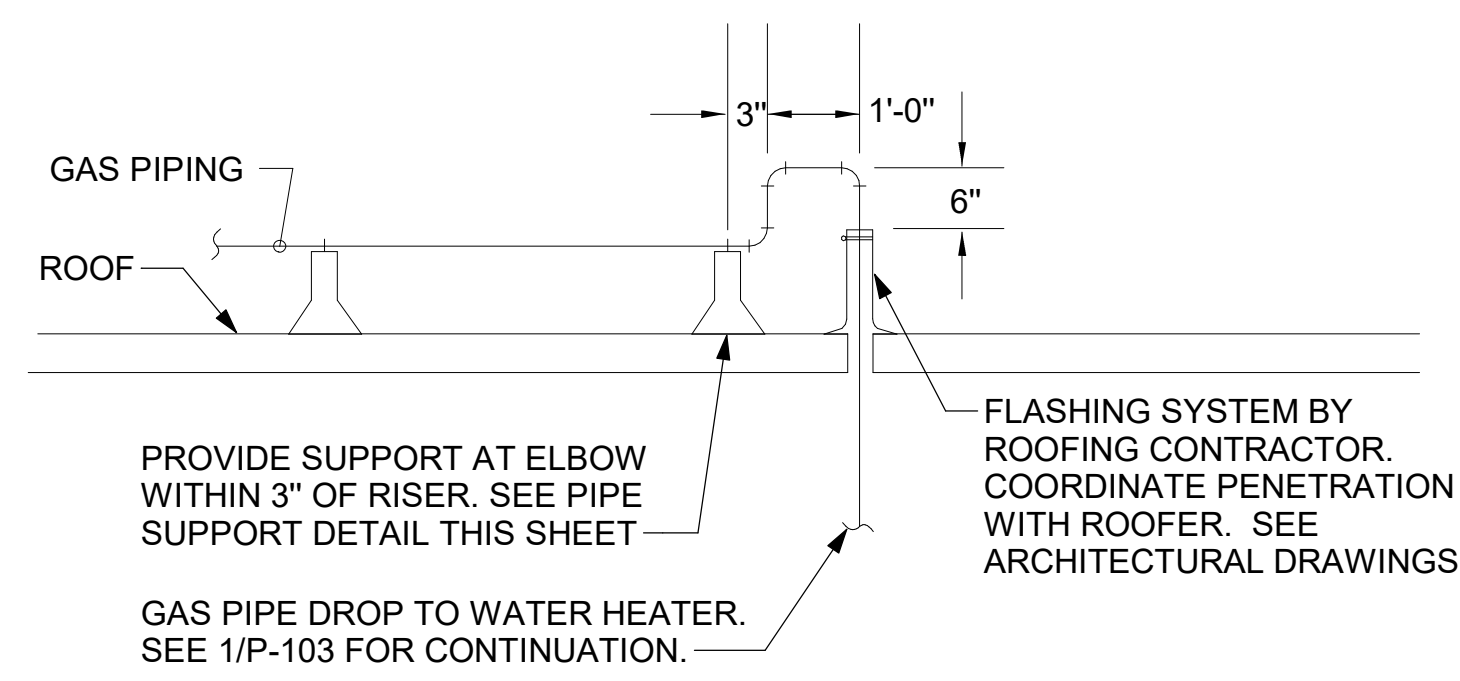


2 GAS PIPE DROP TO WATER HEATER
NOT TO SCALE


- NOTES:**
1. NON ADJUSTABLE MODEL DB610 PIPE STAND TO BE USED FOR NON-ELEVATED PIPING INSTALLED FLAT ON ROOF DECK.
 2. PROVIDE MODEL DBE 10-8 OR DBE 10-12 OR DBE 10-16 AS NEEDED FOR ELEVATING CONDENSATE PIPING TO MAINTAIN PROPER SLOPE AND FOR GAS PIPING CROSSING OVER CONDENSATE PIPING.
 3. ENSURE GAS AND CONDENSATE PIPING DO NOT OBSTRUCT ROOFTOP EQUIPMENT ACCESS OPENINGS. RE-PIPING OF SYSTEMS DUE TO CONFLICTS WITH EQUIPMENT ACCESS OPENINGS SHALL BE DONE AT PLUMBING CONTRACTOR'S EXPENSE.

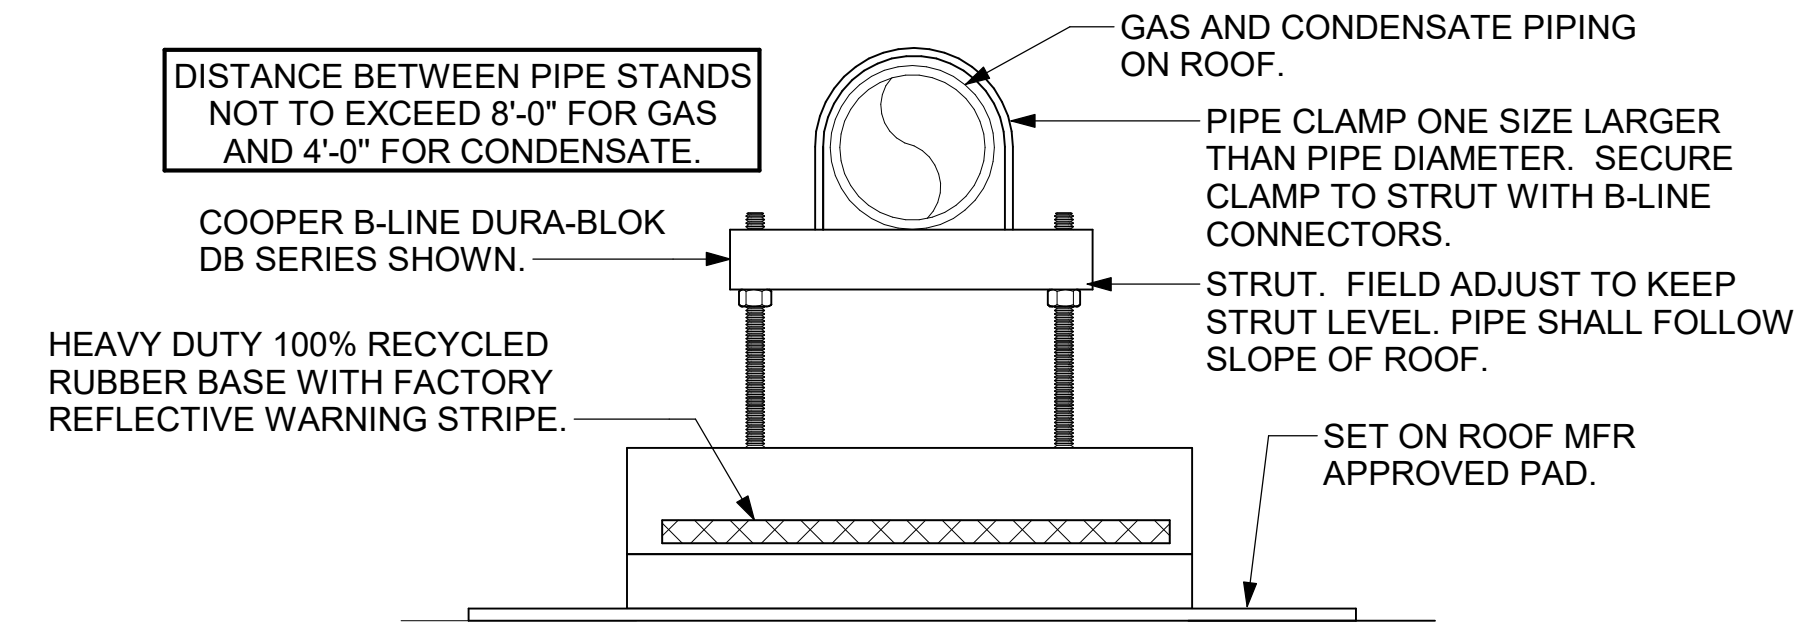

4 PIPING SUPPORT ON ROOF
NOT TO SCALE

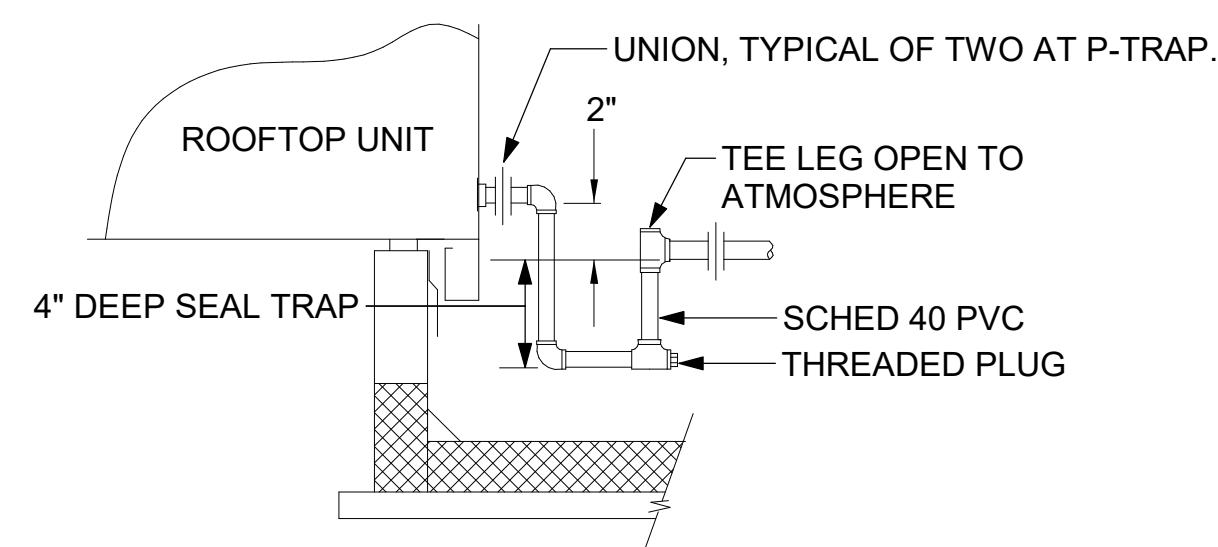


5 CONDENSATE DRAIN PIPING
NOT TO SCALE

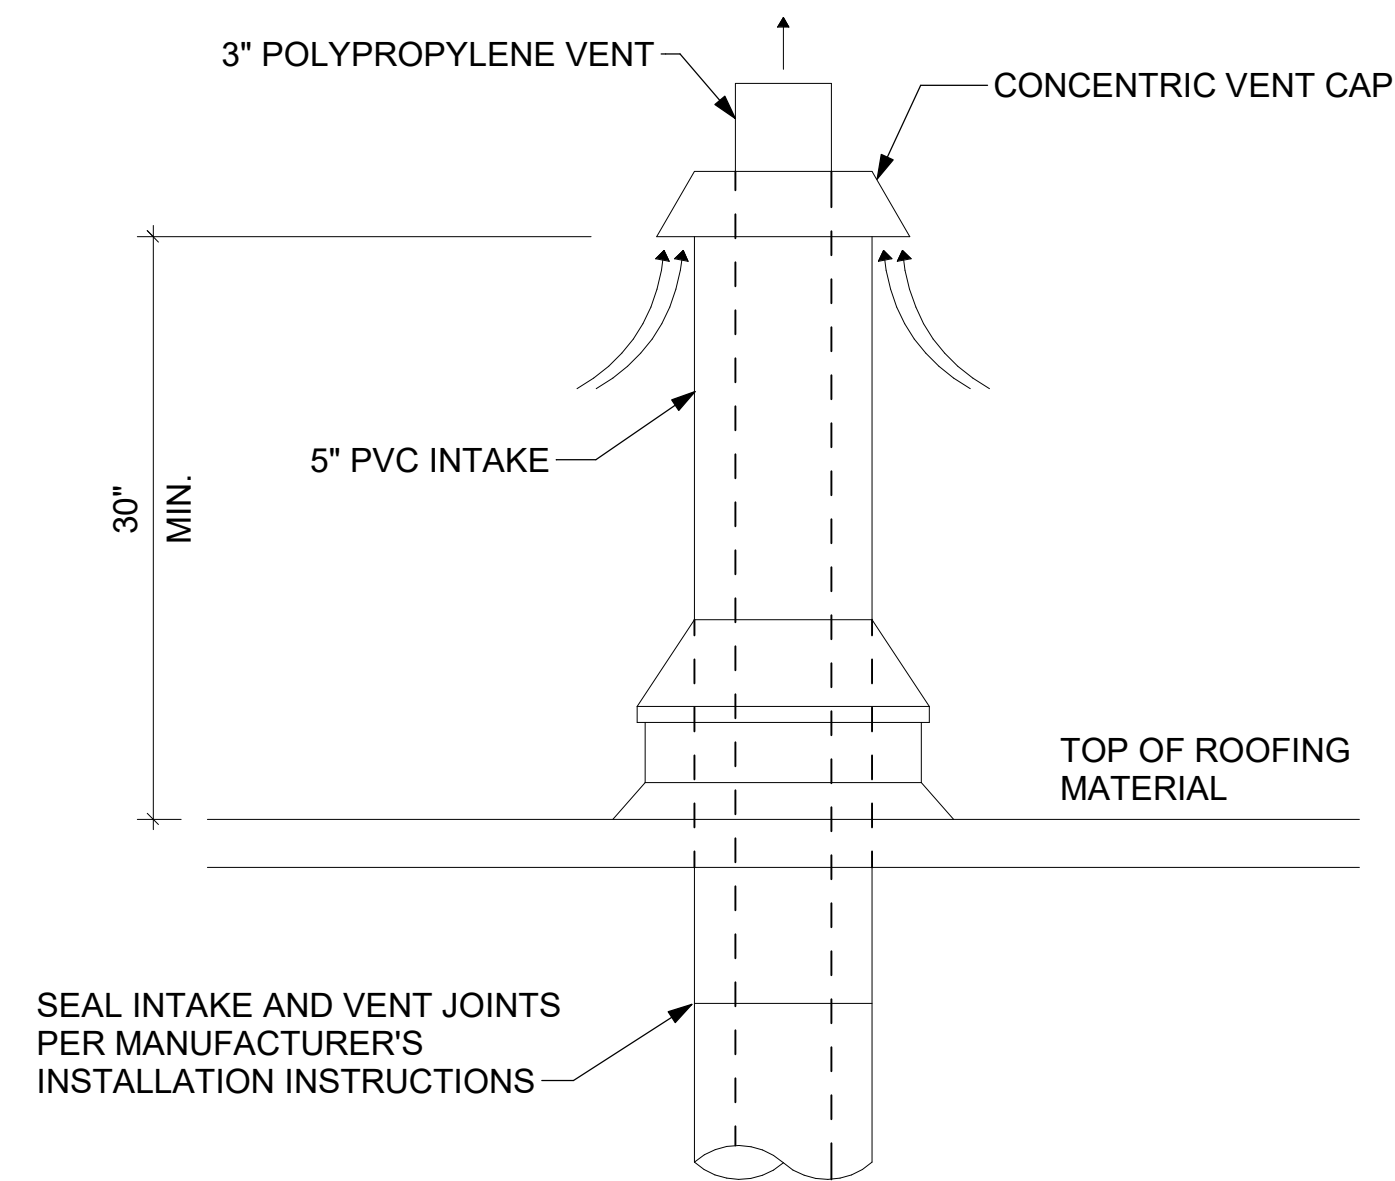


7 WATER HEATER VENT ROOF PENETRATION
NOT TO SCALE



Chick-fil-A
5200 Buffington Road
Atlanta, Georgia
30349-2998



Kurzynske & Associates
2705 Lebanon Pike - Suite One
Nashville, Tennessee 37214
Telephone: (615) 255-5203

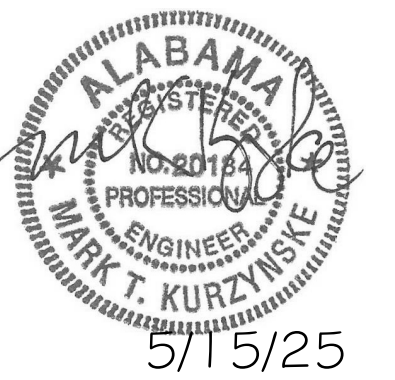

CHICK-FIL-A
SARALAND FSU

SEC HIGHWAY 158 & SHELL STREET
SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P14 LS BN
RELEASE:
PRINTED FOR
CONSTRUCTION

REVISION SCHEDULE

NO.	DATE	DESCRIPTION

SHEET NUMBER

CONSULTANT PROJECT # 25011.CC.S

DATE 02/06/2025

DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.

SHEET DETAILS


SHEET NUMBER

M-502

GREASE EXHAUST DUCT CLEARANCE NOTE:
 CLEARANCES ABOVE CEILING ARE TIGHT. MECHANICAL CONTRACTOR TO FIELD VERIFY EXACT ROUTING AND CLEARANCES PRIOR TO FABRICATING GREASE EXHAUST DUCT.


CLEANOUT DOOR NOTE:
 DUCT WRAP SHALL BE APPLIED TO THE CLEANOUT DOOR PER THE WRAP MFR'S INSTALLATION INSTRUCTIONS. NO EXCEPTIONS. ALSO, THE CLEANOUT DOOR MUST BE REMOVABLE WITHOUT TOOLS AND MUST BE CLEARLY AND PERMANENTLY LABELED.

CRITICAL: MOUNT RIGHT SIDE OF HOOD#3 FLUSH WITH FINISHED EDGE OF PASS THRU OPENING.

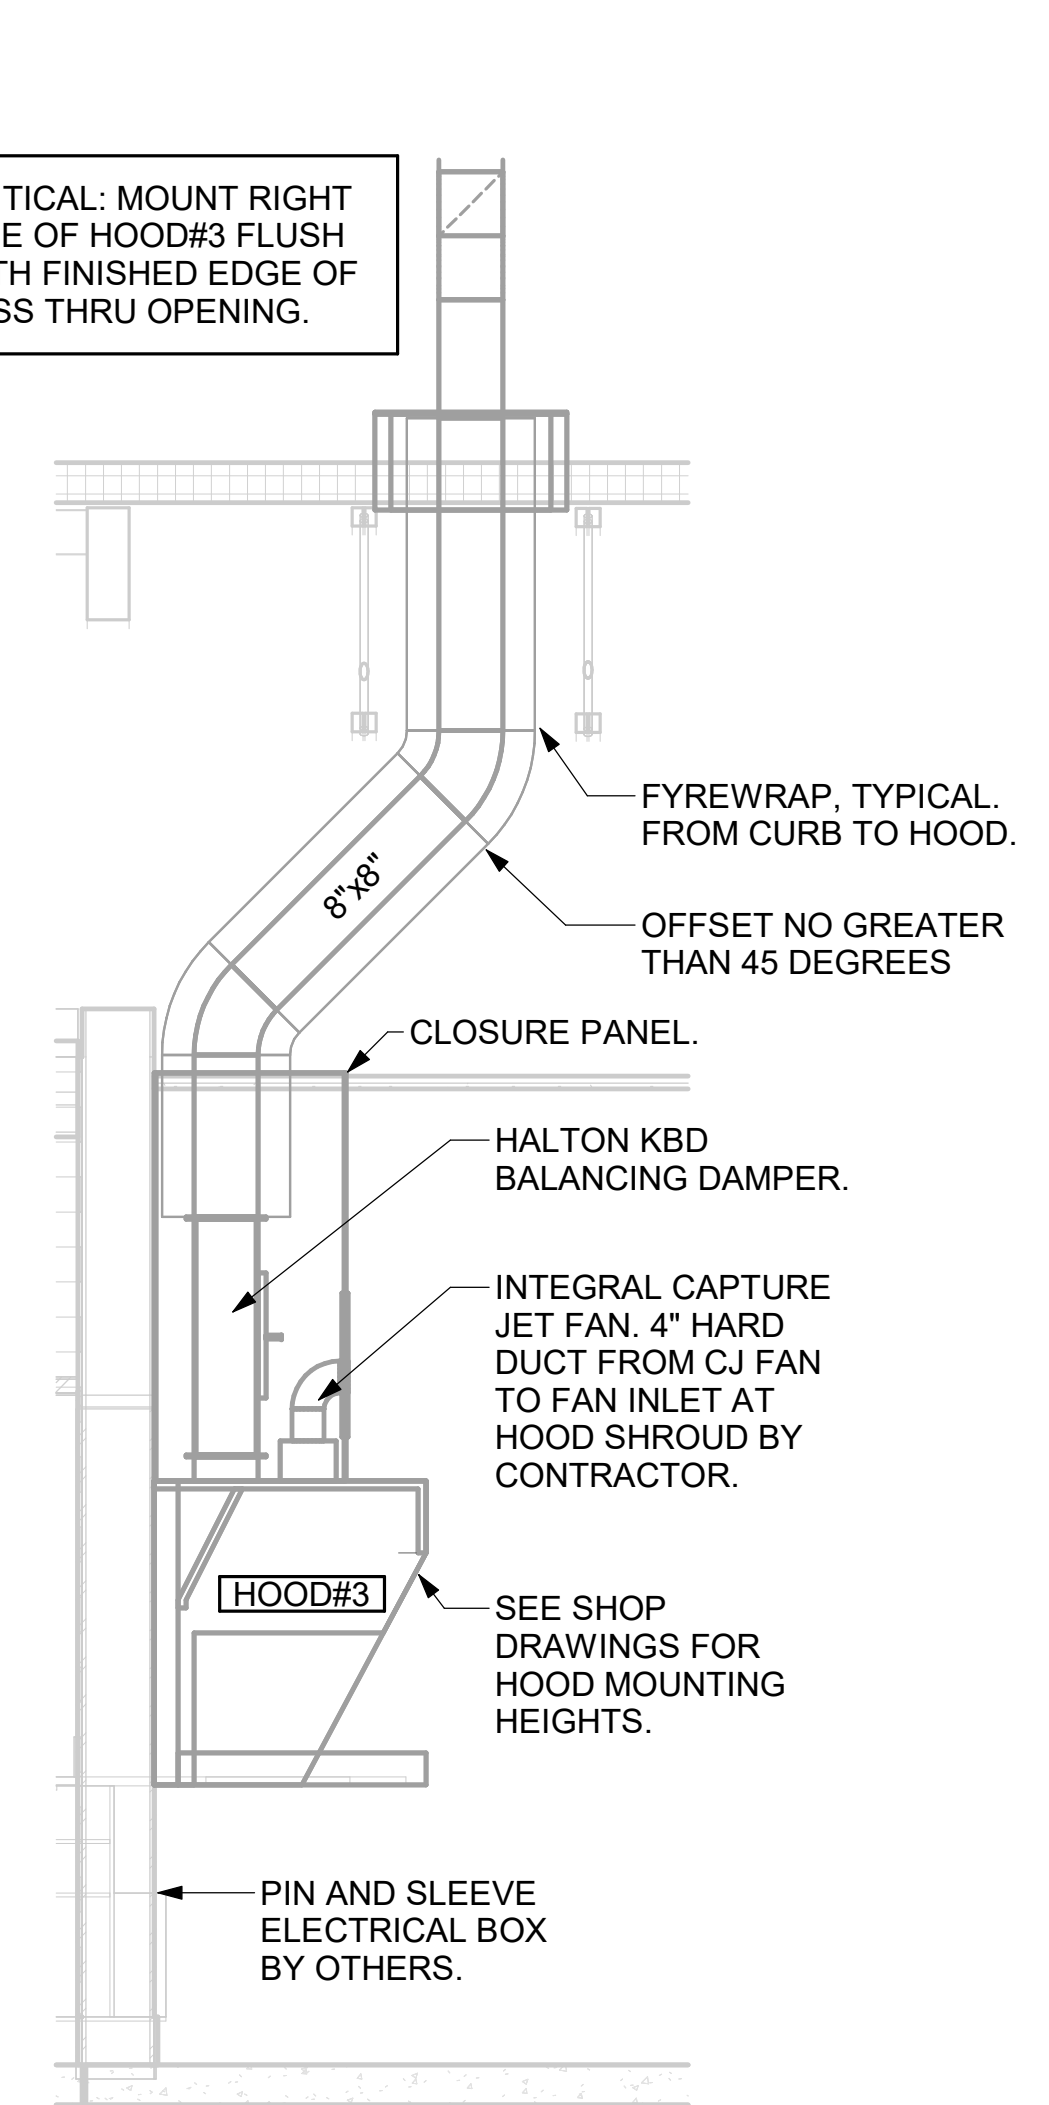


6 HOOD ELEVATION - HOOD#3
 NOT TO SCALE


CRITICAL: MOUNT LEFT SIDE OF HOOD#2 FLUSH WITH FINISHED EDGE OF PASS THRU OPENING.

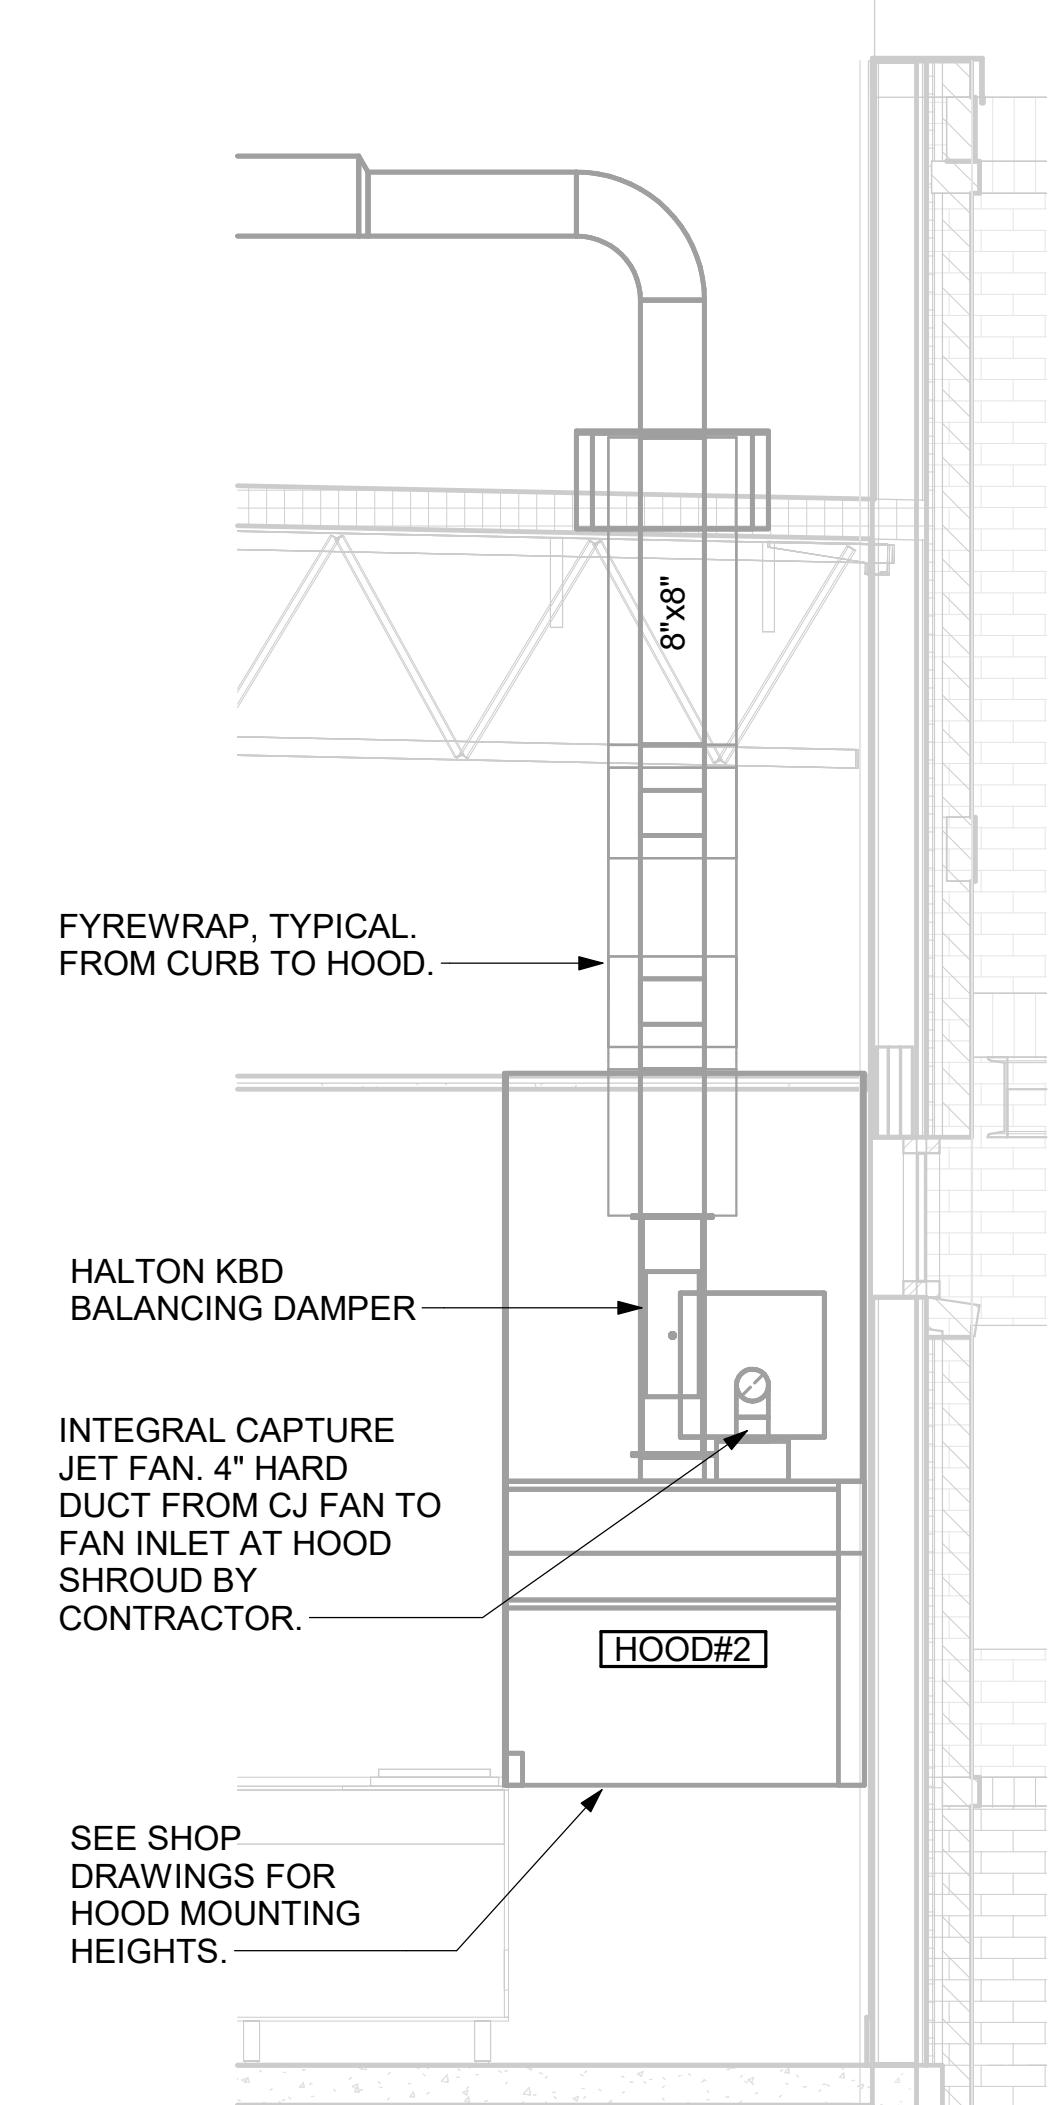


5 HOOD ELEVATION - HOOD#2 - FRONT
 NOT TO SCALE

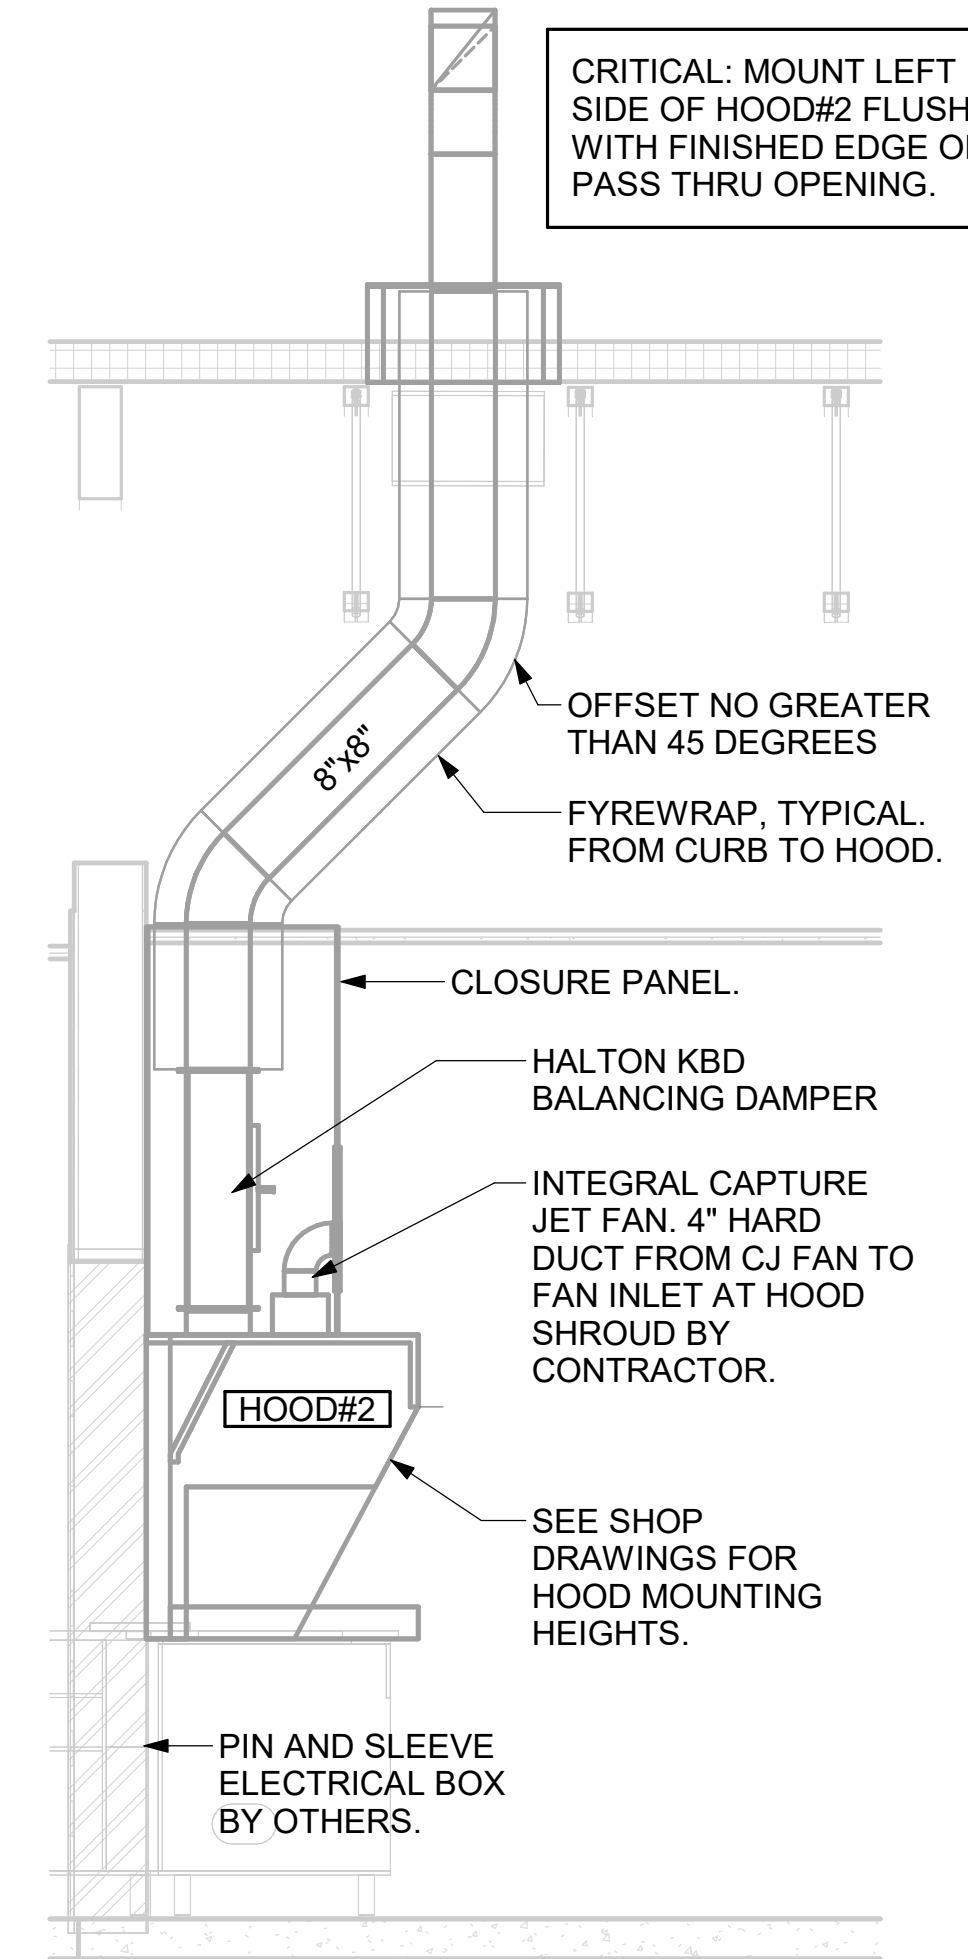


4 HOOD ELEVATION - HOOD#2 - SIDE
 NOT TO SCALE

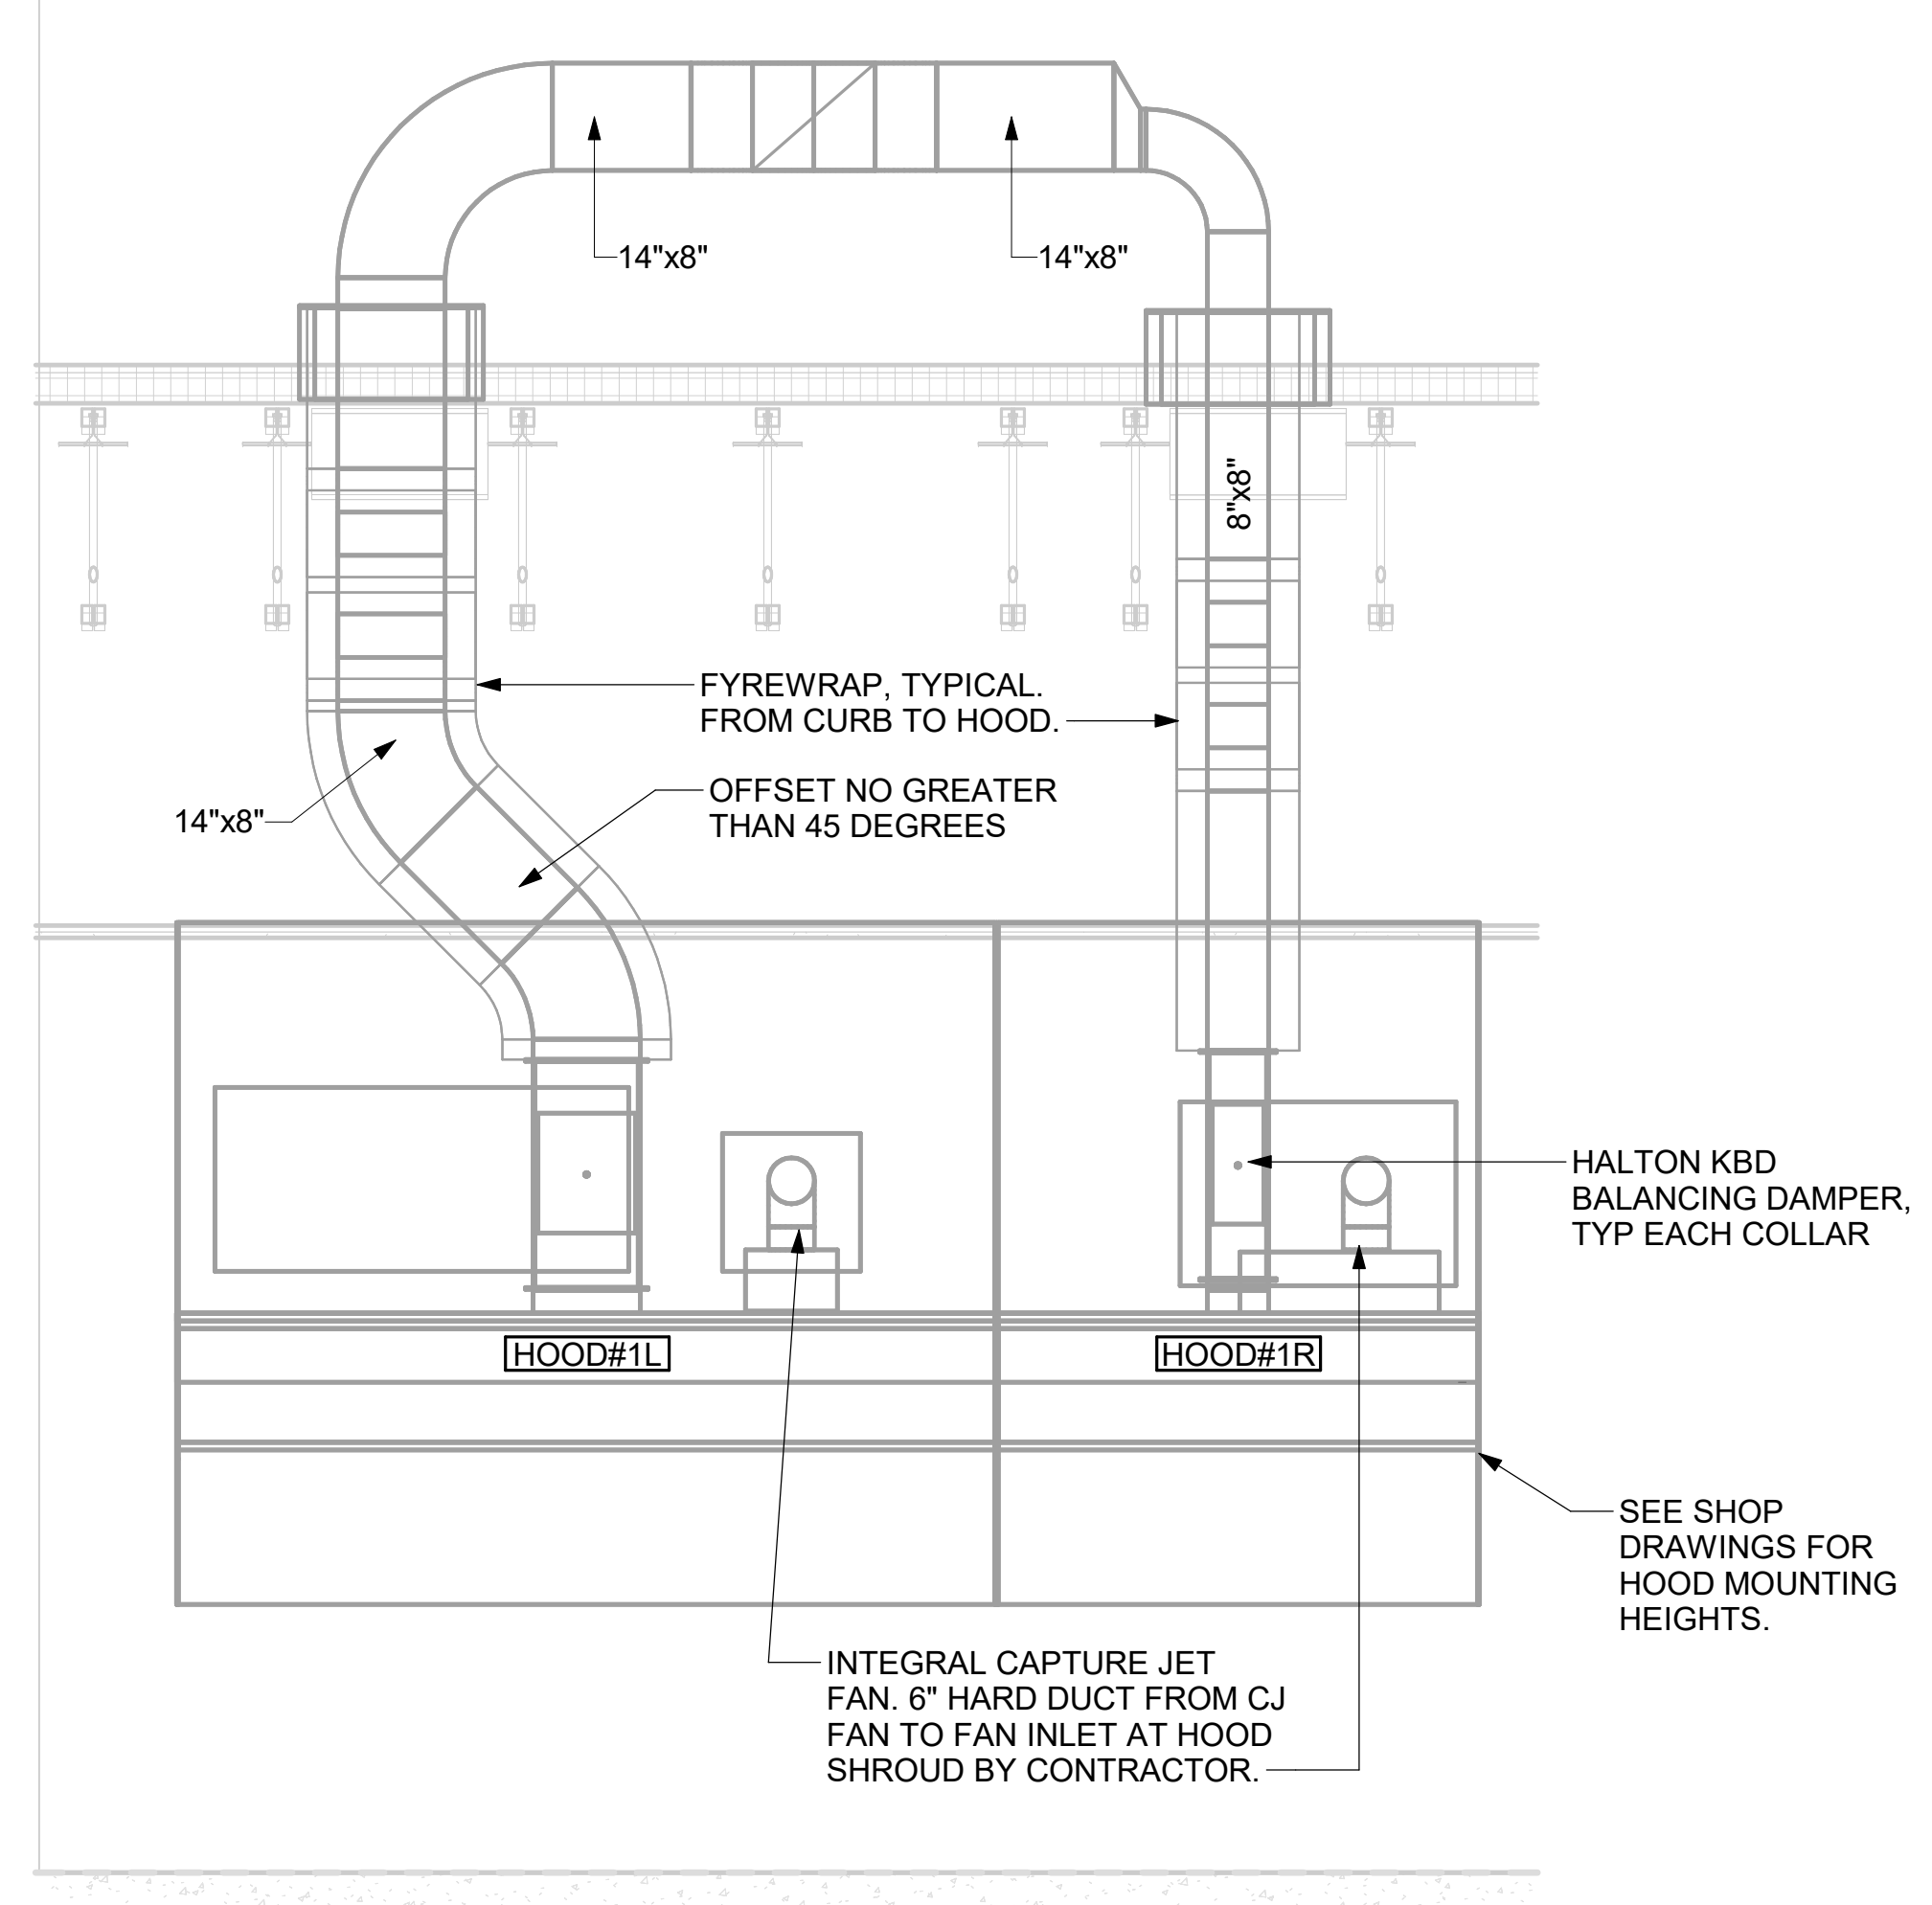

3 HOOD ELEVATION - HOOD#1 - FRONT
 NOT TO SCALE

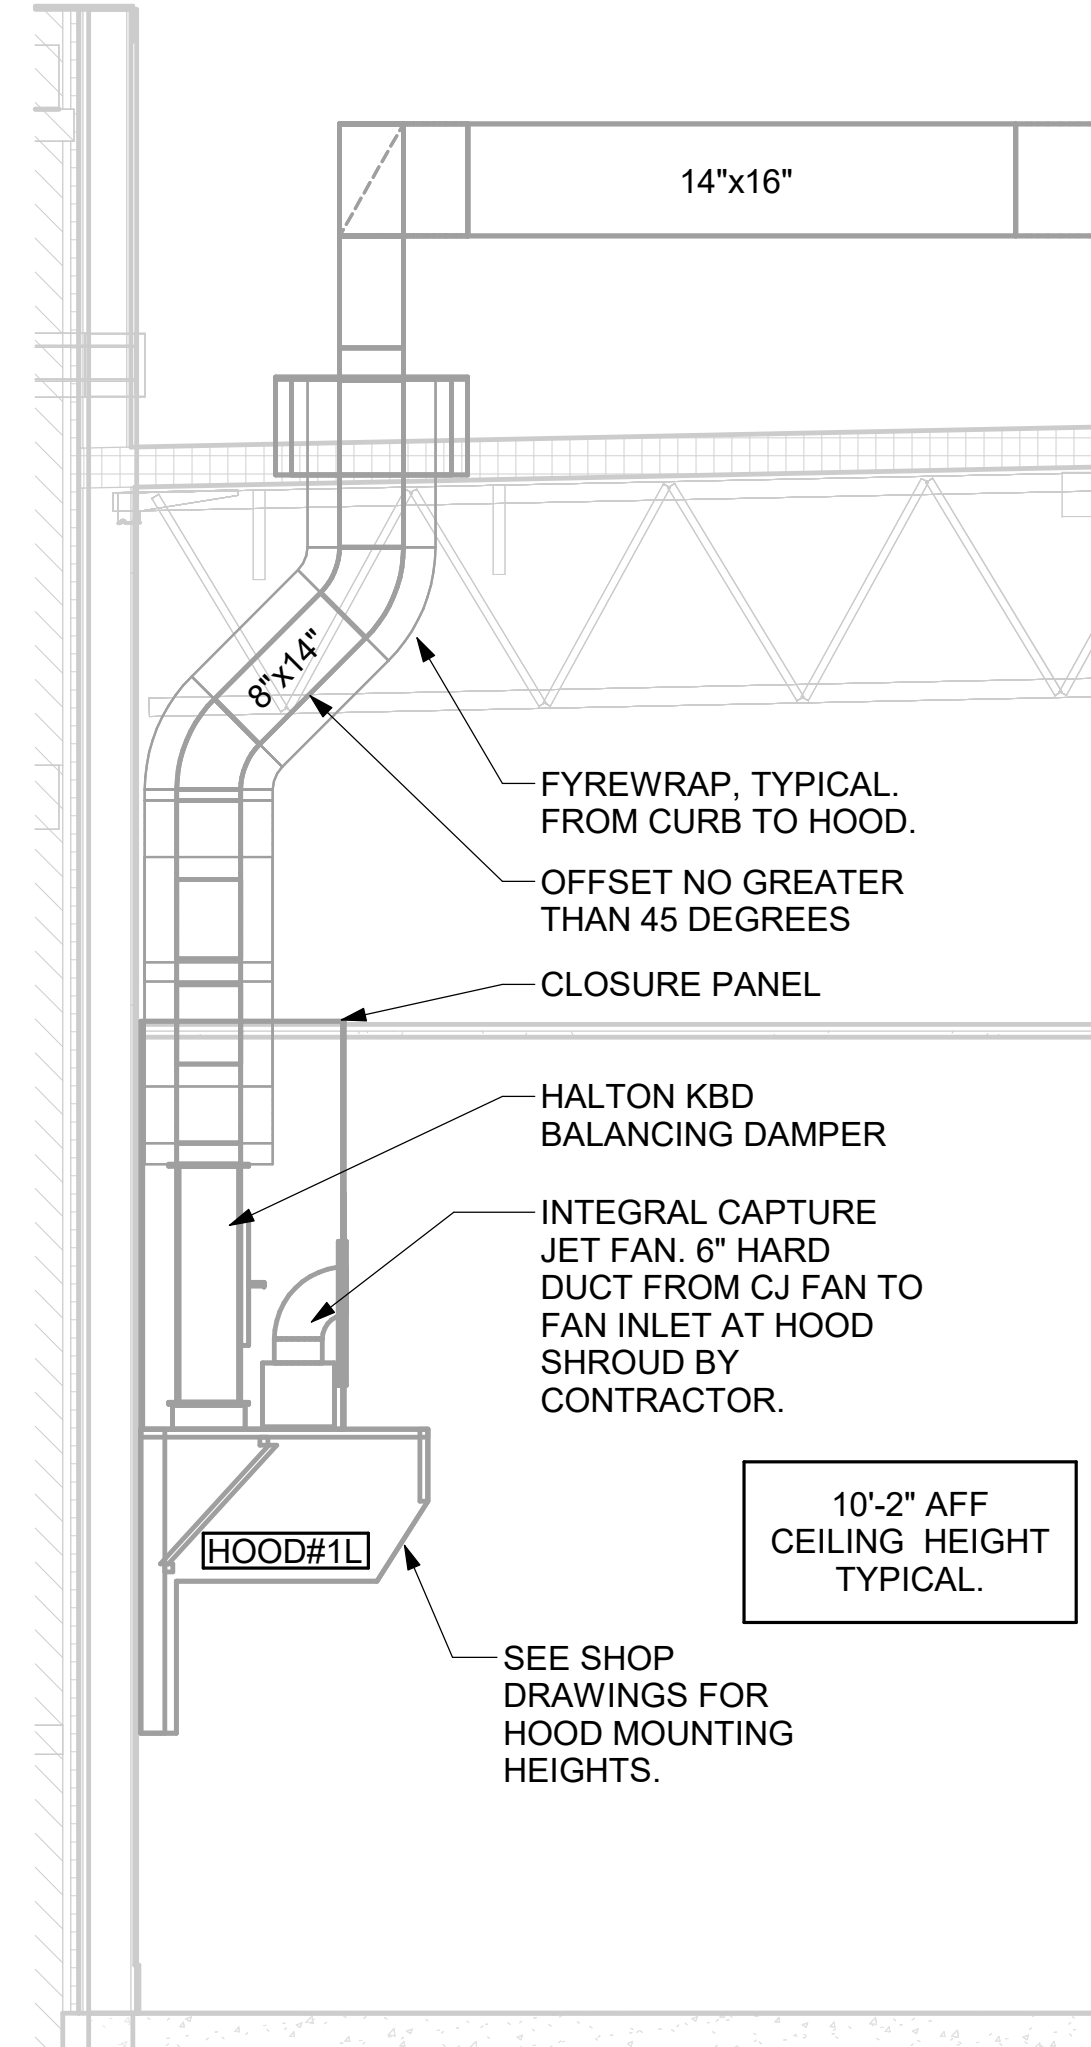


2 HOOD ELEVATION - HOOD#1 - SIDE
 NOT TO SCALE

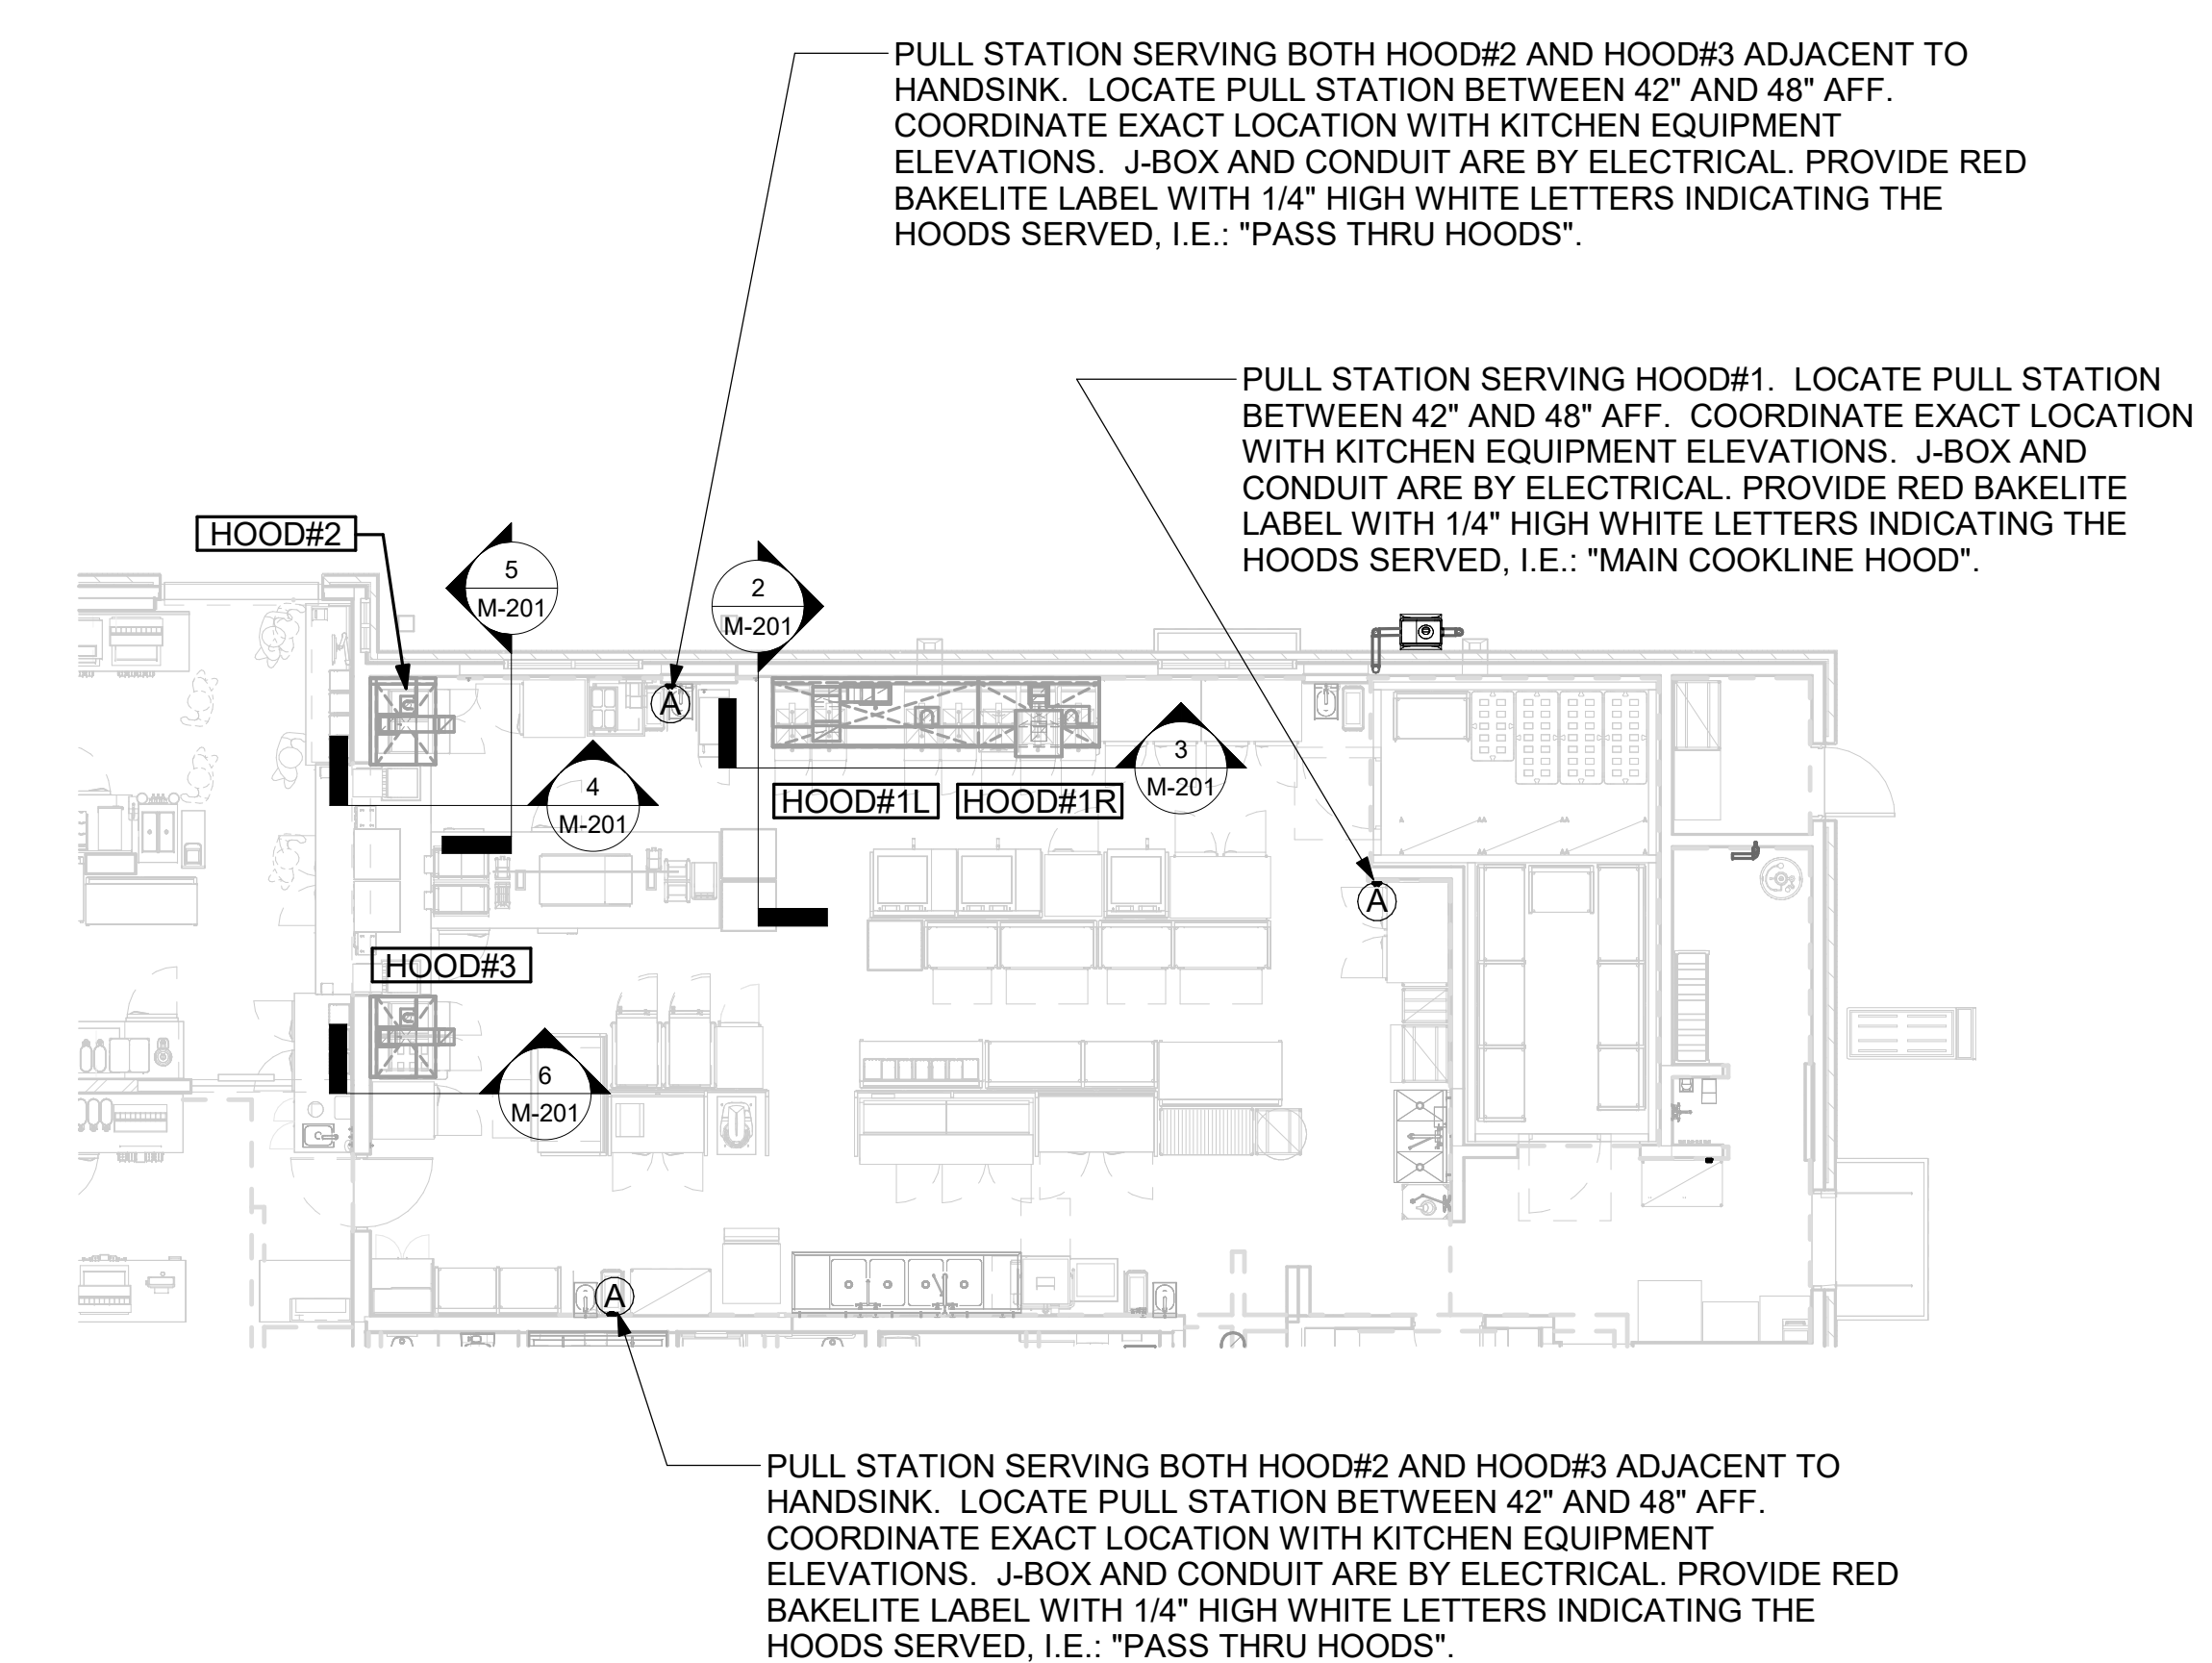


1 HOOD LAYOUT
 NOT TO SCALE



Chick-fil-A
 Chick-fil-A
 5200 Buffington Road
 Atlanta, Georgia
 30349-2998

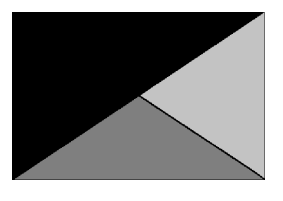

Kurzynske & Associates
 2705 Lebanon Pike - Suite One
 Nashville, Tennessee 37214
 Telephone: (615) 255-5203

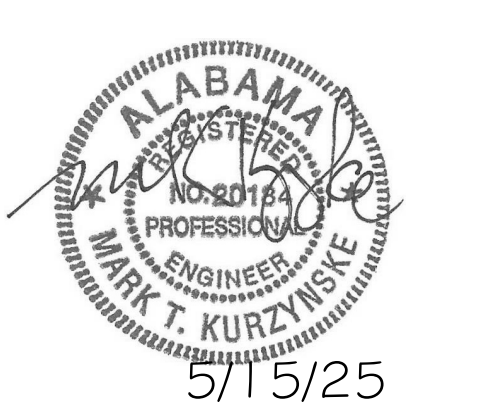

CHICK-FIL-A
SARALAND FSU
 SEC HIGHWAY 158 & SHELL STREET
 SARALAND, AL 36571

FSR#05661

BUILDING TYPE / SIZE: P-14 LS BN
 RELEASE: PRINTED FOR CONSTRUCTION
 REVISION SCHEDULE
 NO. DATE DESCRIPTION

CONSULTANT PROJECT # 25011.CC.S
 DATE 02/06/2025
 DRAWN BY BLM

Information contained on this drawing and in all digital files produced for above named project may not be reproduced in any manner without express written or verbal consent from authorized project representatives.
 SHEET EXHAUST HOOD ELEVATIONS

SHEET NUMBER
M-201

Autodesk Docs://AL_05661_Saraland FSU_2024.11_FSR05661_Saraland FSU_K&A_MEC.rvt
 5/15/2025 1:33:04 PM
 30-LS-05661-M-201-EXHAUST HOOD ELEVATIONS