


GENERAL NOTES:


- ALL PENETRATIONS THROUGH ROOF SHALL BE COORDINATED AND CONSTRUCTED BY LANDLORD ROOFING CONTRACTOR.

KEYED NOTES:

- 6" EXHAUST DUCT UP TO ROOF CAP. MINIMUM 10' FROM ALL FRESH AIR INTAKES.
- 8" EXHAUST DUCT UP TO ROOF CAP. MINIMUM 10' FROM ALL FRESH AIR INTAKES.
- TRANSITION SUPPLY AND RETURN DUCT TO CURB IN RISE.
- ROUTE 1" CONDENSATE TO MOP SINK. CONDENSATE PUMP REQUIRED.
- 4" DRYER EXHAUST TO WALL VENT.
- WRAP EXHAUST DUCT WITH 3M 1-HR FIRE RATED DUCT WRAP OR EQUAL CONTINUOUSLY FROM GRILLE TO EXTERIOR.
- PROVIDE SUITABLE EQUIPMENT RAILS
- NON-SENSING THERMOSTAT WITH REMOTE TEMPERATURE SENSORS AND HUMIDISTATS.

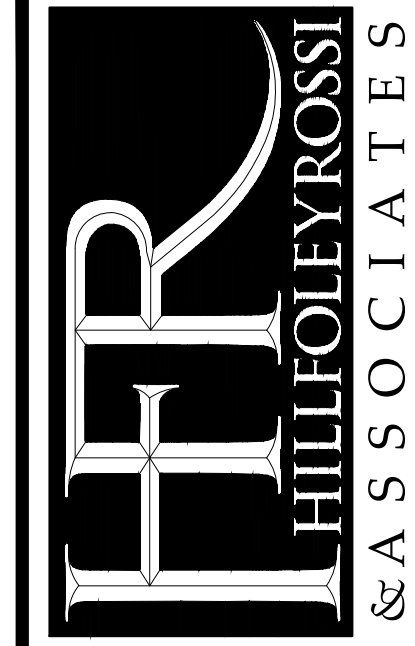

ARCHITECTURE ENGINEERING
 3680 Pleasant Hill Road
 Suite 200
 Duluth, Georgia 30096
 P 770.622.9858
 F 770.622.9535
 www.hillfoleyrossi.com

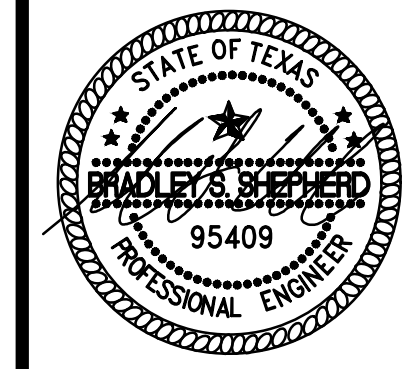

sealed: 12-13-2021

Heartland Dental - New Braunfels, TX
 237 FM 306
 New Braunfels, Texas 78130

For: Heartland Dental
 1200 Network Centre Drive
 Effingham, IL 62401

3/11/22	Landlord Coordination
12/13/21	For Construction
mk	date issue

Floor Plan - Mechanical

M101
 HFR 21.919

1 FLOOR PLAN - MECHANICAL
 M101 SCALE: 1/4" = 1'-0"