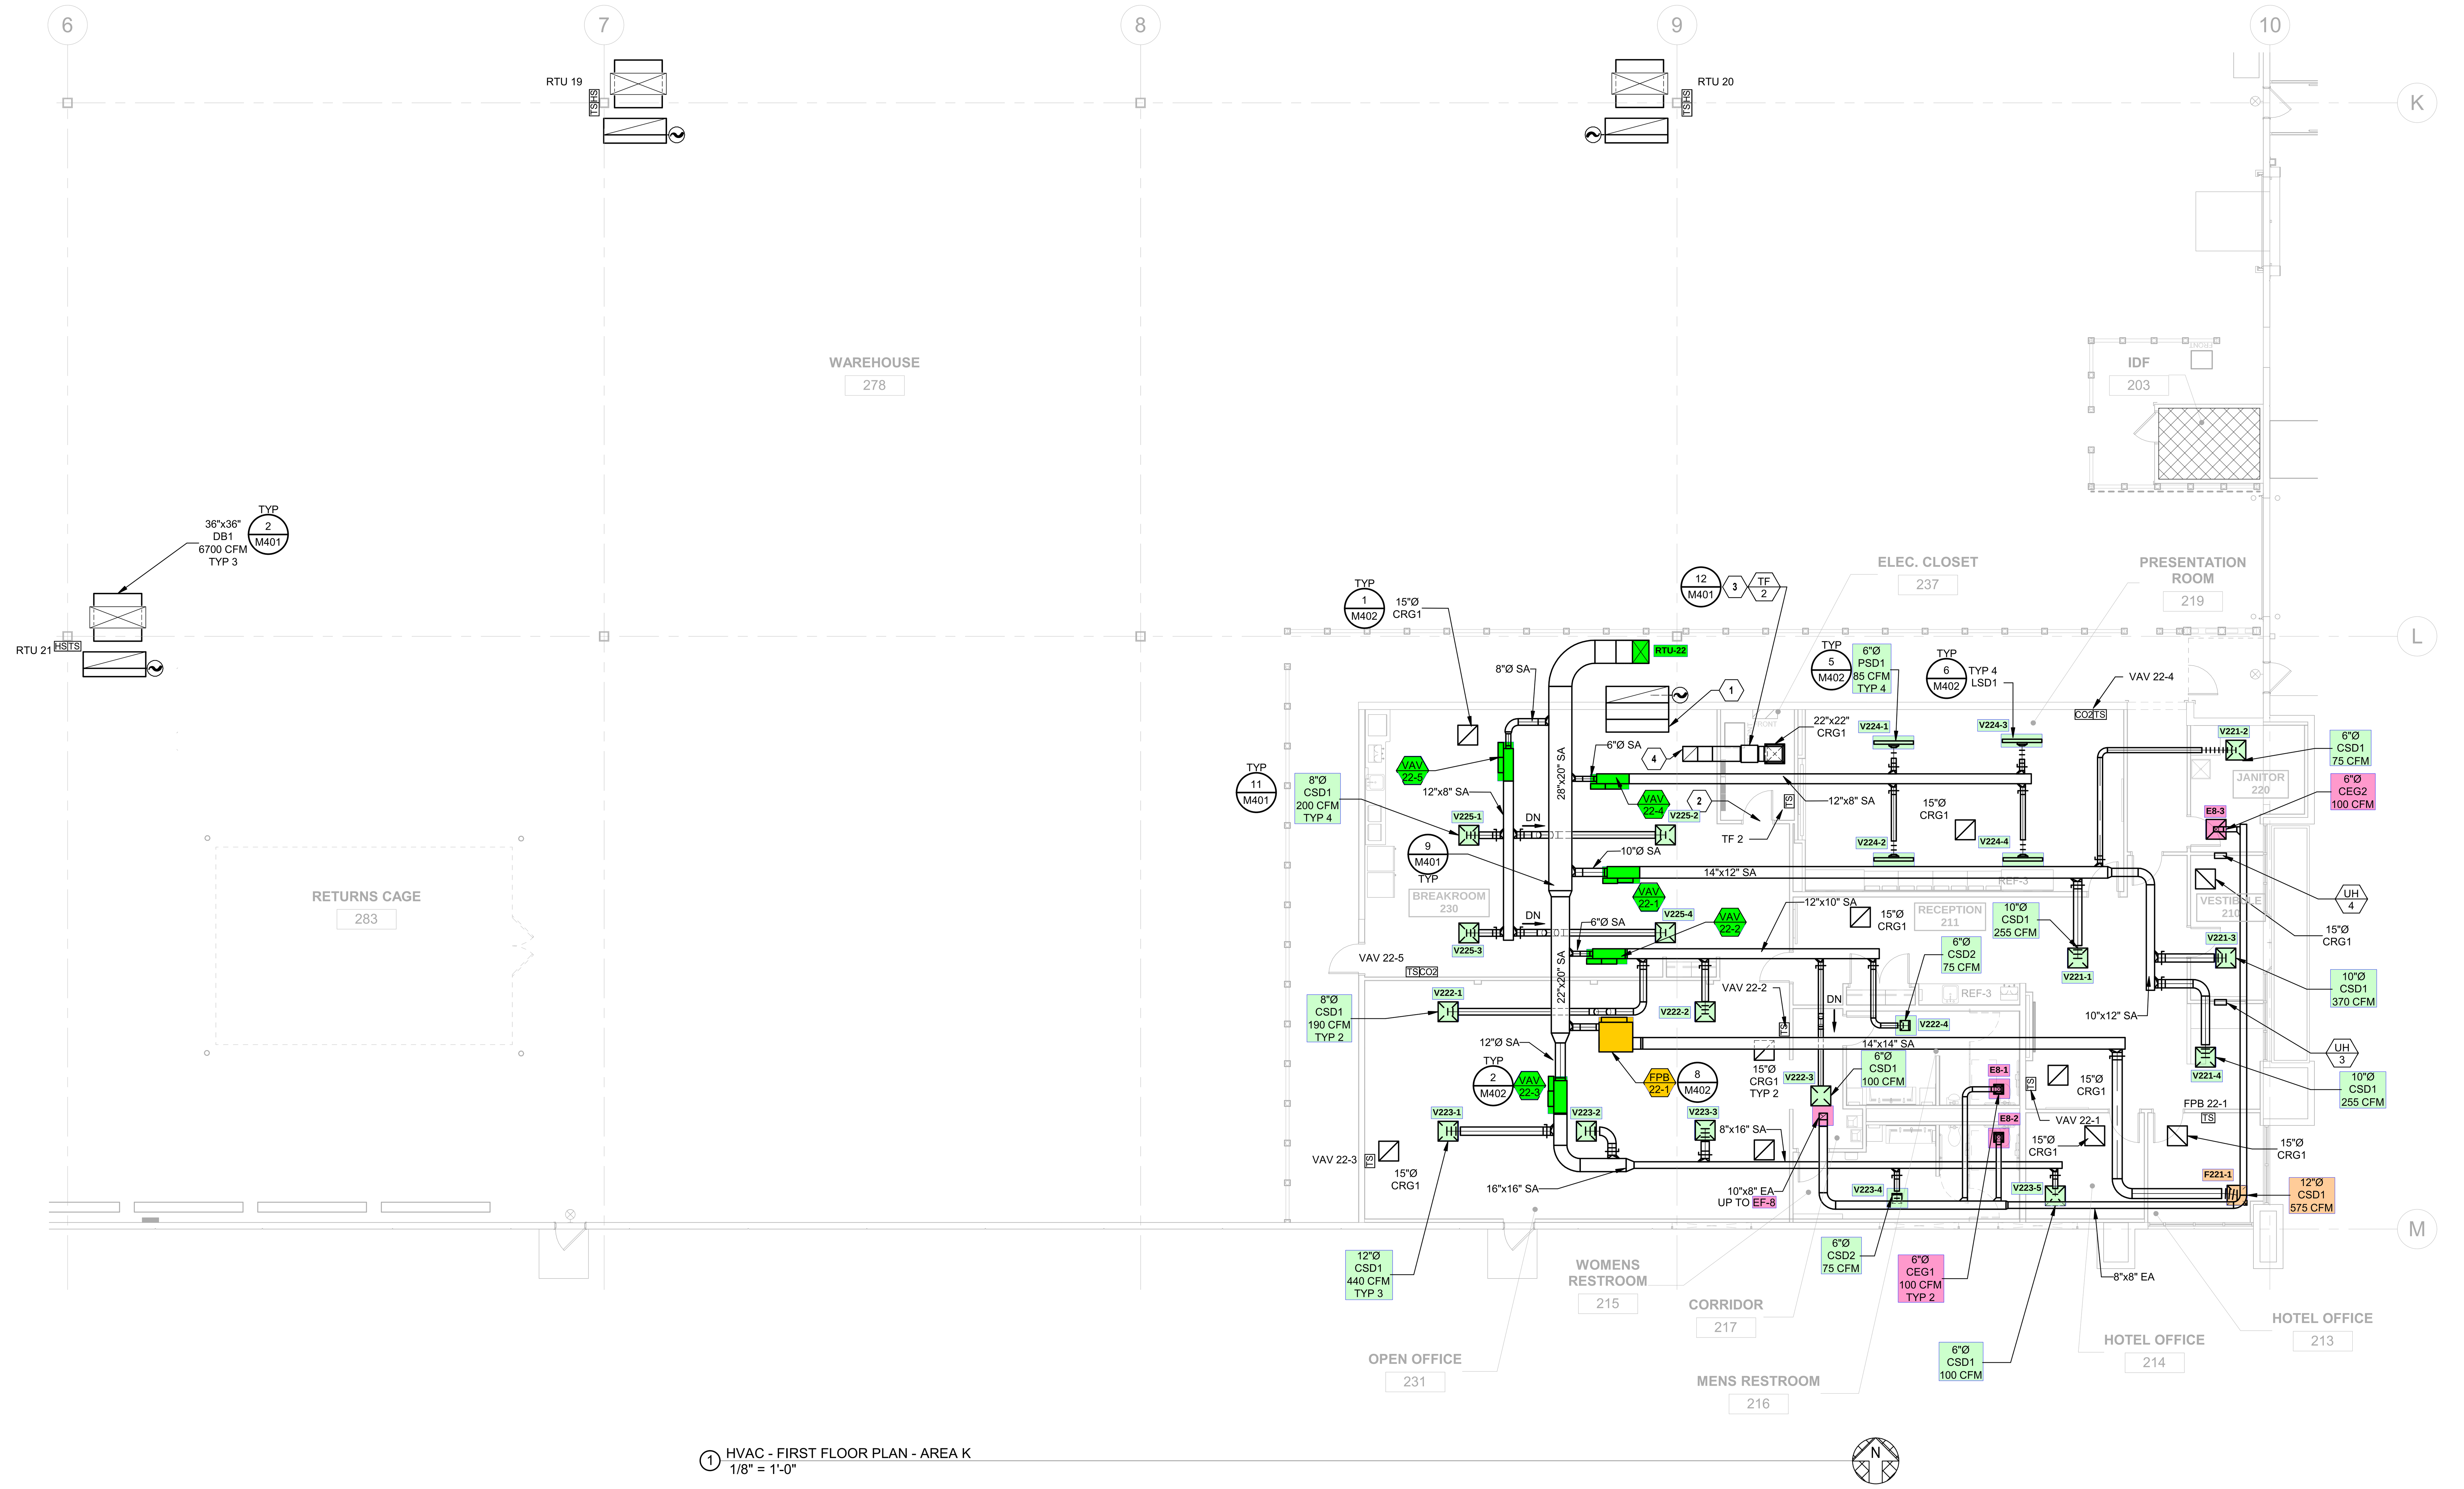

1 HVAC - FIRST FLOOR PLAN - AREA K
1/8" = 1'-0"

MECHANICAL PLAN NOTES:

1. PROVIDE FULL SIZE RETURN AIR BOOT WITH ELBOW AND 1-1/2" ACOUSTICAL LINER.
2. ELECTRICAL CLOSET SHALL HAVE LOUVERED DOOR AS THE TRANSFER AIR PATH FOR TF-2. LOUVERED AREA SHALL BE 24"X16" MINIMUM. SEE ARCHITECTURAL PLANS FOR DOOR INFORMATION.
3. MOUNT FAN A MINIMUM OF 12" ABOVE CEILING GRID.
4. ELBOW RETURN AIR DUCT UP WITH A 90° BEND.

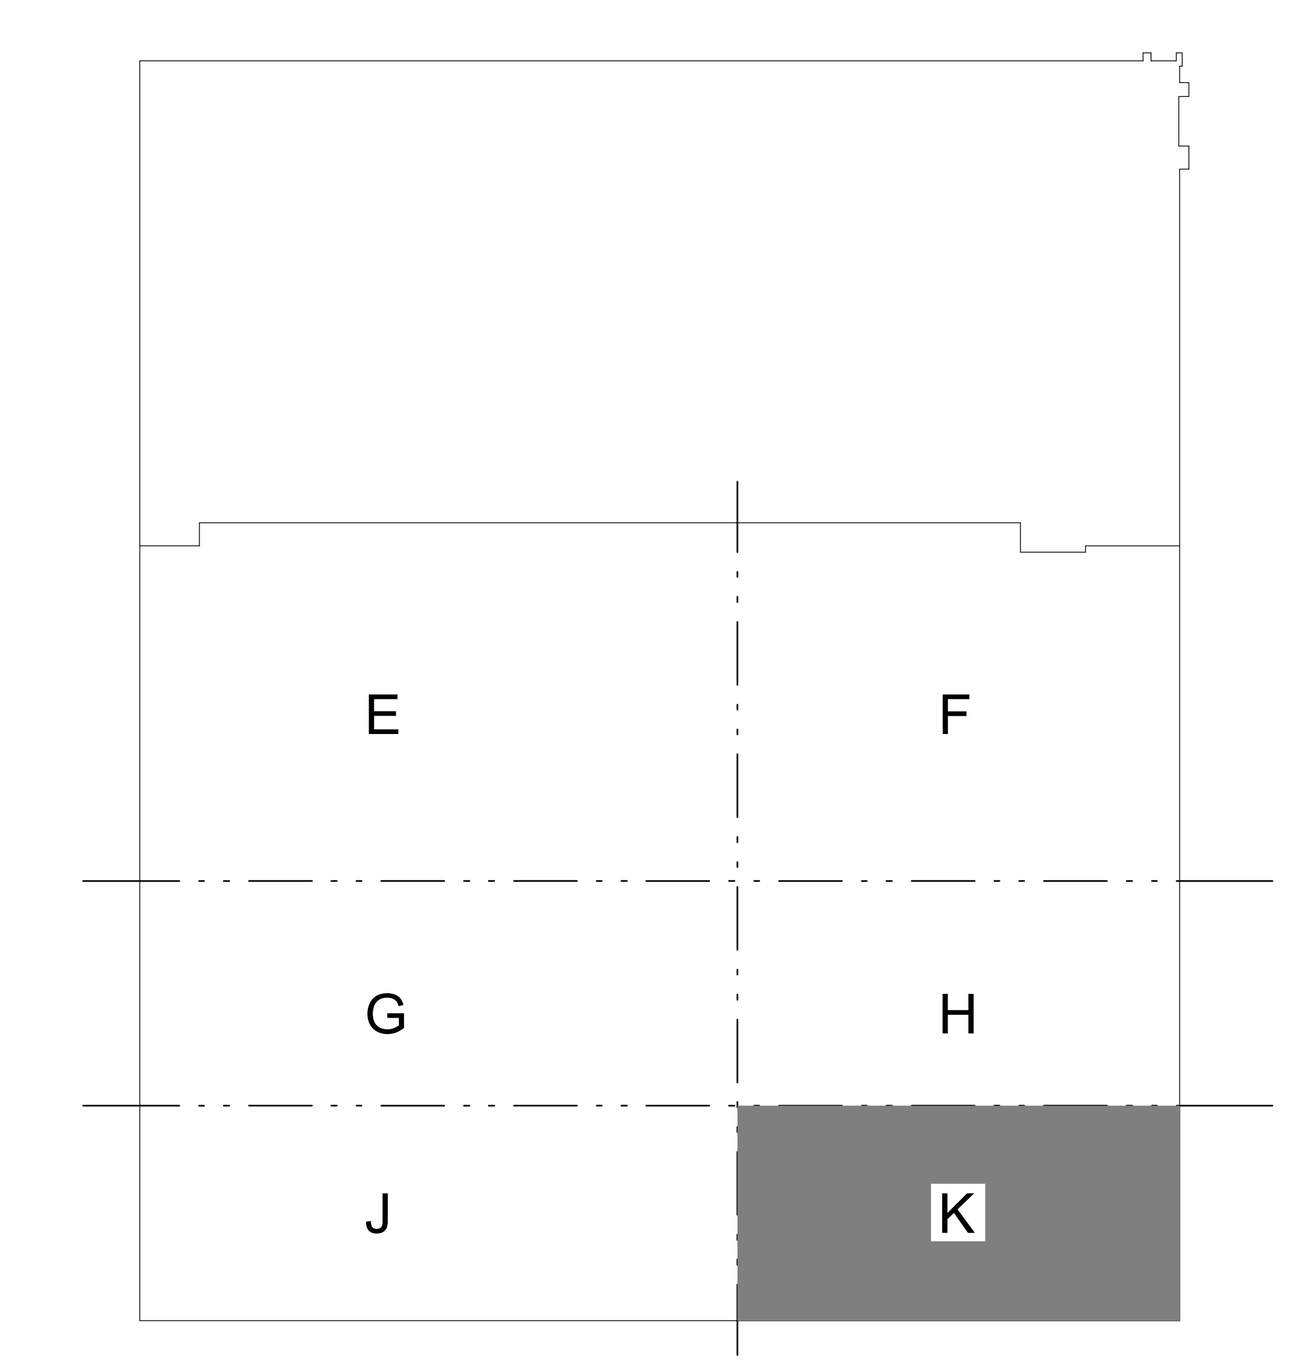

FLOOR 1 KEY PLAN - AREA K

Michael T. Brown

Michael T. Brown, Architect
1220 Marshall Street NE 612.677.7100
Minneapolis 612.677.7499 fax
Minnesota 55413-1036 www.rsparch.com

Project Contact:
Bennet Johnson
(612) 677-7253

Consultants
HENDERSON ENGINEERS
8345 LENEXA DRIVE, SUITE 300
LENEXA, KS 66214
TEL 913.742.5000 **FAX** 913.742.5001
WWW.HENDERSONENGINEERS.COM
2350003250
OH. CORPORATE NO: COA02362
EXPIRES 6/30/2024

Certification

STATE OF OHIO
SEAN O. EISLER
E-82135
REGISTERED PROFESSIONAL ENGINEER

11/09/2023

Project For
UNITEDHEALTH GROUP

Etna, OH 43062

UHG Project #
P1099710

UHG Location Code
OH825

Business Unit
OPTUM SPECIALTY SERVICES

Project No.	2350003250
Drawn By	RF,SD
Checked By	SW
Date	11/09/2023

NOTICE: The designs shown and described herein including all technical drawings, graphics, and models thereof, are proprietary and cannot be copied, duplicated or commercially exploited, in whole or in part, without express written permission of Stephen J. Fautsch, Architect. These are available for limited review and evaluation by clients, consultants, contractors, government agencies, vendors and office personnel only in accordance with this Notice.
© Copyright Michael T. Brown, Architect 2023. All rights reserved.

Revisions

No.	Date	Description

MECHANICAL FLOOR PLAN - AREA K

M101K

SEAN O. EISLER