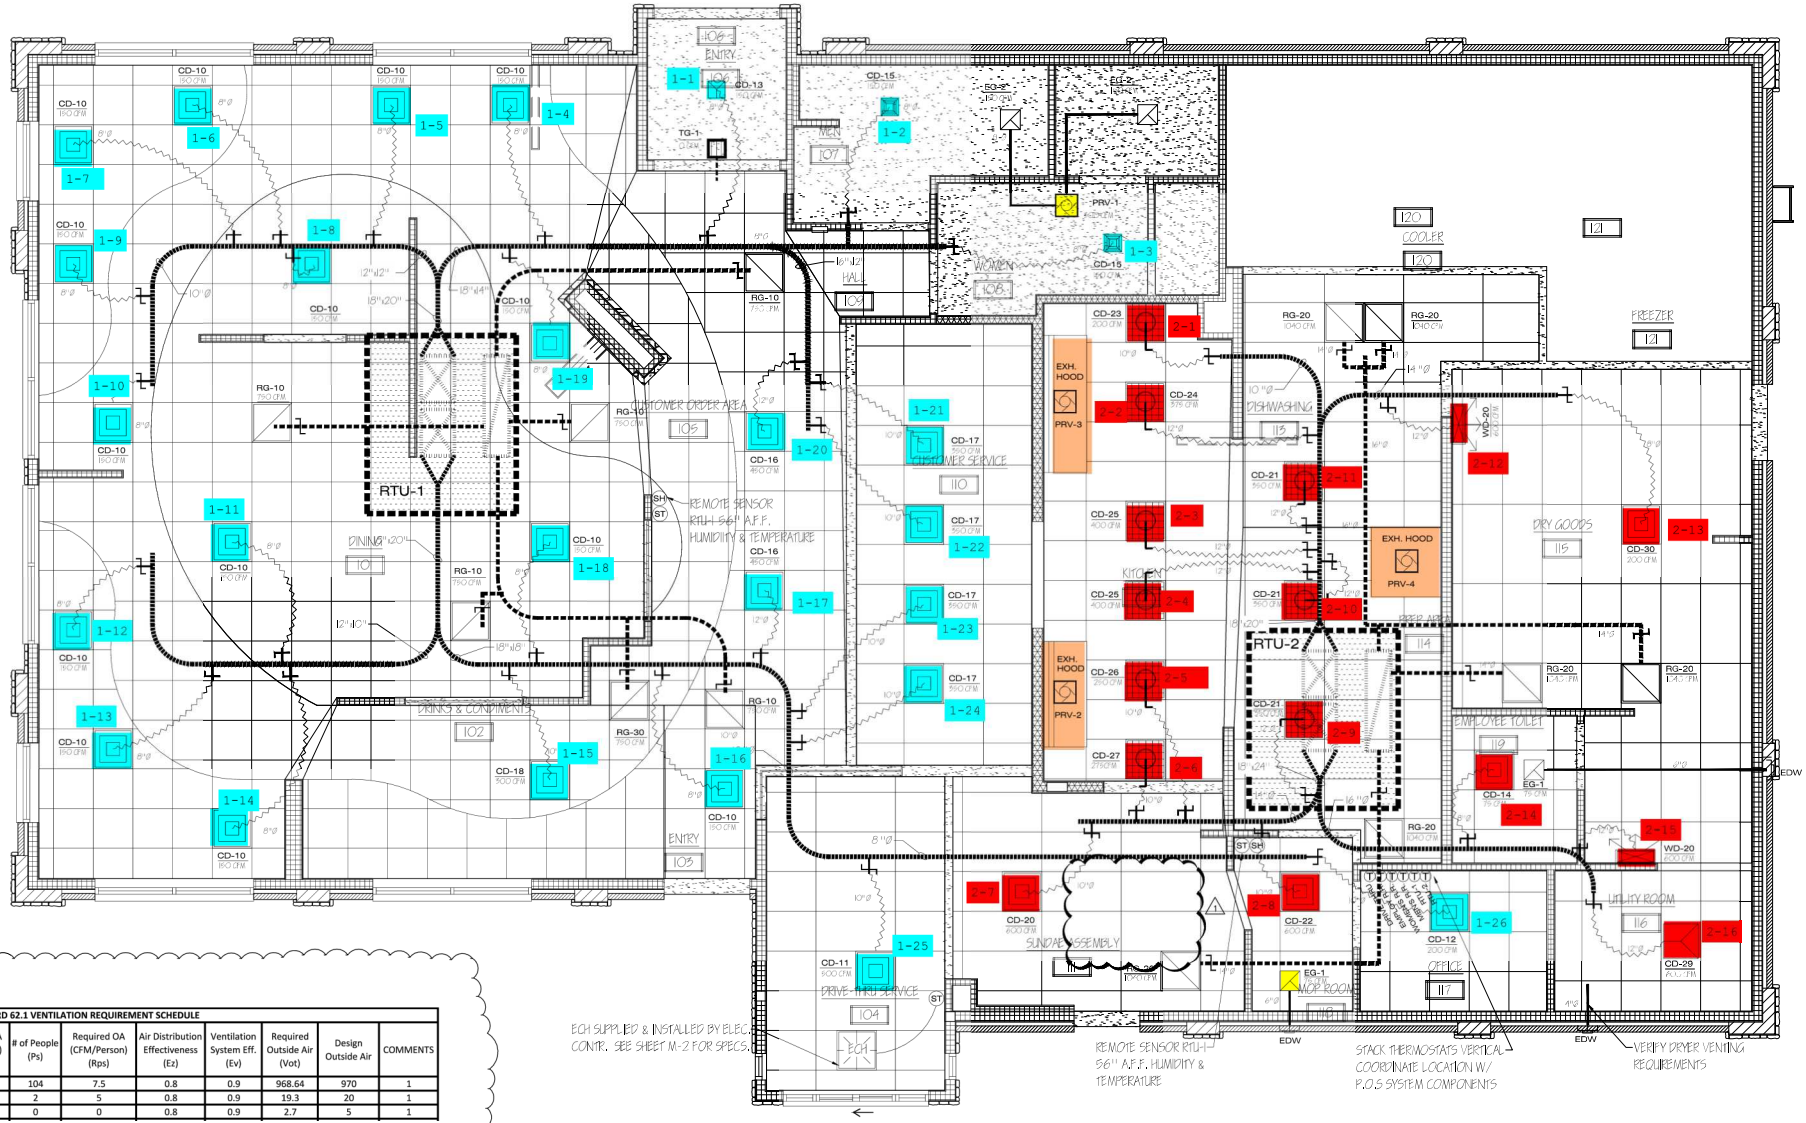

ASHRAE STANDARD 62.1 VENTILATION REQUIREMENT SCHEDULE

Name/#	Area	Required OA (CFM/SQ.FT) (Ras)	# of People (Ps)	Required OA (CFM/Person) (Rps)	Air Distribution Effectiveness (Ez)	Ventilation System Eff. (Ev)	Required Outside Air (Vot)	Design Outside Air	COMMENTS
OOM 101	1048	0.18	104	7.5	0.8	0.9	968.64	970	1
DIMENTS 102	155	0.06	2	5	0.8	0.9	19.3	20	1
Y 103	45	0.06	0	0	0.8	0.9	2.7	5	1