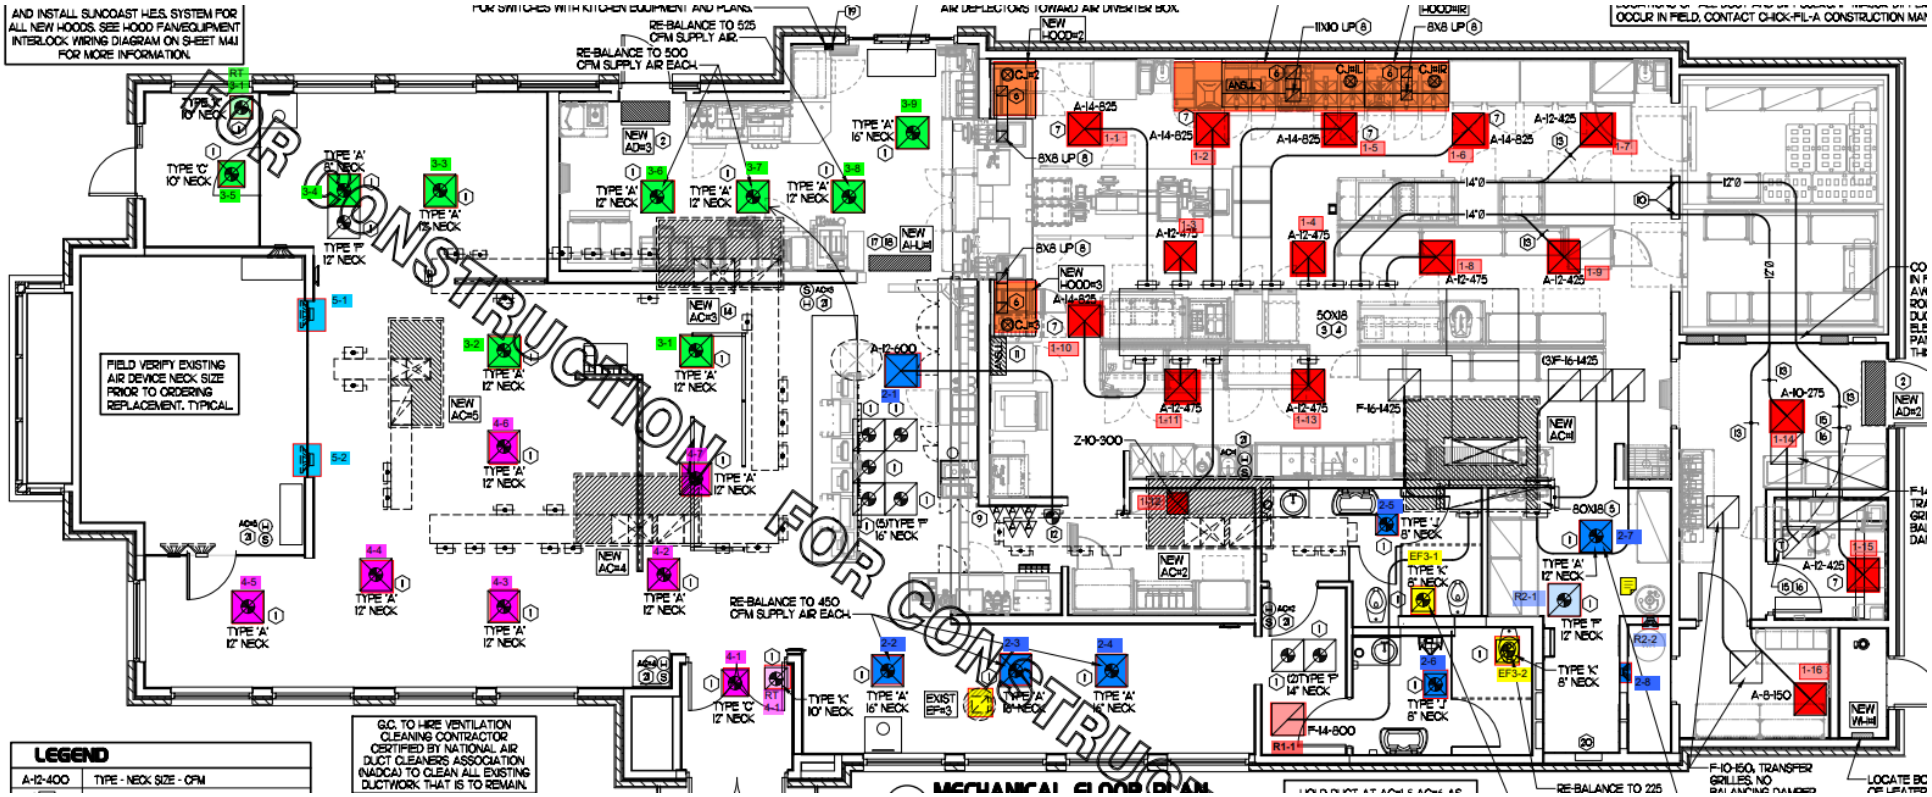
AND INSTALL SUNCOAST H.E.S. SYSTEM FOR ALL NEW HOODS. SEE HOOD FAN/EQUIPMENT INTERLOCK WIRING DIAGRAM ON SHEET M4J FOR MORE INFORMATION.
RE-BALANCE TO 525 CFM SUPPLY AIR.
RE-BALANCE TO 500 CFM SUPPLY AIR EACH.
FIELD VERIFY EXISTING AIR DEVICE NECK SIZE PRIOR TO ORDERING REPLACEMENT. TYPICAL.
RE-BALANCE TO 450 CFM SUPPLY AIR EACH.
G.C. TO HIRE VENTILATION CLEANING CONTRACTOR CERTIFIED BY NATIONAL AIR DUCT CLEANERS ASSOCIATION (NADCA) TO CLEAN ALL EXISTING DUCTWORK THAT IS TO REMAIN.
LEGEND
A-12-400 TYPE - NECK SIZE - CFM
RE-BALANCE TO 225
F-10-150, TRANSFER GRILLES, NO BALANCING DAMPER
MECHANICAL FLOOR PLAN
FOR CONSTRUCTION
FOR CONTRUCTION